



Test Mode	UNII-7_TX AX(HE160) Mode_Ant. 1
-----------	---------------------------------

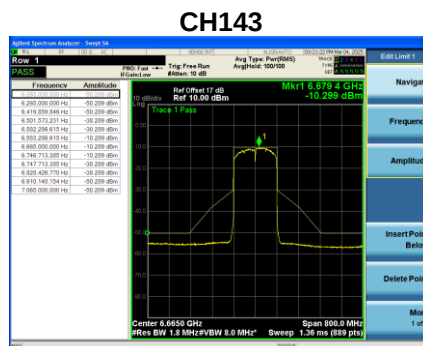


Test Mode	UNII-7_TX AX(HE160) Mode_Ant. 2
-----------	---------------------------------

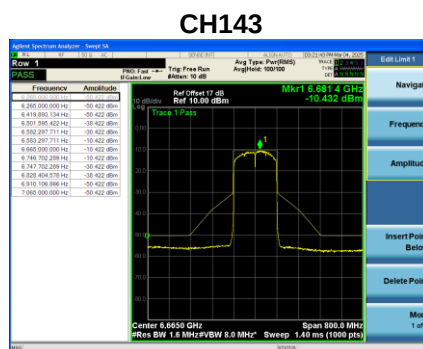


For Antenna Configuration 2

Test Mode UNII-5_TX AX(HE20) Mode_Ant. 1


CH01

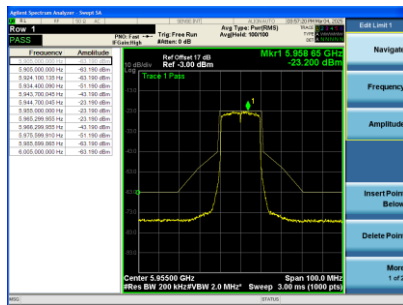

CH45

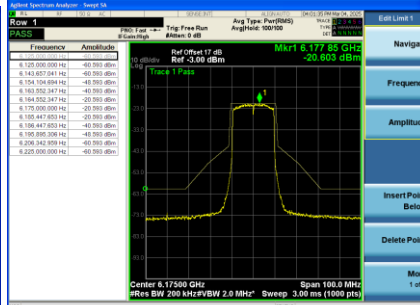


CH93

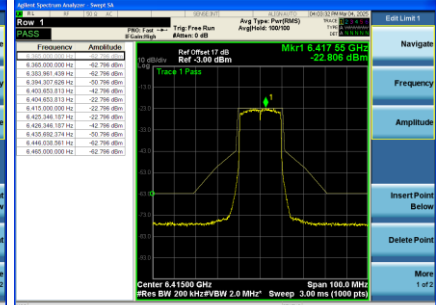


Test Mode UNII-5_TX AX(HE20) Mode_Ant. 2


CH01

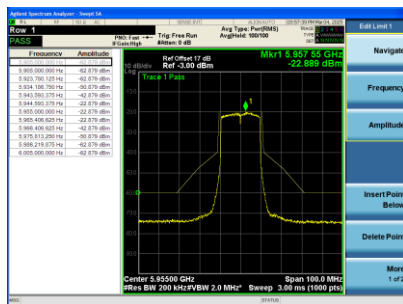

CH45

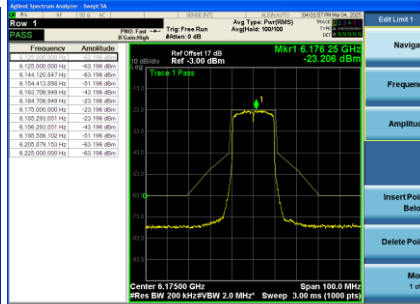


CH93

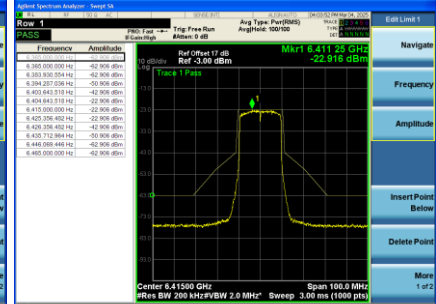


UNII-5 TX AX(HE40) Mode Ant. 1

CH91

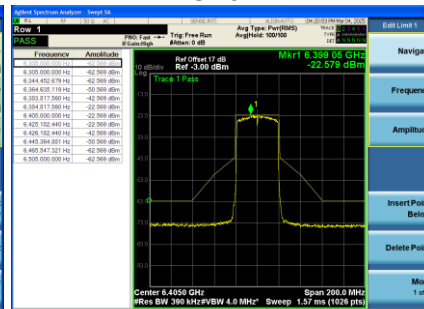


UNII-5 TX AX(HE40) Mode Ant. 2

CH91

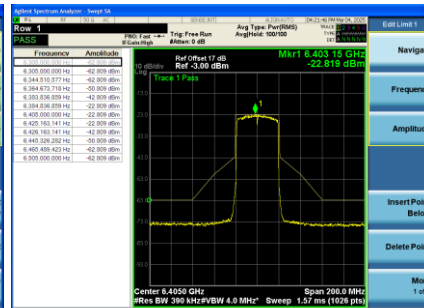


Test Mode UNII-5_TX AX(HE80) Mode_Ant. 1


CH07

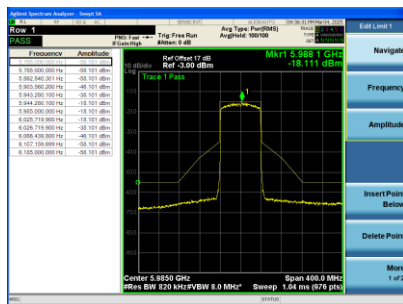

CH39

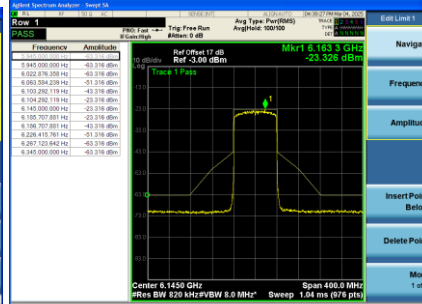


CH87

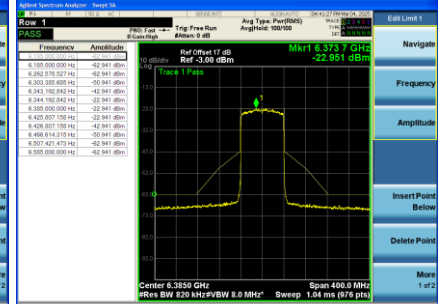


Test Mode UNII-5_TX AX(HE80) Mode_Ant. 2


CH07

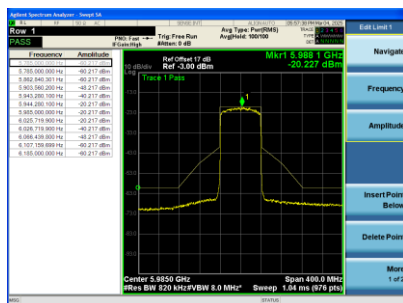

CH39

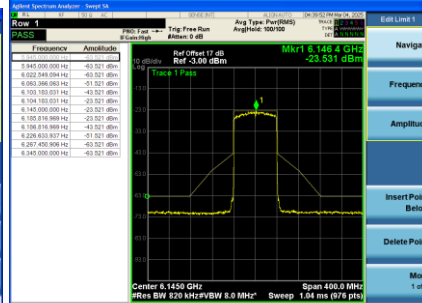


CH87

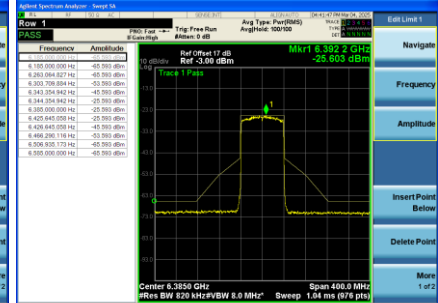


Test Mode UNII-5_TX AX(HE160) Mode_Ant. 1


CH15

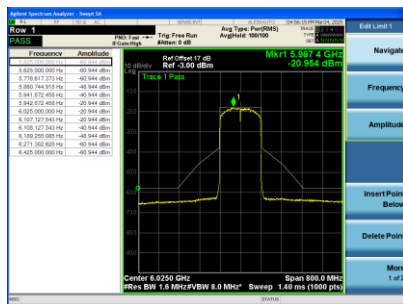

CH47

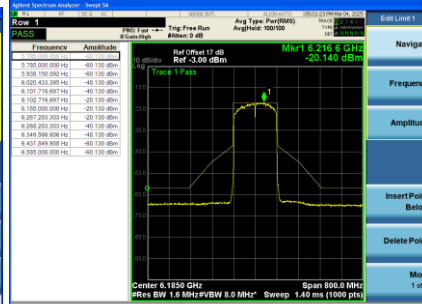


CH79

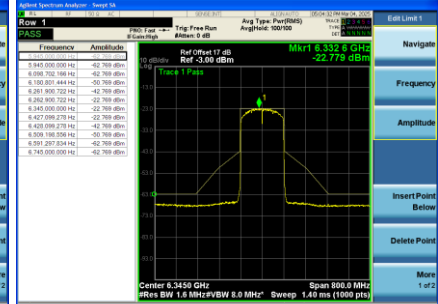


Test Mode UNII-5_TX AX(HE160) Mode_Ant. 2


CH15

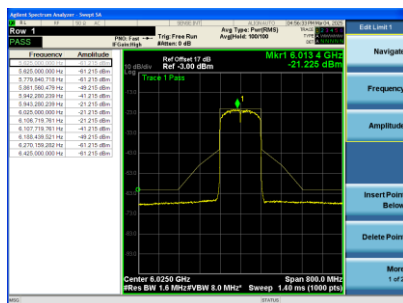

CH47

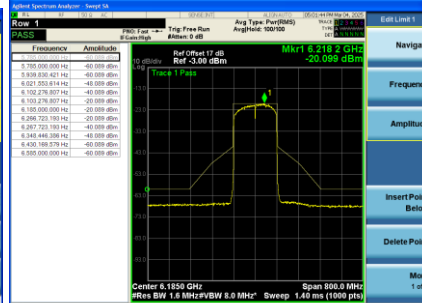


CH79

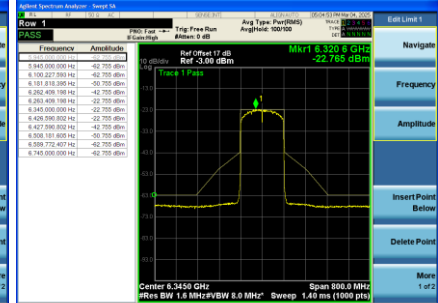


Test Mode UNII-7_TX AX(HE20) Mode_Ant. 1

CH117

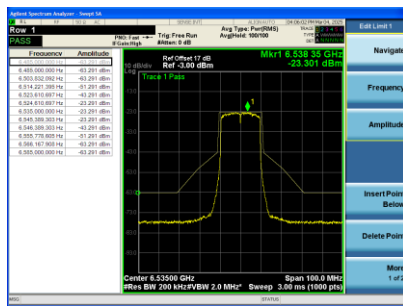


CH149

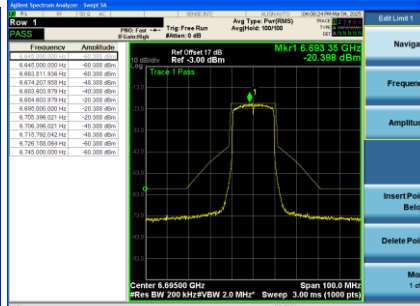


Test Mode UNII-7_TX AX(HE40) Mode_Ant. 1


CH123

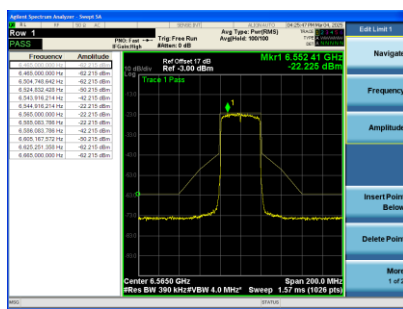

CH147

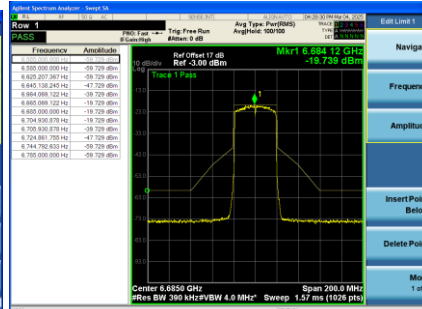


CH179

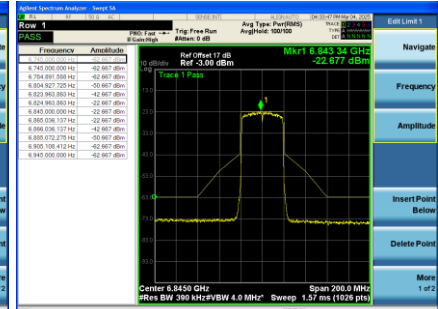


Test Mode UNII-7_TX AX(HE40) Mode_Ant. 2


CH123

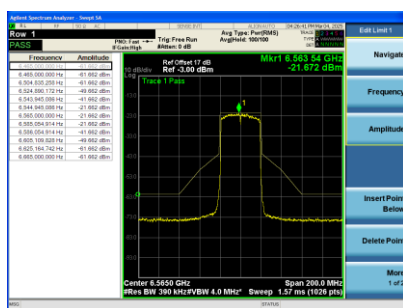


CH147

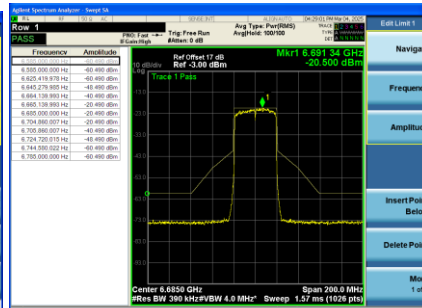


CH179

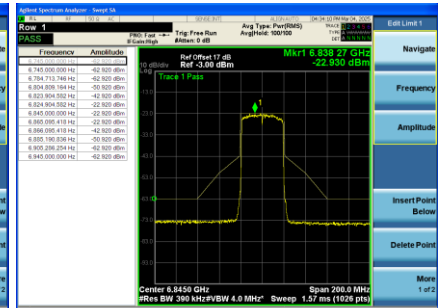


CH135

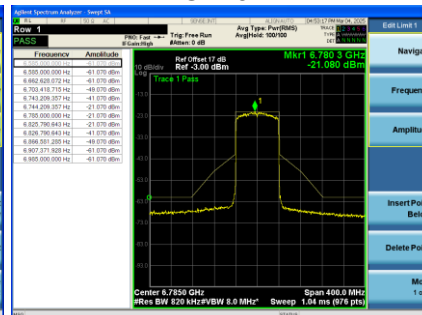


CH135

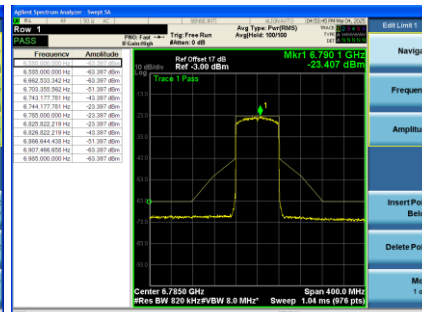

Test Mode	UNII-7_TX AX(HE160) Mode_Ant. 1
-----------	---------------------------------

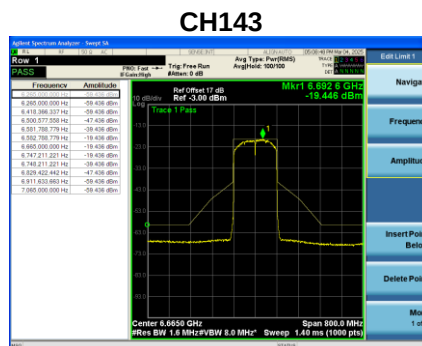

Test Mode	UNII-7_TX AX(HE160) Mode_Ant. 2
-----------	---------------------------------

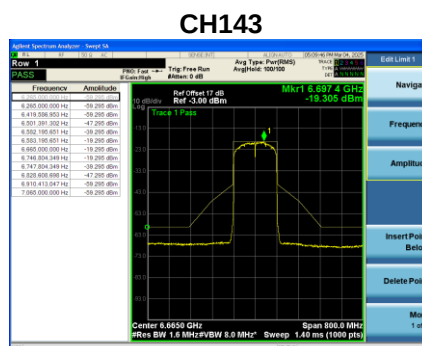

APPENDIX I - CONTENTION BASED PROTOCOL

Test Mode: N/A

Note: "N/A" denotes test is not applicable to this device.

APPENDIX J - FREQUENCY STABILITY

For Antenna Configuration 1

Test Mode	UNII-5
-----------	--------

Voltage vs. Frequency Stability

Voltage (V)	Measurement Frequency (MHz)
Center Frequency	5955.0000
138	5955.0000
120	5954.9800
102	5954.9800
Maximum Deviation (MHz)	-0.0200
Maximum Deviation (ppm)	-3.36

Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)
Center Frequency	5955.0000
-40	5955.0000
-30	5955.0000
-20	5954.9600
-10	5955.0000
0	5955.0200
10	5955.0200
20	5955.0400
30	5955.0200
40	5955.0000
50	5954.9800
60	5955.0000
Maximum Deviation (MHz)	0.0400
Maximum Deviation (ppm)	6.72

For Antenna Configuration 2

Test Mode	UNII-5
-----------	--------

Voltage vs. Frequency Stability

Voltage (V)	Measurement Frequency (MHz)
Center Frequency	5955.0000
138	5955.0000
120	5954.9800
102	5955.0000
Maximum Deviation (MHz)	-0.0200
Maximum Deviation (ppm)	-3.36

Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)
Center Frequency	5955.0000
-40	5954.9800
-30	5954.9800
-20	5955.0000
-10	5954.9800
0	5955.0200
10	5955.0600
20	5955.0200
30	5955.0000
40	5955.0000
50	5955.0200
60	5954.9800
Maximum Deviation (MHz)	0.0600
Maximum Deviation (ppm)	10.08

End of Test Report