



JOINSOON ELECTRONICS MFG.CO,LTO

BT Antenna Simulation report

2022/08/11

APPROVAL SHEET

客戶名稱(Costumer):冠捷TPV

品名規格 (DESCRIPTION) : BT Antenna

檔案號碼 (FILE NO.) : IAHA202206001

版次 (REV) : 01

料號 (PART NO.) :

工程師 (ENGINEER) : Jess

品保確認 (QC. CHK.) : Jane

工程確認 (ENG. CHK.) : Jess

測試時間 (TEST DATE):2022/08/11

發行日期 (RELEASED DATE) : 2022/08/11


Factory : SuZhou JianHe Precision Electronics Co.,Ltd.

Address : NO. 118 TONGCHENG Rd., Wei Tang Town,Xiang Cheng
District,SuZhou City,Jiang Su Province,China.

Index

Index	P.3
2. Antenna Drawing	P.4
3. Antenna Photo	P.5
4. Antenna Related Data	P.6
5. Test procedure	P.8
6. Test Result	P.9
7. Test & System Description	P.16

2. Antenna Drawing

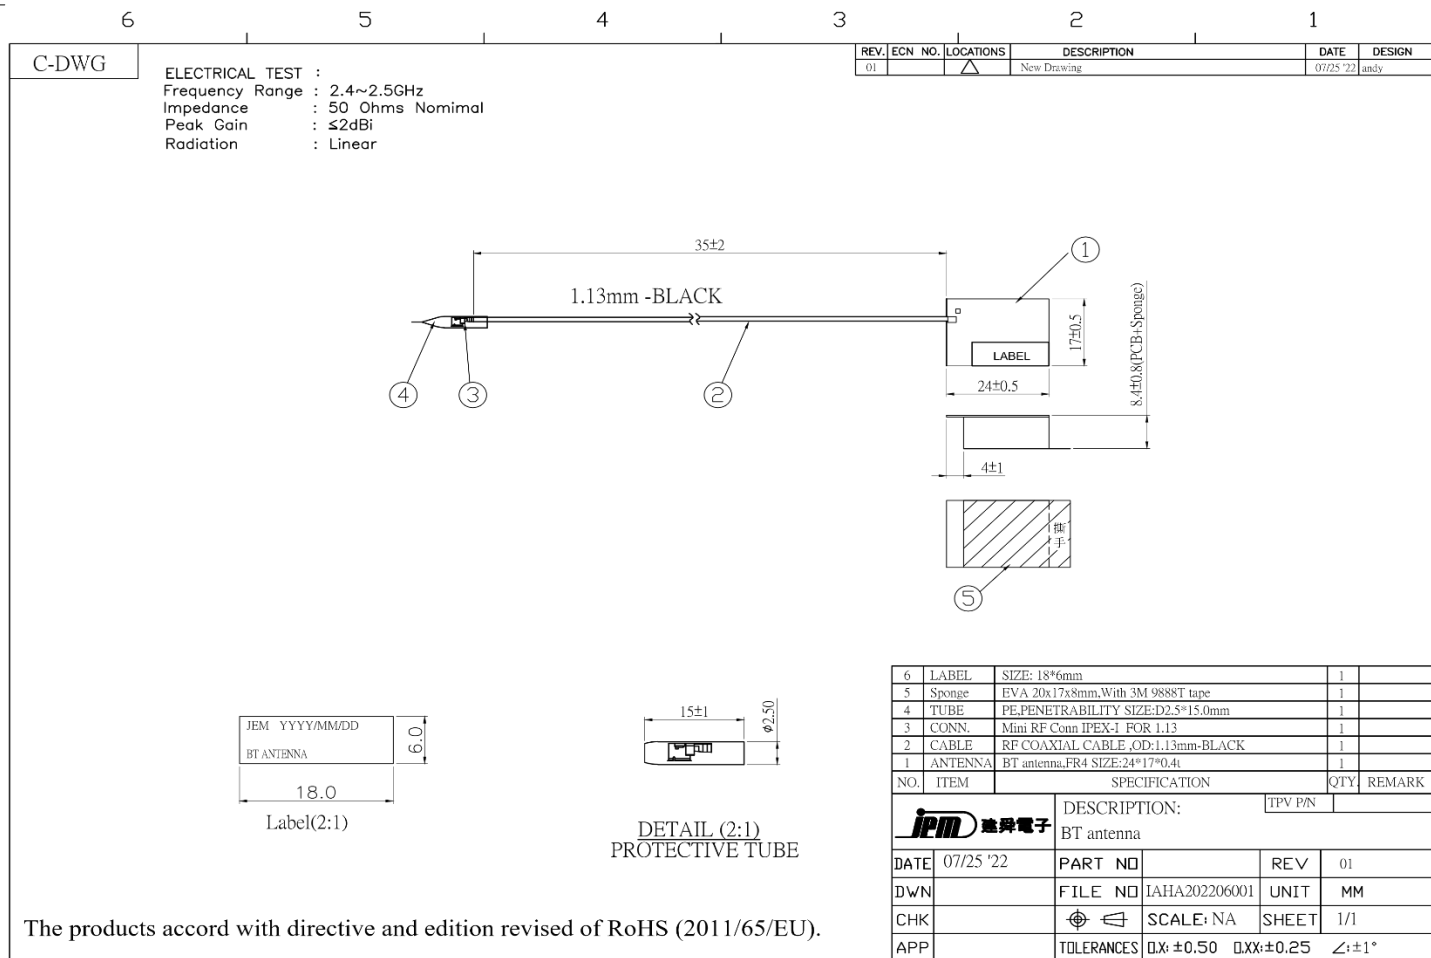

CT0808A

4. Antenna Related Data

4.1 Frequency Range : 2.4~2.5 GHz

4.2 Impedance : 50Ω

4.3 V.S.W.R : ≤ 2.5

4.4 Polarization : Linear

4.5 Cable : MI-113 (Black)

4.6 Connector : Black)20278-112R-13 for 1.13


4.7 Antenna pattern : PIFA

[5. Test Procedure]

- 1. Connect EUT antenna connector to the signal generator.**
- 2. Fasten the EUT to the locator in the center of the turntable, leaving only free space.**
- 3. Transmit a 0 dBm power level from the signal generator to the EUT antenna connector.**
- 4. Make sure the transmit signal is stable at the maximum RF power level.**
- 5. Read the power level on the spectrum analyzer and record it in the following locations.**
- 6. The EUT is placed on a turntable that rotates 360 degree in 1 degree steps. Measure the E and H plane patterns.**
- 7. The turntables should be stepped from 0 degree to 360 degree with a maximum angular resolution of 1 degree. The 360 degree measurement should be compared to the 0 degree value to complete the pattern.**

6. Test Result




6.1 S11 VSWR

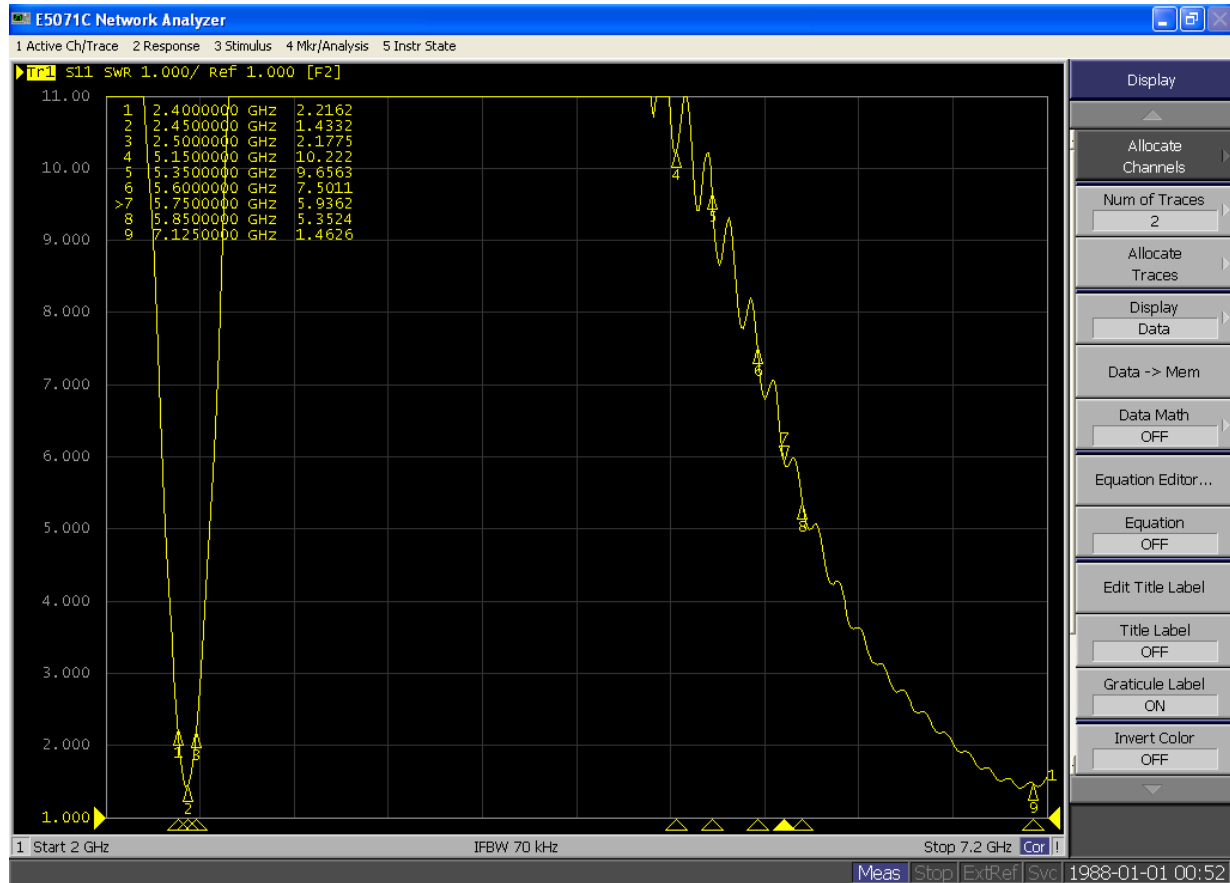

6.2 3D Specifications

Frequency (MHz)	2400	2410	2420	2440	2450	2460	2470	2480	2490	2500
Arg. Gain(dB)	-3.06	-2.78	-3.18	-3.24	-3.38	-3.34	-3.47	-3.63	-3.83	-3.56
Peak Gain (dBm)	2.88	2.85	2.6	2.9	2.61	2.73	2.63	3	2.62	3.39
Efficiency (%)	49.42	52.77	48.05	47.39	45.95	46.38	44.96	43.38	41.42	44.02




3D Pattern

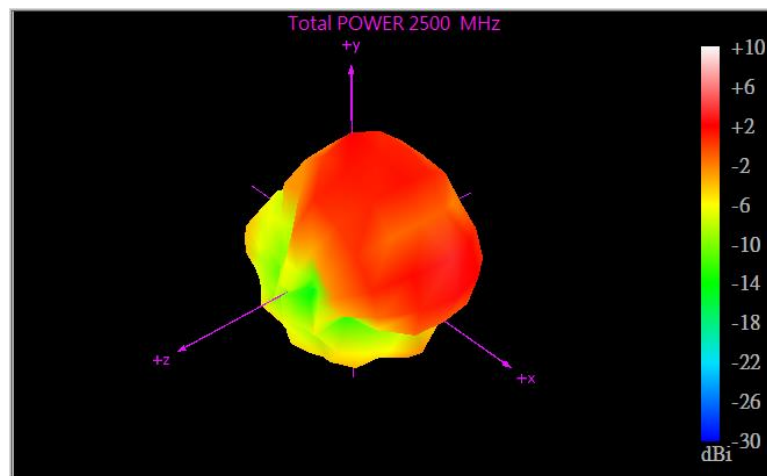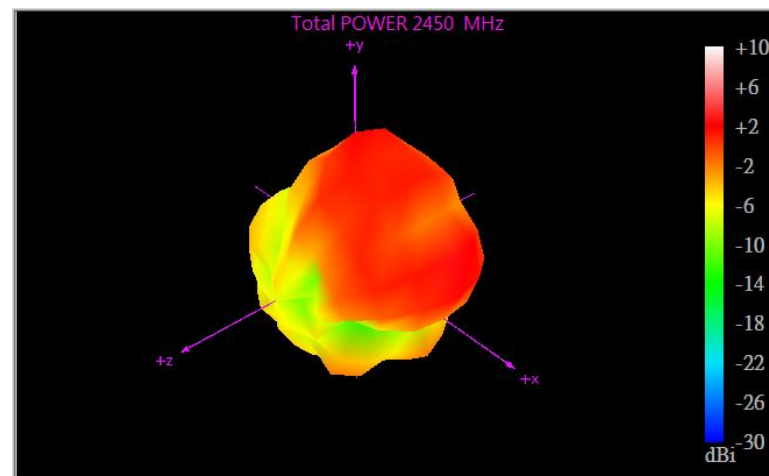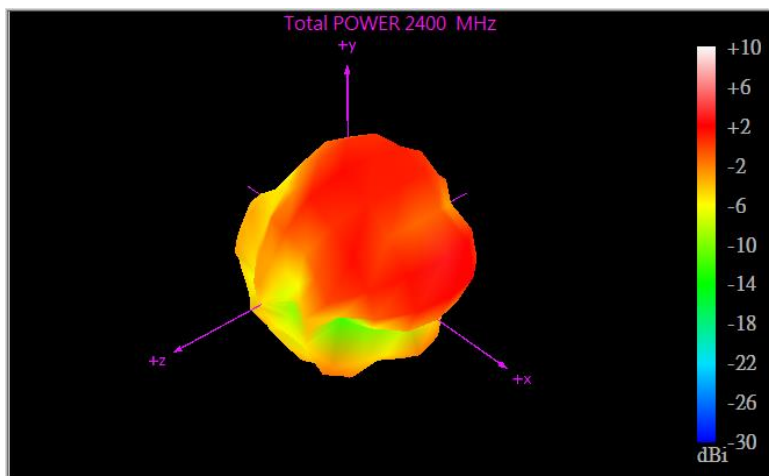

6.3 2D - θ Specifications

Frequency (MHz)	2400	2410	2420	2440	2450	2460	2470	2480	2490	2500
H+V. (Max.) Peak Gain	2.88	2.85	2.60	2.90	2.61	2.73	2.63	3.00	2.62	3.39
H-Pol. (Max.)	-6.05	-5.94	-7.26	-7.81	-8.42	-8.80	-8.18	-8.42	-9.17	-9.34
V-Pol. (Max.)	2.73	2.67	2.44	2.70	2.38	2.62	2.55	2.85	2.52	3.21




2D - θ Pattern

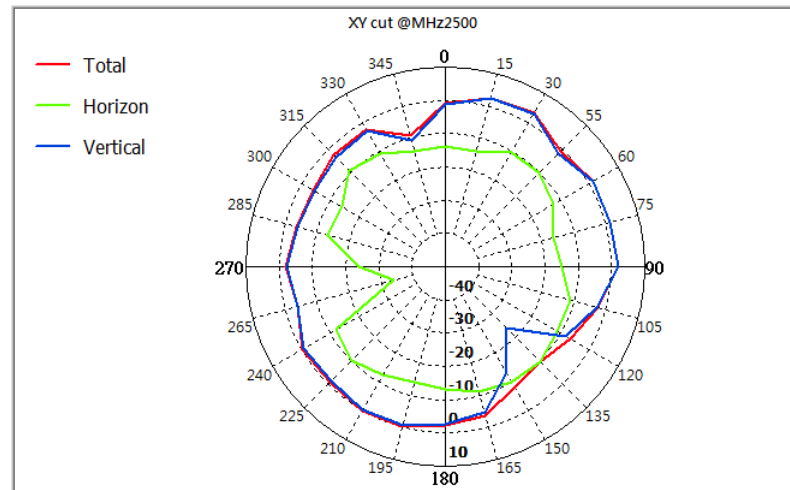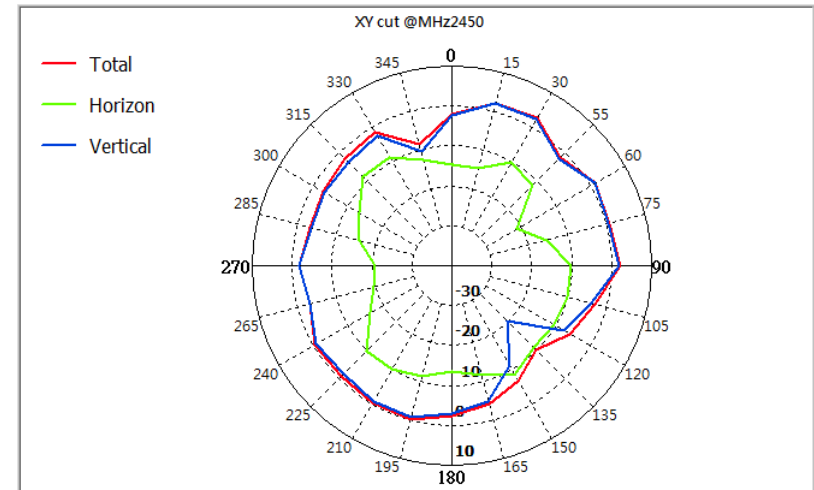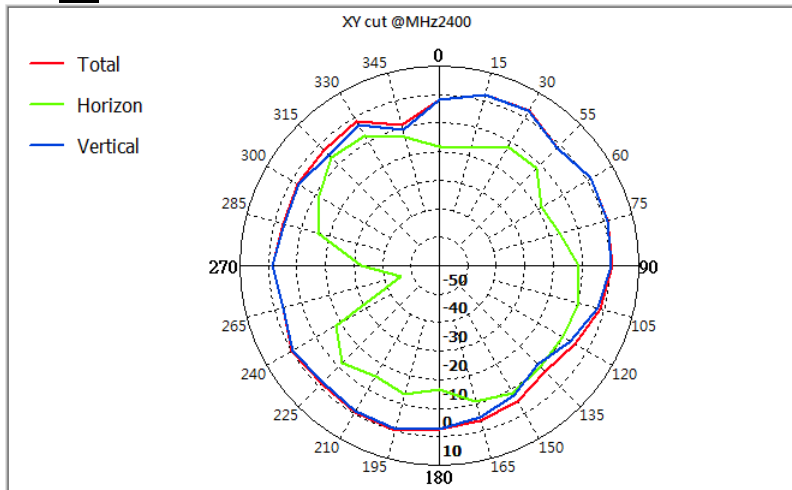

6.4 2D - Φ Specifications


Frequency (MHz)	2400	2410	2420	2440	2450	2460	2470	2480	2490	2500
H+V. (Max.)	0.53	1.22	1.25	1.89	2.10	2.01	1.85	1.98	1.37	1.98
H-Pol. (Max.)	-8.92	-6.85	-10.04	-9.02	-9.85	-10.53	-11.48	-11.47	-11.00	-11.29
V-Pol. (Max.)	0.37	0.97	0.93	1.66	1.83	1.84	1.68	1.78	1.23	1.89

2D - Φ Pattern

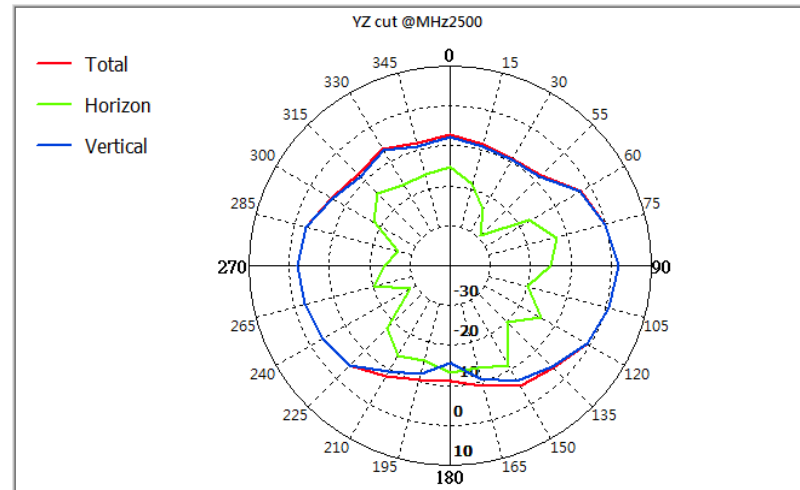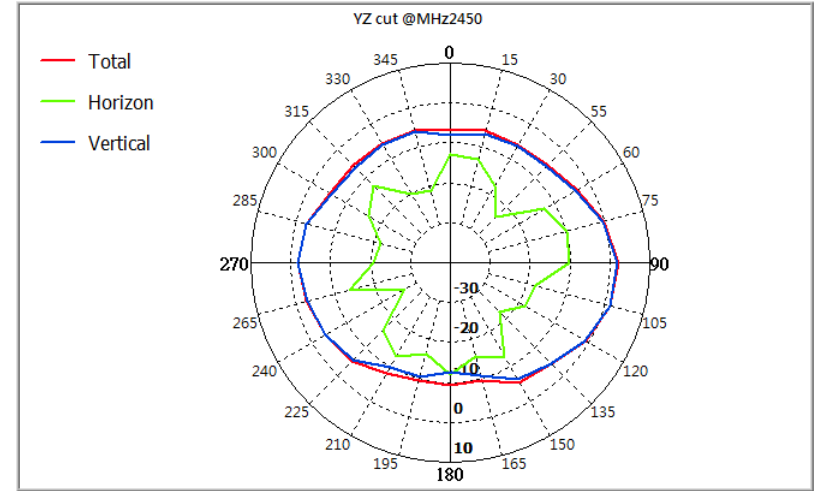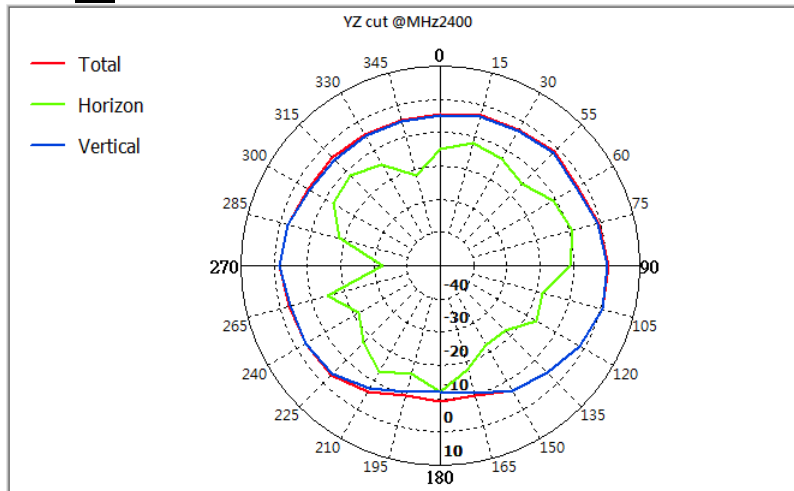

7. Test & System Description

7.1 Test setup

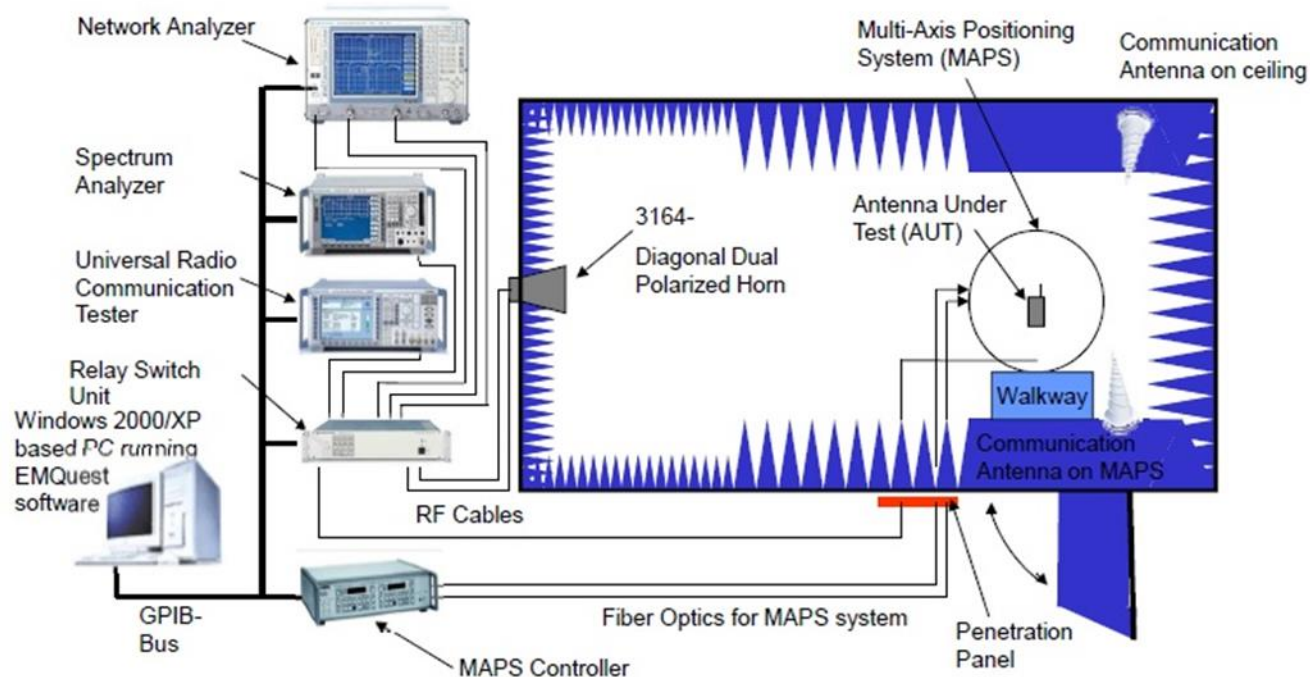

7.2 Equipment list

Device	Type/Model	Manufacturer	Cal. Date	Cal. Du Date
Anechoic Chamber	AMS-8500	ETS-Lindgren	2022/3/3	2023/9/3
Horn antenna(400M~10GHz)	Oct-64	ETS-Lindgren	2022/3/3	2023/9/3
Switch	3499B	Agilent	N/A	N/A
Spectrum Analyzer	N9010A	Agilent	2021/5/7	2023/5/7
ENA	E5071C	Agilent	2021/5/7	2023/5/7
MAPS Controller	2090	ETS-Lindgren	2022/3/3	2023/9/3
Cable 7.5mm 400MHz to 18GHz(H-pol)	SS402	Woken	2021/11/15	2023/11/15
Cable 7.5mm 400MHz to 18GHz(V-pol)	SS402	Woken	2021/11/15	2023/11/15
Cable 14mm 400MHz to 18GHz	SS402	Woken	2021/11/15	2023/11/15