


ANNEX C EUT EXTERNAL PHOTOS


THE FRONT OF EUT (10BDL3051T)



THE BACK OF EUT (10BDL3051T)

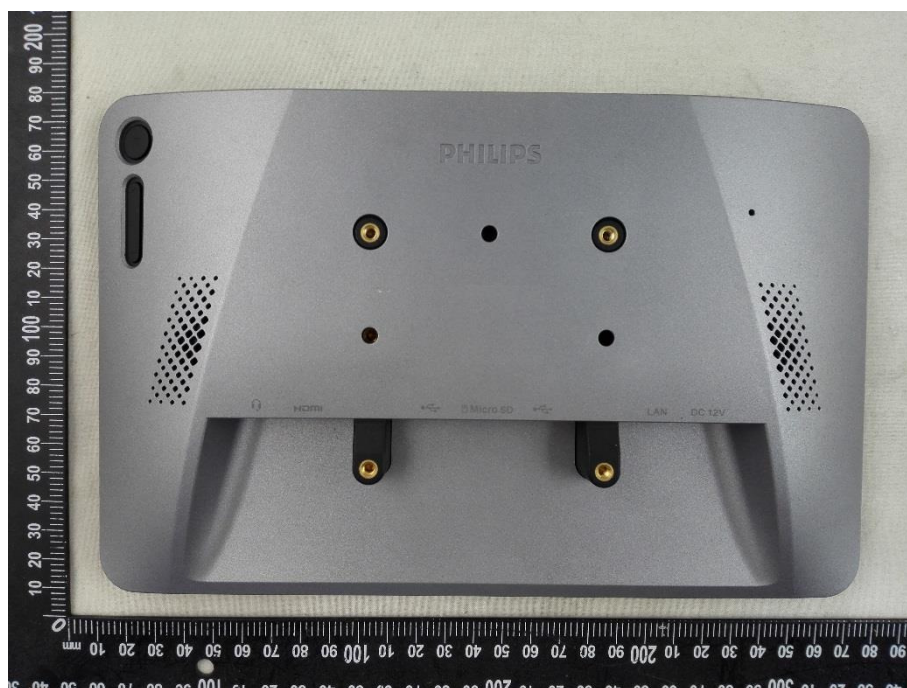

THE LEFT OF EUT (10BDL3051T)

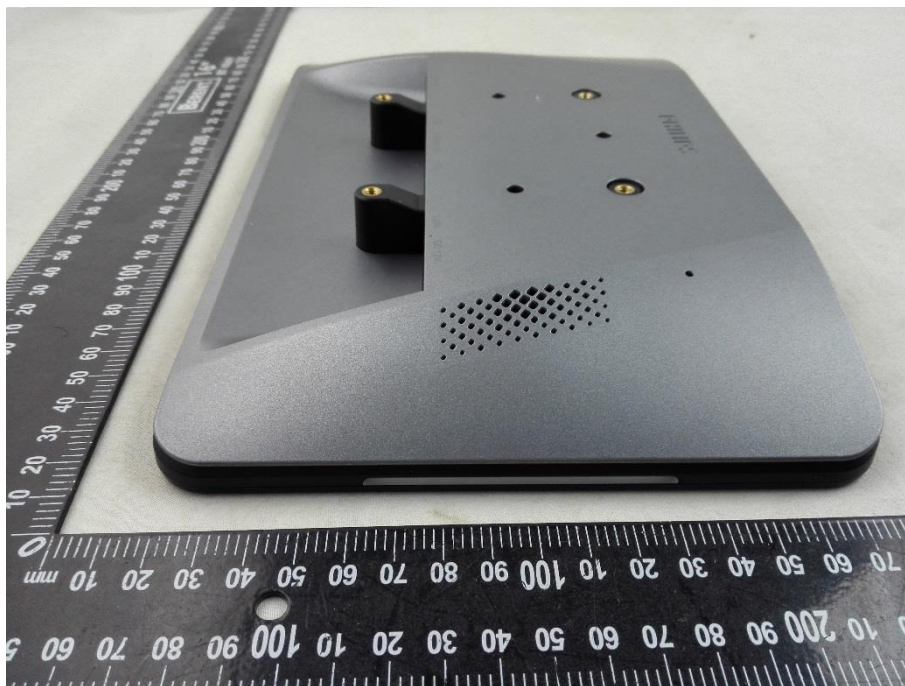

THE RIGHT OF EUT (10BDL3051T)



THE UP OF EUT (10BDL3051T)



THE DOWN OF EUT (10BDL3051T)




THE FRONT OF EUT (10BDL3050Q)



THE BACK OF EUT (10BDL3050Q)




THE LEFT OF EUT (10BDL3050Q)

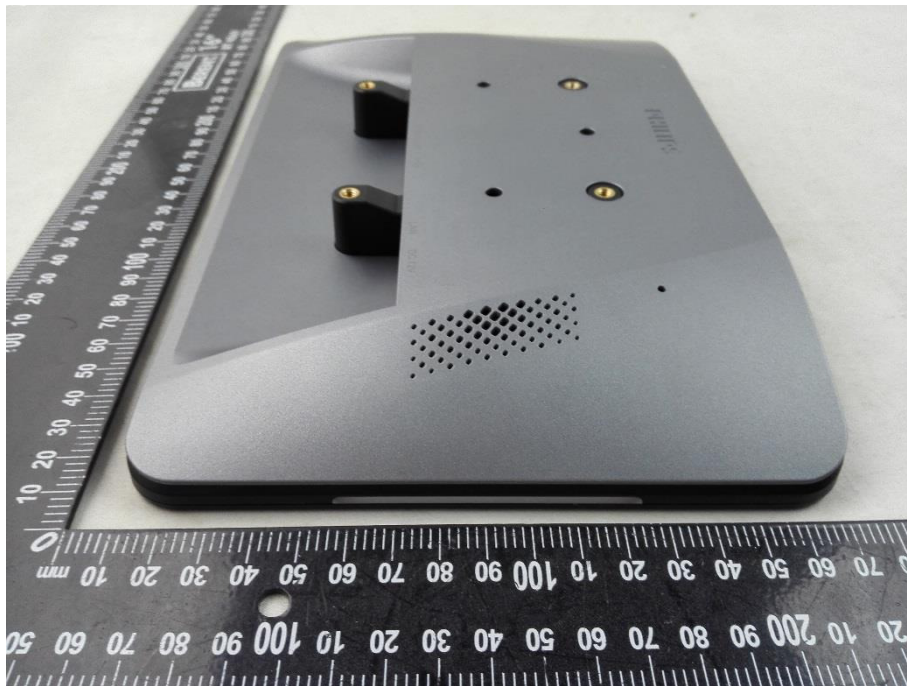

THE RIGHT OF EUT (10BDL3050Q)



THE UP OF EUT (10BDL3050Q)

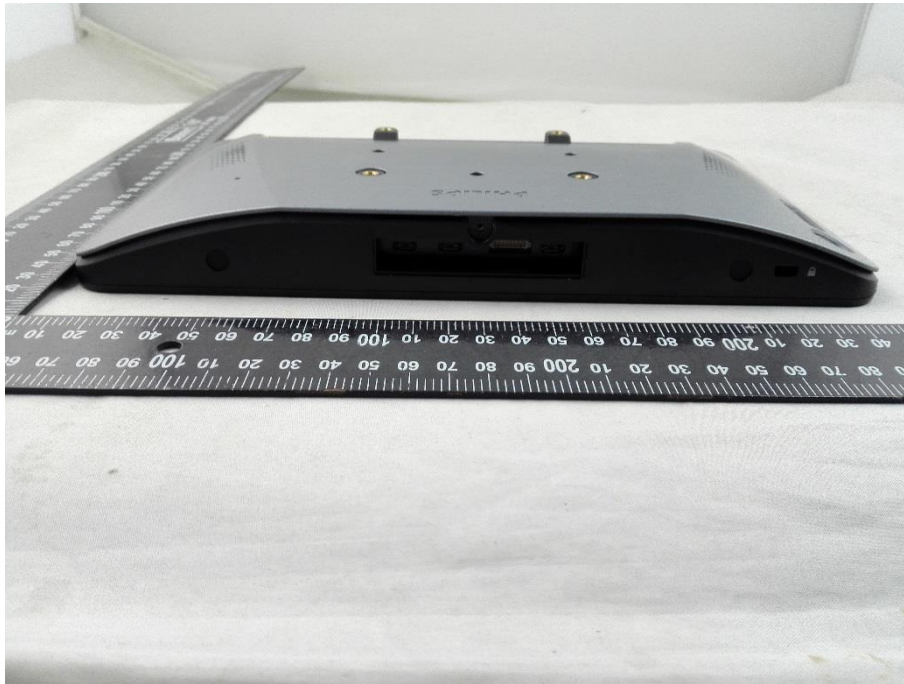

THE DOWN OF EUT (10BDL3050Q)



THE CHARGER (EU)



THE CHARGER (US)



THE CHARGER (UK)



THE CHARGER



A black USB Type-A to FireWire 400 cable is shown coiled on a white surface. The cable has a braided outer sheath. One end is a standard USB Type-A connector, and the other is a FireWire 400 connector. The cable is marked with "USB SUPPLIED" and "REVISION 2.0". A ruler is placed next to the cable for scale, showing it is approximately 1.5 meters long.

A black Ethernet cable is shown coiled next to a ruler. The cable features a standard RJ45 Ethernet connector on one end and a USB Type-A connector on the other. The cable is marked with 'HONGLIN' and technical specifications such as 'CAT 5E', '10/100/1000Mbps', and '1.2m'. The ruler indicates the cable's length is approximately 1.2 meters.

THE HOLDER

