



Please check out the website below for more product information.
www.philips.com/signagesolutions-support



I 0BDL305 I T




Quick
Start

© 2016 Koninklijke Philips N.V. All rights reserved.

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. and are used under license from Koninklijke Philips N.V.

Specifications are subject to change without notice.

Version: V1.00 2016-10-10



Q41G43M181306A

PHILIPS



Colour Monitor



Quick Start Guide



USB Cable



HDMI Cable



Silicon Foot



Stand Bar



DC Power Adapter





Power Plug
(Provided by regions)

* Differences according to regions.

Display design and accessories may differ from those illustrated above.



1

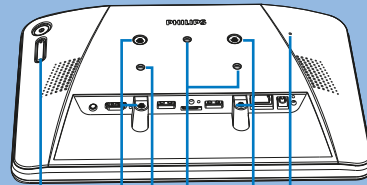

● Wall Mount
Screw Hole

● Reset Button

● Stand screw
hole

VESA mount
(Screw spec: M4)




Speaker

3




Reserved Expansion Port

Micro USB



4

Step 1




Release the back cover
screw to release back
cover

Step 2




Open the back cover with
disassemble tool

Step 3




Separate the back cover
from main device

Step 4




Stick the silicon gaskets on
back cover

Step 5




Install back cover thread
head height not exceed
3mm

Step 6



Route power and network cable from bottom, insert
signboard before mount signboard on back cover

Step 7




*Mounting and installation


Mounting Option 1: [VESA mount]
Supporting VESA standard:
VESA MIS-D75 (75*75mm)
Supporting screw: M4*4mm
(exclude the mounting plate thickness)

Mounting Option 2: [Using back cover]
Supporting screw: Self-tapping screw*3pcs
(exclude the mounting plate thickness)

5



* Simply screw the supplied table stand onto the stand screw hole.

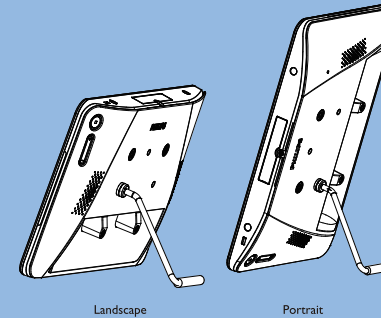

Landscape

Portrait

CARE AND WARNING

WARNING: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/panel PC technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

CAN ICES-3 (A)/NMB-3(A)

This device complies with Industry Canada licence-exempt RSS standard(s).

Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Correct Disposal of this product. This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.

* FCC, IC & CE RF Radiation Exposure Statement Caution: To maintain compliance with the FCC, IC & CE's RF exposure guidelines, place the product at least 20cm from near by persons. *

The suitable temperature for the Colour Monitor and accessories is 0°C~45°C.

Adaptor with ferrite must be used with this equipment to ensure compliance with the Class A FCC limits.

Power Adapter Information:

Model No.: KSASB0241200150D5

INPUT: 100~240V ~50/60Hz 0.6A

OUTPUT: 12V 1.5A