

APPLICATION FOR CERTIFICATION
On Behalf of
Top Victory Electronics (Taiwan) Co., Ltd.
17" Color Monitor
Model : (1)7Elr (2)7Elr+
FCC ID : ARSCM769D

Prepared for : Top Victory Electronics (Taiwan) Co., Ltd.
18F, 738 Chung-Cheng Rd., Chung-Ho 235,
Taipei Hsien, Taiwan, R.O.C.

Prepared By : Taiwan Tokin EMC Eng. Corp.
No. 53-11, Tin-Fu Tsun, Lin-Kou,
Taipei Hsien, Taiwan, R.O.C.

Tel : (02) 2609-9301, 2609-2133
Fax : (02) 2609-9303

File Number : ATM-G00191
Report Number : TTEMC-F20028
Date of Test : Mar. 23 ~ 30, 2000
Date of Report : Apr. 08, 2000

TABLE OF CONTENTS

Description	Page
Test Report Certification	3
1.GENERAL INFORMATION	4
1.1. Description of Device (EUT).....	4
1.2. Tested Supporting System Details	5
1.3. Description of Test Facility	7
1.4. Measurement Uncertainty	7
2.POWERLINE CONDUCTED TEST	8
2.1. Test Equipment	8
2.2. Block Diagram of Test Setup.....	8
2.3. Conducted Powerline Emission Limit (CLASS B)	8
2.4. EUT's Configuration during Compliance Measurement	9
2.5. Operating Condition of EUT	9
2.6. Test Procedure	10
2.7. Line Conducted RF Voltage Measurement Results.....	10
3.RADIATED EMISSION TEST	20
3.1. Test Equipment	20
3.2. Block Diagram of Test Setup.....	20
3.3. Radiation Limit (CISPR 22 Class B)	21
3.4. EUT's Configuration during Compliance Measurement	21
3.5. Operating Condition of EUT	21
3.6. Test Procedure	22
3.7. Radiated Emission Measurement Results	23
4.DEVIATION TO TEST SPECIFICATIONS.....	29
5.MODIFICATIONS TO EUT	30
6.PHOTOGRAPHS.....	31
6.1. Photos of Powerline Conducted Measurement	31
6.2. Photos of Radiated Measurement at Open Field Test Site	32

TEST REPORT CERTIFICATION

Applicant : Top Victory Electronics (Taiwan) Co., Ltd.
 Manufacturer #1 : Top Victory Electronics (Fujian) Co., Ltd.
 Manufacturer #2 : Beijing Orient Top Victory Electronics Co., Ltd.
 FCC ID : ARSCM769D
 EUT Description : 17" Color Monitor
 (A) MODEL NO. : (1)7Elr (2)7Elr+
 (B) SERIAL NO. : N/A
 (C) POWER SUPPLY : AC 120V/60Hz

Measurement Procedure Used:

FCC RULES AND CISPR 22 (DOCKET NO. 92-152, SEP. 1993) AND
FCC / ANSI C63.4-1992

The device described above was tested by TAIWAN TOKIN EMC ENG. CORP. to determine the maximum emission levels emanating from the device. The maximum emission levels were compared to the CISPR 22 Class B limits both radiated and conducted emissions. The measurement results are contained in this test report and TAIWAN TOKIN EMC ENG. CORP. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC official limits.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Taiwan Tokin EMC Eng. corp.

The test results in this test report are traceable to national or international standards.

Date of Test : Mar. 23 ~ 30, 2000

Prepared by : 
 (KITTY NI)

Test Engineer : 
 (ALLEN WANG)

Approve & Authorized Signer : 
 (JACKIE DENG)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description	:	17" Color Monitor
Model Number	:	(1)7Elr (2)7Elr+
		M/N 7Elr is MPR-2 Safety Version M/N 7Elr+ is TCO Safety Version
Serial Number	:	N/A
FCC ID	:	ARSCM769D
Applicant	:	Top Victory Electronics (Taiwan) Co., Ltd. 18F, 738 Chung-Cheng Rd., Chung-Ho 235 Taiwan, R.O.C.
Manufacturer #1	:	Top Victory Electronics (Fujian) Co., Ltd. Yuan Hong Road, Shang-Lu Fuqing City, Fujian, China
Manufacturer #2	:	Beijing Orient Top Victory Electronics Co., Ltd. No. 10, Jiu Xian Qiao Rd., Chao Yang District, Beijing, China.
CRT	:	Chunghwa, M/N M41AGE93X76 C S/N B004500008
Data Cable	:	Shielded, Undetachable, 1.8m Bonded a ferrite core
Power Cord	:	Non-Shielded, Detachable, 1.8m
Date of Receipt of Sample	:	Mar. 22, 2000
Date of Test	:	Mar. 23 ~ 30, 2000

1.2. Tested Supporting System Details

1.2.1. PERSONAL COMPUTER

Mother Board	:	ASUS, M/N P5A FCC ID. By DoC
CPU	:	AMD K6-2 266MHz
Case	:	Enlight, M/N EN7105C
S.P.S.	:	SPI, M/N FSP250-61GT S/N W13562650
Floppy Driver 3.5"	:	Mitsumi, M/N D353M3
Hard Disk Driver	:	Seagate, M/N ST34321A S/N VTH90436
VGA Card	:	Dataexpert, M/N CP765V2 S/N E700492317 FCC ID LUT-CP765
Power Cord	:	Non-Shielded, Detachable, 1.8m

1.2.2. PS2 KEYBOARD

Model Number	:	5121
Serial Number	:	J83300815
FCC ID	:	E5XKBM104M10UC
Manufacturer	:	BTC
Data Cable	:	Shielded, Undetachable, 1m

1.2.3. USB KEYBOARD

Model Number	:	KU-8933
Serial Number	:	8H17800113
FCC ID	:	By DoC
Manufacturer	:	Chicony Electronics Co., Ltd.
Data Cable	:	Shielded, Undetachable, 1.8m

1.2.4. PRINTER

Model Number	:	2225C+
Serial Number	:	3123S97227
FCC ID	:	DSI6XU2225
Manufacturer	:	Hewlett Packard
Power Adapter	:	KANI, Model AD-09
Power Cord	:	Non-Shielded, Detachable, 2.0m
Data Cable	:	Shielded, Detachable, 1.2m

1.2.5. MODEM # 1

Model Number	:	DM-1414
Serial Number	:	980034386
FCC ID	:	IFAXDM1414
Manufacturer	:	Accex
Data Cable	:	Shielded, Detachable, 1.2m
Power Adapter	:	Amigo, M/N AM-91000A
		Non-Shielded, Undetachable, 1.8m

1.2.6. MODEM # 2

Model Number	:	DM-1414
Serial Number	:	980034385
FCC ID	:	IFAXDM1414
Manufacturer	:	Accex
Data Cable	:	Shielded, Detachable, 1.2m
Power Adapter	:	Amigo, M/N AM-91000A
		Non-Shielded, Undetachable, 1.8m

1.2.7. PS2 MOUSE

Model Number	:	M-S35
Serial Number	:	LZA82103122
FCC ID	:	DZL211029
Manufacturer	:	Logitech
Data Cable	:	Non-Shielded, Undetachable, 1.8m

1.2.8. USB MOUSE

Model Number	:	M-UB48
Serial Number	:	LZB81900205
FCC ID	:	DZL211137
Manufacturer	:	Logitech
Data Cable	:	Shielded, Undetachable, 1.8m

1.3. Description of Test Facility

Site Description (No. 7 Open Site)	:	Dec. 02, 1999 File on Federal Communication Commission FCC Engineering Laboratory 7435 Oakland Mills Road Columbia, MD 21046, U.S.A.
Name of Firm	:	Taiwan Tokin EMC Eng. Corp.
Site Location	:	No. 53-11, Tin-Fu Tsun, Lin-Kou, Taipei Hsien, Taiwan, R.O.C.
NVLAP lab. Code	:	200077-0
DAR-Registration No.	:	DAT-P-092/99-00

1.4. Measurement Uncertainty

- (1) Radiation Uncertainty $U_r = \pm 4.01\text{dB}$
- (2) Conduction Uncertainty $U_c = \pm 2.26\text{dB}$

2.4. EUT's Configuration during Compliance Measurement

The following equipment were installed on RF LINE VOLTAGE measurement to meet the Commission requirement and operating in a manner which tended to maximize its emission characteristics in a normal application.

2.4.1. 17" Color Monitor (EUT)

Model Number	:	7Elr
Serial Number	:	N/A
FCC ID	:	ARSCM769D
Manufacturer #1	:	Top Victory Electronics (Fujian) Co., Ltd.
Manufacturer #2	:	Beijing Orient Top Victory Electronics Co., Ltd.
CRT	:	Chunghwa, M/N M41AGE93X76 C S/N B004500008
Data Cable	:	Shielded, Undetachable, 1.8m Bonded a ferrite core
Power Cord	:	Non-Shielded, Detachable, 1.8m

2.4.2. Supporting System : As in section 1.2

2.5. Operating Condition of EUT

2.5.1. Setup the EUT and simulator as shown on 2.2.

2.5.2. Turn on the power of all equipment.

2.5.3. Personal Computer read data from disk.

2.5.4. Personal Computer running the self-test program "Hwin" by windows and sent "H" character to monitor (EUT) through VGA card, the screen displayed and filled with "H" pattern by EUT's resolution.

2.5.5. Personal Computer read data from floppy disk 、Modem and then wrote the data into floppy disk 、Modem.

2.5.6. Personal computer sent "H" character to printer, the printer printed "H" pattern.

2.5.7. The other peripheral devices were driven and operated in turn during all testing.

2.5.8. Repeat the above procedures from 2.5.3 to 2.5.7.

2.6. Test Procedure

The EUT was connected to the power mains through a line impedance stabilization network (L.I.S.N.# 1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N. # 2). This provided a 50 ohm coupling impedance for the measuring equipment. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to FCC ANSI C63.4-1992 requirement.

The bandwidth of the R&S Test Receiver ESHS10 was set at 10KHz.

The frequency range from 150KHz to 30MHz was checked.

Three kinds of horizontal working frequency were done during conducted measurement and all the test results are listed in section 2.7..

2.7. Line Conducted RF Voltage Measurement Results

PASSED. Please refer to the following pages. (9 pages)

All emissions not reported below are too low against the prescribed limits.

EUT : 17" Color Monitor Model No.: 7Elr

Test Date : Mar. 30, 2000 Temperature : 25.1°C Humidity : 60%

Mode	Frequency Resolution	Reference Data #
1.	800*600/85Hz, 54KHz	# 10 (11, 12), # 13 (14, 15)
2.	1280*1024/60Hz, 64KHz	# 19 (20, 21), # 16 (17, 18)
3.	1024*768/85Hz, 69KHz	# 7 (8, 9), # 4 (5, 6)


Please refer to the next pages.

TOKIN

TAIWAN TOKIN EMC ENG. CORP.

No53-11, Tin-fu Tsun, Lin-kou Hsiang,
Ttaipei, County, Taiwan ,R.O.C.
tel:02-26092133
fax:02-26099303

Data#: 10 File#: topvictory.EMI Date: 2000-03-30 Time: 17:20:40

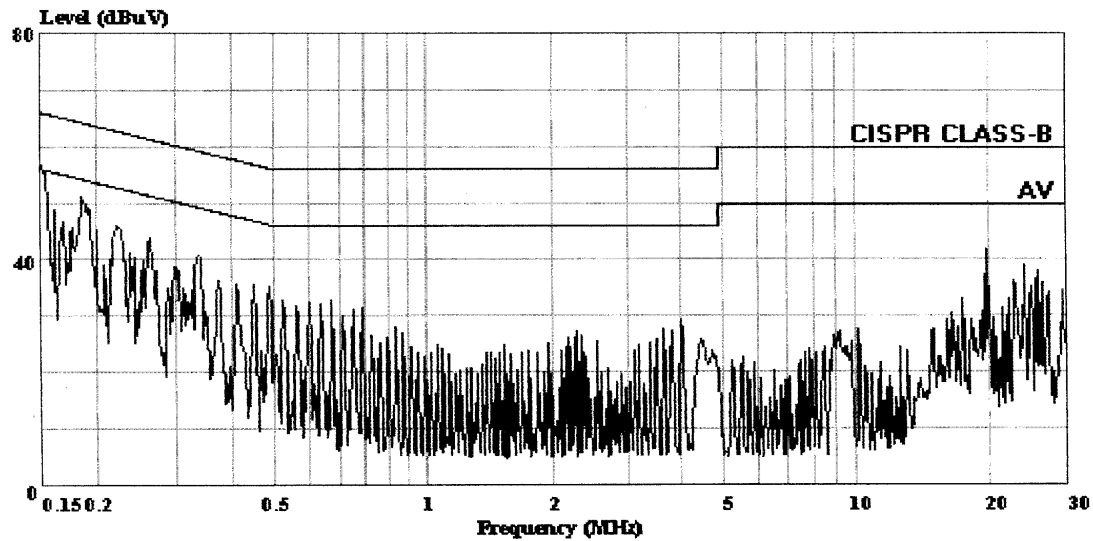

TAIWAN TOKIN EMC ENG. CORP. (NO.4 SHIELDED ROOM)

Trace:

Ref Trace:


Condition: CISPR CLASS-B KNW-407 NEUTRAL
EUT : 17" COLOR MONITOR
POWER: 120Vac/60Hz
MEMO : 54KHz(800X600;85Hz)

TOKIN

TAIWAN TOKIN EMC ENG. CORP.

No53-11, Tin-fu Tsun, Lin-kou Hsiang,
Ttaipei, County, Taiwan ,R.O.C.
tel:02-26092133
fax:02-26099303

Data#: 13 File#: topvictory.EMI Date: 2000-03-30 Time: 17:25:41

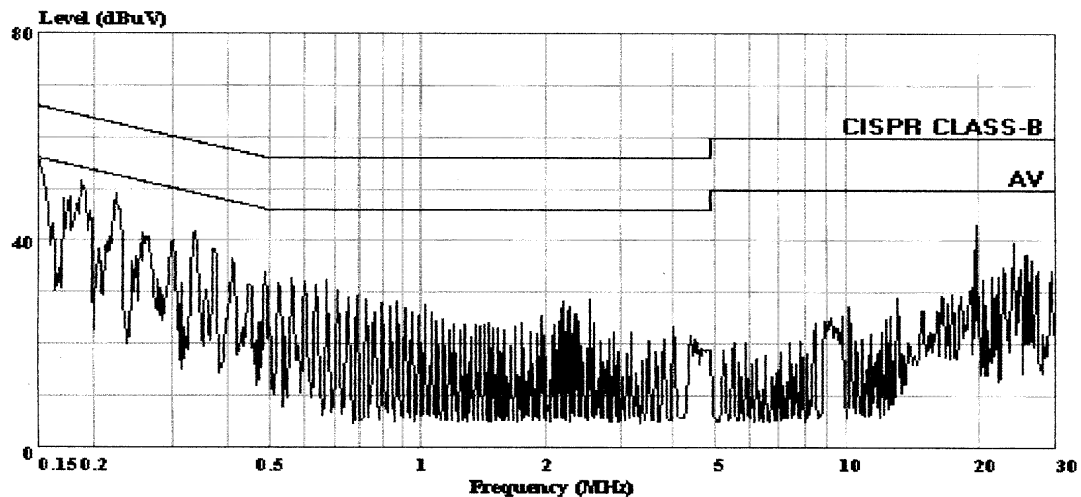

TAIWAN TOKIN EMC ENG. CORP. (NO.4 SHIELDED ROOM)

Trace:

Ref Trace:

Condition: CISPR CLASS-B KNW-407 LINE
EUT : 17" COLOR MONITOR
POWER: 120Vac/60Hz
MEMO : 54KHz(800X600;85Hz)

TOKIN

No53-11, Tin-fu Tsun, Lin-kou Hsiang,
Ttaipei, County, Taiwan, R.O.C.
tel:02-26092133
fax:02-26099303

TAIWAN TOKIN EMC ENG. CORP.

Data#: 11 File#: topvictory.EMI
NO.4 SHIELDED ROOM

Date: 2000-03-30 Time: 17:23:53

Condition: CISPR CLASS-B KNW-407 NEUTRAL
EUT : 17" COLOR MONITOR
POWER: 120Vac/60Hz
MEMO : 54KHz (800X600;85Hz)

Page: 1

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	dB	
1	0.151	55.29	-10.67	65.96	54.96	0.30	0.03	0.00	QP
2	0.188	51.45	-12.67	64.11	51.19	0.22	0.03	0.00	QP
3	0.337	42.36	-16.92	59.29	42.20	0.13	0.04	0.00	QP
4	0.676	32.04	-23.96	56.00	31.89	0.10	0.05	0.00	QP
5	4.127	29.60	-26.40	56.00	29.45	0.10	0.05	0.00	QP
6	19.828	41.83	-18.17	60.00	41.44	0.20	0.19	0.00	QP

Data#: 12 File#: topvictory.EMI Date: 2000-03-30 Time: 17:24:20
NO.4 SHIELDED ROOM

Condition: CISPR CLASS-B(AV) KNW-407 NEUTRAL
EUT : 17" COLOR MONITOR
POWER: 120Vac/60Hz
MEMO : 54KHz (800X600;85Hz)

Page: 1

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	dB	
1 !	0.151	47.31	-8.65	55.96	46.98	0.30	0.03	0.00	Average
2 !	0.188	45.24	-8.88	54.11	44.98	0.22	0.03	0.00	Average
3 !	0.337	39.88	-9.40	49.29	39.72	0.13	0.04	0.00	Average
4	0.676	29.24	-16.76	46.00	29.09	0.10	0.05	0.00	Average
5	4.127	22.39	-23.61	46.00	22.24	0.10	0.05	0.00	Average
6 !	19.816	40.46	-9.54	50.00	40.07	0.20	0.19	0.00	Average

TOKIN

TAIWAN TOKIN EMC ENG. CORP.

No53-11, Tin-fu Tsun, Lin-kou Hsiang,
Ttaipei, County, Taiwan , R.O.C.
tel:02-26092133
fax:02-26099303

Data#: 14 File#: topvictory.EMI
NO.4 SHIELDED ROOM

Date: 2000-03-30 Time: 17:28:29

Condition: CISPR CLASS-B KNW-407 LINE
EUT : 17" COLOR MONITOR
POWER: 120Vac/60Hz
MEMO : 54KHz(800X600;85Hz)

Page: 1

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	dB	
1	0.150	55.94	-10.05	65.99	55.61	0.30	0.03	0.00	QP
2	0.187	51.72	-12.45	64.17	51.46	0.22	0.03	0.00	QP
3	0.226	44.91	-17.67	62.58	44.69	0.18	0.04	0.00	QP
4	0.675	32.37	-23.63	56.00	32.22	0.10	0.05	0.00	QP
5	2.663	27.37	-28.63	56.00	27.22	0.10	0.05	0.00	QP
6	19.815	49.08	-10.92	60.00	48.69	0.20	0.19	0.00	QP

Data#: 15 File#: topvictory.EMI
NO.4 SHIELDED ROOM

Date: 2000-03-30 Time: 17:28:59

Condition: CISPR CLASS-B(AV) KNW-407 LINE
EUT : 17" COLOR MONITOR
POWER: 120Vac/60Hz
MEMO : 54KHz(800X600;85Hz)

Page: 1


	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	dB	
1 !	0.150	47.61	-8.38	55.99	47.28	0.30	0.03	0.00	Average
2 !	0.187	47.12	-7.05	54.17	46.86	0.22	0.03	0.00	Average
3	0.226	35.75	-16.83	52.58	35.53	0.18	0.04	0.00	Average
4	0.675	28.67	-17.33	46.00	28.52	0.10	0.05	0.00	Average
5	2.663	24.55	-21.45	46.00	24.40	0.10	0.05	0.00	Average
6 !	19.815	40.56	-9.44	50.00	40.17	0.20	0.19	0.00	Average

TOKIN

TAIWAN TOKIN EMC ENG. CORP.

No53-11, Tin-fu Tsun, Lin-kou Hsiang,
Ttaipei, County, Taiwan ,R.O.C.
tel:02-26092133
fax:02-26099303

Data#: 19 File#: topvictory.EMI Date: 2000-03-30 Time: 17:43:26

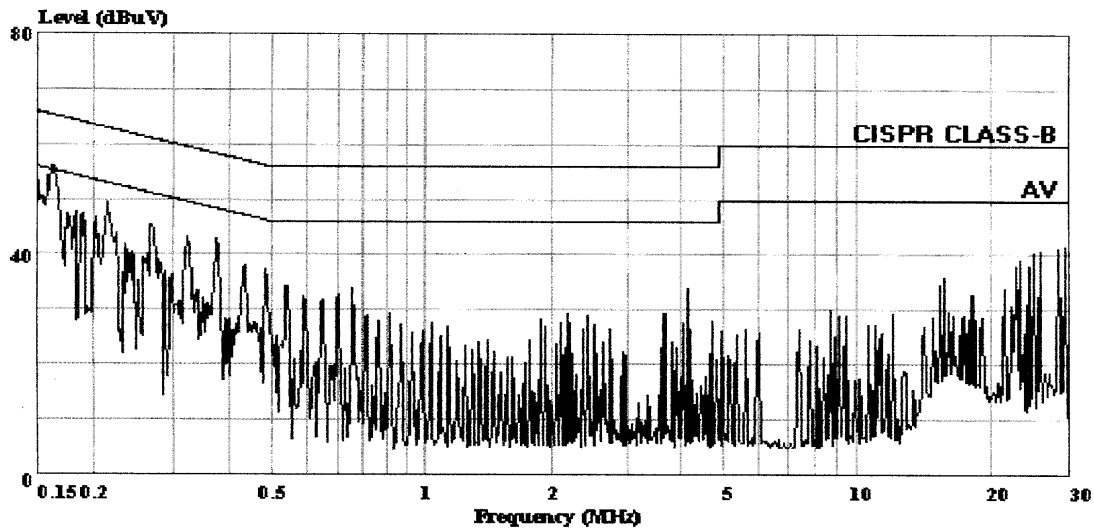

TAIWAN TOKIN EMC ENG. CORP. (NO.4 SHIELDED ROOM)

Trace:

Ref Trace:


Condition: CISPR CLASS-B KNW-407 NEUTRAL
EUT : 17" COLOR MONITOR
POWER: 120Vac/60Hz
MEMO : 64KHz (1280X1024; 60Hz)

TOKIN

TAIWAN TOKIN EMC ENG. CORP.

No53-11, Tin-fu Tsun, Lin-kou Hsiang,
Ttaipei, County, Taiwan ,R.O.C.
tel:02-26092133
fax:02-26099303

Data#: 16 File#: topvictory.EMI Date: 2000-03-30 Time: 17:30:22

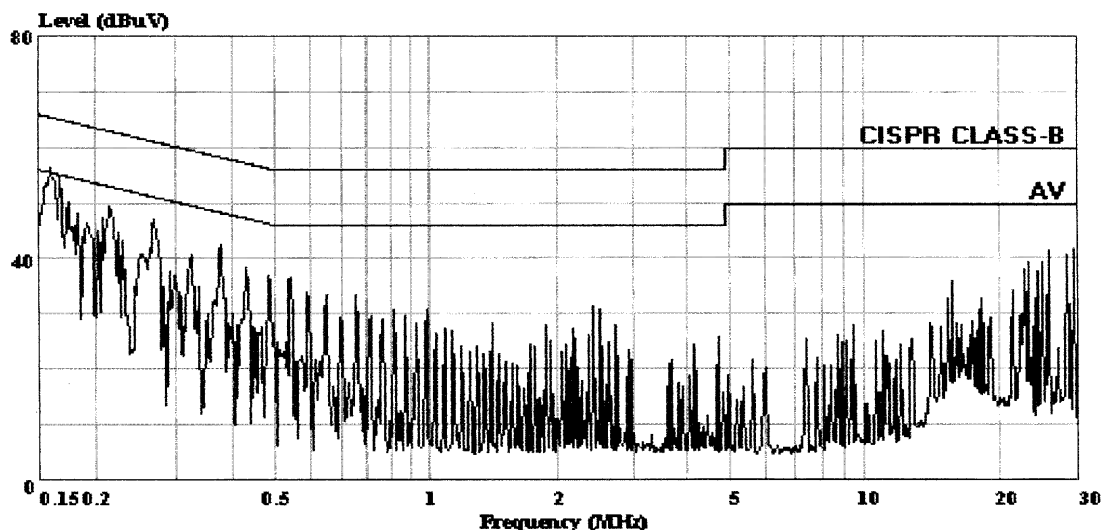

TAIWAN TOKIN EMC ENG. CORP. (NO.4 SHIELDED ROOM)

Trace:

Ref Trace:

Condition: CISPR CLASS-B KNW-407 LINE
EUT : 17" COLOR MONITOR
POWER: 120Vac/60Hz
MEMO : 64KHz (1280X1024; 60Hz)

TOKIN

TAIWAN TOKIN EMC ENG. CORP.

No53-11, Tin-fu Tsun, Lin-kou Hsiang,
Ttaipei, County, Taiwan, R.O.C.
tel:02-26092133
fax:02-26099303

Data#: 20 File#: topvictory.EMI
NO.4 SHIELDED ROOM

Date: 2000-03-30 Time: 17:45:32

Condition: CISPR CLASS-B KNW-407 NEUTRAL
EUT : 17" COLOR MONITOR
POWER: 120Vac/60Hz
MEMO : 64KHz(1280X1024;60Hz)

Page: 1

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	dB	
1 !	0.160	55.54	-9.91	65.45	55.23	0.28	0.03	0.00	QP
2	0.213	48.39	-14.69	63.08	48.16	0.19	0.04	0.00	QP
3	0.378	41.53	-16.79	58.31	41.38	0.11	0.04	0.00	QP
4	0.756	32.59	-23.41	56.00	32.44	0.10	0.05	0.00	QP
5	4.263	33.73	-22.27	56.00	33.58	0.10	0.05	0.00	QP
6	29.199	38.52	-21.48	60.00	37.94	0.38	0.20	0.00	QP

Data#: 21 File#: topvictory.EMI
NO.4 SHIELDED ROOM

Date: 2000-03-30 Time: 17:46:07

Condition: CISPR CLASS-B(AV) KNW-407 NEUTRAL
EUT : 17" COLOR MONITOR
POWER: 120Vac/60Hz
MEMO : 64KHz(1280X1024;60Hz)

Page: 1

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	dB	
1 !	0.160	48.21	-7.24	55.45	47.90	0.28	0.03	0.00	Average
2	0.213	42.65	-10.43	53.08	42.42	0.19	0.04	0.00	Average
3 !	0.378	40.00	-8.32	48.31	39.85	0.11	0.04	0.00	Average
4	0.756	29.93	-16.07	46.00	29.78	0.10	0.05	0.00	Average
5	4.263	25.89	-20.11	46.00	25.74	0.10	0.05	0.00	Average
6	29.199	33.61	-16.39	50.00	33.03	0.38	0.20	0.00	Average

TOKIN

TAIWAN TOKIN EMC ENG. CORP.

No53-11, Tin-fu Tsun, Lin-kou Hsiang,
Ttaipei, County, Taiwan, R.O.C.
tel:02-26092133
fax:02-26099303

Data#: 17 File#: topvictory.EMI Date: 2000-03-30 Time: 17:39:37
NO.4 SHIELDED ROOM

Condition: CISPR CLASS-B KNW-407 LINE
EUT : 17" COLOR MONITOR
POWER: 120Vac/60Hz
MEMO : 64KHz(1280X1024;60Hz)

Page: 1

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	dB	
1 !	0.161	57.01	-8.42	65.42	56.70	0.28	0.03	0.00	QP
2	0.215	49.16	-13.84	63.00	48.94	0.19	0.04	0.00	QP
3	0.269	47.66	-13.49	61.15	47.47	0.16	0.04	0.00	QP
4	0.376	42.39	-15.97	58.36	42.24	0.11	0.04	0.00	QP
5	0.538	35.84	-20.16	56.00	35.70	0.10	0.04	0.00	QP
6	29.199	38.21	-21.79	60.00	37.63	0.38	0.20	0.00	QP

Data#: 18 File#: topvictory.EMI Date: 2000-03-30 Time: 17:40:22
NO.4 SHIELDED ROOM

Condition: CISPR CLASS-B(AV) KNW-407 LINE
EUT : 17" COLOR MONITOR
POWER: 120Vac/60Hz
MEMO : 64KHz(1280X1024;60Hz)

Page: 1


	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	dB	
1 !	0.161	48.89	-6.54	55.42	48.58	0.28	0.03	0.00	Average
2 !	0.215	44.65	-8.35	53.00	44.43	0.19	0.04	0.00	Average
3 !	0.269	44.82	-6.33	51.15	44.63	0.16	0.04	0.00	Average
4 !	0.376	41.00	-7.36	48.36	40.85	0.11	0.04	0.00	Average
5	0.538	33.47	-12.53	46.00	33.33	0.10	0.04	0.00	Average
6	29.199	33.86	-16.14	50.00	33.28	0.38	0.20	0.00	Average

TOKIN

TAIWAN TOKIN EMC ENG. CORP.

No53-11, Tin-fu Tsun, Lin-kou Hsiang,
Ttaipei, County, Taiwan, R.O.C.
tel: 02-26092133
fax: 02-26099303

Data#: 7 File#: topvictory.EMI Date: 2000-03-30 Time: 17:11:07

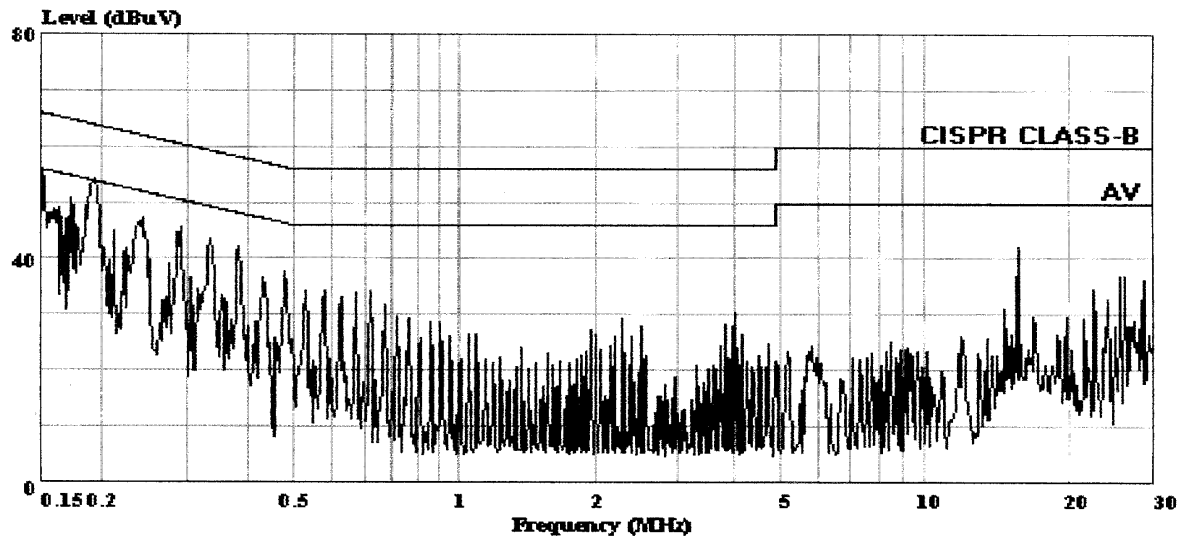

TAIWAN TOKIN EMC ENG. CORP. (NO.4 SHIELDED ROOM)

Trace:

Ref Trace:


Condition: CISPR CLASS-B KNW-407 NEUTRAL
EUT : 17" COLOR MONITOR
POWER: 120Vac/60Hz
MEMO : 69KHz (1024X768; 85Hz)

TOKIN

TAIWAN TOKIN EMC ENG. CORP.

No53-11, Tin-fu Tsun, Lin-kou Hsiang,
Ttaipei, County, Taiwan, R.O.C.
tel: 02-26092133
fax: 02-26099303

Data#: 4 File#: topvictory.EMI Date: 2000-03-30 Time: 16:40:57

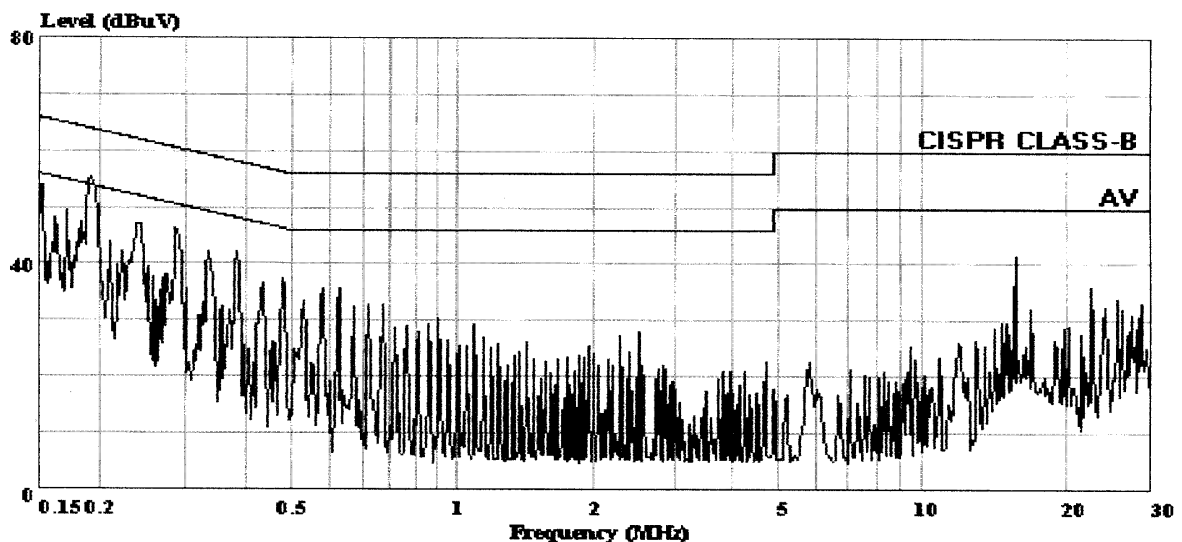

TAIWAN TOKIN EMC ENG. CORP. (NO.4 SHIELDED ROOM)

Trace:

Ref Trace:

Condition: CISPR CLASS-B KNW-407 LINE
EUT : 17" COLOR MONITOR
POWER: 120Vac/60Hz
MEMO : 69KHz (1024X768; 85Hz)

TOKIN

No53-11, Tin-fu Tsun, Lin-kou Hsiang,
Ttaipei, County, Taiwan, R.O.C.
tel: 02-26092133
fax: 02-26099303

TAIWAN TOKIN EMC ENG. CORP.

Data#: 8 File#: topvictory.EMI Date: 2000-03-30 Time: 17:14:10
NO.4 SHIELDED ROOM

Condition: CISPR CLASS-B KNW-407 NEUTRAL
EUT : 17" COLOR MONITOR
POWER: 120Vac/60Hz
MEMO : 69KHz (1024X768; 85Hz)

Page: 1

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	dB	
1	0.150	48.33	-17.66	65.99	48.00	0.30	0.03	0.00	QP
2	0.191	53.54	-10.45	63.99	53.29	0.22	0.03	0.00	QP
3	0.286	43.12	-17.52	60.64	42.93	0.15	0.04	0.00	QP
4	0.720	33.40	-22.60	56.00	33.25	0.10	0.05	0.00	QP
5	4.127	30.10	-25.90	56.00	29.95	0.10	0.05	0.00	QP
6	15.700	38.46	-21.54	60.00	38.23	0.11	0.11	0.00	QP

Data#: 9 File#: topvictory.EMI Date: 2000-03-30 Time: 17:18:44
NO.4 SHIELDED ROOM

Condition: CISPR CLASS-B(AV) KNW-407 NEUTRAL
EUT : 17" COLOR MONITOR
POWER: 120Vac/60Hz
MEMO : 69KHz (1024X768; 85Hz)

Page: 1

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	dB	
1	0.150	39.41	-16.58	55.99	39.08	0.30	0.03	0.00	Average
2	0.191	46.65	-7.34	53.99	46.40	0.22	0.03	0.00	Average
3	0.286	40.55	-10.09	50.64	40.36	0.15	0.04	0.00	Average
4	0.720	28.66	-17.34	46.00	28.51	0.10	0.05	0.00	Average
5	4.127	23.13	-22.87	46.00	22.98	0.10	0.05	0.00	Average
6	15.700	33.20	-16.80	50.00	32.97	0.11	0.11	0.00	Average

TOKIN

TAIWAN TOKIN EMC ENG. CORP.

No53-11, Tin-fu Tsun, Lin-kou Hsiang,
Ttaipei, County, Taiwan, R.O.C.
tel:02-26092133
fax:02-26099303

Data#: 5 File#: topvictory.EMI Date: 2000-03-30 Time: 16:58:49
NO.4 SHIELDED ROOM

Condition: CISPR CLASS-B KNW-407 LINE
EUT : 17" COLOR MONITOR
POWER: 120Vac/60Hz
MEMO : 69KHz(1024X768;85Hz)

Page: 1

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	dB	
1 !	0.192	54.02	-9.95	63.97	53.77	0.21	0.03	0.00	QP
2	0.288	45.71	-14.88	60.59	45.52	0.15	0.04	0.00	QP
3	0.384	41.75	-16.44	58.19	41.60	0.11	0.04	0.00	QP
4	0.623	35.22	-20.78	56.00	35.07	0.10	0.05	0.00	QP
5	2.641	28.51	-27.49	56.00	28.36	0.10	0.05	0.00	QP
6	15.702	38.84	-21.16	60.00	38.61	0.11	0.11	0.00	QP

Data#: 6 File#: topvictory.EMI Date: 2000-03-30 Time: 16:59:20
NO.4 SHIELDED ROOM

Condition: CISPR CLASS-B(AV) KNW-407 LINE
EUT : 17" COLOR MONITOR
POWER: 120Vac/60Hz
MEMO : 69KHz(1024X768;85Hz)

Page: 1

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	dB	
1 !	0.192	48.13	-5.84	53.97	47.88	0.21	0.03	0.00	Average
2 !	0.288	42.56	-8.03	50.59	42.37	0.15	0.04	0.00	Average
3	0.384	38.09	-10.10	48.19	37.94	0.11	0.04	0.00	Average
4	0.623	31.51	-14.49	46.00	31.36	0.10	0.05	0.00	Average
5	2.641	25.22	-20.78	46.00	25.07	0.10	0.05	0.00	Average
6	15.702	34.27	-15.73	50.00	34.04	0.11	0.11	0.00	Average

3. RADIATED EMISSION TEST


3.1. Test Equipment

The following test equipments were used during the radiated emission tests :


Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	HP	8595E	3829A03489	Oct.13, 99'	1 Year
2.	Test Receiver	Rohde & Schwarz	ESVS10	826148/005	May.05, 99'	1 Year
3.	Computer	TOKIN	586PC	N/A	N/A	NA
4.	Printer	HP	C6450A	TH96Q121ZC	N/A	N/A
5.	Amplifier	HP	8447D	2944A06891	N/A	N/A
6.	Broadband Antenna	Chase	VBA6106A	1240	Jul. 23, 99'	1 Year
7.	Log Periodic Antenna	Chase	UPA6109	1064	Jul. 23, 99'	1 Year

3.2. Block Diagram of Test Setup

3.2.1. Block Diagram of connection between EUT and simulators

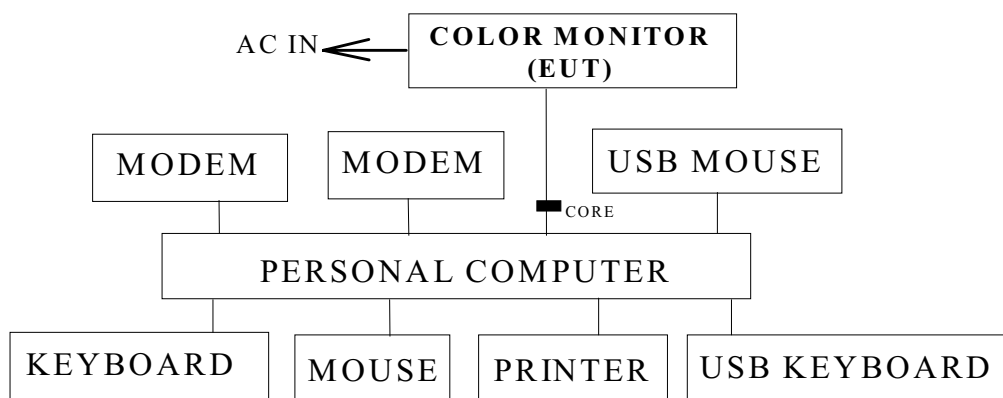

3.2.2. Open Field Test Site (10m) Setup Diagram

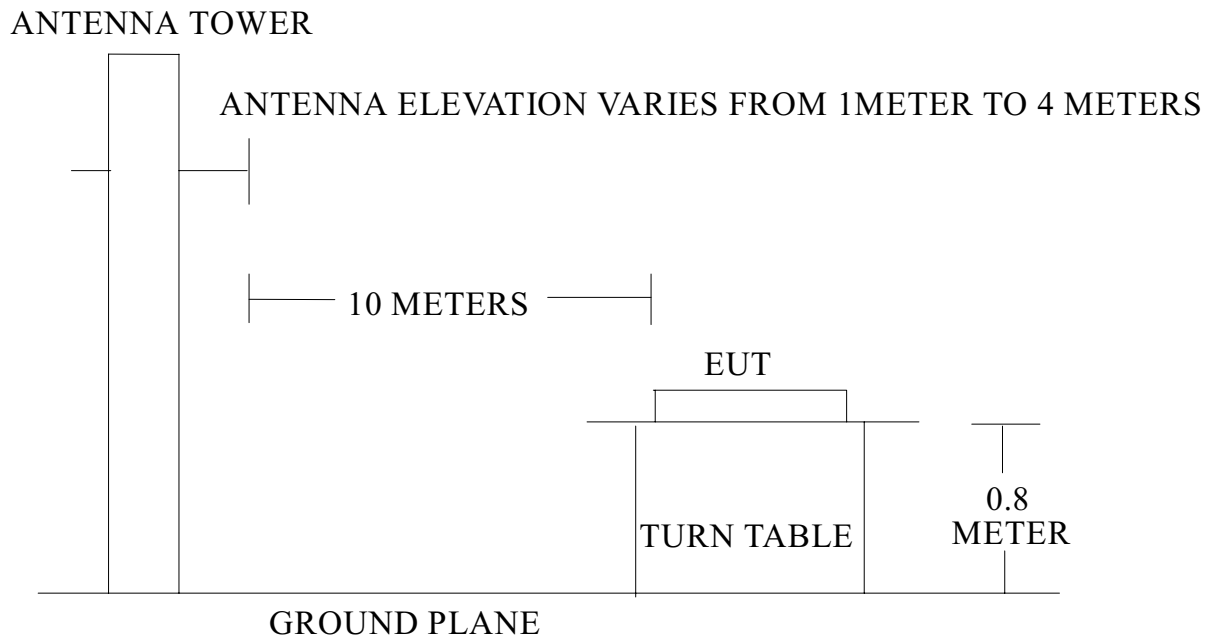

3.3. Radiation Limit (CISPR 22 Class B)

FREQUENCY	DISTANCE	FIELD STRENGTHS LIMITS
MHz	Meters	dBuV/m
30 ~ 230	10	30
230 ~ 1000	10	37

Remark : (1) The tighter limit shall apply at the edge between two frequency bands.
 (2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3.4. EUT's Configuration during Compliance Measurement

The configuration of EUT and its simulators were the same as those used in conducted measurement. Please refer to 2.4.

3.5. Operating Condition of EUT

Same as conducted measurement which is listed in Section 2.5.

3.6. Test Procedure

The EUT and its simulators were placed on a turn table which was 0.8 meter above ground. The turn table rotate 360 degrees to determine the position of the maximum emission level. EUT was set 10 meters away from the receiving antenna which were mounted on a antenna tower. The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated biconical and log periodical antenna) and dipole antenna were used as receiving antenna. Both horizontal and vertical polarization of the antenna were set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4-1992 requirement.

The bandwidth of the R&S Test Receiver ESVS10 was set at 120KHz.

The frequency range from 30MHz to 1000MHz was checked.

Three kinds of horizontal working frequency were done during radiated measurement and all the test results are listed in section 3.7..

Test Mode :

- (1) 54KHz/800*600, 85Hz
- (2) 64KHz/1280*1024, 60Hz
- (3) 69KHz/1024*768, 85Hz

3.7. Radiated Emission Measurement Results

PASSED.

All emissions not reported below are too low against the prescribed limits.

Date of Test :	Mar. 27, 2000	Temperature :	18.5°C
EUT :	17" Color Monitor	Humidity :	81%
Test Mode :	54KHz/800*600/85Hz		

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading		Emission Level		Margin dB
			Horizontal dB μ V		Horizontal dB μ V/m	Limits dB μ V/m	
44.877	16.22	1.24	- 1.23		16.23	30.00	13.77
67.313	11.98	1.59	5.32		18.89	30.00	11.11
134.622	20.05	2.21	- 1.81		20.45	30.00	9.55
168.274	20.98	2.53	- 1.73		21.78	30.00	8.22
190.710	20.94	2.72	- 1.73		21.93	30.00	8.07
224.364	21.96	2.84	- 1.26		23.54	30.00	6.46
246.800	21.86	3.06	- 0.30		24.62	37.00	12.38
280.454	24.18	3.23	1.23		28.64	37.00	8.36
314.109	14.19	3.56	5.93		23.68	37.00	13.32
358.981	14.95	3.75	1.77		20.47	37.00	16.53
426.289	16.18	4.21	6.13		26.52	37.00	10.48
471.161	17.55	4.47	2.15		24.17	37.00	12.83
504.815	18.49	4.59	2.58		25.66	37.00	11.34
538.469	19.42	4.76	- 0.41		23.77	37.00	13.23
560.905	20.03	4.84	- 0.87		24.00	37.00	13.00

Remark : All reading are Quasi-Peak values.

Date of Test : Mar. 27, 2000 Temperature : 18.5°C
 EUT : 17" Color Monitor Humidity : 81%
 Test Mode : 54KHz/800*600/85Hz

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading		Emission Level		Margin dB
			Vertical dBμV		Vertical dBμV/m	Limits dBμV/m	
33.660	18.77	1.07	3.12		22.96	30.00	7.04
44.878	18.16	1.24	5.30		24.70	30.00	5.30
67.314	12.93	1.59	10.15		24.67	30.00	5.33
112.174	17.33	2.03	3.89		23.25	30.00	6.75
168.264	20.77	2.53	- 0.84		22.46	30.00	7.54
190.693	23.18	2.72	- 2.13		23.77	30.00	6.23
224.360	21.54	2.84	- 1.58		22.80	30.00	7.20
280.450	21.73	3.23	0.20		25.16	37.00	11.84
314.084	14.79	3.56	5.73		24.08	37.00	12.92
358.969	15.61	3.75	1.80		21.16	37.00	15.84
415.059	16.45	4.17	2.90		23.52	37.00	13.48
448.713	17.23	4.35	3.91		25.49	37.00	11.51
504.803	18.65	4.59	3.68		26.92	37.00	10.08
527.239	18.98	4.78	0.75		24.51	37.00	12.49
594.547	20.13	5.19	0.07		25.39	37.00	11.61

Remark : All reading are Quasi-Peak values.

Date of Test : Mar. 23, 2000 Temperature : 22°C

EUT : 17" Color Monitor Humidity : 65%

Test Mode : 64KHz/1280*1024/60Hz

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading		Emission Level		Margin dB
			Horizontal dBμV		Horizontal dBμV/m	Limits dBμV/m	
55.152	13.29	1.37	0.68		15.34	30.00	14.66
70.904	12.27	1.62	0.90		14.79	30.00	15.21
118.160	19.12	2.12	- 1.62		19.62	30.00	10.38
133.912	20.00	2.19	- 2.95		19.24	30.00	10.76
189.044	20.83	2.71	- 1.92		21.62	30.00	8.38
228.404	22.14	2.85	0.00		24.99	30.00	5.01
267.804	23.26	3.26	1.11		27.63	37.00	9.37
315.058	14.16	3.61	12.24		30.01	37.00	6.99
346.562	14.87	3.81	7.11		25.79	37.00	11.21
370.190	15.11	3.99	7.60		26.70	37.00	10.30
425.322	16.20	4.19	8.64		29.03	37.00	7.97
472.578	17.57	4.45	6.98		29.00	37.00	8.00
504.077	18.48	4.58	3.36		26.42	37.00	10.58
574.961	19.89	5.09	1.13		26.11	37.00	10.89

Remark : All reading are Quasi-Peak values.

Date of Test : Mar. 23, 2000 Temperature : 22°C

EUT : 17" Color Monitor Humidity : 65%

Test Mode : 64KHz/1280*1024/60Hz

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading		Emission Level		Margin dB
			Vertical dBμV		Vertical dBμV/m	Limits dBμV/m	
31.489	19.75	1.00	5.13		25.88	30.00	4.12
70.869	13.43	1.62	10.55		25.60	30.00	4.40
110.249	17.39	1.97	2.10		21.46	30.00	8.54
126.001	18.23	2.18	4.09		24.50	30.00	5.50
133.901	19.07	2.19	4.22		25.48	30.00	4.52
165.381	21.25	2.47	- 1.70		22.02	30.00	7.98
189.016	22.34	2.71	- 1.71		23.34	30.00	6.66
212.652	21.69	2.80	- 2.76		21.73	30.00	8.27
267.782	22.93	3.26	- 0.95		25.24	37.00	11.76
315.053	14.72	3.61	9.69		28.02	37.00	8.98
346.557	15.70	3.81	4.17		23.68	37.00	13.32
370.185	15.69	3.99	5.47		25.15	37.00	11.85
441.069	17.27	4.32	1.46		23.05	37.00	13.95
496.201	18.22	4.61	2.67		25.50	37.00	11.50
543.457	19.45	4.89	0.22		24.56	37.00	12.44

Remark : All reading are Quasi-Peak values.

Date of Test : Mar. 23, 2000 Temperature : 22°C
 EUT : 17" Color Monitor Humidity : 65%
 Test Mode : 69KHz/1024*768/85Hz

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading		Emission Level		Margin dB
			Horizontal dBuV	Horizontal dBuV/m	Limits dBuV/m		
66.405	11.93	1.57	2.13	15.63	30.00		14.37
85.380	14.99	1.74	- 1.33	15.40	30.00		14.60
123.330	19.11	2.13	- 1.53	19.71	30.00		10.29
132.817	19.80	2.19	- 0.87	21.12	30.00		8.88
* 161.280	20.67	2.44	- 0.07	23.04	30.00		6.96
180.255	20.66	2.57	- 2.40	20.83	30.00		9.17
227.692	22.14	2.83	- 2.56	22.41	30.00		7.59
275.130	23.97	3.22	0.94	28.13	37.00		8.87
322.576	14.45	3.63	4.97	23.05	37.00		13.95
379.500	15.52	3.98	7.40	26.90	37.00		10.10
407.963	15.91	4.04	3.17	23.12	37.00		13.88
445.913	16.54	4.33	2.50	23.37	37.00		13.63
512.326	18.67	4.65	0.48	23.80	37.00		13.20
540.788	19.58	4.82	- 0.09	24.31	37.00		12.69
588.226	19.83	4.99	- 0.83	23.99	37.00		13.01

- Remark :
1. All reading are Quasi-Peak values.
 2. The worst emission was detected at 161.280MHz with corrected signal level of 23.04dBuV/m (limit was 30dBuV/m) when the antenna was at horizontal polarization and was at 4m high and the turn table was at 55° .
 3. 0° is the table front facing the antenna. Degree is calculated from 0° clockwise facing the antenna.

Date of Test : Mar. 23, 2000 Temperature : 22°C
 EUT : 17" Color Monitor Humidity : 65%
 Test Mode : 69KHz/1024*768/85Hz

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Vertical dBuV	Emission Level Vertical dBuV/m	Limits dBuV/m	Margin dB
66.405	12.87	1.57	5.29	19.73	30.00	10.27
85.380	16.03	1.74	5.50	23.27	30.00	6.73
113.842	17.56	2.04	5.04	24.64	30.00	5.36
123.330	18.23	2.13	2.48	22.84	30.00	7.16
* 132.818	18.95	2.19	5.12	26.26	30.00	3.74
161.280	21.40	2.44	2.32	26.16	30.00	3.84
189.751	23.06	2.73	- 1.88	23.91	30.00	6.09
227.701	22.32	2.83	- 2.85	22.30	30.00	7.70
256.163	22.51	3.00	- 0.86	24.65	37.00	12.35
322.576	14.83	3.63	2.39	20.85	37.00	16.15
360.526	15.52	3.74	3.01	22.27	37.00	14.73
379.500	16.24	3.98	2.19	22.41	37.00	14.59
474.375	18.21	4.45	2.56	25.22	37.00	11.78
502.838	18.56	4.61	3.41	26.58	37.00	10.42
578.738	19.71	5.12	- 0.06	24.77	37.00	12.23

- Remark :
1. All reading are Quasi-Peak values.
 2. The worst emission was detected at 132.818MHz with corrected signal level of 26.26dBuV/m (limit was 30dBuV/m) when the antenna was at vertical polarization and was at 1m high and the turn table was at 115° .
 3. 0° is the table front facing the antenna. Degree is calculated from 0° clockwise facing the antenna.

4. DEVIATION TO TEST SPECIFICATIONS

【NONE】

5. MODIFICATIONS TO EUT

1. Added a ferrite core on the signal cable of video board input.
2. Added a ferrite core on the signal cable (outside).
3. Added a ferrite core on Focus & G2.
4. Video board with metal shielding case.
5. Added ground wire from CRT arcing wire (right side) to video board shielding case.
6. Added three ground wires from the rear side of video shielding case (right, left & middle side) to mother board.
7. Added two ground wires from CRT arcing wire (right & left side) to mother board.

6. PHOTOGRAPHS

6.1. Photos of Powerline Conducted Measurement



FRONT VIEW OF CONDUCTED TEST



BACK VIEW OF CONDUCTED TEST

6.2. Photos of Radiated Measurement at Open Field Test Site

Test Mode: 69KHz/1024*768/85Hz



FRONT VIEW OF RADIATED TEST



BACK VIEW OF RADIATED TEST



SETUP WITH MAXIMUM DETECTED EMISSION AT HORIZONTAL POLARIZATION



SETUP WITH MAXIMUM DETECTED EMISSION AT VERTICAL POLARIZATION