

FCC TEST REPORT

REPORT NO.: F920703A04

MODEL NO.: 7Vlr****(multiple listing models see page 5)

PART NO.: P793-1, S793-1

RECEIVED: July 3, 2003

TESTED: July 4, 2003

APPLICANT: Top Victory Electronics (Taiwan) Co., Ltd.

ADDRESS: 18F, No. 738, Chung Cheng Road, Chung Ho,
Taipei Hsien, Taiwan 235

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chiapau Tsun, Linko, Taipei,
Taiwan, R.O.C.

This test report consists of 20 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



Lab Code: 200102-0


Table of Contents


1	CERTIFICATION	3
2	SUMMARY OF TEST RESULTS	4
3	GENERAL INFORMATION	5
3.1	GENERAL DESCRIPTION OF EUT	5
3.2	DESCRIPTION OF TEST MODES.....	6
3.3	DESCRIPTION OF SUPPORT UNITS	7
4	EMISSION TEST.....	8
4.1	CONDUCTED EMISSION MEASUREMENT	8
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	8
4.1.2	TEST INSTRUMENTS	8
4.1.3	TEST PROCEDURE	9
4.1.4	DEVIATION FROM TEST STANDARD	9
4.1.5	TEST SETUP	9
4.1.6	EUT OPERATING CONDITIONS	10
4.1.7	TEST RESULTS	11
4.2	RADIATED EMISSION MEASUREMENT	13
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	13
4.2.2	TEST INSTRUMENTS	14
4.2.3	TEST PROCEDURE	14
4.2.4	DEVIATION FROM TEST STANDARD	15
4.2.5	TEST SETUP	15
4.2.6	EUT OPERATING CONDITIONS	15
4.2.7	TEST RESULTS	16
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	18
6	APPENDIX - INFORMATION ON THE TESTING LABORATORIES.....	20

1 CERTIFICATION

PRODUCT: 17" Color Monitor
BRAND NAME: AOC, Lenovo
MODEL NO.: 7Vlr****(multiple listing models see page 5)
PART NO.: P793-1, S793-1
TEST ITEM: ENGINEERING SAMPLE
APPLICANT: TOP VICTORY ELECTRONICS (TAIWAN) CO., LTD.
STANDARDS: FCC Part 15, Subpart B, Class B
ANSI C63.4-1992
ICES-003: 1997

We, **Advance Data Technology Corporation**, hereby certify that one sample (model: 7Vlr) of the designation has been tested in our facility on July 4, 2003. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

PREPARED BY: , **DATE:** July 8, 2003
(Eric Chang)

APPROVED BY: , **DATE:** July 8, 2003
(Mike Su, Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Remarks
FCC Part 15, Subpart B, Class B ICES-003: 1997	Conducted Test	PASS	Meets Class B Limit Minimum passing margin is -11.09 dB at 0.563 MHz
	Radiated Test	PASS	Meets Class B Limit Minimum passing margin is -3.0 dB at 270.08 MHz

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	17" Color Monitor
MODEL NO.	7Vlr**** (see below multiple listing models)
PART NO.	P793-1, S793-1
POWER SUPPLY	Switching Input rating: 100-240Vac, 50/60Hz Power Cord: Non-shielded AC, 3 pin (1.8m)
DATA CABLE	NA

NOTE: The EUT is a 17" Color Monitor with resolution up to 1600x1200.

The EUT has multiple listing models as following:

BRAND	MODEL	REMARK
AOC	7Vlr****	The "*" can be any alphanumeric character including blank, only for marketing differences
	7Glr****	
	7Klr****	
	7A****	
	7F****	
	17*****	
	A17*****	
	F17*****	
Lenovo	LXH-GJ796F	

For the final test, model: 7Vlr was selected as the representative for the test and its data is recorded in this report.

For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

3.2 DESCRIPTION OF TEST MODES

The EUT was pre-tested under the following resolution & horizontal synchronization speed modes:

- ◆ 1600x1200 mode (75Hz/93kHz),
- ◆ 1280x1024 mode (85Hz/91kHz),
- ◆ 640x480 mode (60Hz/31.5kHz)

The worst emission levels were found when the EUT was tested under **1600x1200 mode (75Hz/93kHz)** resolution. Therefore, only the test data of EUT tested under this mode is recorded in this report.

3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	PERSONAL COMPUTER	HP	Brio BA410	SG12106031	FCC DoC Approved
2	MODEM	ACEEX	1414	980020501	IFAXDM1414
3	PRINTER	EPSON	LQ-300+	DCGY017081	FCC DoC Approved
4	PS/2 KEYBOARD	BTC	5200T	F24800252	E5XKB5122WTH01 10
5	PS/2 MOUSE	BTC	M851	N/A	E5XMSM860
6	VGA DISPLAY CARD	ELSA	ERAZOR III LT	0111011969	FCC DoC Approved

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	N/A
2	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.
3	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core
4	1.6 m foil shielded wire, terminated with PS/2 connector via metallic frame, w/o core.
5	1.5 m Non shielded wire, terminated with PS/2 connector via drain wire, w/o core.
6	N/A

NOTE: All power cords of the above support units are non-shielded (1.8m).

4 EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

- NOTES:**
- (1) The lower limit shall apply at the transition frequencies.
 - (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 - (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESHS30	828109/007	Jun 24, 2004
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	839135/006	July 17, 2004
FCC ISN	FCC-TLISN-T2-02	20117	Oct 18, 2003
FCC ISN	FCC-TLISN-T4-02	20116	Oct 18, 2003
FCC ISN	FCC-TLISN-T8-02	20096	Oct 18, 2003
EMCO-L.I.S.N. (for peripheral)	3825/2	9204-1964	July 17, 2004
Software	Cond-V2M3	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C02.01	May. 23, 2004
HP Terminator (For EMCO LISN)	11593A	E1-01-298	Feb. 23, 2004
HP Terminator (For EMCO LISN)	11593A	E1-01-299	Feb. 23, 2004

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. “*”: These equipment are used for conducted telecom port test only (if tested).
 3. The test was performed in ADT Shielded Room No. 2.
 4. The VCCI Site Registration No. is C-240.


4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

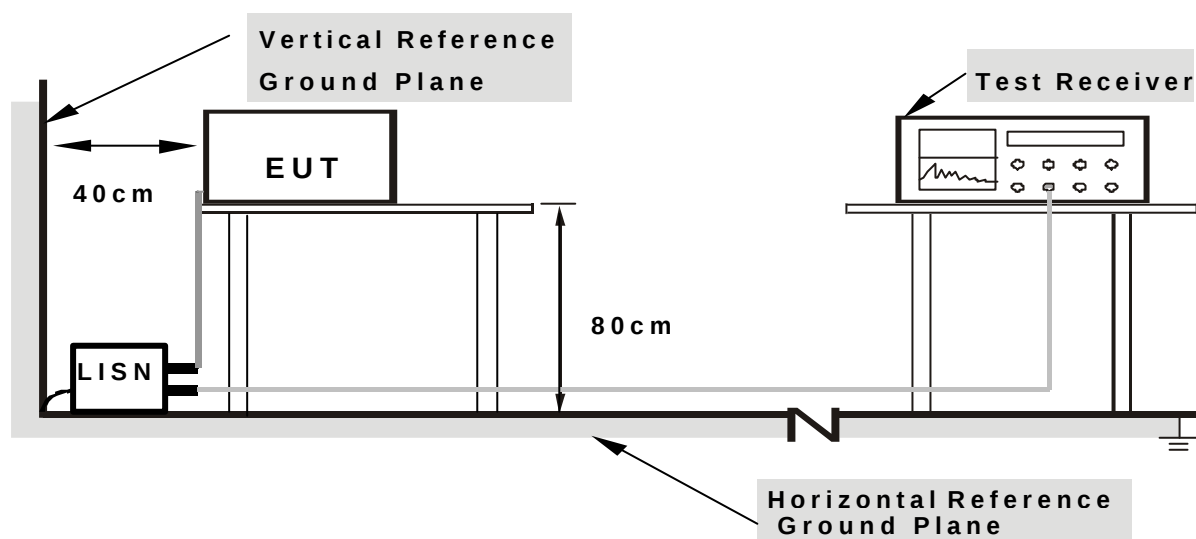

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS


- a. Turned on the power of all equipment.
- b. PC ran a test program to enable all functions.
- c. PC read and wrote messages from FDD and HDD.
- d. PC sent "H" messages to monitor (EUT) and monitor displayed "H" patterns on screen.
- e. PC sent "H" messages to modem.
- f. PC sent "H" messages to printer, and the printer printed them out.
- g. Steps c-g were repeated.

4.1.7 TEST RESULTS

EUT	17" Color Monitor	MODEL NO.	7Vlr
MODE	1600x1200 (75Hz/93kHz)	6dB BANDWIDTH	9 kHz
INPUT POWER	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	27 deg. C, 67 % RH, 1005 hPa	TESTED BY: Jun Wu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.185	0.10	50.95	-	51.05	-	64.25	54.25	-13.20	-
2	0.375	0.10	45.15	-	45.25	-	58.40	48.40	-13.15	-
3	0.563	0.13	44.78	-	44.91	-	56.00	46.00	-11.09	-
4	0.843	0.17	43.21	-	43.38	-	56.00	46.00	-12.62	-
5	1.688	0.20	42.28	-	42.48	-	56.00	46.00	-13.52	-
6	2.625	0.26	40.78	-	41.04	-	56.00	46.00	-14.96	-
7	15.657	1.04	46.74	-	47.78	-	60.00	50.00	-12.22	-
8	22.595	1.35	46.86	-	48.21	-	60.00	50.00	-11.79	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

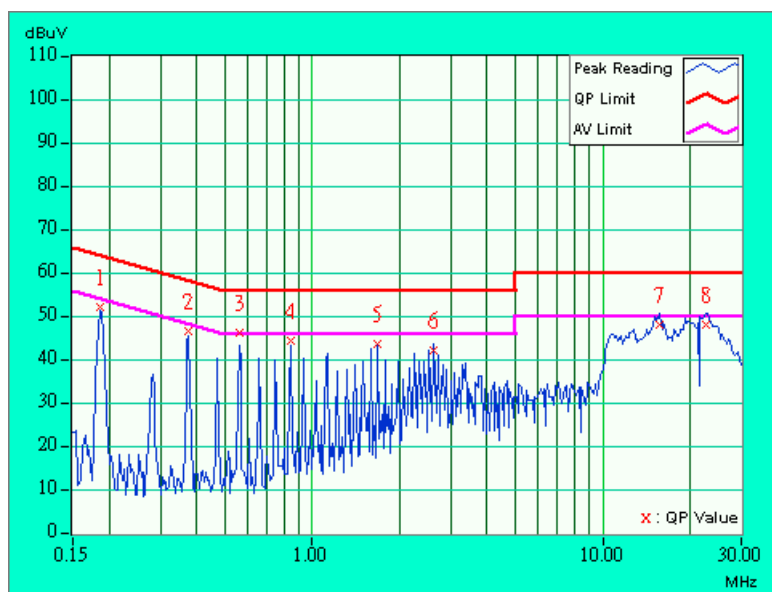

EUT	17" Color Monitor	MODEL NO.	7Vlr
MODE	1600x1200 (75Hz/93kHz)	6dB BANDWIDTH	9 kHz
INPUT POWER	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	27 deg. C, 67 % RH, 1005 hPa	TESTED BY: Jun Wu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.187	0.10	50.96	-	51.06	-	64.17	54.17	-13.11	-
2	0.375	0.10	44.01	-	44.11	-	58.39	48.39	-14.28	-
3	0.562	0.13	41.04	-	41.17	-	56.00	46.00	-14.83	-
4	1.218	0.20	39.05	-	39.25	-	56.00	46.00	-16.75	-
5	2.625	0.26	44.54	-	44.80	-	56.00	46.00	-11.20	-
6	10.592	0.54	43.74	-	44.28	-	60.00	50.00	-15.72	-
7	21.283	1.15	46.48	-	47.63	-	60.00	50.00	-12.37	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

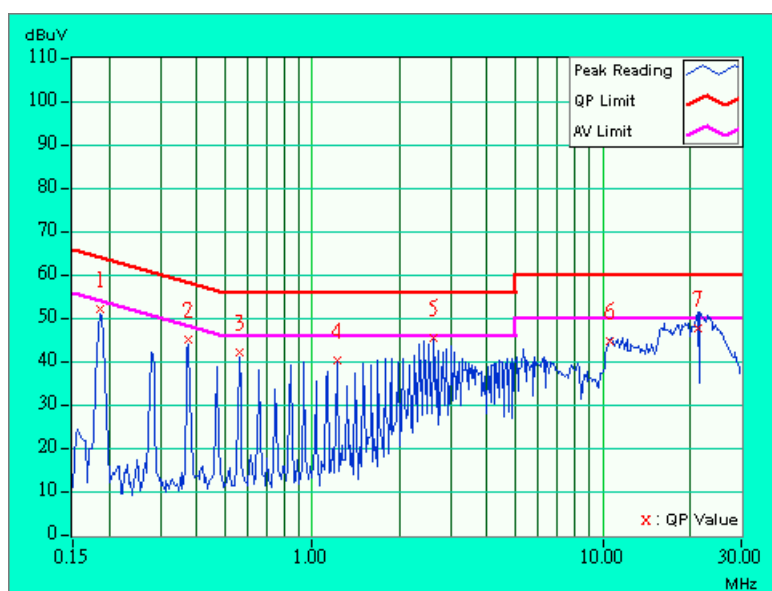

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT FOR FREQUENCY BELOW 1000 MHz

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 10m)
	dBuV/m	dBuV/m
30 – 230	40	30
230 - 1000	47	37

LIMIT OF RADIATED EMISSION OF FCC PART 15, SUBPART B FOR FREQUENCY ABOVE 1000 MHz

FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80.0	60.0	74.0	54.0

- Note:** (1) The lower limit shall apply at the transition frequencies.
 (2) Emission level (dBuV/m) = 20 log Emission level (uV/m).
 (3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HP Spectrum Analyzer	8594A	3144A00308	Aug. 18, 2003
HP Preamplifier	8447D	2944A08119	Jul. 01, 2004
* HP Preamplifier	8449B	3008A01201	Dec. 01, 2003
* HP Preamplifier	8449B	3008A01292	Aug. 07, 2003
SCHAFFNER TEST RECEIVER	SCR 3501	408	Jan. 26, 2004
SCHAFFNER Tunable Dipole Antenna	VHBA 9123	459	Nov. 22, 2003
SCHWARZBECK Tunable Dipole Antenna	UHA 9105	977	
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Feb. 13, 2004
* CHASE Bilog Antenna	CBL6112B	2640	July. 07, 2003
* SCHWARZBECK Horn Antenna	BBHA9120-D 1	D130	July 03, 2003
* EMCO Horn Antenna	3115	9312-4192	Mar. 23 2004
* ADT. Turn Table	TT100	0201	NA
* ADT. Tower	AT100	0201	NA
* Software	ADT_Radiated_V5.14	NA	NA
* ANRITSU RF Switches	MP59B	E10124	Feb. 28, 2004
* TIMES RF cable	8D	CABLE-ST2-01	Feb. 28, 2004

- NOTE:**
1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
 2. "*" = These equipment are used for the final measurement.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The test was performed in ADT Open Site No. 2.
 5. The VCCI Site Registration No. is R-237.

4.2.3 TEST PROCEDURE


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10-meter open field site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the ratable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi- peak method or average method as specified and then reported In Data sheet peak mode and QP mode.
- g. For measurement of frequency above 1000 MHz, the EUT was set 3 meters away from the interference antenna and the detect function was set to Peak or Average.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

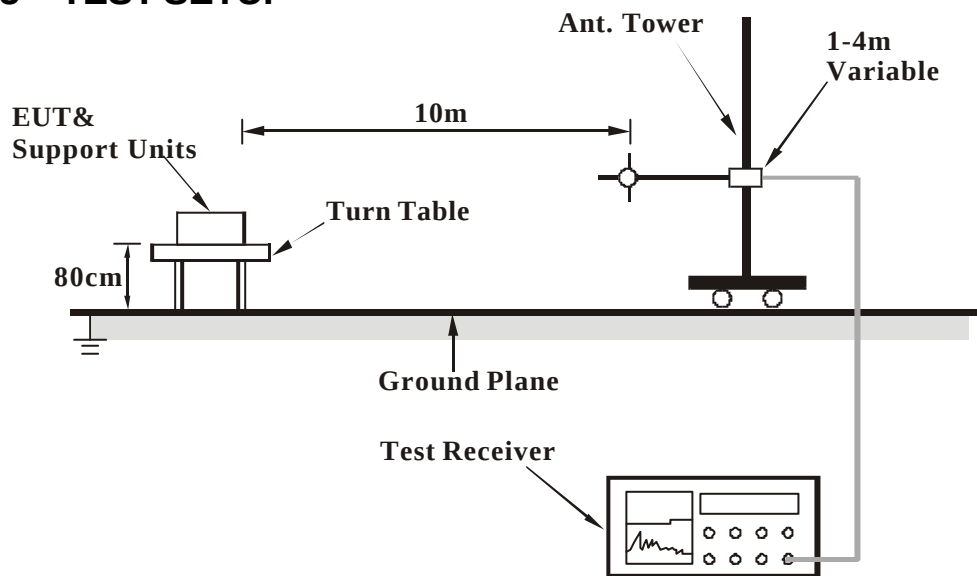

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.


4.2.7 TEST RESULTS

EUT	17" Color Monitor	MODEL NO.	7Vlr
MODE	1600x1200 (75Hz/93kHz)	FREQUENCY RANGE	30-2000 MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	29 deg. C, 63 % RH, 1005 hPa	TESTED BY: Jun Wu	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 10 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	50.53	21.4 QP	30.00	-8.60	4.00 H	298	11.40	10.10
2	114.65	20.0 QP	30.00	-10.00	4.00 H	38	6.70	13.30
3	134.88	24.5 QP	30.00	-5.50	4.00 H	238	11.70	12.80
4	168.80	22.1 QP	30.00	-7.90	4.00 H	38	11.30	10.80
5	185.50	22.8 QP	30.00	-7.20	4.00 H	337	12.00	10.80
6	202.50	24.4 QP	30.00	-5.60	4.00 H	312	13.10	11.30
7	236.48	30.2 QP	37.00	-6.80	3.13 H	273	16.60	13.60
8	253.63	29.1 QP	37.00	-7.90	3.11 H	99	14.10	15.00
9	270.08	34.0 QP	37.00	-3.00	2.85 H	269	18.50	15.50
10	287.05	30.9 QP	37.00	-6.10	3.08 H	169	15.00	15.90
11	438.69	30.5 QP	37.00	-6.50	2.32 H	102	10.70	19.80
12	751.00	25.8 QP	37.00	-11.20	1.34 H	245	1.20	24.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

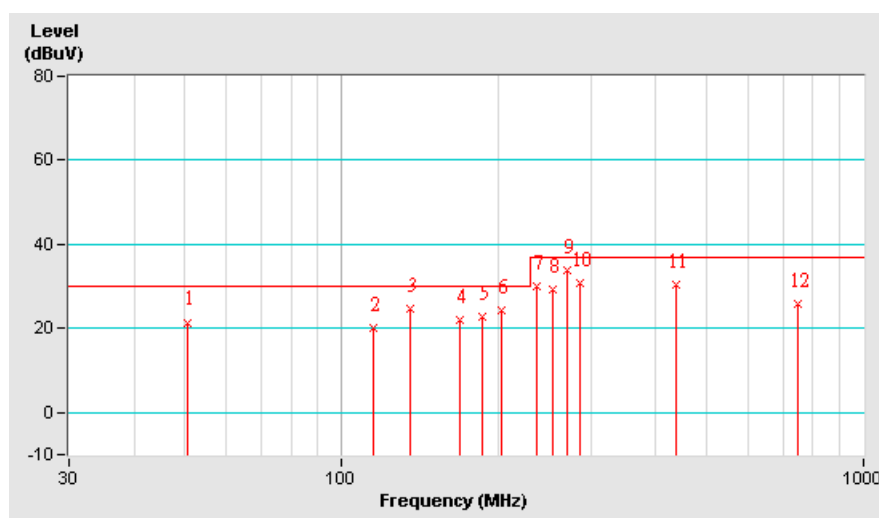


EUT	17" Color Monitor	MODEL NO.	7Vlr
MODE	1600x1200 (75Hz/93kHz)	FREQUENCY RANGE	30-2000 MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	29 deg. C, 63 % RH, 1005 hPa	TESTED BY: Jun Wu	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 10 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	47.73	25.4 QP	30.00	-4.60	1.00 V	328	13.60	11.80
2	50.63	26.1 QP	30.00	-3.90	1.00 V	78	16.00	10.10
3	67.48	24.8 QP	30.00	-5.20	1.00 V	33	17.90	6.90
4	84.24	25.2 QP	30.00	-4.80	1.00 V	353	16.00	9.20
5	134.90	23.6 QP	30.00	-6.40	1.00 V	146	10.80	12.80
6	168.78	23.8 QP	30.00	-6.20	1.00 V	1	13.00	10.80
7	185.53	20.4 QP	30.00	-9.60	1.00 V	288	9.70	10.80
8	202.51	24.3 QP	30.00	-5.70	1.00 V	296	13.00	11.30
9	356.00	26.3 QP	37.00	-10.70	1.01 V	36	8.80	17.50
10	438.68	29.3 QP	37.00	-7.70	1.00 V	1	9.50	19.80
11	750.10	25.7 QP	37.00	-11.30	1.98 V	295	1.10	24.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

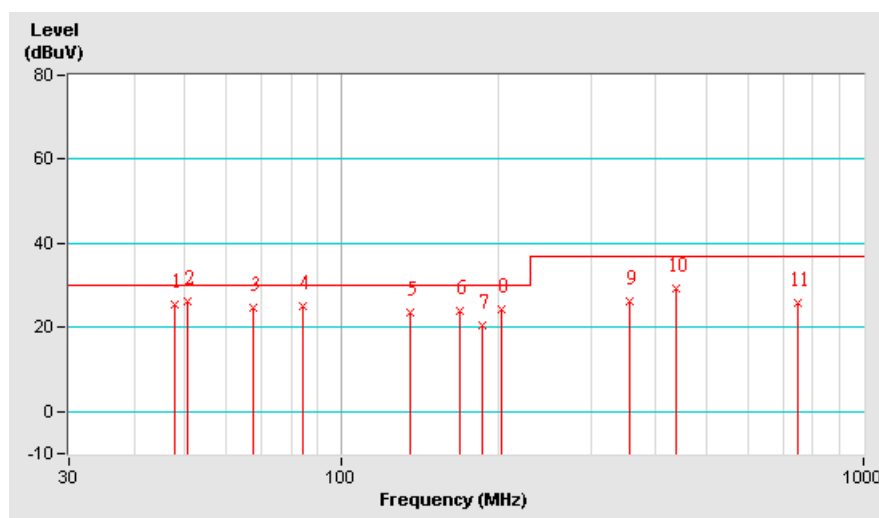

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST



RADIATED EMISSION TEST



6 APPENDIX - INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP, UL
Germany	TUV Rheinland
Japan	VCCI
New Zealand	MoC
Norway	NEMKO
Canada	INDUSTRY CANADA
R.O.C.	CNLA, BSMI

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.
If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:
Tel: 886-2-26052180
Fax: 886-2-26052943

Hsin Chu EMC Lab:
Tel: 886-35-935343
Fax: 886-35-935342

Lin Kou Safety Lab:
Tel: 886-2-26093195
Fax: 886-2-26093184

Lin Kou RF & Telecom Lab.
Tel: 886-3-3270910
Fax: 886-3-3270892

Email: service@mail.adt.com.tw
Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.