

FCC TEST REPORT

REPORT NO.: RF940315L04
MODEL NO.: QAL0708-001
RECEIVED: Mar. 15, 2005
TESTED: Mar. 15 ~ Mar. 28, 2005
ISSUED: Mar. 29, 2005

APPLICANT: Victor Company of Japan, LTD

ADDRESS: 3-12, Moriya-cho, Kanagawa-ku, Yokohama221,
Japan

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang 244, Taipei Hsien, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen,
Kwei Shan Hsiang, Taoyuan Hsien 333,
Taiwan, R.O.C.

This test report consists of 73 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



No. 2177-01

Table of Contents

1.	CERTIFICATION	4
2.	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	6
3.	GENERAL INFORMATION.....	7
3.1	GENERAL DESCRIPTION OF EUT	7
3.2	DESCRIPTION OF TEST MODES.....	8
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	9
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:	10
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	12
3.4	DESCRIPTION OF SUPPORT UNITS	13
4.	TEST TYPES AND RESULTS	14
4.1	CONDUCTED EMISSION MEASUREMENT	14
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	14
4.1.2	TEST INSTRUMENTS.....	14
4.1.3	TEST PROCEDURES	15
4.1.4	DEVIATION FROM TEST STANDARD	15
4.1.5	TEST SETUP	16
4.1.6	EUT OPERATING CONDITIONS	16
4.1.7	TEST RESULTS	17
4.2	RADIATED EMISSION MEASUREMENT	37
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	37
4.2.2	TEST INSTRUMENTS.....	38
4.2.3	TEST PROCEDURES	39
4.2.4	DEVIATION FROM TEST STANDARD	39
4.2.5	TEST SETUP	40
4.2.6	EUT OPERATING CONDITIONS	40
4.2.7	TEST RESULTS	41
4.3	6dB BANDWIDTH MEASUREMENT	48
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	48
4.3.2	TEST INSTRUMENTS.....	48
4.3.3	TEST PROCEDURE.....	49
4.3.4	DEVIATION FROM TEST STANDARD	49
4.3.5	TEST SETUP	49
4.3.6	EUT OPERATING CONDITIONS	49
4.3.7	TEST RESULTS	50
4.4	MAXIMUM PEAK OUTPUT POWER	54
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	54
4.4.2	INSTRUMENTS.....	54

4.4.3	TEST PROCEDURES	55
4.4.4	DEVIATION FROM TEST STANDARD	55
4.4.5	TEST SETUP	55
4.4.6	EUT OPERATING CONDITIONS	55
4.4.7	TEST RESULTS	56
4.5	POWER SPECTRAL DENSITY MEASUREMENT	57
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	57
4.5.2	TEST INSTRUMENTS.....	57
4.5.3	TEST PROCEDURE.....	58
4.5.4	DEVIATION FROM TEST STANDARD	58
4.5.5	TEST SETUP	58
4.5.6	EUT OPERATING CONDITION	58
4.5.7	TEST RESULTS	59
4.6	BAND EDGES MEASUREMENT	63
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	63
4.6.2	TEST INSTRUMENTS.....	63
4.6.3	TEST PROCEDURE.....	63
4.6.4	DEVIATION FROM TEST STANDARD	63
4.6.5	EUT OPERATING CONDITION	63
4.6.6	TEST RESULTS	64
4.7	ANTENNA REQUIREMENT	68
4.7.1	STANDARD APPLICABLE	68
4.7.2	ANTENNA CONNECTED CONSTRUCTION.....	68
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	69
6.	INFORMATION ON THE TESTING LABORATORIES	73

1. CERTIFICATION

PRODUCT: USB wireless transmitter
BRAND NAME: JVC
MODEL NO.: QAL0708-001
TEST SAMPLE: ENGINEERING SAMPLE
TESTED: Mar. 15 ~ Mar. 28, 2005
APPLICANT: Victor Company of Japan, LTD
STANDARDS: FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Candice Chen , **DATE:** Mar. 29, 2005
(Candice Chen)

TECHNICAL
ACCEPTANCE : Gary Chang , **DATE:** Mar. 29, 2005
Responsible for RF (Gary Chang)

APPROVED BY : Cody Chang , **DATE:** Mar. 29, 2005
(Cody Chang,
Deputy Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C (Section 15.247)			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -14.99dB at 0.150MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -3.23dB at 9648.00MHz
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

Measurement	Frequency	Uncertainty
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.63 dB
	200MHz ~1000MHz	3.65 dB
	1GHz ~ 18GHz	2.20 dB
	18GHz ~ 40GHz	1.88 dB

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	USB wireless transmitter
MODEL NO.	QAL0708-001
POWER SUPPLY	5Vdc from host equipment
MODULATION TYPE	$\pi/4$ DQPSK
MODULATION TECHNOLOGY	DSSS
TRANSFER RATE	2Mbps
FREQUENCY RANGE	2400 ~ 2483.5MHz
NUMBER OF CHANNEL	13
CHANNEL SPACING	802.11b: 5MHz
OUTPUT POWER	20.559mW
DATA CABLE	0.6m shielded cable with one core
ANTENNA TYPE	Chip antenna with -1dBi gain
I/O PORTS	USB
ASSOCIATED DEVICES	NA

NOTE:



The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Thirteen channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	8	2447 MHz
2	2417 MHz	9	2452 MHz
3	2422 MHz	10	2457 MHz
4	2427 MHz	11	2462 MHz
5	2432 MHz	12	2467 MHz
6	2437 MHz	13	2472 MHz
7	2442 MHz		

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

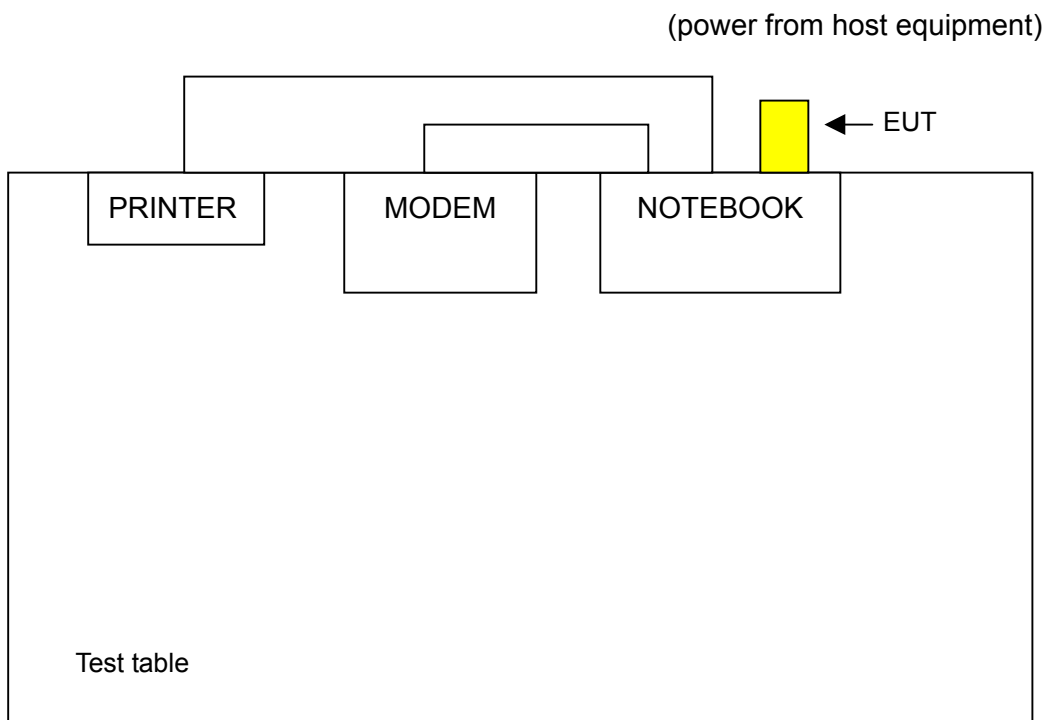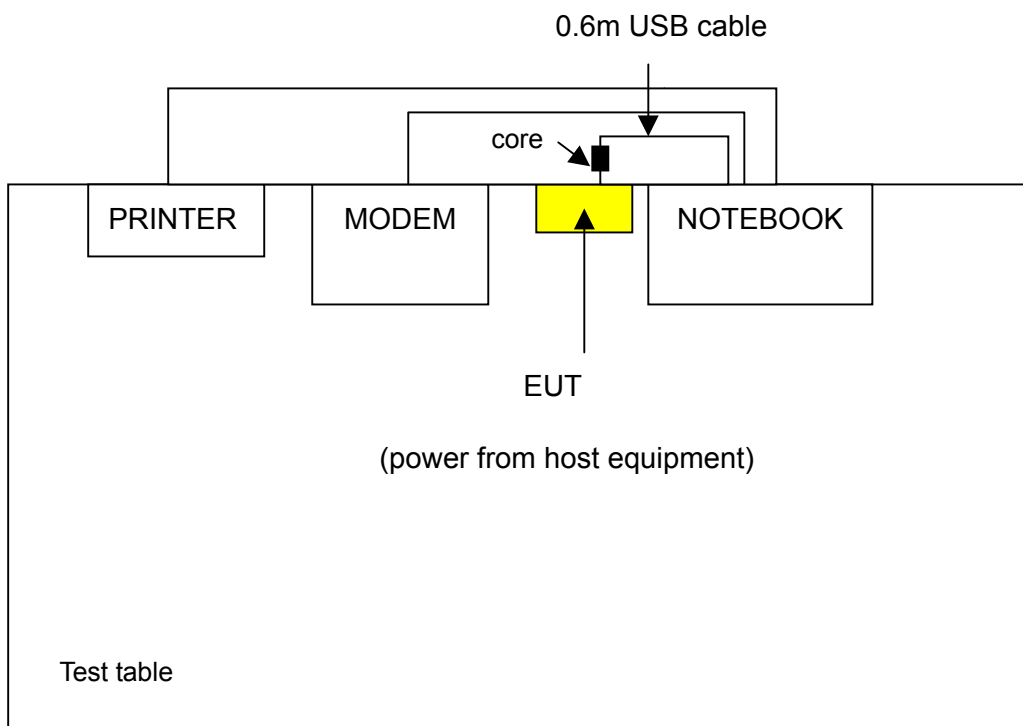Mode 1 (The EUT connected with Notebook directly)**Mode 2 (The EUT connected with Notebook via USB cable)**

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT configure mode	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
1	X	X	Note 1	Note 2	The EUT connected with Notebook directly
2	X	X	Note 1	Note 2	The EUT connected with Notebook via USB cable

Where PLC: Power Line Conducted Emission

RE<1G RE: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

Note 1: No effect on Radiated Emission above 1GHz.

Note 2: Conducted RF measurement is independent of USB cable.

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT configure mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
1	802.11b	1 to 13	1, 6, 11, 12, 13	DSSS	$\pi/4$ DQPSK	2
2	802.11b	1 to 13	1, 6, 11, 12, 13	DSSS	$\pi/4$ DQPSK	2

Radiated Emission Test (Below 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT configure mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
1	802.11b	1 to 13	11	DSSS	$\pi/4$ DQPSK	2
2	802.11b	1 to 13	11	DSSS	$\pi/4$ DQPSK	2

Radiated Emission Test (Above 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT configure mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
2	802.11b	1 to 13	1, 6, 11, 12, 13	DSSS	$\pi/4$ DQPSK	2



Bandedge Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 13	1, 13	DSSS	$\pi/4$ DQPSK	2

Antenna Port Conducted Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 13	1, 6, 11, 12, 13	DSSS	$\pi/4$ DQPSK	2

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a USB wireless transmitter. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	12130898320	E2K24CLNS
2	PRINTER	EPSON	LQ-300+	DCGY047265	FCC DoC Approved
3	MODEM	ACEEX	1414V/3	0401008248	IFAXDM1414

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2 shielded cable without core
3	1.2 shielded cable without core

NOTE: All power cords of the above support units are non shielded (1.8m).

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100291	Nov. 16, 2005
RF signal cable Woken	5D-FB	Cable-HYC01-01	Jan. 09, 2006
LISN ROHDE & SCHWARZ	ESH3-Z5	100312	Feb. 15, 2006
LISN ROHDE & SCHWARZ	ESH2-Z5	100104	Feb. 15, 2006
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 1.
 3. The VCCI Site Registration No. is C-2040.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

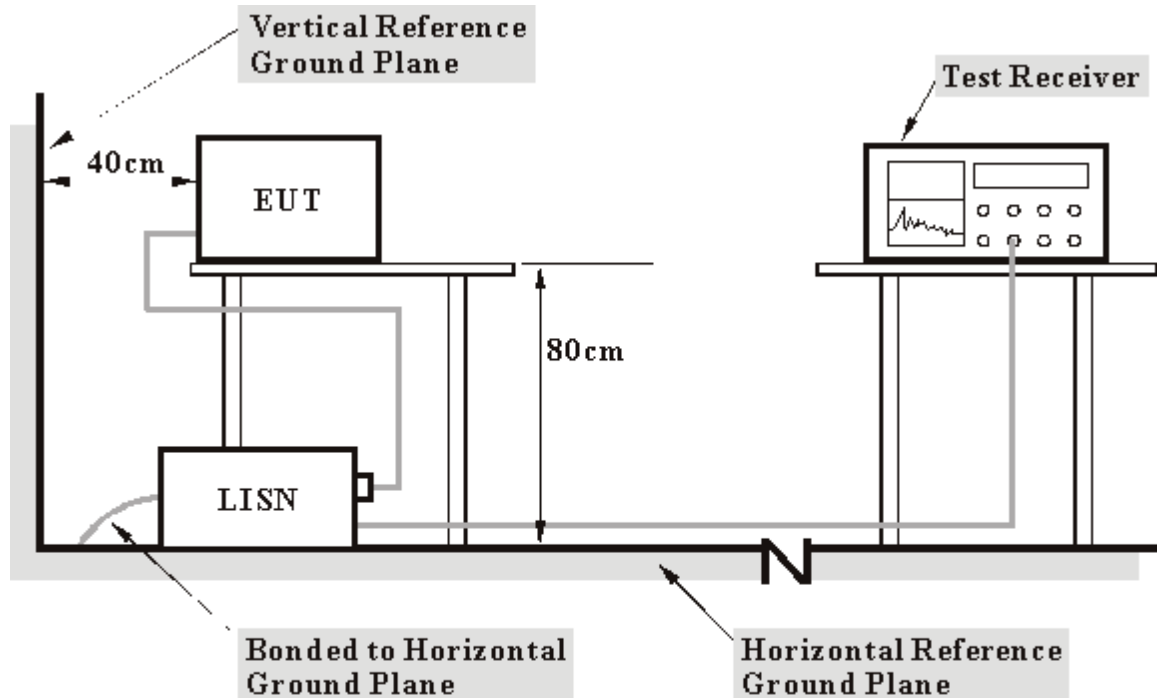

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- Connected the EUT to a notebook system (via a USB cable) placed on a testing table.
- The notebook system ran a test program (provided by manufacturer) to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- The notebook system sent "H" messages to its screen.
- The notebook system sent "H" messages to modem.
- The notebook system sent "H" messages to printer, and the printer printed them on paper.
- Steps c ~ e were repeated.


4.1.7 TEST RESULTS

Conducted Worst-Case Data (connected with Notebook directly)

EUT	USB wireless transmitter	MEASUREMENT DETAIL	
MODEL	QAL0708-001	PHASE	Line 1
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	$\pi/4$ DQPSK	ENVIRONMENTAL CONDITIONS	20deg. C, 70%RH, 991hPa
TRANSFER RATE	2Mbps	INPUT POWER (system)	120Vac, 60 Hz
TEST MODE	1	TESTED BY	Scott Yang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	50.39	-	50.49	-	66.00	56.00	-15.51	-
2	0.166	0.10	48.13	-	48.23	-	65.18	55.18	-16.94	-
3	0.199	0.11	44.89	-	45.00	-	63.63	53.63	-18.63	-
4	1.961	0.21	31.96	-	32.17	-	56.00	46.00	-23.83	-
5	4.316	0.30	27.60	-	27.90	-	56.00	46.00	-28.10	-
6	10.527	0.44	35.50	-	35.94	-	60.00	50.00	-24.06	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

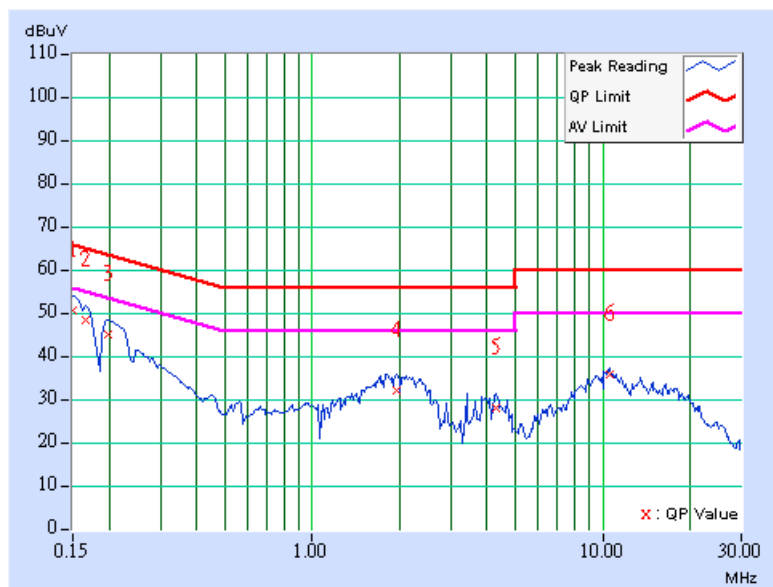

EUT	USB wireless transmitter	MEASUREMENT DETAIL	
MODEL	QAL0708-001	PHASE	Line 2
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	$\pi/4$ DQPSK	ENVIRONMENTAL CONDITIONS	20deg. C, 70%RH, 991hPa
TRANSFER RATE	2Mbps	INPUT POWER (system)	120Vac, 60 Hz
TEST MODE	1	TESTED BY	Scott Yang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	50.91	-	51.01	-	66.00	56.00	-14.99	-
2	0.211	0.10	43.49	-	43.59	-	63.16	53.16	-19.57	-
3	0.455	0.11	29.54	-	29.65	-	56.79	46.79	-27.14	-
4	2.109	0.21	31.47	-	31.68	-	56.00	46.00	-24.32	-
5	10.461	0.41	32.63	-	33.04	-	60.00	50.00	-26.96	-
6	18.578	0.59	27.29	-	27.88	-	60.00	50.00	-32.12	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

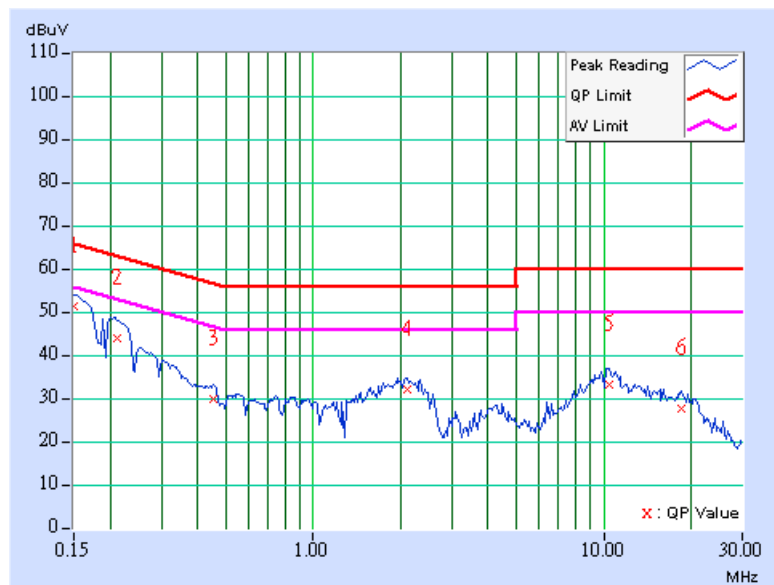

EUT	USB wireless transmitter	MEASUREMENT DETAIL	
MODEL	QAL0708-001	PHASE	Line 1
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	$\pi/4$ DQPSK	ENVIRONMENTAL CONDITIONS	20deg. C, 70%RH, 991hPa
TRANSFER RATE	2Mbps	INPUT POWER (system)	120Vac, 60 Hz
TEST MODE	1	TESTED BY	Scott Yang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	46.59	-	46.69	-	66.00	56.00	-19.31	-
2	0.172	0.10	45.15	-	45.25	-	64.87	54.87	-19.62	-
3	0.201	0.11	45.54	-	45.65	-	63.58	53.58	-17.93	-
4	2.109	0.21	32.13	-	32.34	-	56.00	46.00	-23.66	-
5	10.590	0.44	35.60	-	36.04	-	60.00	50.00	-23.96	-
6	17.305	0.77	30.59	-	31.36	-	60.00	50.00	-28.64	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

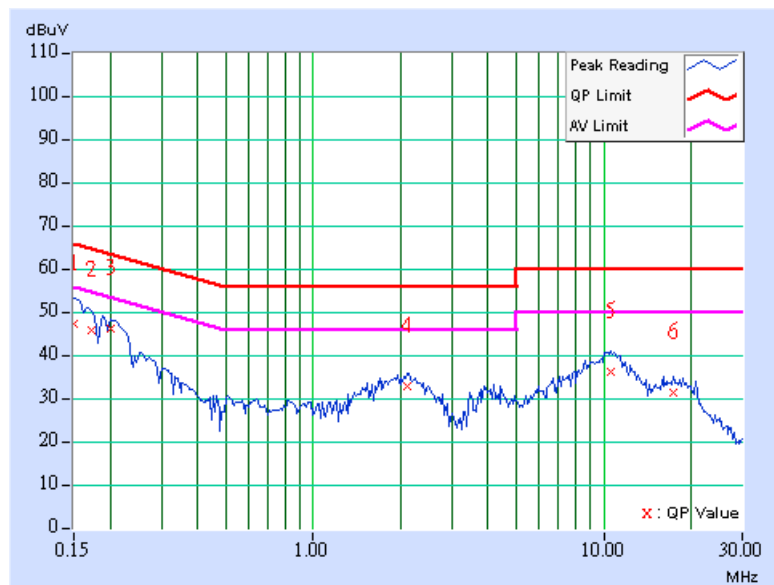

EUT	USB wireless transmitter	MEASUREMENT DETAIL	
MODEL	QAL0708-001	PHASE	Line 2
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	$\pi/4$ DQPSK	ENVIRONMENTAL CONDITIONS	20deg. C, 70%RH, 991hPa
TRANSFER RATE	2Mbps	INPUT POWER (system)	120Vac, 60 Hz
TEST MODE	1	TESTED BY	Scott Yang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	46.81	-	46.91	-	66.00	56.00	-19.09	-
2	0.201	0.10	45.32	-	45.42	-	63.58	53.58	-18.16	-
3	2.047	0.21	30.50	-	30.71	-	56.00	46.00	-25.29	-
4	4.078	0.28	27.94	-	28.22	-	56.00	46.00	-27.78	-
5	10.430	0.41	36.73	-	37.14	-	60.00	50.00	-22.86	-
6	18.949	0.60	29.48	-	30.08	-	60.00	50.00	-29.92	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

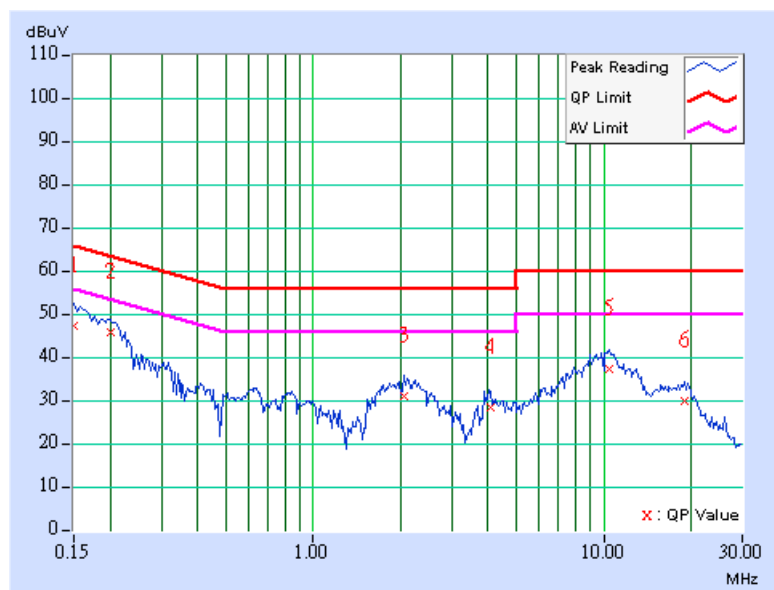

EUT	USB wireless transmitter	MEASUREMENT DETAIL	
MODEL	QAL0708-001	PHASE	Line 1
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	$\pi/4$ DQPSK	ENVIRONMENTAL CONDITIONS	20deg. C, 70%RH, 991hPa
TRANSFER RATE	2Mbps	INPUT POWER (system)	120Vac, 60 Hz
TEST MODE	1	TESTED BY	Scott Yang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.154	0.10	45.80	-	45.90	-	65.79	55.79	-19.89	-
2	0.201	0.11	45.01	-	45.12	-	63.58	53.58	-18.46	-
3	1.914	0.21	32.02	-	32.23	-	56.00	46.00	-23.77	-
4	3.922	0.28	28.33	-	28.61	-	56.00	46.00	-27.39	-
5	10.715	0.45	36.19	-	36.64	-	60.00	50.00	-23.36	-
6	17.457	0.78	29.51	-	30.29	-	60.00	50.00	-29.71	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

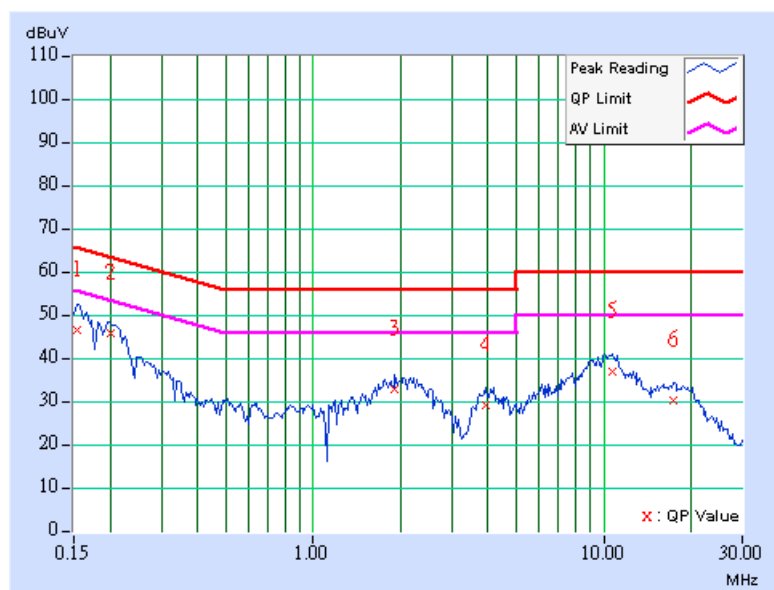

EUT	USB wireless transmitter	MEASUREMENT DETAIL	
MODEL	QAL0708-001	PHASE	Line 2
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	$\pi/4$ DQPSK	ENVIRONMENTAL CONDITIONS	20deg. C, 70%RH, 991hPa
TRANSFER RATE	2Mbps	INPUT POWER (system)	120Vac, 60 Hz
TEST MODE	1	TESTED BY	Scott Yang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.151	0.10	47.51	-	47.61	-	65.93	55.93	-18.32	-
2	0.205	0.10	44.93	-	45.03	-	63.42	53.42	-18.39	-
3	0.427	0.11	29.66	-	29.77	-	57.30	47.30	-27.54	-
4	2.277	0.22	30.68	-	30.90	-	56.00	46.00	-25.10	-
5	9.728	0.40	36.76	-	37.16	-	60.00	50.00	-22.84	-
6	17.438	0.56	28.99	-	29.55	-	60.00	50.00	-30.45	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

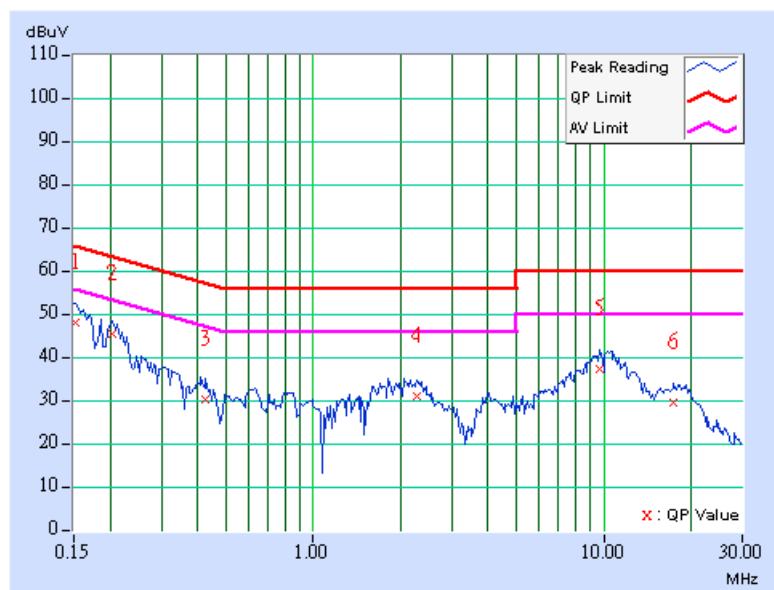

EUT	USB wireless transmitter	MEASUREMENT DETAIL	
MODEL	QAL0708-001	PHASE	Line 1
CHANNEL	Channel 12	6dB BANDWIDTH	9 kHz
MODULATION TYPE	$\pi/4$ DQPSK	ENVIRONMENTAL CONDITIONS	20deg. C, 70%RH, 991hPa
TRANSFER RATE	2Mbps	INPUT POWER (system)	120Vac, 60 Hz
TEST MODE	1	TESTED BY	Scott Yang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.154	0.10	41.53	-	41.63	-	65.79	55.79	-24.16	-
2	0.224	0.11	42.31	-	42.42	-	62.66	52.66	-20.24	-
3	1.914	0.21	31.53	-	31.74	-	56.00	46.00	-24.26	-
4	3.879	0.28	27.52	-	27.80	-	56.00	46.00	-28.20	-
5	10.176	0.43	37.26	-	37.69	-	60.00	50.00	-22.31	-
6	15.559	0.66	29.91	-	30.57	-	60.00	50.00	-29.43	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

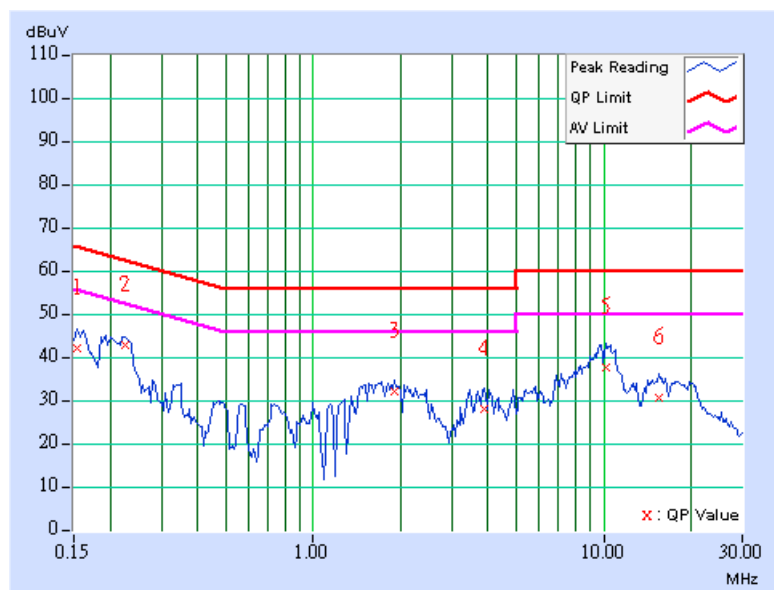

EUT	USB wireless transmitter	MEASUREMENT DETAIL	
MODEL	QAL0708-001	PHASE	Line 2
CHANNEL	Channel 12	6dB BANDWIDTH	9 kHz
MODULATION TYPE	$\pi/4$ DQPSK	ENVIRONMENTAL CONDITIONS	20deg. C, 70%RH, 991hPa
TRANSFER RATE	2Mbps	INPUT POWER (system)	120Vac, 60 Hz
TEST MODE	1	TESTED BY	Scott Yang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.228	0.10	41.63	-	41.73	-	62.52	52.52	-20.79	-
2	0.345	0.10	31.29	-	31.39	-	59.07	49.07	-27.68	-
3	1.879	0.21	30.87	-	31.08	-	56.00	46.00	-24.92	-
4	3.926	0.28	25.88	-	26.16	-	56.00	46.00	-29.84	-
5	10.199	0.40	37.50	-	37.90	-	60.00	50.00	-22.10	-
6	15.527	0.50	32.91	-	33.41	-	60.00	50.00	-26.59	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

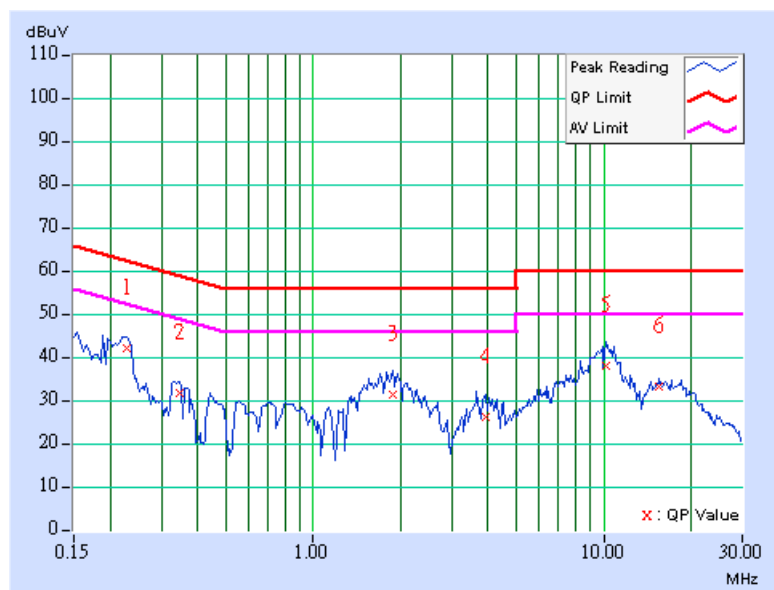

EUT	USB wireless transmitter	MEASUREMENT DETAIL	
MODEL	QAL0708-001	PHASE	Line 1
CHANNEL	Channel 13	6dB BANDWIDTH	9 kHz
MODULATION TYPE	$\pi/4$ DQPSK	ENVIRONMENTAL CONDITIONS	20deg. C, 70%RH, 991hPa
TRANSFER RATE	2Mbps	INPUT POWER (system)	120Vac, 60 Hz
TEST MODE	1	TESTED BY	Scott Yang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	46.69	-	46.79	-	66.00	56.00	-19.21	-
2	0.224	0.11	42.45	-	42.56	-	62.66	52.66	-20.10	-
3	0.341	0.11	31.61	-	31.72	-	59.17	49.17	-27.44	-
4	1.934	0.21	31.25	-	31.46	-	56.00	46.00	-24.54	-
5	3.680	0.27	27.68	-	27.95	-	56.00	46.00	-28.05	-
6	9.977	0.42	39.93	-	40.35	-	60.00	50.00	-19.65	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

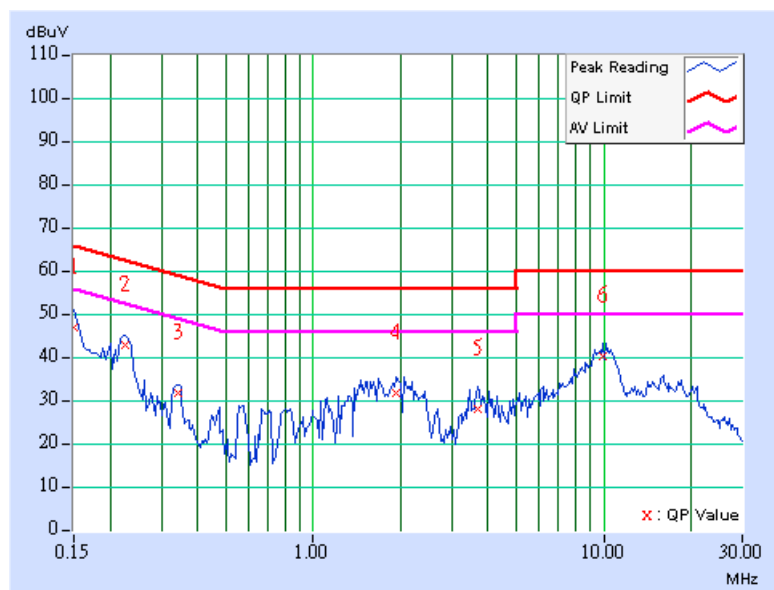

EUT	USB wireless transmitter	MEASUREMENT DETAIL	
MODEL	QAL0708-001	PHASE	Line 2
CHANNEL	Channel 13	6dB BANDWIDTH	9 kHz
MODULATION TYPE	$\pi/4$ DQPSK	ENVIRONMENTAL CONDITIONS	20deg. C, 70%RH, 991hPa
TRANSFER RATE	2Mbps	INPUT POWER (system)	120Vac, 60 Hz
TEST MODE	1	TESTED BY	Scott Yang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	50.51	-	50.61	-	66.00	56.00	-15.39	-
2	0.228	0.10	41.80	-	41.90	-	62.52	52.52	-20.62	-
3	1.992	0.21	30.19	-	30.40	-	56.00	46.00	-25.60	-
4	3.918	0.28	26.48	-	26.76	-	56.00	46.00	-29.24	-
5	10.484	0.41	38.68	-	39.09	-	60.00	50.00	-20.91	-
6	17.355	0.56	32.39	-	32.95	-	60.00	50.00	-27.05	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

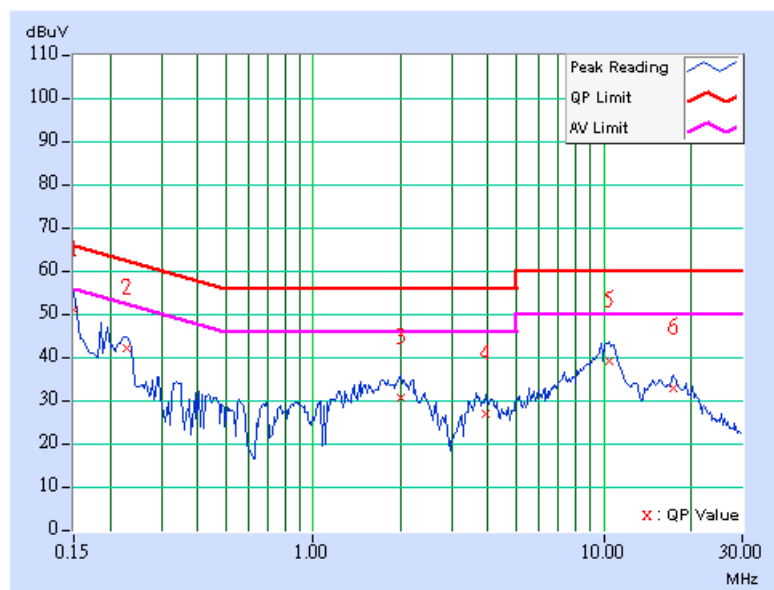


Conducted Worst-Case Data (connected with Notebook via USB cable)

EUT	USB wireless transmitter	MEASUREMENT DETAIL	
MODEL	QAL0708-001	PHASE	Line 1
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	$\pi/4$ DQPSK	ENVIRONMENTAL CONDITIONS	20deg. C, 70%RH, 991hPa
TRANSFER RATE	2Mbps	INPUT POWER (system)	120Vac, 60 Hz
TEST MODE	2	TESTED BY	Scott Yang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.170	0.10	43.08	-	43.18	-	64.98	54.98	-21.80	-
2	0.216	0.11	40.47	-	40.58	-	62.96	52.96	-22.38	-
3	1.906	0.21	33.49	-	33.70	-	56.00	46.00	-22.30	-
4	3.773	0.28	28.96	-	29.24	-	56.00	46.00	-26.76	-
5	10.406	0.44	38.02	-	38.46	-	60.00	50.00	-21.54	-
6	15.465	0.66	32.22	-	32.88	-	60.00	50.00	-27.12	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

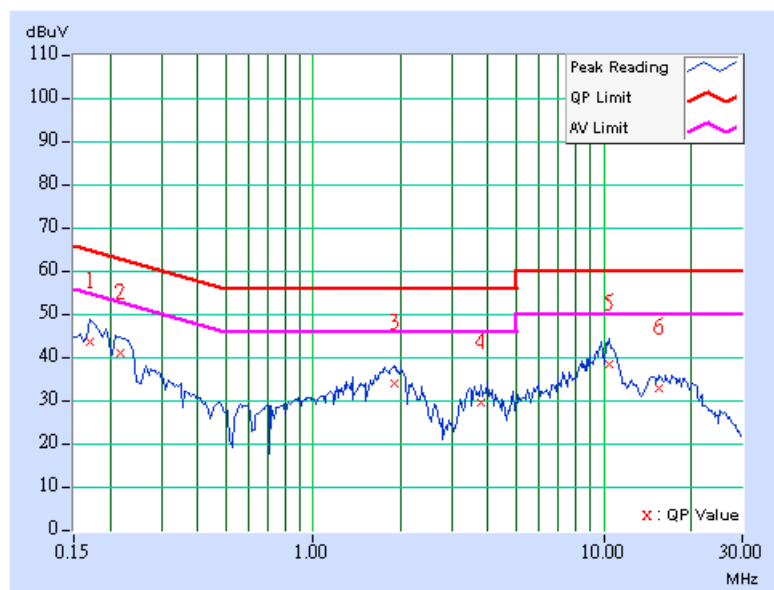

EUT	USB wireless transmitter	MEASUREMENT DETAIL	
MODEL	QAL0708-001	PHASE	Line 2
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	$\pi/4$ DQPSK	ENVIRONMENTAL CONDITIONS	20deg. C, 70%RH, 991hPa
TRANSFER RATE	2Mbps	INPUT POWER (system)	120Vac, 60 Hz
TEST MODE	2	TESTED BY	Scott Yang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	0.10	44.58	-	44.68	-	65.58	55.58	-20.90	-
2	0.189	0.10	42.16	-	42.26	-	64.08	54.08	-21.82	-
3	0.224	0.10	42.28	-	42.38	-	62.66	52.66	-20.28	-
4	1.801	0.20	34.33	-	34.53	-	56.00	46.00	-21.47	-
5	3.938	0.28	30.39	-	30.67	-	56.00	46.00	-25.33	-
6	10.438	0.41	39.61	-	40.02	-	60.00	50.00	-19.98	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

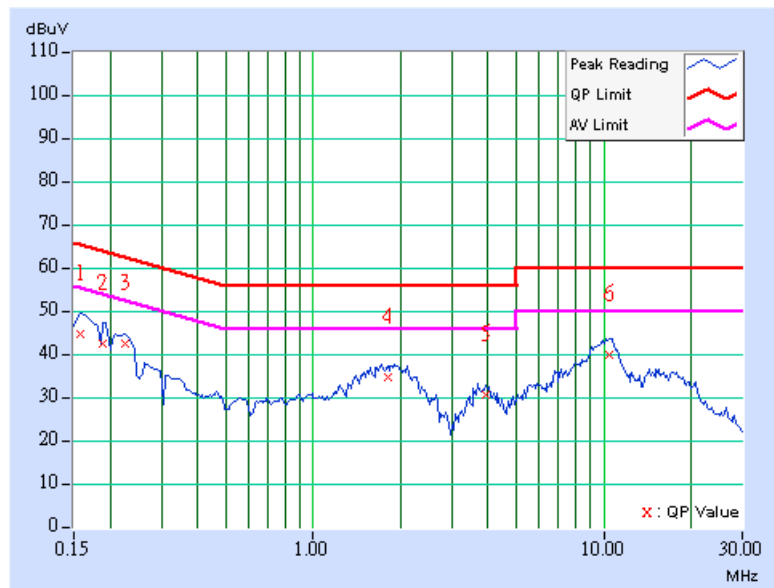

EUT	USB wireless transmitter	MEASUREMENT DETAIL	
MODEL	QAL0708-001	PHASE	Line 1
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	$\pi/4$ DQPSK	ENVIRONMENTAL CONDITIONS	20deg. C, 70%RH, 991hPa
TRANSFER RATE	2Mbps	INPUT POWER (system)	120Vac, 60 Hz
TEST MODE	2	TESTED BY	Scott Yang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.189	0.11	42.44	-	42.55	-	64.08	54.08	-21.53	-
2	0.224	0.11	42.24	-	42.35	-	62.66	52.66	-20.31	-
3	1.965	0.21	32.30	-	32.51	-	56.00	46.00	-23.49	-
4	3.535	0.27	30.04	-	30.31	-	56.00	46.00	-25.69	-
5	10.359	0.44	38.04	-	38.48	-	60.00	50.00	-21.52	-
6	17.605	0.79	32.10	-	32.89	-	60.00	50.00	-27.11	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

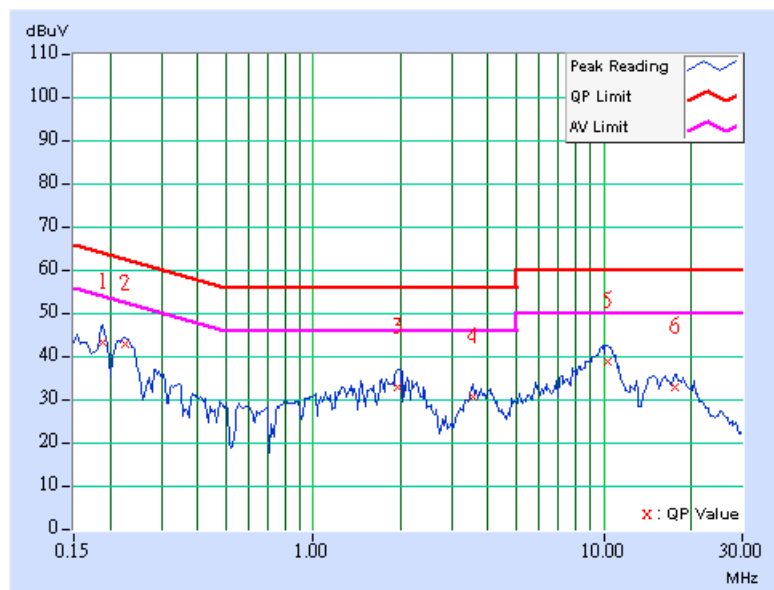

EUT	USB wireless transmitter	MEASUREMENT DETAIL	
MODEL	QAL0708-001	PHASE	Line 2
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	$\pi/4$ DQPSK	ENVIRONMENTAL CONDITIONS	20deg. C, 70%RH, 991hPa
TRANSFER RATE	2Mbps	INPUT POWER (system)	120Vac, 60 Hz
TEST MODE	2	TESTED BY	Scott Yang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.162	0.10	45.22	-	45.32	-	65.38	55.38	-20.06	-
2	0.213	0.10	42.55	-	42.65	-	63.11	53.11	-20.46	-
3	1.754	0.20	33.20	-	33.40	-	56.00	46.00	-22.60	-
4	3.844	0.27	29.10	-	29.37	-	56.00	46.00	-26.63	-
5	10.406	0.41	38.71	-	39.12	-	60.00	50.00	-20.88	-
6	15.512	0.50	31.14	-	31.64	-	60.00	50.00	-28.36	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

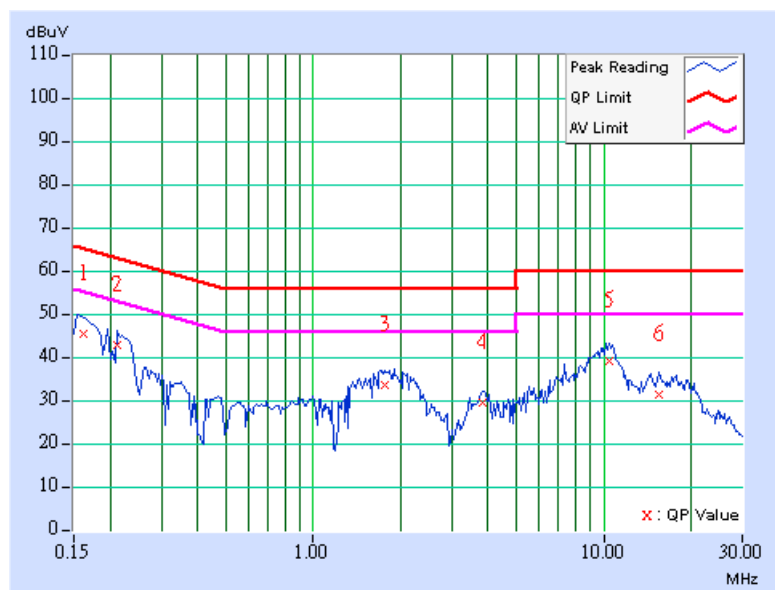

EUT	USB wireless transmitter	MEASUREMENT DETAIL	
MODEL	QAL0708-001	PHASE	Line 1
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	$\pi/4$ DQPSK	ENVIRONMENTAL CONDITIONS	20deg. C, 70%RH, 991hPa
TRANSFER RATE	2Mbps	INPUT POWER (system)	120Vac, 60 Hz
TEST MODE	2	TESTED BY	Scott Yang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	0.10	48.03	-	48.13	-	65.58	55.58	-17.45	-
2	0.224	0.11	42.36	-	42.47	-	62.66	52.66	-20.19	-
3	1.922	0.21	33.11	-	33.32	-	56.00	46.00	-22.68	-
4	3.668	0.27	28.49	-	28.76	-	56.00	46.00	-27.24	-
5	10.305	0.43	39.12	-	39.55	-	60.00	50.00	-20.45	-
6	17.234	0.77	32.42	-	33.19	-	60.00	50.00	-26.81	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

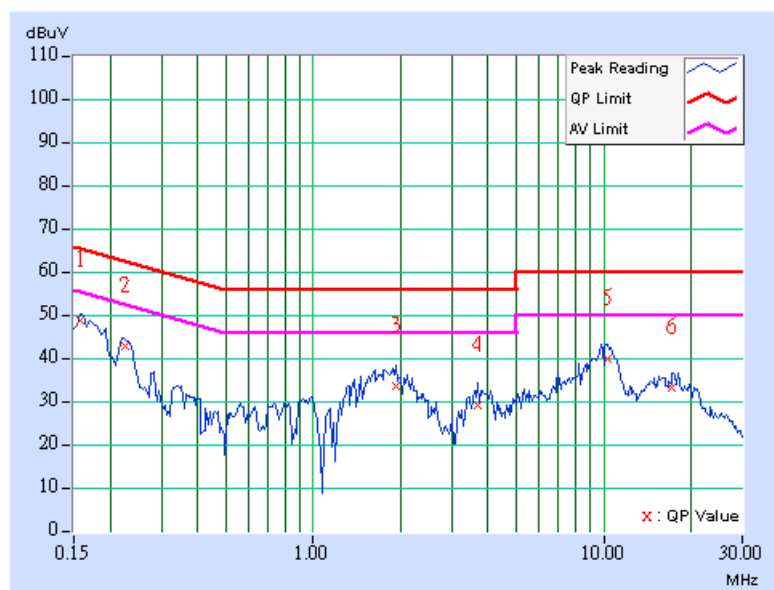

EUT	USB wireless transmitter	MEASUREMENT DETAIL	
MODEL	QAL0708-001	PHASE	Line 2
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	$\pi/4$ DQPSK	ENVIRONMENTAL CONDITIONS	20deg. C, 70%RH, 991hPa
TRANSFER RATE	2Mbps	INPUT POWER (system)	120Vac, 60 Hz
TEST MODE	2	TESTED BY	Scott Yang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.166	0.10	45.25	-	45.35	-	65.18	55.18	-19.83	-
2	0.224	0.10	42.22	-	42.32	-	62.66	52.66	-20.34	-
3	1.953	0.21	33.11	-	33.32	-	56.00	46.00	-22.68	-
4	3.719	0.27	28.07	-	28.34	-	56.00	46.00	-27.66	-
5	10.602	0.41	38.42	-	38.83	-	60.00	50.00	-21.17	-
6	15.949	0.52	31.94	-	32.46	-	60.00	50.00	-27.54	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

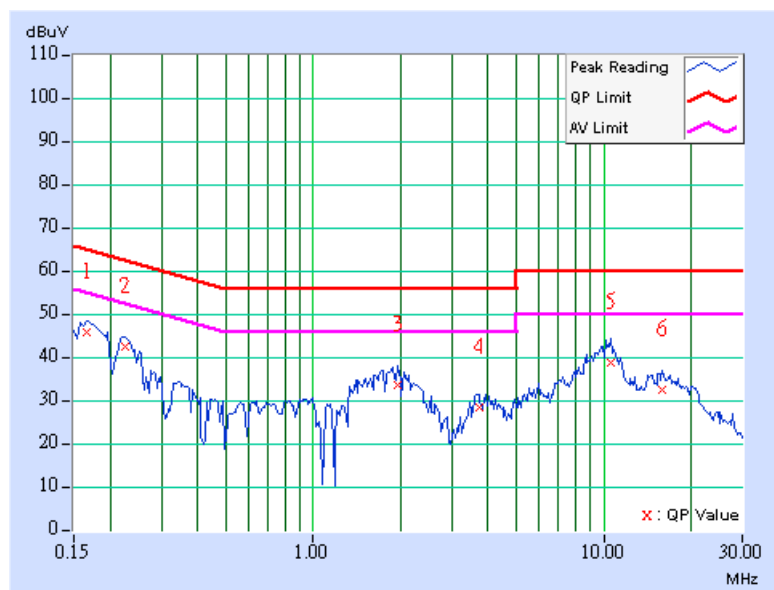

EUT	USB wireless transmitter	MEASUREMENT DETAIL	
MODEL	QAL0708-001	PHASE	Line 1
CHANNEL	Channel 12	6dB BANDWIDTH	9 kHz
MODULATION TYPE	$\pi/4$ DQPSK	ENVIRONMENTAL CONDITIONS	20deg. C, 70%RH, 991hPa
TRANSFER RATE	2Mbps	INPUT POWER (system)	120Vac, 60 Hz
TEST MODE	2	TESTED BY	Scott Yang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.170	0.10	45.64	-	45.74	-	64.98	54.98	-19.24	-
2	0.228	0.11	41.74	-	41.85	-	62.52	52.52	-20.67	-
3	1.820	0.20	32.93	-	33.13	-	56.00	46.00	-22.87	-
4	3.762	0.28	30.94	-	31.22	-	56.00	46.00	-24.78	-
5	10.211	0.43	38.20	-	38.63	-	60.00	50.00	-21.37	-
6	15.633	0.67	32.31	-	32.98	-	60.00	50.00	-27.02	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

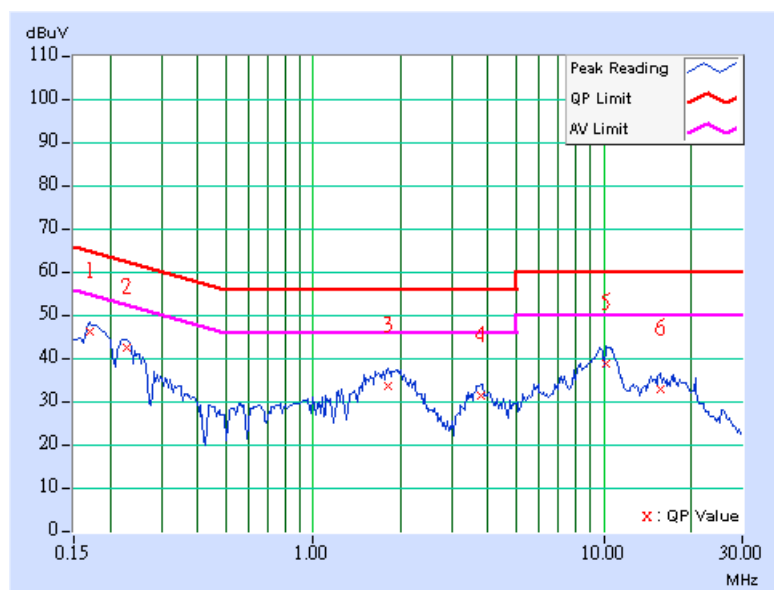

EUT	USB wireless transmitter	MEASUREMENT DETAIL	
MODEL	QAL0708-001	PHASE	Line 2
CHANNEL	Channel 12	6dB BANDWIDTH	9 kHz
MODULATION TYPE	$\pi/4$ DQPSK	ENVIRONMENTAL CONDITIONS	20deg. C, 70%RH, 991hPa
TRANSFER RATE	2Mbps	INPUT POWER (system)	120Vac, 60 Hz
TEST MODE	2	TESTED BY	Scott Yang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	42.54	-	42.64	-	66.00	56.00	-23.36	-
2	0.193	0.10	41.98	-	42.08	-	63.91	53.91	-21.83	-
3	0.224	0.10	41.98	-	42.08	-	62.66	52.66	-20.58	-
4	1.980	0.21	33.22	-	33.43	-	56.00	46.00	-22.57	-
5	10.445	0.41	37.81	-	38.22	-	60.00	50.00	-21.78	-
6	17.648	0.56	31.36	-	31.92	-	60.00	50.00	-28.08	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

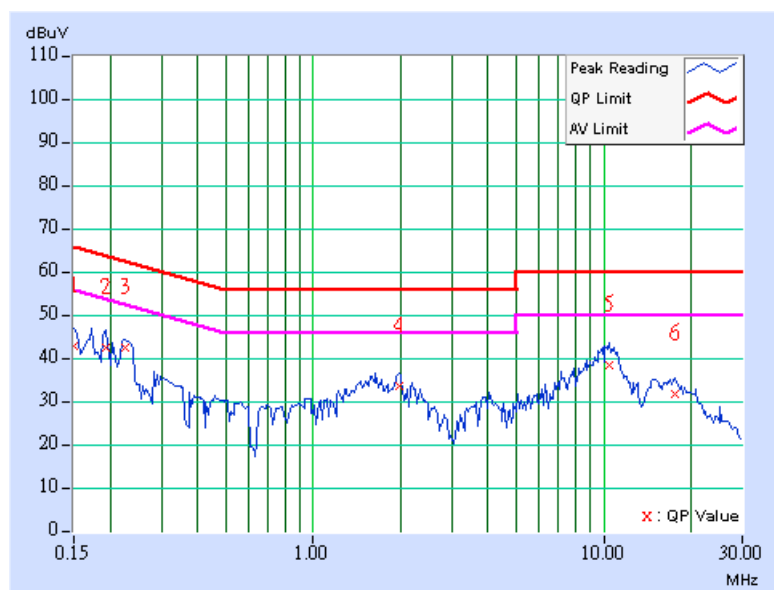

EUT	USB wireless transmitter	MEASUREMENT DETAIL	
MODEL	QAL0708-001	PHASE	Line 1
CHANNEL	Channel 13	6dB BANDWIDTH	9 kHz
MODULATION TYPE	$\pi/4$ DQPSK	ENVIRONMENTAL CONDITIONS	20deg. C, 70%RH, 991hPa
TRANSFER RATE	2Mbps	INPUT POWER (system)	120Vac, 60 Hz
TEST MODE	2	TESTED BY	Scott Yang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.11	41.83	-	41.94	-	64.43	54.43	-22.49	-
2	0.224	0.11	42.04	-	42.15	-	62.66	52.66	-20.51	-
3	1.820	0.20	32.32	-	32.52	-	56.00	46.00	-23.48	-
4	3.879	0.28	27.73	-	28.01	-	56.00	46.00	-27.99	-
5	10.215	0.43	37.18	-	37.61	-	60.00	50.00	-22.39	-
6	15.660	0.67	32.92	-	33.59	-	60.00	50.00	-26.41	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

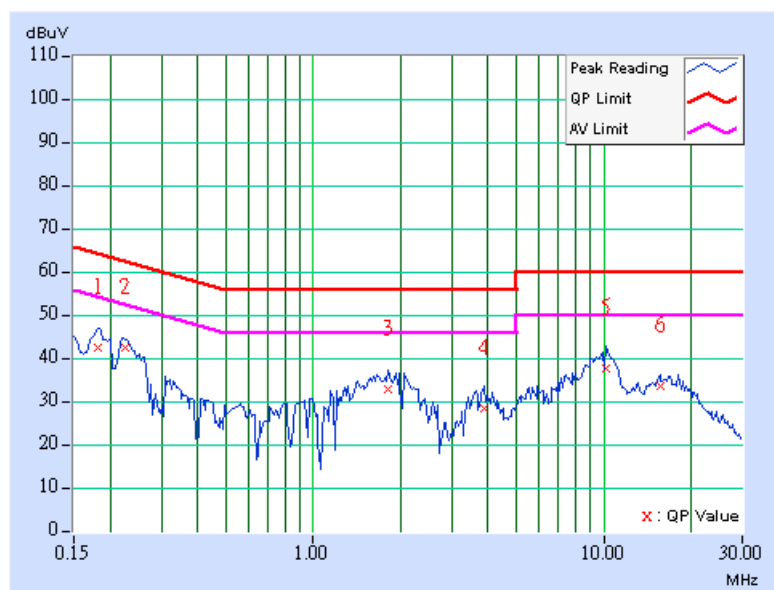

EUT	USB wireless transmitter	MEASUREMENT DETAIL	
MODEL	QAL0708-001	PHASE	Line 2
CHANNEL	Channel 13	6dB BANDWIDTH	9 kHz
MODULATION TYPE	$\pi/4$ DQPSK	ENVIRONMENTAL CONDITIONS	20deg. C, 70%RH, 991hPa
TRANSFER RATE	2Mbps	INPUT POWER (system)	120Vac, 60 Hz
TEST MODE	2	TESTED BY	Scott Yang

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.166	0.10	43.24	-	43.34	-	65.18	55.18	-21.84	-
2	0.228	0.10	41.62	-	41.72	-	62.52	52.52	-20.80	-
3	1.820	0.20	31.63	-	31.83	-	56.00	46.00	-24.17	-
4	3.887	0.28	26.94	-	27.22	-	56.00	46.00	-28.78	-
5	10.336	0.41	37.57	-	37.98	-	60.00	50.00	-22.02	-
6	15.020	0.49	32.21	-	32.70	-	60.00	50.00	-27.30	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

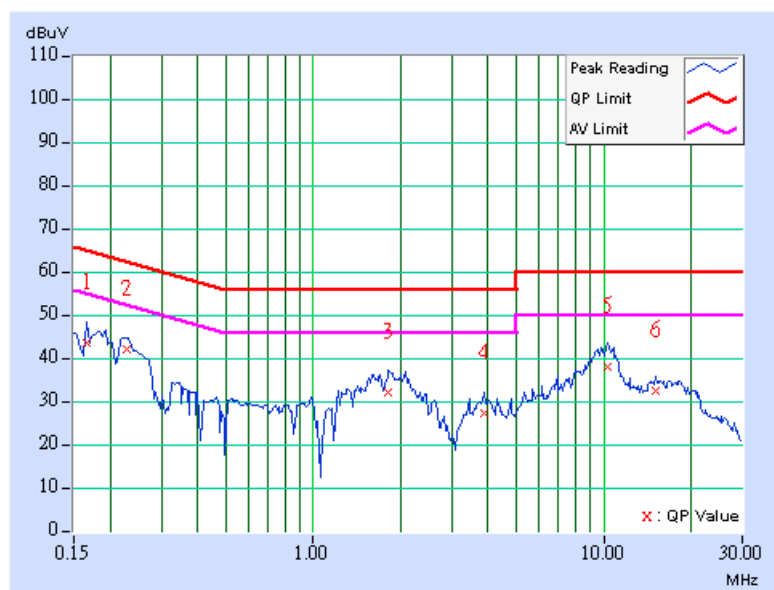

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	838496/016	Jan. 07, 2006
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100041	Nov. 29, 2005
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Jan. 22, 2006
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-404	Jan. 05, 2006
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA 9170242	Jan. 23, 2006
Preamplifier Agilent	8447D	2944A10631	Nov. 17, 2005
Preamplifier Agilent	8449B	3008A01960	Nov. 14, 2005
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	219272/4	Jan. 26, 2006
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	219275/4	Jan. 26, 2006
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA
Antenna Tower Controller inn-co GmbH	CO2000	019303	NA
Turn Table ADT.	TT100.	TT93021704	NA
Turn Table Controller ADT.	SC100.	SC93021704	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The IC Site Registration No. is IC4924-4.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi-peak method or average method as specified and then reported in Data sheet peak mode and QP mode.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

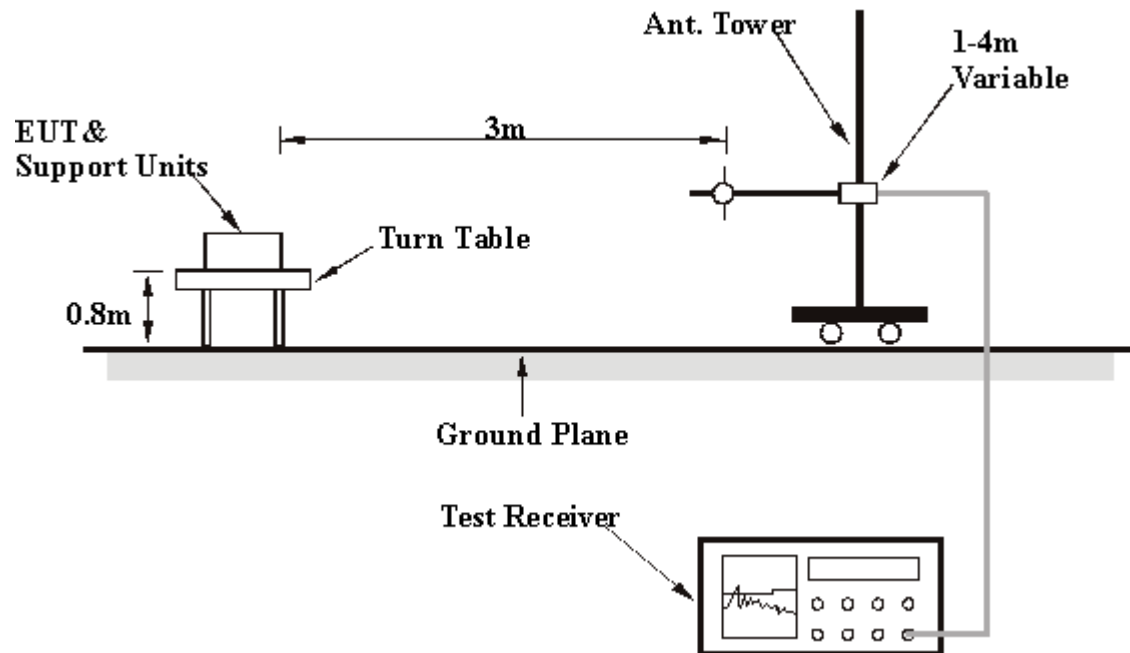

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS

Below 1GHz Worst-Case Data (connected with Notebook directly)

EUT	USB wireless transmitter	MEASUREMENT DETAIL	
MODEL	QAL0708-001	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	$\pi/4$ DQPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 60%RH, 991hPa
TRANSFER RATE	2Mbps	INPUT POWER (system)	120Vac, 60 Hz
TEST MODE	1	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	166.07	34.48 QP	43.50	-9.02	1.50 H	274	20.16	14.32
2	232.16	36.29 QP	46.00	-9.71	1.00 H	205	23.82	12.48
3	267.15	36.47 QP	46.00	-9.53	1.00 H	205	22.92	13.55
4	337.13	39.94 QP	46.00	-6.06	1.00 H	91	24.71	15.23
5	591.78	40.28 QP	46.00	-5.72	1.50 H	55	19.67	20.60
6	675.37	38.03 QP	46.00	-7.97	1.00 H	193	16.28	21.74

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	133.03	29.94 QP	43.50	-13.56	1.00 V	349	16.05	13.89
2	166.07	33.41 QP	43.50	-10.09	1.50 V	43	19.09	14.32
3	337.13	31.78 QP	46.00	-14.22	1.25 V	331	16.55	15.23
4	529.58	28.78 QP	46.00	-17.22	1.00 V	295	9.68	19.10
5	591.78	36.93 QP	46.00	-9.07	1.50 V	295	16.33	20.60
6	675.37	32.92 QP	46.00	-13.08	1.25 V	298	11.17	21.74

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value

Below 1GHz Worst-Case Data (connected with Notebook via USB cable)

EUT	USB wireless transmitter	MEASUREMENT DETAIL	
MODEL	QAL0708-001	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	$\pi/4$ DQPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 56%RH, 991hPa
TRANSFER RATE	2Mbps	INPUT POWER (system)	120Vac, 60 Hz
TEST MODE	2	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	113.59	35.82 QP	43.50	-7.68	1.25 H	268	23.67	12.14
2	177.74	36.13 QP	43.50	-7.37	1.50 H	280	23.20	12.93
3	214.67	32.08 QP	43.50	-11.42	1.25 H	277	20.58	11.49
4	251.60	36.05 QP	46.00	-9.95	1.00 H	307	22.94	13.11
5	306.03	42.63 QP	46.00	-3.37	1.00 H	211	28.17	14.46
6	352.69	34.09 QP	46.00	-11.91	1.00 H	280	18.56	15.53
7	572.34	34.25 QP	46.00	-11.75	1.50 H	112	14.07	20.18
8	733.69	35.85 QP	46.00	-10.15	1.00 H	223	12.81	23.03
9	881.42	34.15 QP	46.00	-11.85	1.50 H	193	9.41	24.74
10	933.91	35.74 QP	46.00	-10.26	1.25 H	196	10.29	25.45

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	96.09	30.58 QP	43.50	-12.92	1.00 V	106	20.15	10.43
2	113.59	33.73 QP	43.50	-9.77	1.00 V	202	21.59	12.14
3	179.68	35.77 QP	43.50	-7.73	1.00 V	298	23.03	12.74
4	306.03	35.12 QP	46.00	-10.88	1.00 V	220	20.66	14.46
5	350.74	30.38 QP	46.00	-15.62	1.00 V	217	14.90	15.48
6	465.43	33.42 QP	46.00	-12.58	1.25 V	292	15.30	18.12
7	617.05	27.14 QP	46.00	-18.86	1.50 V	235	6.01	21.13
8	733.69	32.14 QP	46.00	-13.86	1.00 V	82	9.11	23.03
9	865.87	34.64 QP	46.00	-11.36	1.00 V	211	10.21	24.43
10	933.91	31.64 QP	46.00	-14.36	1.50 V	163	6.20	25.45

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value

802.11b DSSS modulation

EUT	USB wireless transmitter	MEASUREMENT DETAIL	
MODEL	QAL0708-001	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	$\pi/4$ DQPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 53%RH, 991hPa
TRANSFER RATE	2Mbps	INPUT POWER (system)	120Vac, 60 Hz
TEST MODE	2	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	52.48 PK	74.00	-21.52	1.06 H	188	21.51	30.97
1	2390.00	43.45 AV	54.00	-10.55	1.06 H	188	12.48	30.97
2	*2412.00	95.86 PK			1.06 H	188	64.80	31.06
2	*2412.00	92.52 AV			1.06 H	188	61.46	31.06
3	4824.00	46.52 PK	74.00	-27.48	1.15 H	22	10.09	36.43
3	4824.00	37.22 AV	54.00	-16.78	1.15 H	22	0.79	36.43
4	9648.00	53.96 PK	74.00	-20.04	1.44 H	339	8.89	45.07
4	9648.00	44.50 AV	54.00	-9.50	1.44 H	339	-0.57	45.07

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	52.29 PK	74.00	-21.71	1.39 V	188	21.32	30.97
1	2390.00	43.41 AV	54.00	-10.59	1.39 V	188	12.44	30.97
2	*2412.00	93.55 PK			1.39 V	188	62.49	31.06
2	*2412.00	90.57 AV			1.39 V	188	59.51	31.06
3	4824.00	48.02 PK	74.00	-25.98	1.01 V	177	11.59	36.43
3	4824.00	41.13 AV	54.00	-12.87	1.01 V	177	4.70	36.43
4	9648.00	56.49 PK	74.00	-17.51	1.38 V	170	11.42	45.07
4	9648.00	50.77 AV	54.00	-3.23	1.38 V	170	5.70	45.07

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency

EUT	USB wireless transmitter	MEASUREMENT DETAIL	
MODEL	QAL0708-001	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	$\pi/4$ DQPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 53%RH, 991hPa
TRANSFER RATE	2Mbps	INPUT POWER (system)	120Vac, 60 Hz
TEST MODE	2	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	95.42 PK			1.08 H	211	64.25	31.17
1	*2437.00	92.13 AV			1.08 H	211	60.96	31.17
2	4874.00	45.89 PK	74.00	-28.11	1.11 H	332	9.35	36.54
2	4874.00	36.76 AV	54.00	-17.24	1.11 H	332	0.22	36.54
3	9748.00	53.64 PK	74.00	-20.36	1.41 H	340	8.37	45.27
3	9748.00	44.18 AV	54.00	-9.82	1.41 H	340	-1.09	45.27

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	93.12 PK			1.35 V	199	61.95	31.17
1	*2437.00	90.18 AV			1.35 V	199	59.01	31.17
2	4874.00	47.74 PK	74.00	-26.26	1.02 V	182	11.20	36.54
2	4874.00	40.86 AV	54.00	-13.14	1.02 V	182	4.32	36.54
3	9748.00	56.11 PK	74.00	-17.89	1.34 V	181	10.84	45.27
3	9748.00	50.35 AV	54.00	-3.65	1.34 V	181	5.08	45.27

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency

EUT	USB wireless transmitter	MEASUREMENT DETAIL	
MODEL	QAL0708-001	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	$\pi/4$ DQPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 53%RH, 991hPa
TRANSFER RATE	2Mbps	INPUT POWER (system)	120Vac, 60 Hz
TEST MODE	2	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	95.33 PK			1.01 H	191	64.05	31.28
1	*2462.00	92.56 AV			1.01 H	191	61.28	31.28
2	2483.50	53.46 PK	74.00	-20.54	1.01 H	191	22.09	31.37
2	2483.50	44.08 AV	54.00	-9.92	1.01 H	191	12.71	31.37
3	9848.00	53.31 PK	74.00	-20.69	1.39 H	350	7.90	45.41
3	9848.00	43.87 AV	54.00	-10.13	1.39 H	350	-1.54	45.41

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	93.07 PK			1.33 V	210	61.79	31.28
1	*2462.00	90.02 AV			1.33 V	210	58.74	31.28
2	2483.50	44.59 PK	74.00	-29.41	1.33 V	210	13.22	31.37
2	2483.50	41.54 AV	54.00	-12.46	1.33 V	210	10.17	31.37
3	4924.00	56.01 PK	74.00	-17.99	1.28 V	210	19.35	36.66
3	4924.00	50.13 AV	54.00	-3.87	1.28 V	210	13.47	36.66

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency

EUT	USB wireless transmitter	MEASUREMENT DETAIL	
MODEL	QAL0708-001	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 12	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	$\pi/4$ DQPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 53%RH, 991hPa
TRANSFER RATE	2Mbps	INPUT POWER (system)	120Vac, 60 Hz
TEST MODE	2	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	96.69 PK			1.30 H	245	65.39	31.30
1	*2467.00	93.46 AV			1.30 H	245	62.16	31.30
2	2483.50	52.51 PK	74.00	-21.49	1.30 H	245	21.14	31.37
2	2483.50	44.03 AV	54.00	-9.97	1.30 H	245	12.66	31.37
3	9868.00	53.15 PK	74.00	-20.85	1.24 H	333	7.73	45.42
3	9868.00	43.62 AV	54.00	-10.38	1.24 H	333	-1.80	45.42

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	93.09 PK			1.23 V	230	61.81	31.28
1	*2467.00	90.10 AV			1.23 V	230	58.82	31.28
2	2483.50	43.66 PK	74.00	-30.34	1.23 V	230	12.29	31.37
2	2483.50	40.67 AV	54.00	-13.33	1.23 V	230	9.30	31.37
3	9868.00	56.12 PK	74.00	-17.88	1.24 V	320	10.70	45.42
3	9868.00	50.23 AV	54.00	-3.77	1.24 V	320	4.81	45.42

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency

EUT	USB wireless transmitter	MEASUREMENT DETAIL	
MODEL	QAL0708-001	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 13	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	$\pi/4$ DQPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 53%RH, 991hPa
TRANSFER RATE	2Mbps	INPUT POWER (system)	120Vac, 60 Hz
TEST MODE	2	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	96.39 PK			1.29 H	189	65.07	31.32
1	*2472.00	93.30 AV			1.29 H	189	61.98	31.32
2	2483.50	55.34 PK	74.00	-18.66	1.29 H	189	23.97	31.37
2	2483.50	46.79 AV	54.00	-7.21	1.29 H	189	15.42	31.37
3	9888.00	53.31 PK	74.00	-20.69	1.39 H	350	7.88	45.43
3	9888.00	43.87 AV	54.00	-10.13	1.39 H	350	-1.56	45.43

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	92.86 PK			1.31 V	200	61.54	31.32
1	*2472.00	89.70 AV			1.31 V	200	58.38	31.32
2	2483.50	46.35 PK	74.00	-27.65	1.31 V	200	14.98	31.37
2	2483.50	43.19 AV	54.00	-10.81	1.31 V	200	11.82	31.37
3	9888.00	55.68 PK	74.00	-18.32	1.24 V	222	10.25	45.43
3	9888.00	49.70 AV	54.00	-4.30	1.24 V	222	4.27	45.43

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK 30	100049	Aug. 12, 2005

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

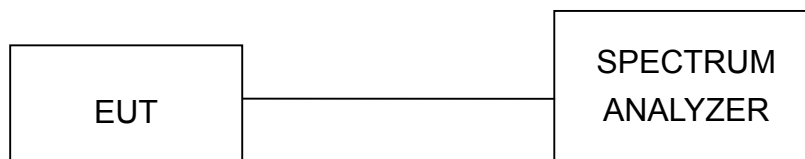

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.3.7 TEST RESULTS

802.11b DSSS modulation


EUT	USB wireless transmitter	MODEL	QAL0708-001
MODULATION TYPE	$\pi/4$ DQPSK	TRANSFER RATE	2Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	21deg. C, 50%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	9.16	0.5	PASS
6	2437	9.20	0.5	PASS
11	2462	9.16	0.5	PASS
12	2467	9.16	0.5	PASS
13	2472	9.16	0.5	PASS


CH1

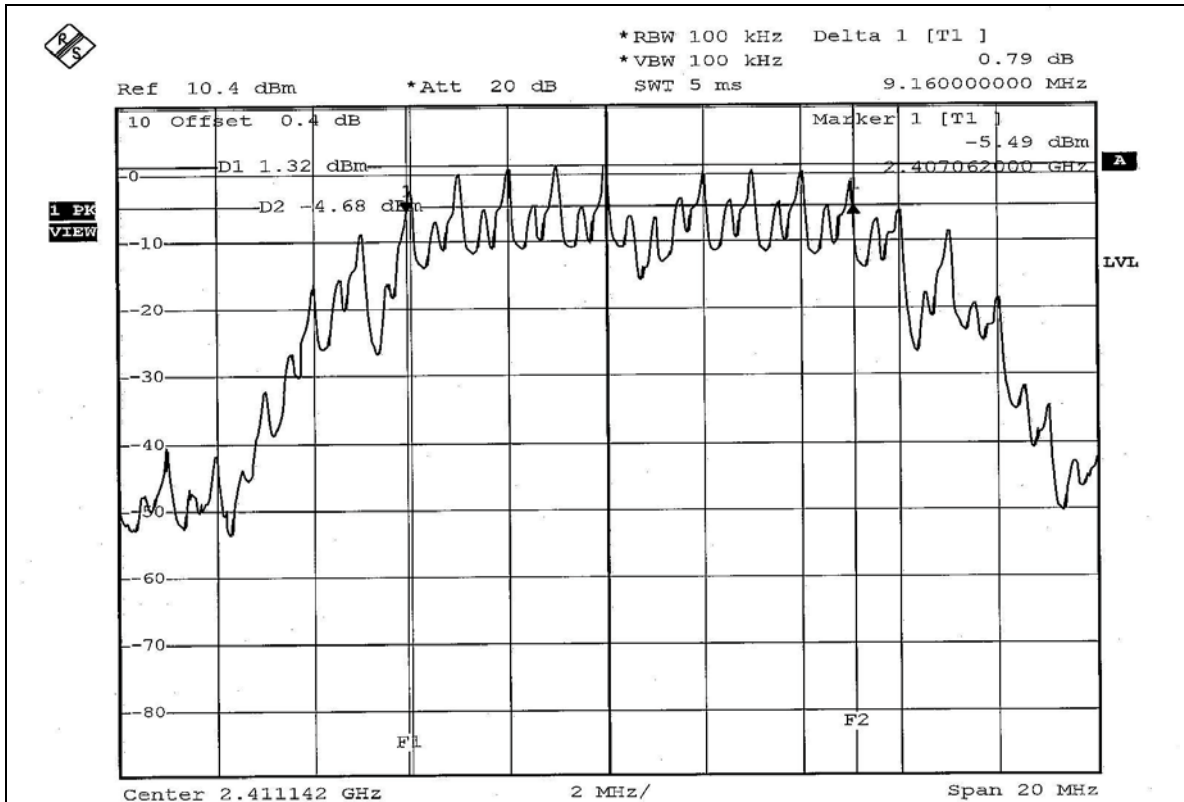


CH6

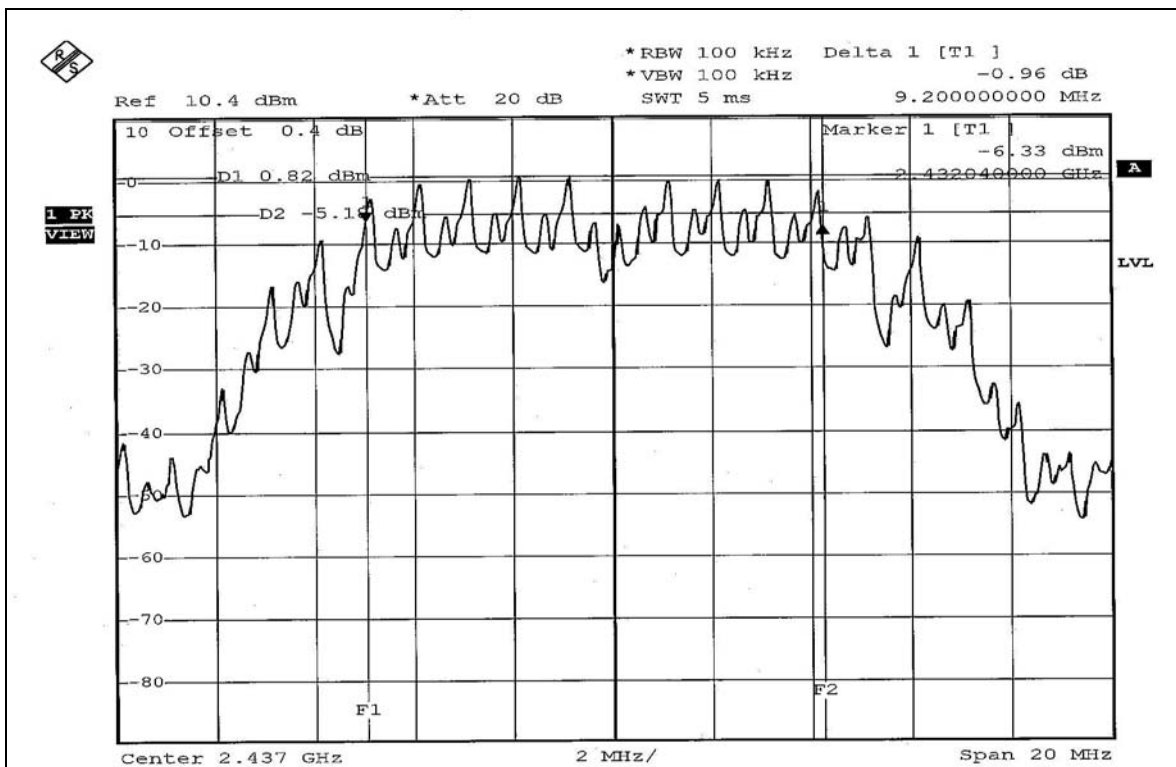


CH11

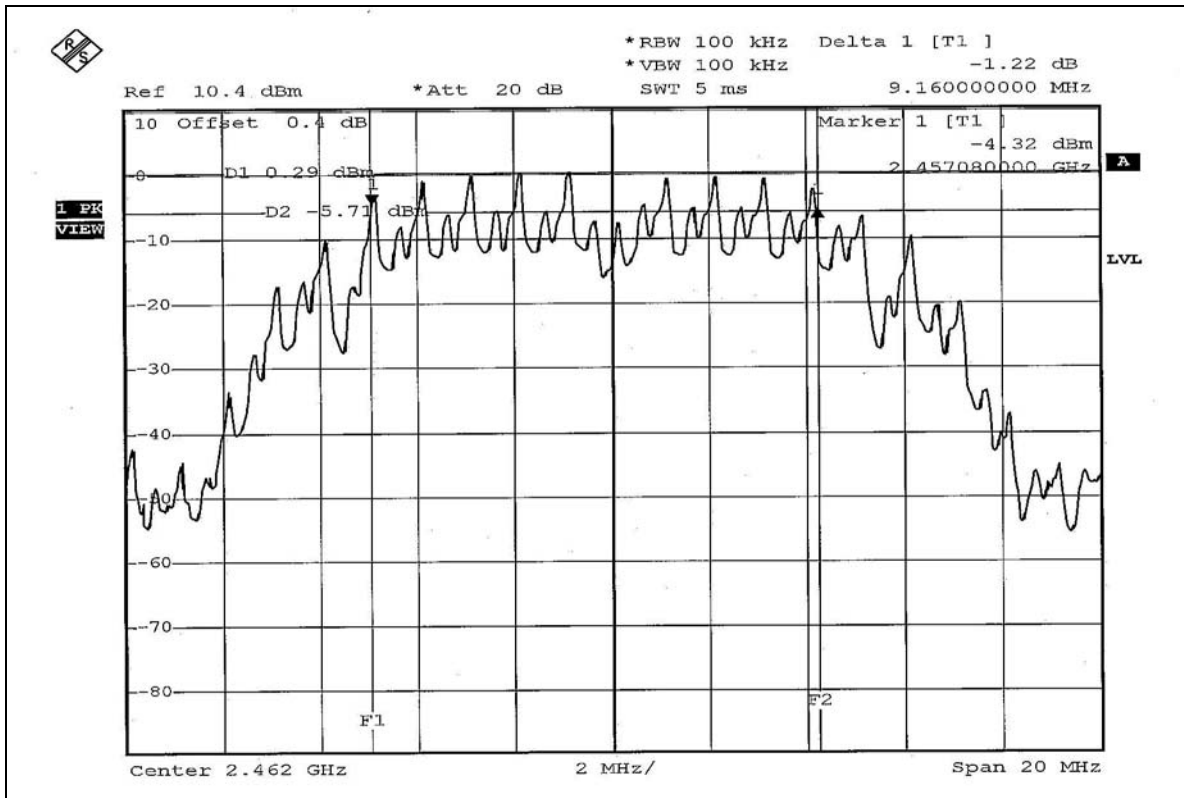

CH12

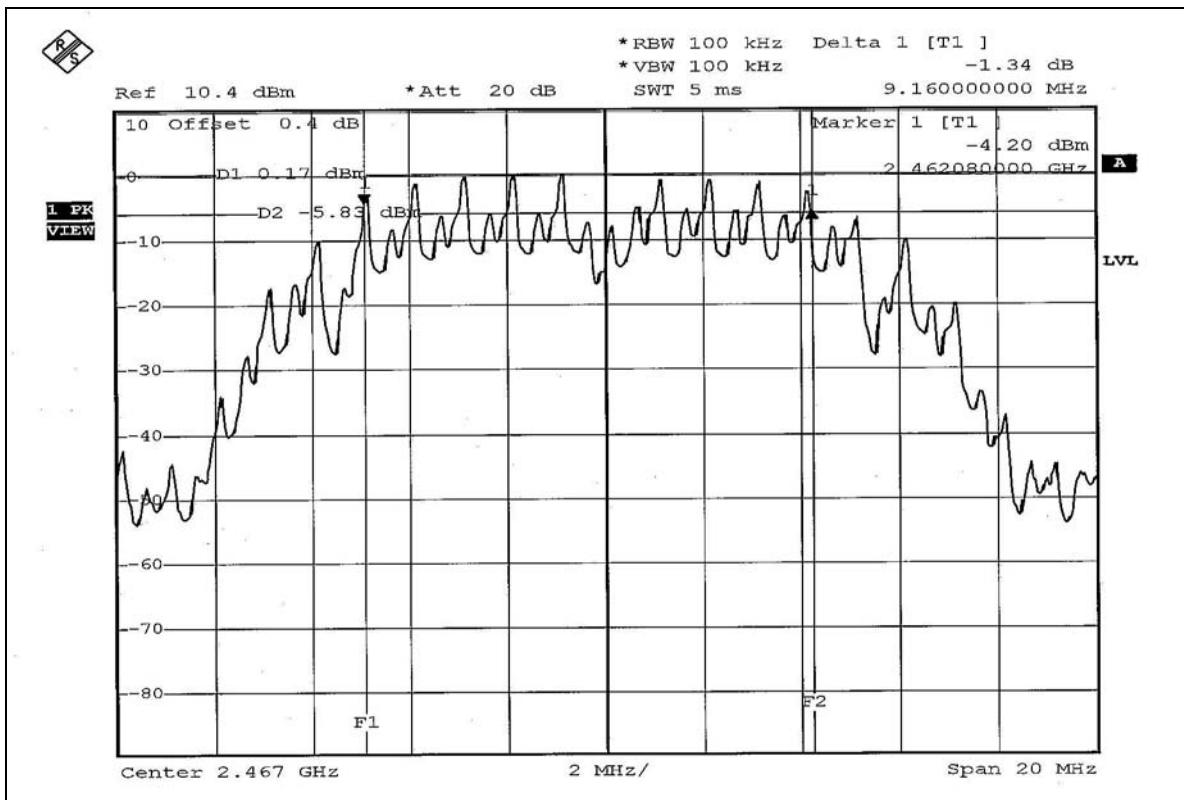

CH13

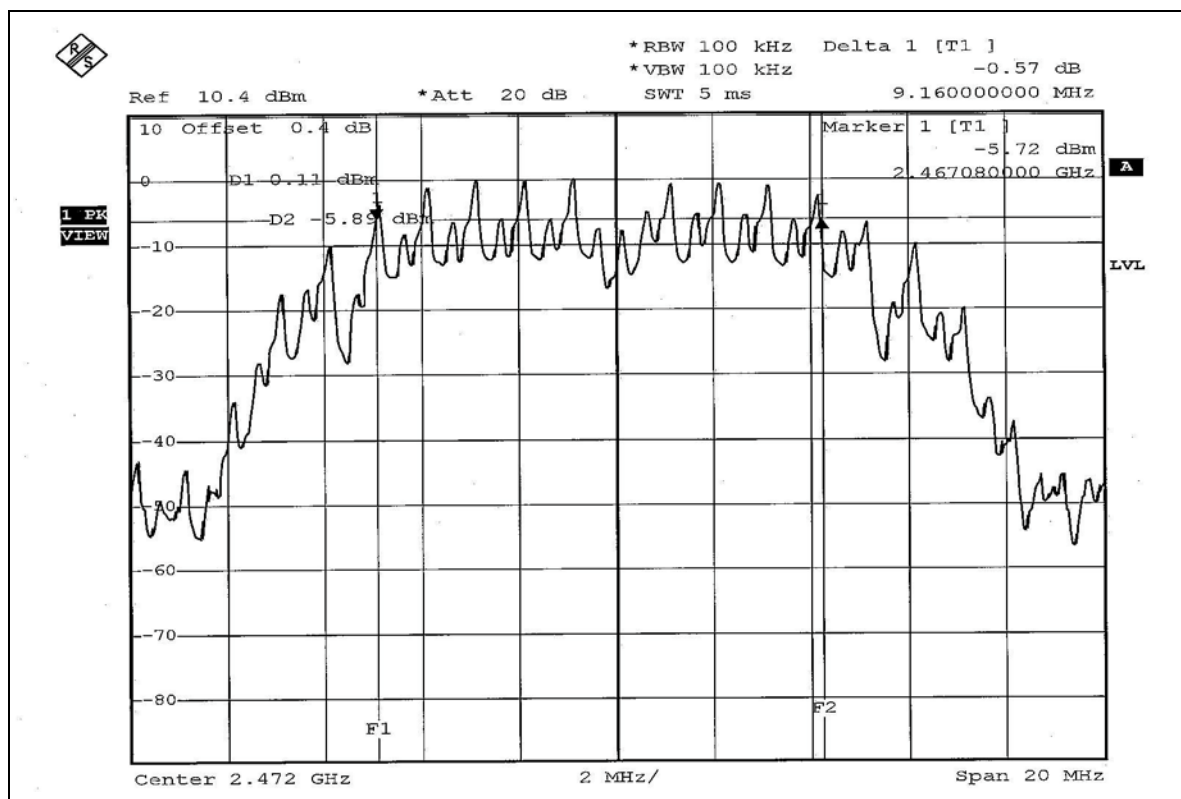

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 06, 2005
TEKTRONIX OSCILLOSCOPE	TDS 1012	C019167	Feb. 01, 2006
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.4.7 TEST RESULTS

802.11b DSSS modulation

EUT	USB wireless transmitter	MODEL	QAL0708-001
MODULATION TYPE	$\pi/4$ DQPSK	TRANSFER RATE	2Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	21deg.C, 50%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	20.559	13.13	30	PASS
6	2437	20.417	13.10	30	PASS
11	2462	20.184	13.05	30	PASS
12	2467	19.953	13.00	30	PASS
13	2472	19.588	12.92	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6


4.5.7 TEST RESULTS

802.11b DSSS modulation


EUT	USB wireless transmitter	MODEL	QAL0708-001
MODULATION TYPE	$\pi/4$ DQPSK	TRANSFER RATE	2Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	21deg.C, 50%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-2.63	8	PASS
6	2437	-2.95	8	PASS
11	2462	-3.48	8	PASS
12	2467	-3.60	8	PASS
13	2472	-3.65	8	PASS


CH1

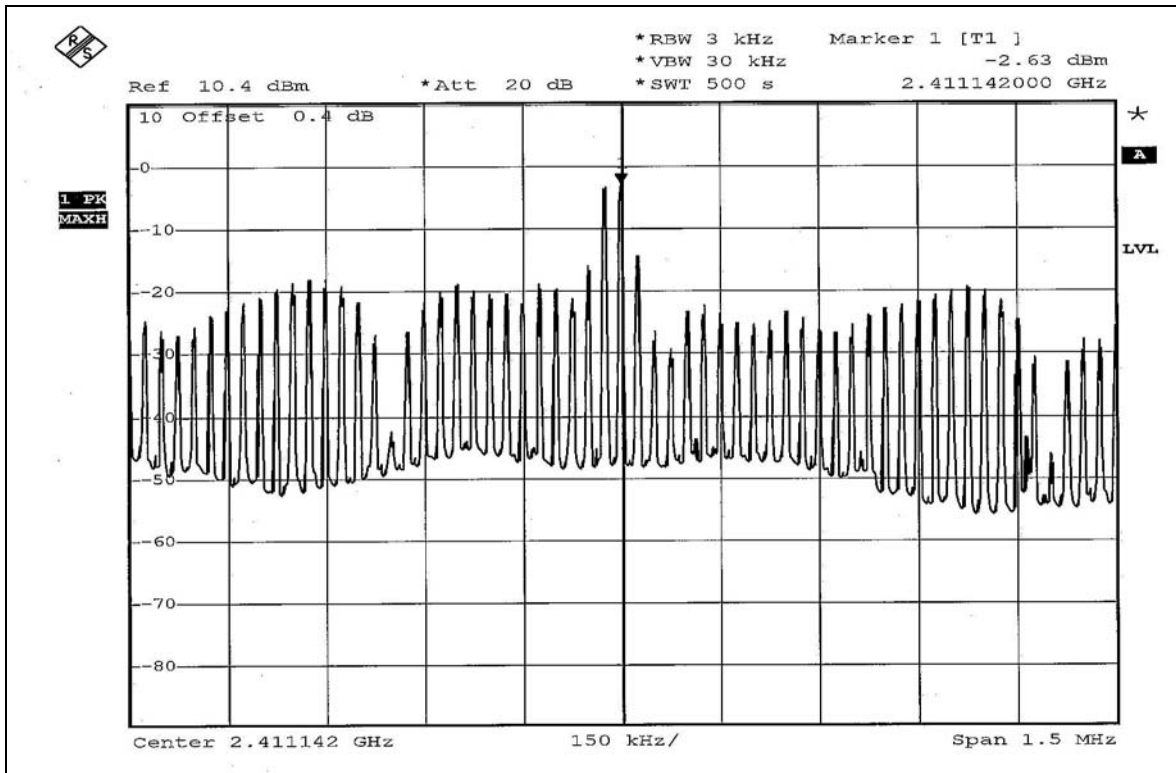


CH6

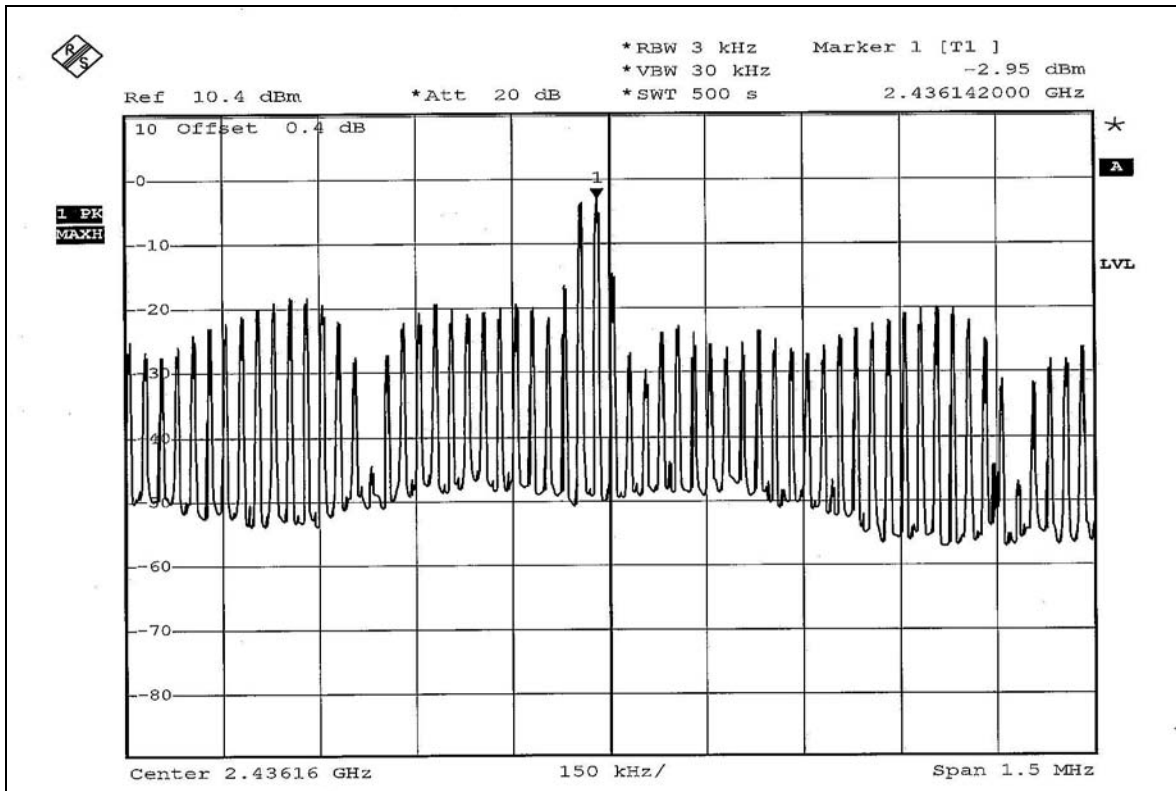


CH11

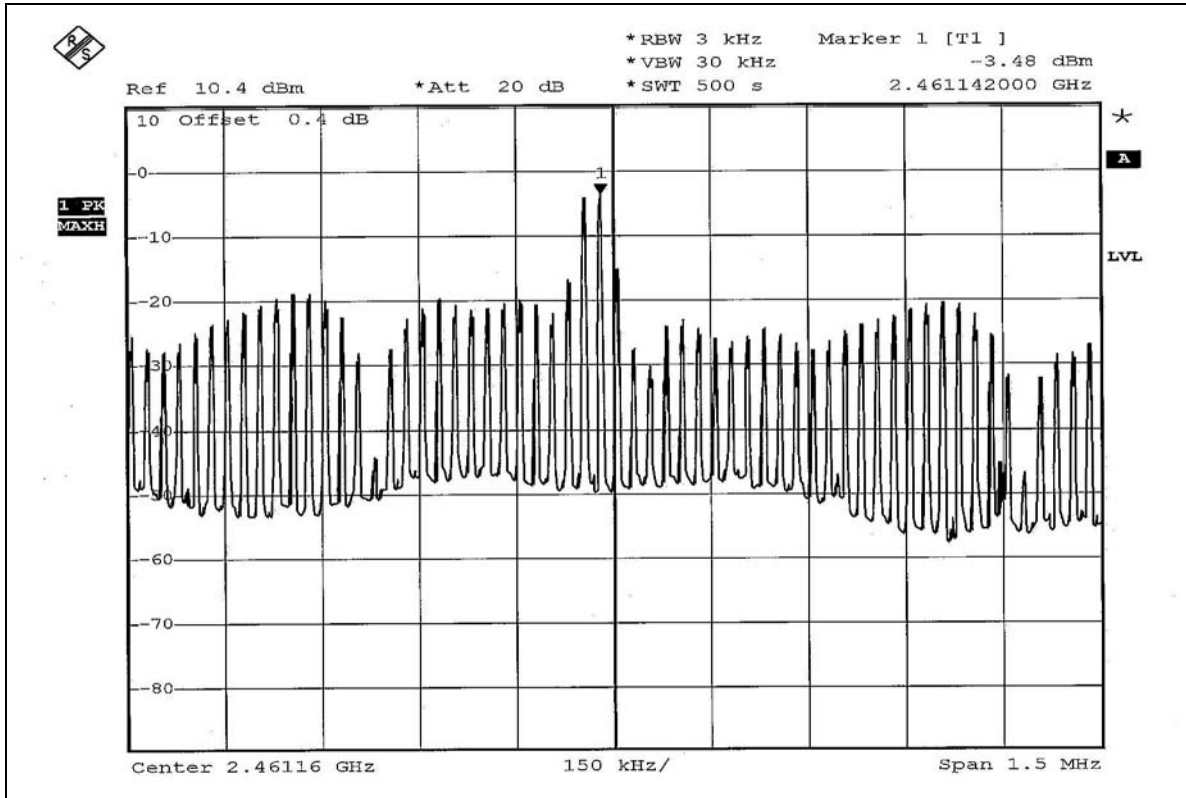

CH12

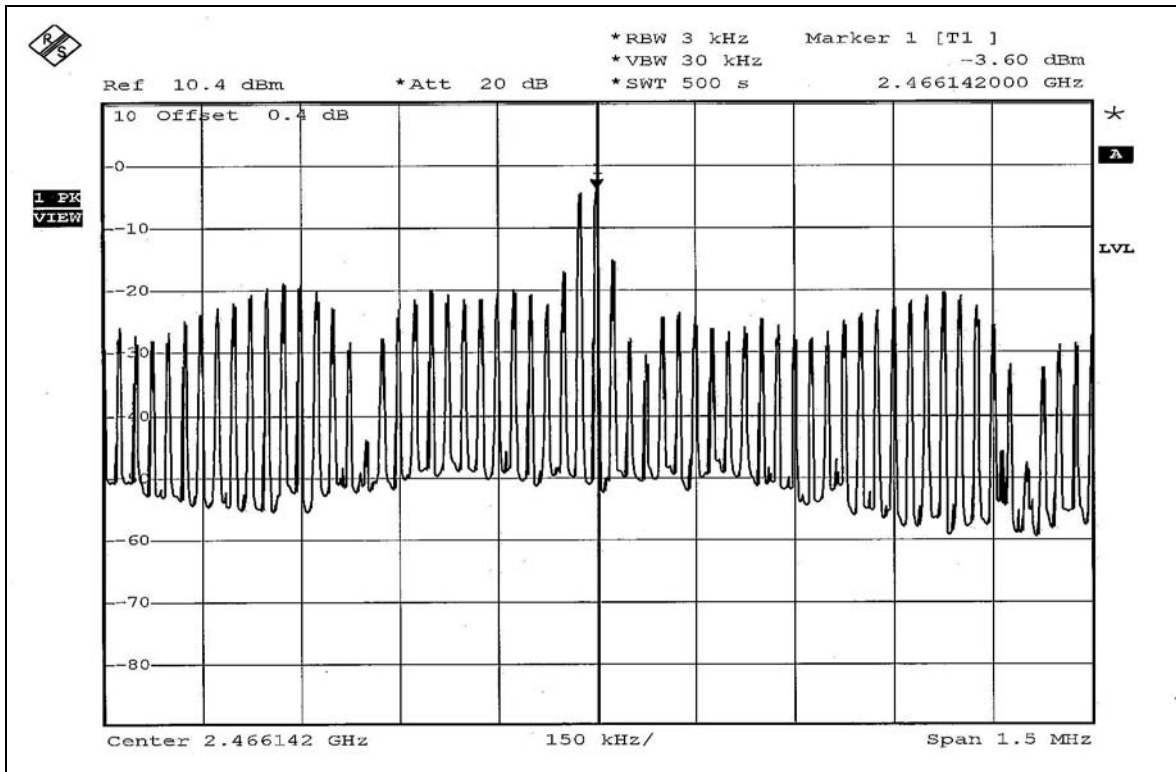

CH13

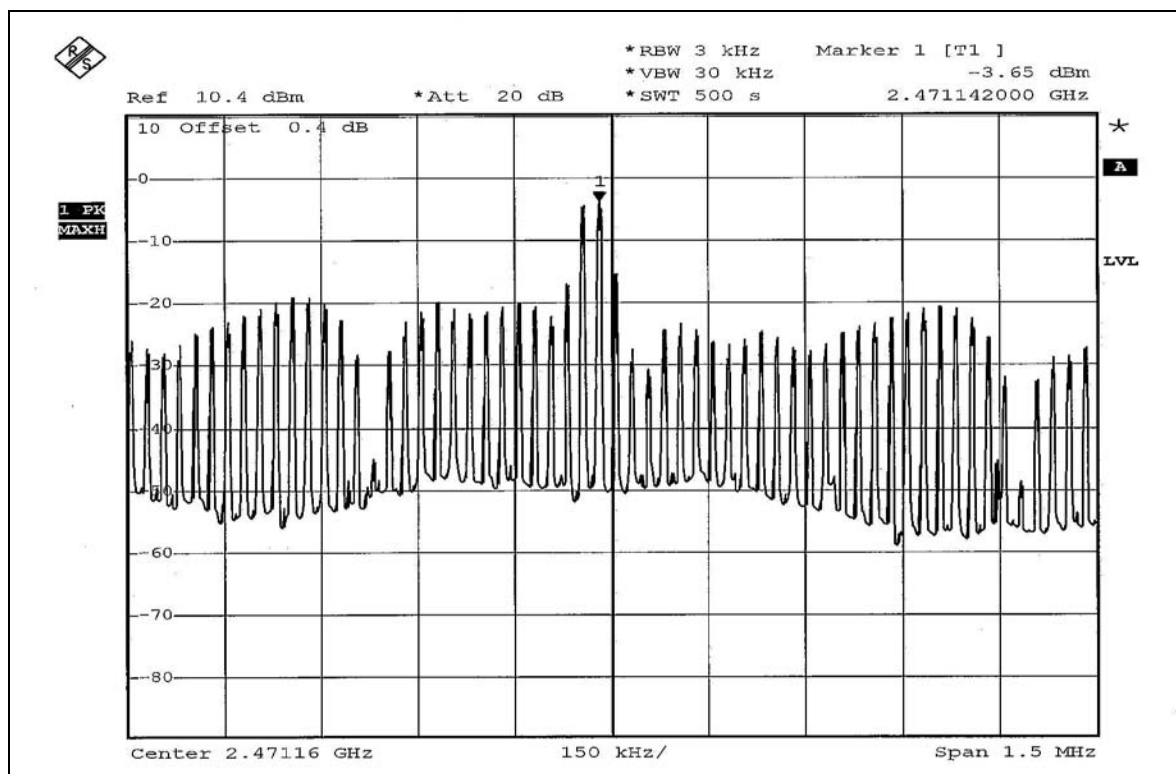

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges were measured and recorded.

The spectrum plots (Peak RBW=VBW=100kHz ; Average RBW=1MHz, VBW=10Hz) are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6



4.6.6 TEST RESULTS

The spectrum plots are attached on the following 6 images. D2 line indicates the highest level, and D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(d).



DSSS modulation



NOTE 1: The band edge emission plot on page 65 shows 57.16dBc between carrier maximum power and local maximum emission in restrict band (2.3467GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 95.86dBuV/m (Peak), so the maximum field strength in restrict band is $95.86 - 57.16 = 38.70$ dBuV/m which is under 74dBuV/m limit..



The band edge emission plot of on page 65 shows 64.96dBc between carrier maximum power and local maximum emission in restrict band (2.3650GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 92.52dBuV/m (Average), so the maximum field strength in restrict band is $92.52 - 64.96 = 27.56$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on page 66 shows 49.18dBc between carrier maximum power and local maximum emission in restrict band (2.4842GHz). The emission of carrier strength list in the test result of channel 13 at the item 4.2.7 is 96.39dBuV/m (Peak), so the maximum field strength in restrict band is $96.39 - 49.18 = 47.21$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on page 67 shows 50.79dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 13 at the item 4.2.7 is 93.30dBuV/m (Average), so the maximum field strength in restrict band is $93.30 - 50.79 = 42.51$ dBuV/m which is under 54dBuV/m limit.

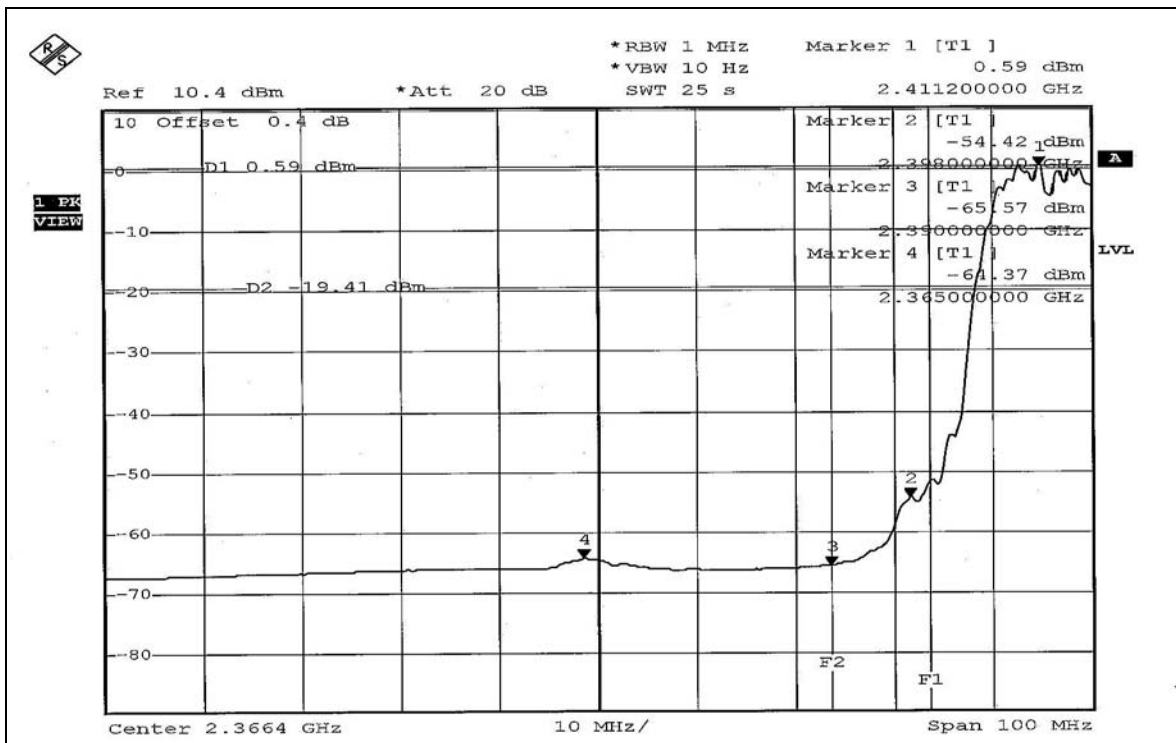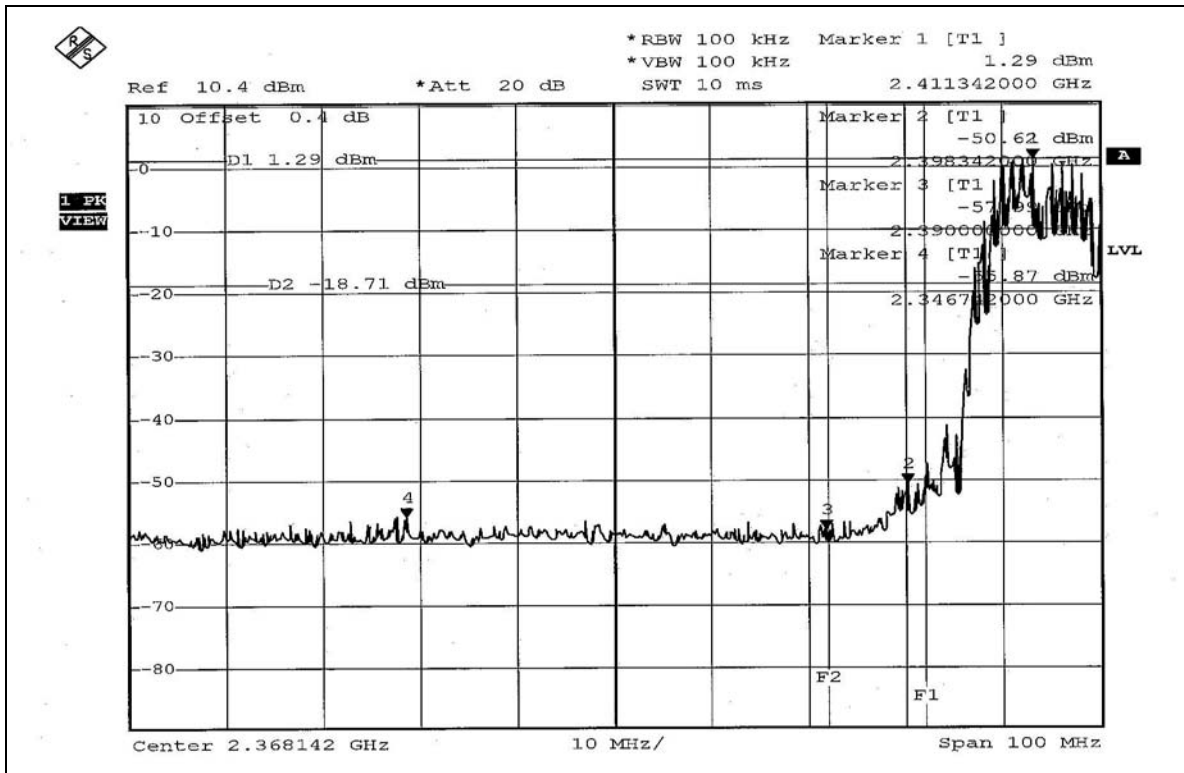DSSS modulation

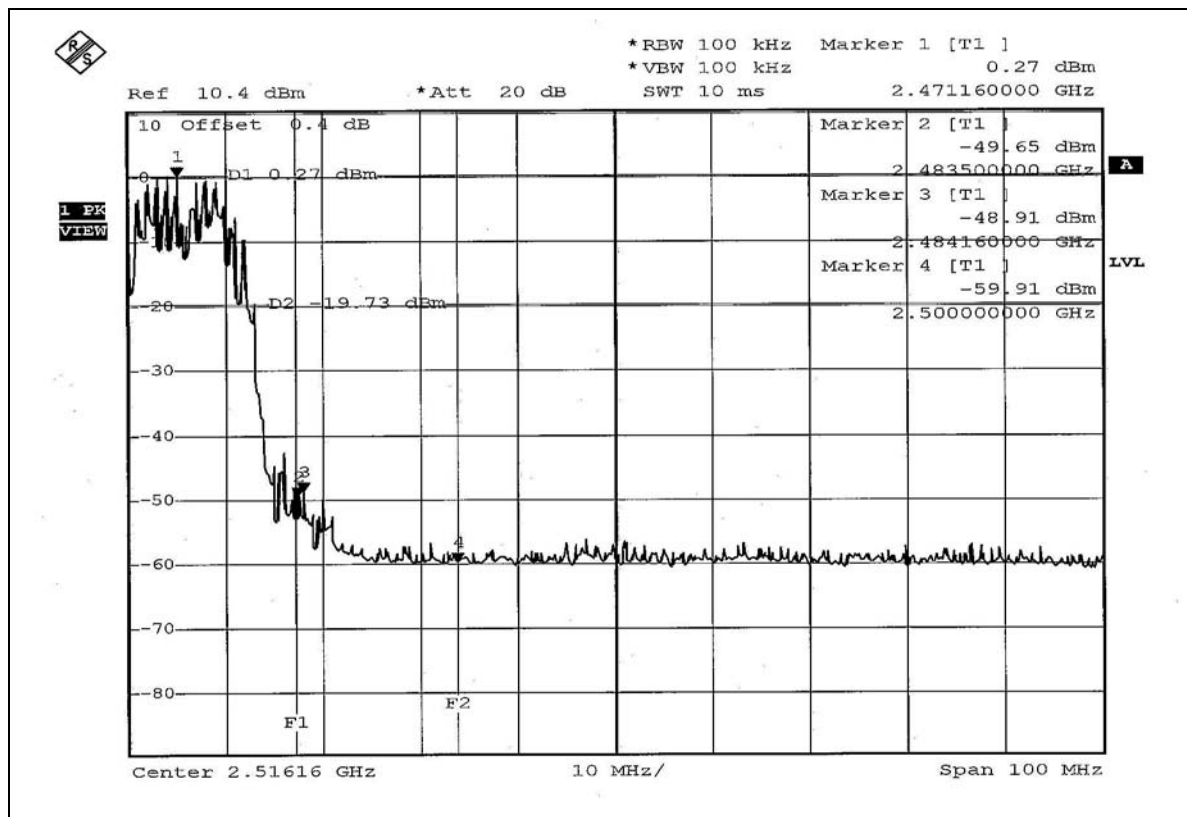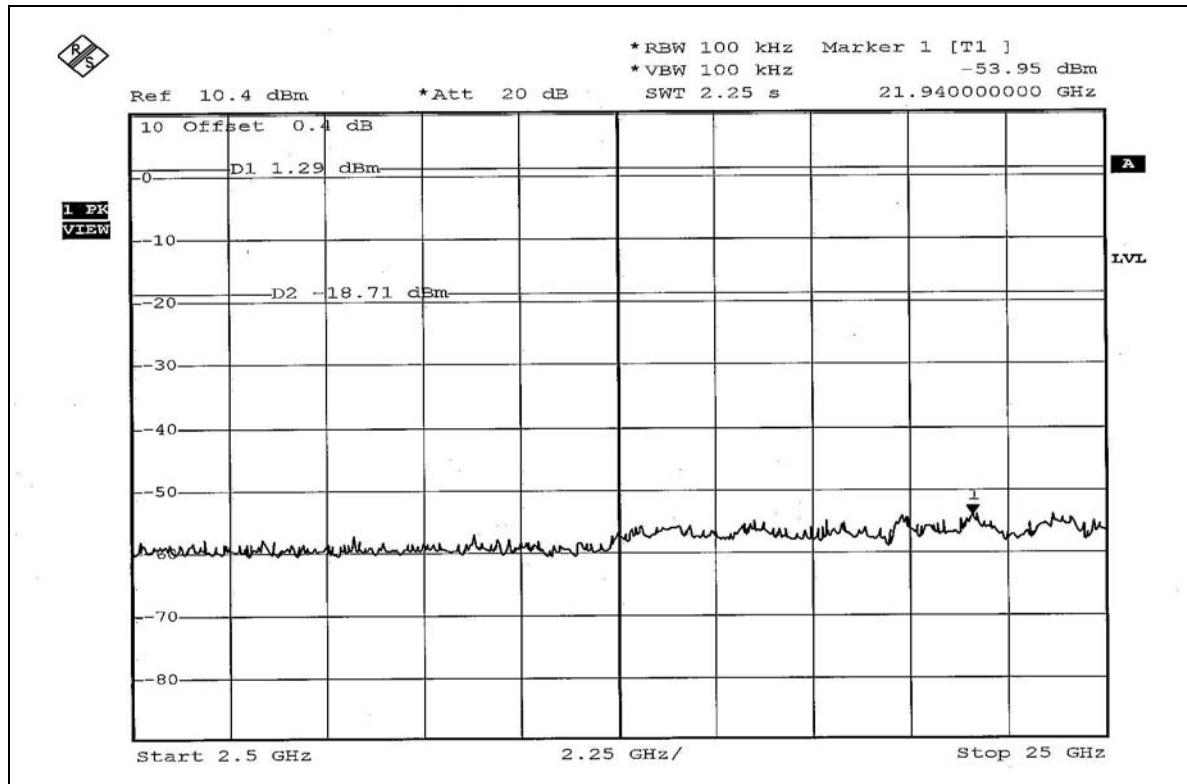

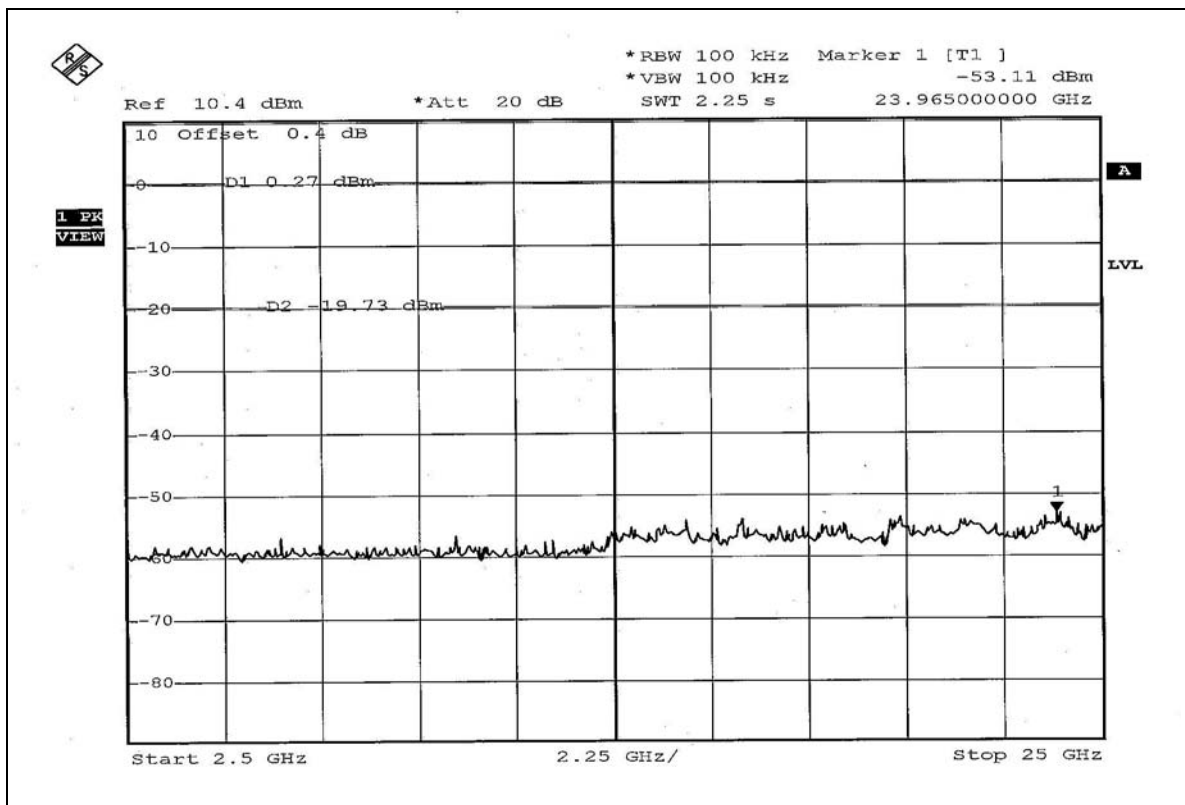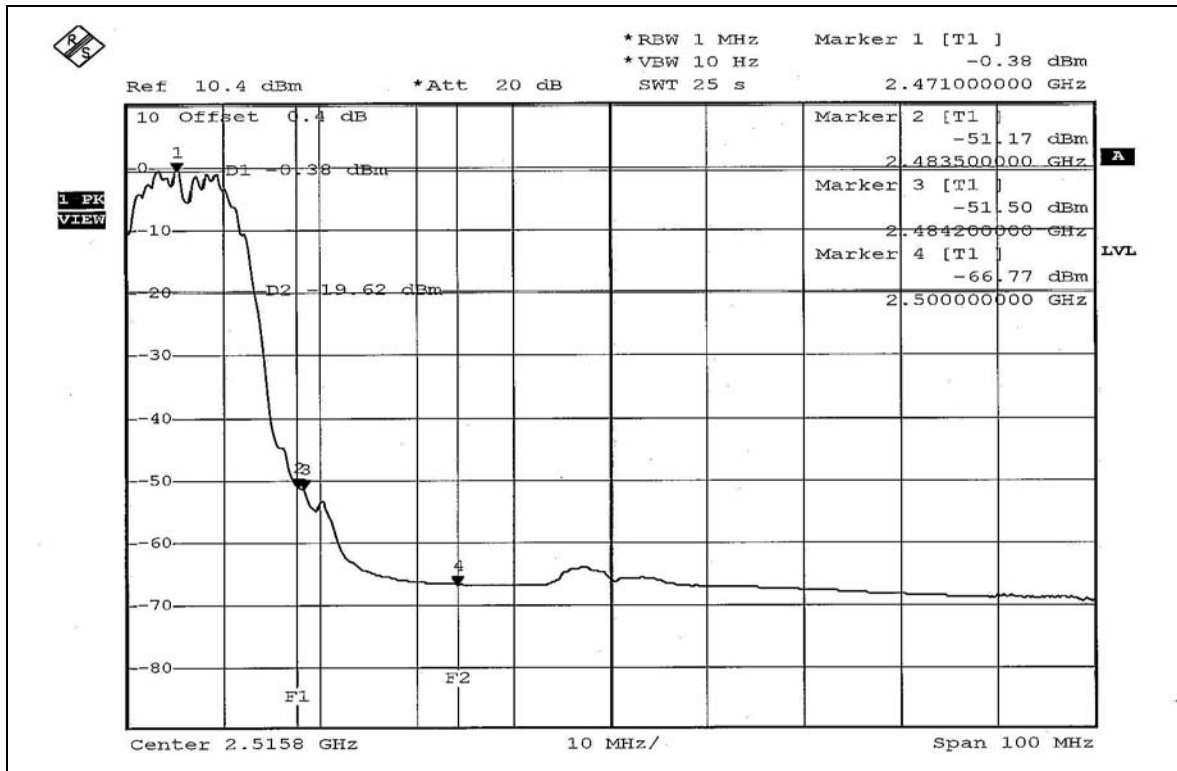



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Chip antenna without connector. The maximum Gain of the antenna is -1dBi.

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST

Test Mode 1




Test Mode 2





RADIATED EMISSION TEST

Test Mode 1

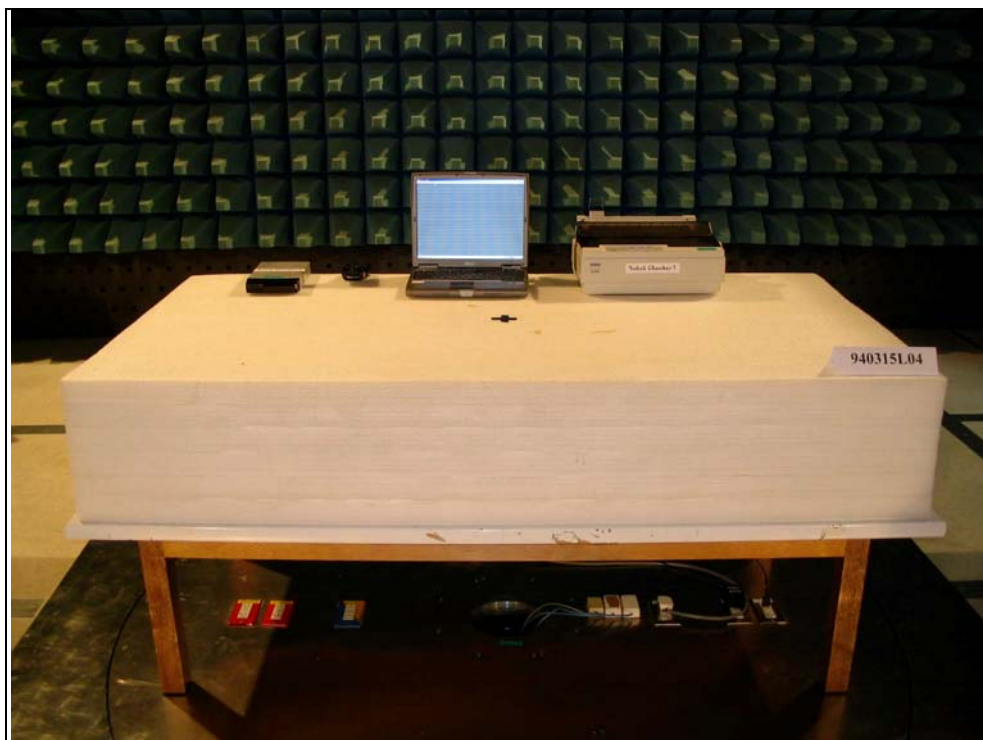

Test Mode 2

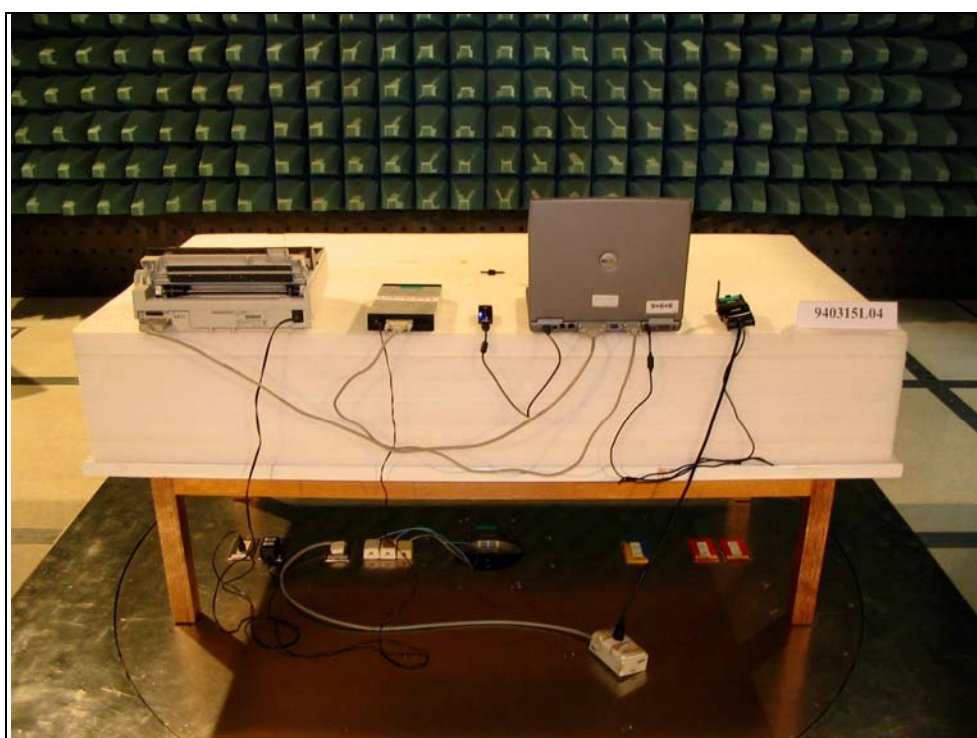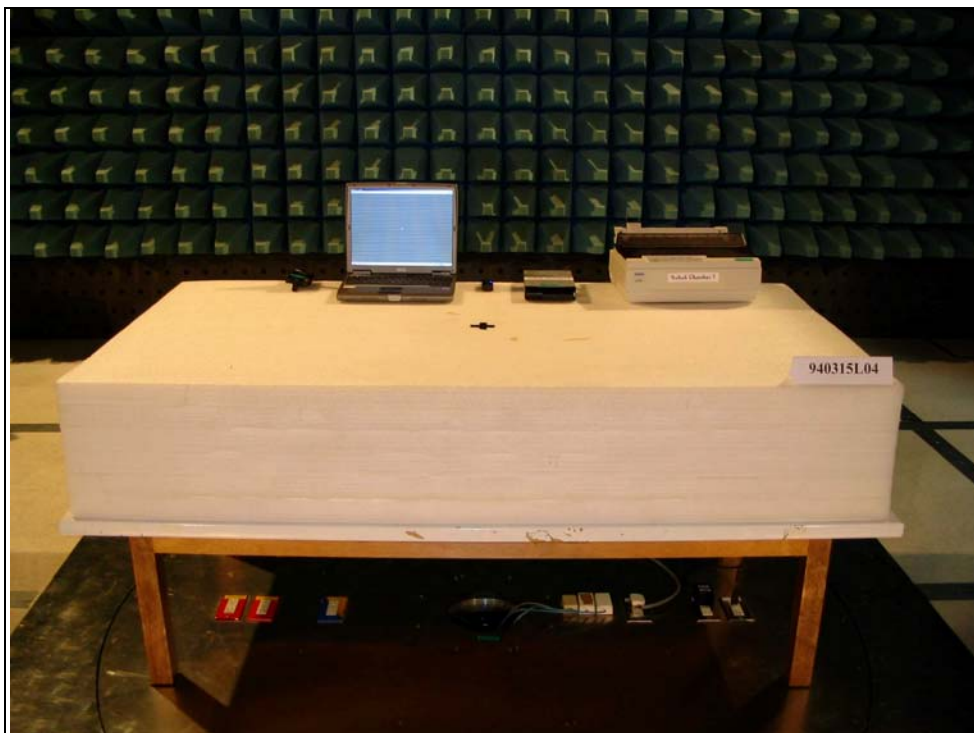

6. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, NVLAP, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Linko RF Lab.

Tel: 886-3-3270910

Fax: 886-3-3270892

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also