USED ON:

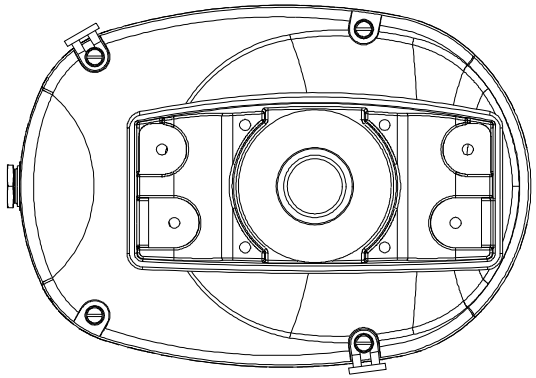

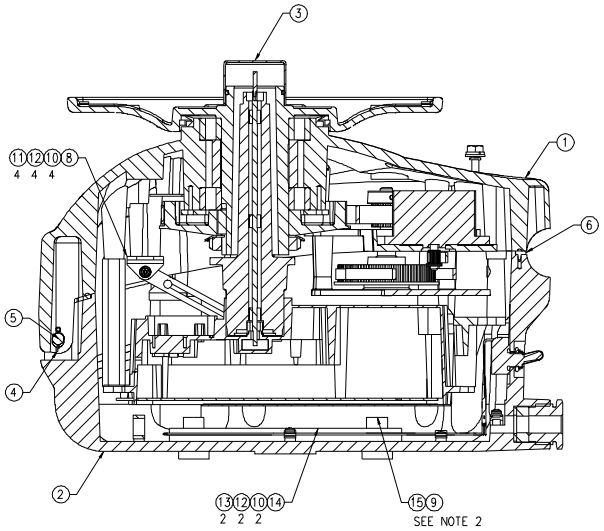



NOTES

1) RATING PLATE LABEL (ITEM 16) TO BE POSITIONED AT REAR RIGHT HAND SIDE, ON LOWER RADIUS, AS SHOWN.

2) THE BITUMEN WASHERS (ITEM 9) MUST BE STUCK TO THE INSIDE OF THE PEDESTAL BOTTOM CASTING AROUND THE FOUR MOUNTING HOLES. THE RETAINING BUSHES (ITEM 15) WILL TRAP THE WASHERS AND MAY SQUASH THEM DURING ASSEMBLY, THIS IS ACCEPTABLE.

3) THE HINGE PIN (ITEM 5) MUST BE RETAINED BY THE TWO SPLIT PINS (ITEM 4).

4) THE CABLE IN THE BOTTOM CASE ASSEMBLY MUST BE CONECTED TO THE CONNECTOR ON THE MODULATOR PCB. CABLES NOT SHOWN FOR CLARITY.

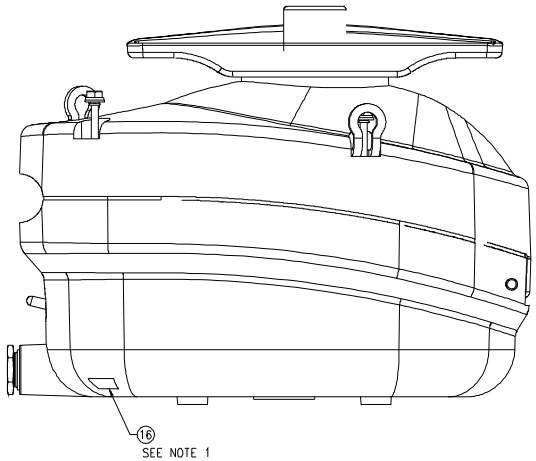

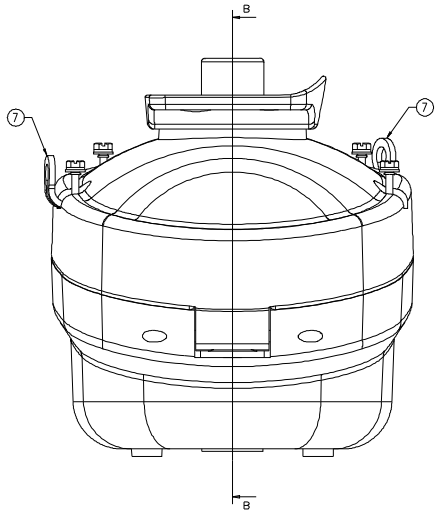

ITEM No	DRG/PART No	QTY	DESCRIPTION
1	4357-005	1	TOP CASE ASSEMBLY
2	4357-002	1	BOTTOM CASE ASSEMBLY
3	15349	1	PIPE CAP
4	24082	2	SPLIT PIN
5	3020-279	1	HINGE PIN
6	3010-354	1	PEDESTAL CASE SEAL
7	3036-194	2	INSTALATION BRACKET
8	4357-015	1	STAY ASSEMBLY
9	3010-357	4	BITUMEN WASHERS
10	23078	8	M4 PLAIN WASHER
11	21214	4	M4 X 16 SCREW
12	23048	8	M4 SPRING WASHER
13	21284	4	M4 X 8 SCREW
14	3036-197	2	PEDESTAL MOUNTING BRACKET
15	3020-354	4	PEDESTAL RETAINING BUSH
16	3029-268	1	RATING LABEL

PARTS LIST

ISS	DESCRIPTION OF CHANGE	DATE
C	BOM ADDED L.D.Y	12.05.99 SM
B	UPDATED L.D.Y	27.01.98
A	FIRST ISSUE	ORIGINAL

© THE INFORMATION CONTAINED HEREIN SHALL NOT BE REPRODUCED IN WHOLE OR IN PART WITHOUT THE PRIOR WRITTEN PERMISSION OF AUTOHELM.

Autohelm

TOLERANCES UNLESS OTHERWISE STATED
X ±0.50
.X ±0.25
.XX ±0.10
.XXX ±0.05
ANGLES ±1°
DIMENSIONS IN MM

MACHINING: 1.6 SURFACE
SHARP INTERNAL CORNERS TO HAVE RADIUS 0.4 MAX
DEBURR ALL EDGES

SCALE: 1:2

DRAWN TO BS308 DO NOT SCALE - IF IN DOUBT ASK

MATERIAL

FINISH

FROZEN DATE/ISSUE/BY: Not Frozen

DR'N: L.D.Y DATE: 1.10.97
CK'D: SM
APP'D: SM

TITLE: PEDASTAL ASSEMBLY

DRAWING No. 5357-001

SHT 1 OF 1

A1