

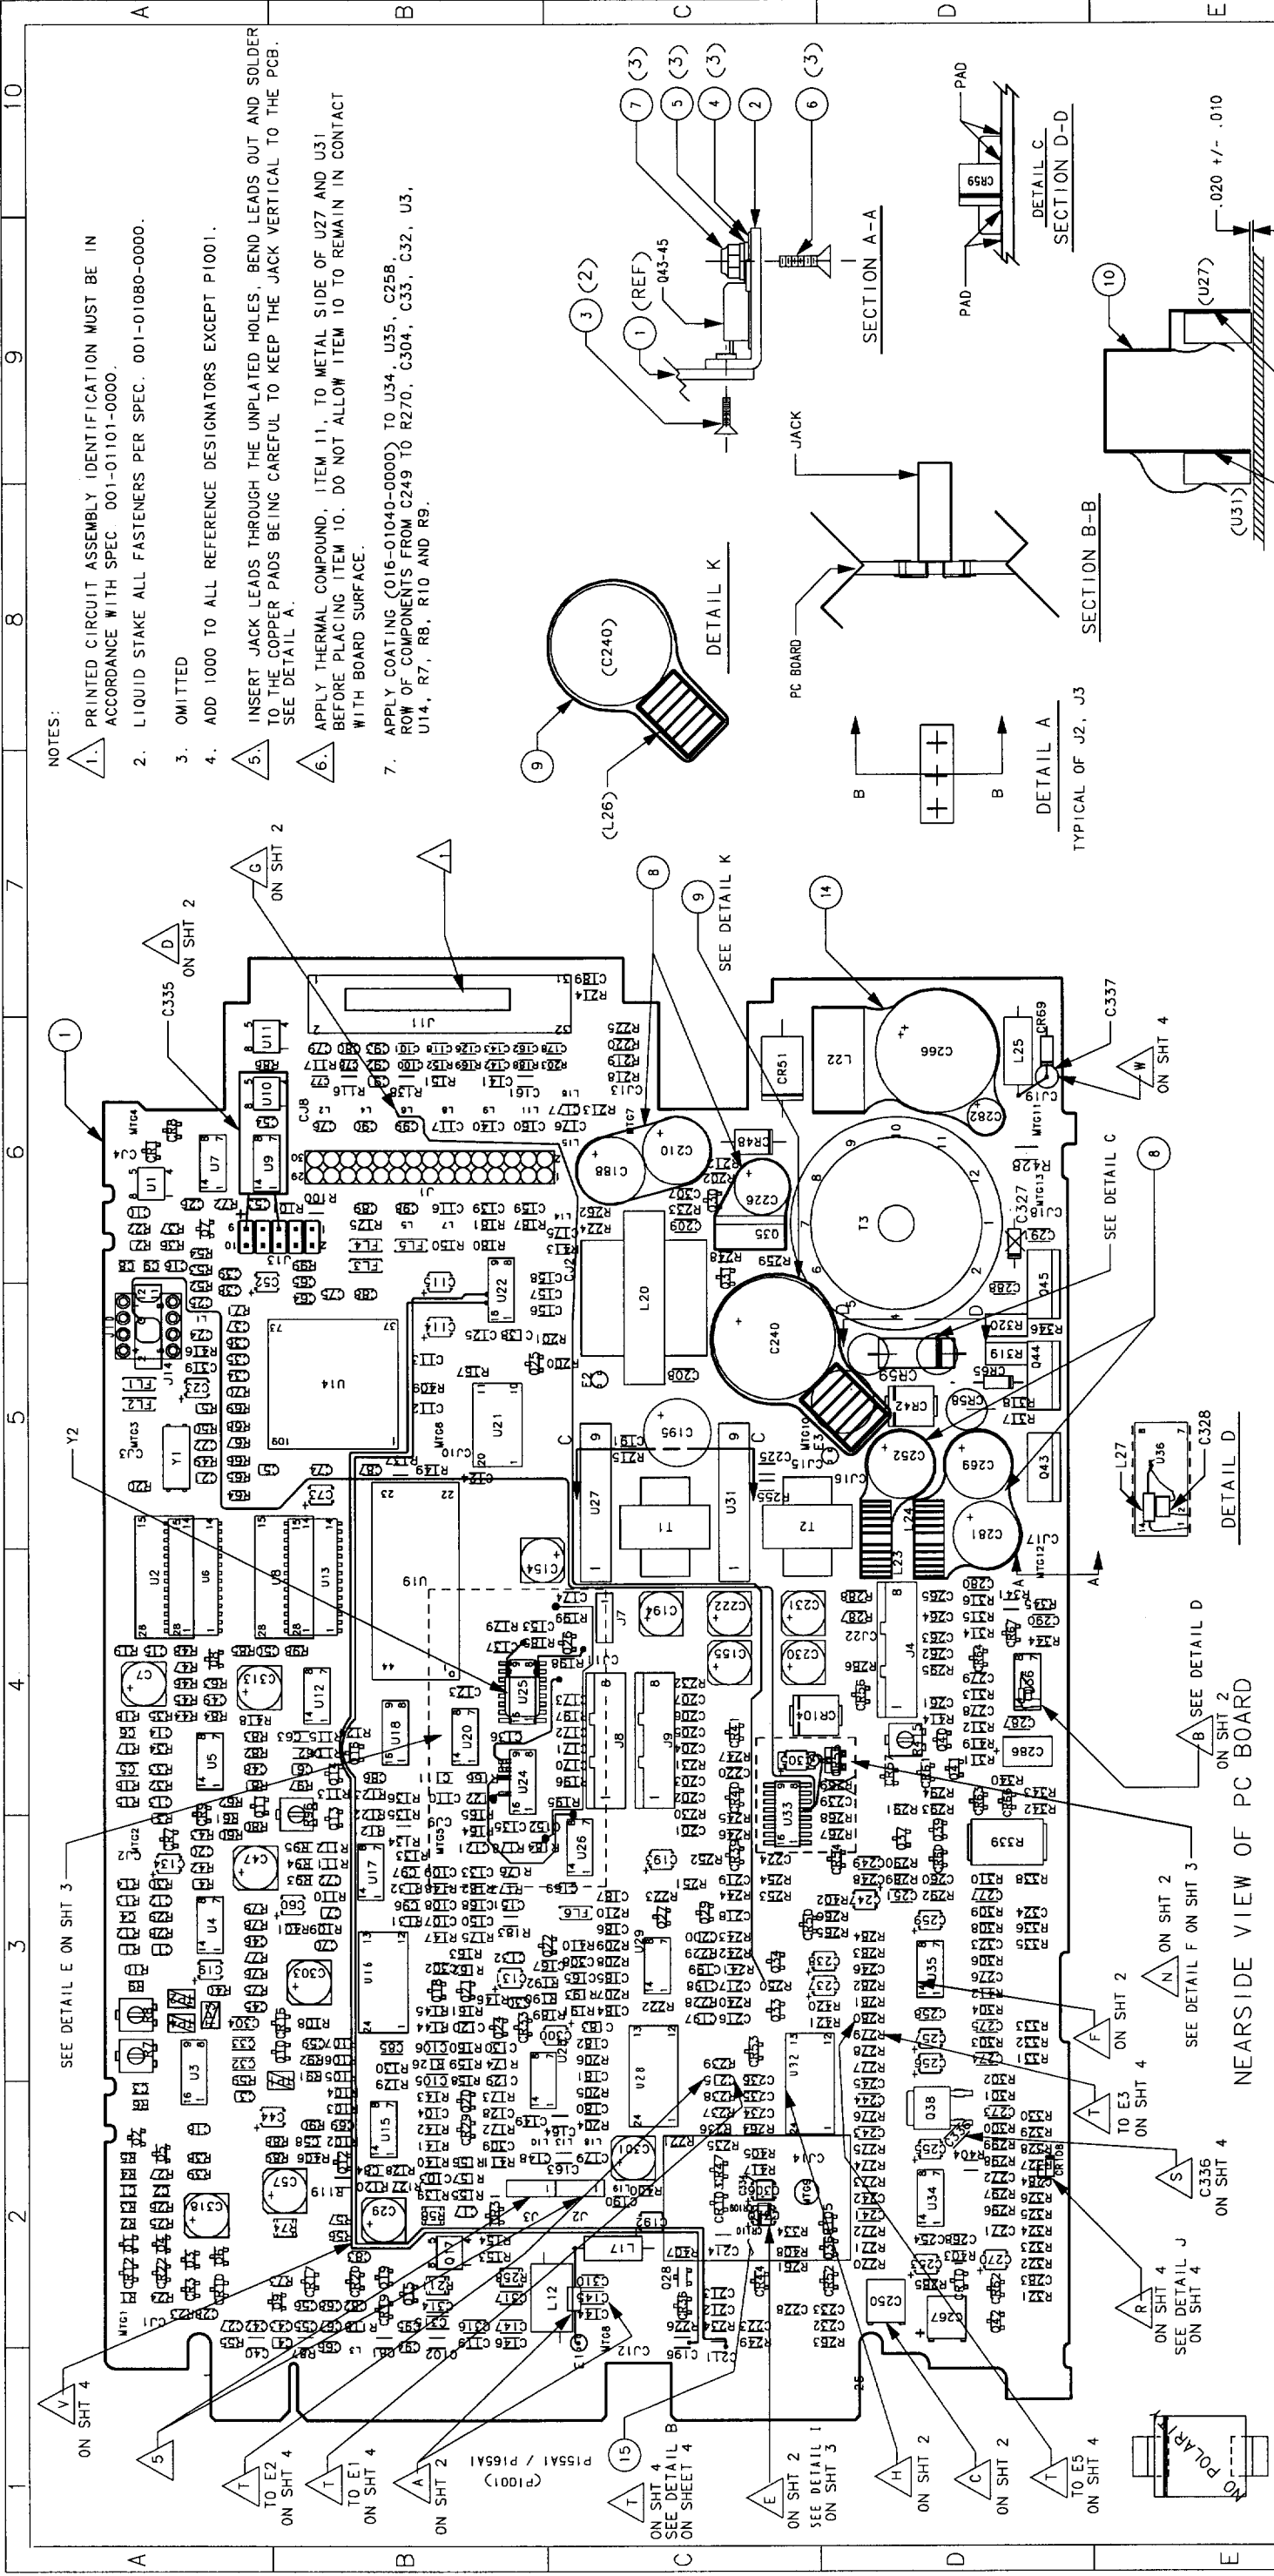
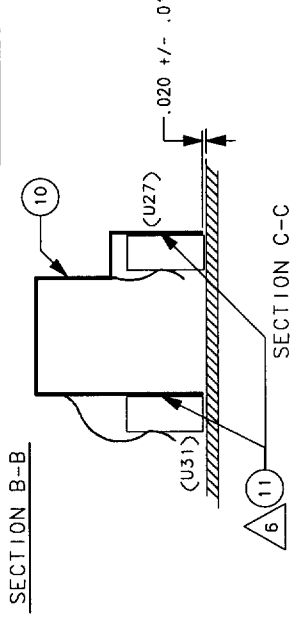


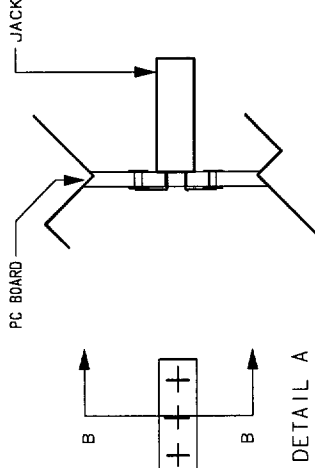

NOTES:

1. PRINTED CIRCUIT ASSEMBLY IDENTIFICATION MUST BE IN ACCORDANCE WITH SPEC 001-01101-0000.
2. LIQUID STAKE ALL FASTENERS PER SPEC. 001-01080-0000.
3. OMITTED
4. ADD 1000 TO ALL REFERENCE DESIGNATORS EXCEPT P1001.
5. INSERT JACK LEADS THROUGH THE UNPLATED HOLES. BEND LEADS OUT AND SOLDER TO THE COPPER PADS BEING CAREFUL TO KEEP THE JACK VERTICAL TO THE PCB. SEE DETAIL A.
6. APPLY THERMAL COMPOUND, ITEM 11, TO METAL SIDE OF U27 AND U31 BEFORE PLACING ITEM 10. DO NOT ALLOW ITEM 10 TO REMAIN IN CONTACT WITH BOARD SURFACE.
7. APPLY COATING (016-01040-0000) TO U34, U35, C258, U14, R7, R8, R10 AND R9.

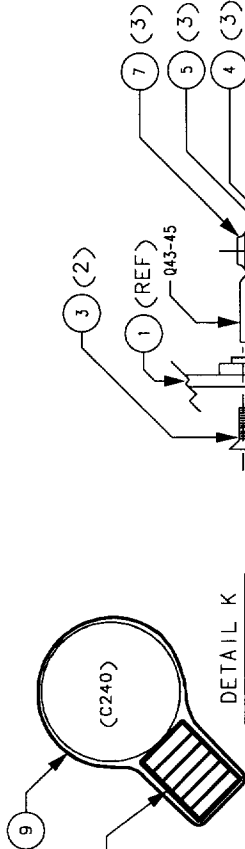


THIS DRAWING IS NOT COMPLETE WITHOUT PARTS LIST 200-09059-0040

200-05660-XXXX		KX 165A	NEXT ASSY.		UNIT	
AB	LSST	66/79	AB	LSST	66/79	AB
CD	LSST	66/79	CD	LSST	66/79	CD
EF	LSST	66/79	EF	LSST	66/79	EF
GH	LSST	66/79	GH	LSST	66/79	GH
IJ	LSST	66/79	IJ	LSST	66/79	IJ
KL	LSST	66/79	KL	LSST	66/79	KL
MN	LSST	66/79	MN	LSST	66/79	MN
OP	LSST	66/79	OP	LSST	66/79	OP
QR	LSST	66/79	QR	LSST	66/79	QR
ST	LSST	66/79	ST	LSST	66/79	ST
UV	LSST	66/79	UV	LSST	66/79	UV
WX	LSST	66/79	WX	LSST	66/79	WX
YZ	LSST	66/79	YZ	LSST	66/79	YZ

MENTOR GRAPHICS DRAWING: TO BE MAINTAINED BY P.C. DESIGN

SIZE	D	Honeywell International Inc	CAGE: 22373
DATE	07/99	NAME	MAIN BOARD
DESIGNED BY	NEW SHAM	DATE	07/99
CHECKED BY	NEW SHAM	DATE	07/99
APPROVED BY	NEW SHAM	DATE	07/99
DOCUMENT NUMBER	300-09059-0040	SHEET	1
ANGLES	NONE	OF	4

Honeywell

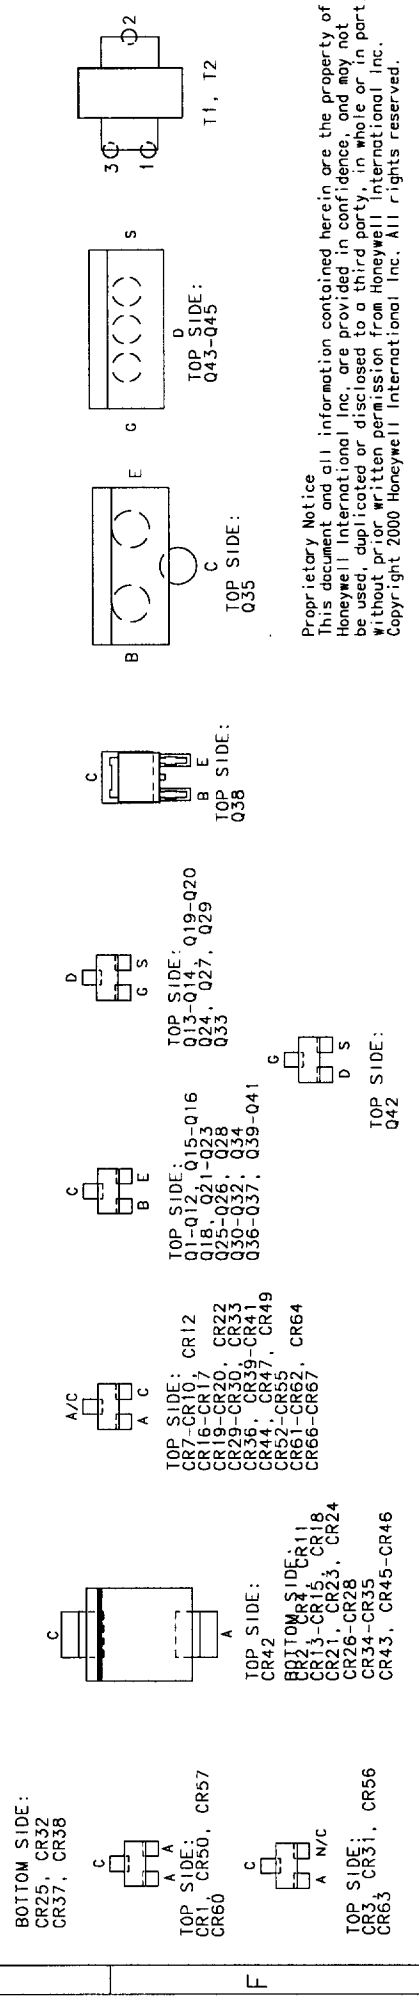

AUTHORIZED PRINT

SINGAPORE DISTRIBUTION

Proprietary Notice
This document and all information contained herein are the property of Honeywell International Inc. are provided in confidence, and may not be used, duplicated or disclosed to a third party in whole or in part, without prior written permission from Honeywell International Inc. Copyright 2000 Honeywell International Inc. All rights reserved.

