


# Radio Test Report

## FCC ID: ATL-FITACTAIR

**Report No.** : IP-RF15040228  
**Applicant** : iLuv Creative Technology  
**Equipment Under Test (EUT)**  
**EUT Name** : Fit Active Air  
**Model No.** : FITACTAIR  
**Serial No.** : N/A  
**Receipt Date** : 2015-03-26  
**Test Date** : 2015-03-27 to 2015-04-13  
**Issue Date** : 2015-04-15  
**Standards** : FCC Part 15C, 15.247  
**Conclusions** : **PASS**

In the configuration tested, the EUT complied with the standards specified above

**Test/Witness Engineer**

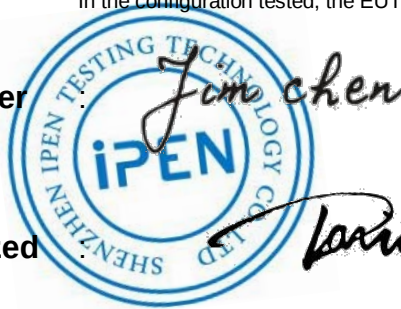

**Approved & Authorized**



This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

## TABLE OF CONTENTS

|           |                                                               |           |
|-----------|---------------------------------------------------------------|-----------|
| <b>1</b>  | <b>GENERAL INFORMATION .....</b>                              | <b>4</b>  |
| 1.1       | Client Information .....                                      | 4         |
| 1.2       | General Description of EUT (Equipment Under Test).....        | 4         |
| 1.3       | Block Diagram Showing the Configuration of System Tested..... | 5         |
| 1.4       | Description of Support Units .....                            | 5         |
| 1.5       | Description of Operating Mode.....                            | 6         |
| 1.6       | Description of Test Software Setting.....                     | 6         |
| 1.7       | Test Facility .....                                           | 7         |
| <b>2</b>  | <b>TEST RESULTS SUMMARY .....</b>                             | <b>8</b>  |
| <b>3</b>  | <b>TEST EQUIPMENT .....</b>                                   | <b>9</b>  |
| <b>4</b>  | <b>CONDUCTED EMISSION.....</b>                                | <b>10</b> |
| 4.1       | Test Standard and Limit .....                                 | 10        |
| 4.2       | Test Setup.....                                               | 10        |
| 4.3       | Test Procedure.....                                           | 10        |
| 4.4       | Test Data.....                                                | 11        |
| <b>5</b>  | <b>RADIATE EMISSION TEST .....</b>                            | <b>14</b> |
| 5.1       | Test Standard and Limit .....                                 | 14        |
| 5.2       | Test Setup.....                                               | 14        |
| 5.3       | Test Procedure.....                                           | 16        |
| 5.4       | Test Data.....                                                | 16        |
| <b>6</b>  | <b>BAND EDGE .....</b>                                        | <b>24</b> |
| 6.1       | Test Standard and Limit .....                                 | 24        |
| 6.2       | Test Setup.....                                               | 24        |
| 6.3       | Test Procedure.....                                           | 24        |
| 6.4       | Test Data.....                                                | 25        |
| <b>7</b>  | <b>PEAK POWER TEST .....</b>                                  | <b>30</b> |
| 7.1       | Test Standard and Limit .....                                 | 30        |
| 7.2       | Test Setup.....                                               | 30        |
| 7.3       | Test Procedure.....                                           | 30        |
| 7.4       | Test Data.....                                                | 30        |
| <b>8</b>  | <b>BANDWIDTH .....</b>                                        | <b>33</b> |
| 8.1       | Test Standard and Limit .....                                 | 33        |
| 8.2       | Test Setup.....                                               | 33        |
| 8.3       | Test Procedure.....                                           | 33        |
| 8.4       | Test Data.....                                                | 33        |
| <b>9</b>  | <b>POWER DENSITY .....</b>                                    | <b>36</b> |
| 9.1       | Test Standard and Limit .....                                 | 36        |
| 9.2       | Test Setup.....                                               | 36        |
| 9.3       | Test Procedure.....                                           | 36        |
| 9.4       | Test Data.....                                                | 36        |
| <b>10</b> | <b>ANTENNA CONDUCTED EMISSIONS .....</b>                      | <b>39</b> |
| 10.1      | Test Standard and Limit .....                                 | 39        |
| 10.2      | Test Setup.....                                               | 39        |
| 10.3      | Test Procedure.....                                           | 39        |
| 10.4      | Test Data.....                                                | 40        |

|           |                                                  |           |
|-----------|--------------------------------------------------|-----------|
| <b>11</b> | <b>ANTENNA REQUIREMENT .....</b>                 | <b>44</b> |
|           | 11.1 Standard and Limit.....                     | 44        |
|           | 11.2 Antenna Construction .....                  | 44        |
| <b>12</b> | <b>APPENDIX- RF EXPOSURE INFORMATION.....</b>    | <b>45</b> |
| <b>13</b> | <b>PHOTOGRAPHS - CONSTRUCTIONAL DETAILS.....</b> | <b>47</b> |
| <b>14</b> | <b>FCC ID LABEL .....</b>                        | <b>51</b> |
| <b>15</b> | <b>LABEL LOCATION .....</b>                      | <b>52</b> |
| <b>16</b> | <b>PHOTOGRAPHS – TEST SETUP.....</b>             | <b>53</b> |

# 1 General Information

## 1.1 Client Information

**Applicant** : iLuv Creative Technology  
**Address** : 2 Harbor Park Drive, Port Washington, NY 11050  
**Manufacturer** : Shenzhen Lanxingqiao Technology Co.,Ltd.  
**Address** : 3rd Floor, No. 1 Building, Launch Science Park, Wuhe Road, Bantian Street, Longgang Area, Shenzhen,Guangdong, China

## 1.2 General Description of EUT (Equipment Under Test)

|                        |   |                                                            |                            |
|------------------------|---|------------------------------------------------------------|----------------------------|
| EUT Name               | : | Fit Active Air                                             |                            |
| Model No.              | : | FITACTAIR                                                  |                            |
| Serial No.             | : | N/A                                                        |                            |
| Product Description    | : | Operation Frequency:                                       | Bluetooth: 2402MHz~2480MHz |
|                        |   | Number of Channel:                                         | 40 Channels see note (2)   |
|                        |   | Out Power                                                  | 2.45 dBm (Max.)            |
|                        |   | Antenna Designation:                                       | 0 dBi see note (3)         |
|                        |   | Modulation Type:                                           | GFSK Mode                  |
| Power Supply           | : | DC Voltage supplied from Li-ion System                     |                            |
| Power Rating           | : | DC 5.0V from Host system<br>DC 3.7V 1000mAh Li-ion battery |                            |
| Connecting I/O Port(S) | : | Please refer to the User's Manual                          |                            |

**Note:**

- (1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.  
 (2) Channel List:


| Bluetooth(BLE) Channel List |                 |         |                 |         |                 |
|-----------------------------|-----------------|---------|-----------------|---------|-----------------|
| Channel                     | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 00                          | 2402            | 14      | 2430            | 28      | 2458            |
| 01                          | 2404            | 15      | 2432            | 29      | 2460            |
| 02                          | 2406            | 16      | 2434            | 30      | 2462            |
| 03                          | 2408            | 17      | 2436            | 31      | 2464            |
| 04                          | 2410            | 18      | 2438            | 32      | 2466            |
| 05                          | 2412            | 19      | 2440            | 33      | 2468            |

|    |      |           |             |           |             |
|----|------|-----------|-------------|-----------|-------------|
| 06 | 2414 | <b>20</b> | <b>2442</b> | 34        | 2470        |
| 07 | 2416 | 21        | 2444        | 35        | 2472        |
| 08 | 2418 | 22        | 2446        | 36        | 2474        |
| 09 | 2420 | 23        | 2448        | 37        | 2476        |
| 10 | 2422 | 24        | 2450        | 38        | 2478        |
| 11 | 2424 | 25        | 2452        | <b>39</b> | <b>2480</b> |
| 12 | 2426 | 26        | 2454        |           |             |
| 13 | 2428 | 27        | 2456        |           |             |

## (3) Antenna description

| Ant. | Brand | Model Name | Antenna Type | Gain(dBi) |
|------|-------|------------|--------------|-----------|
| 1    | N/A   | N/A        | Integral Ant | 0         |

## 1.3 Block Diagram Showing the Configuration of System Tested

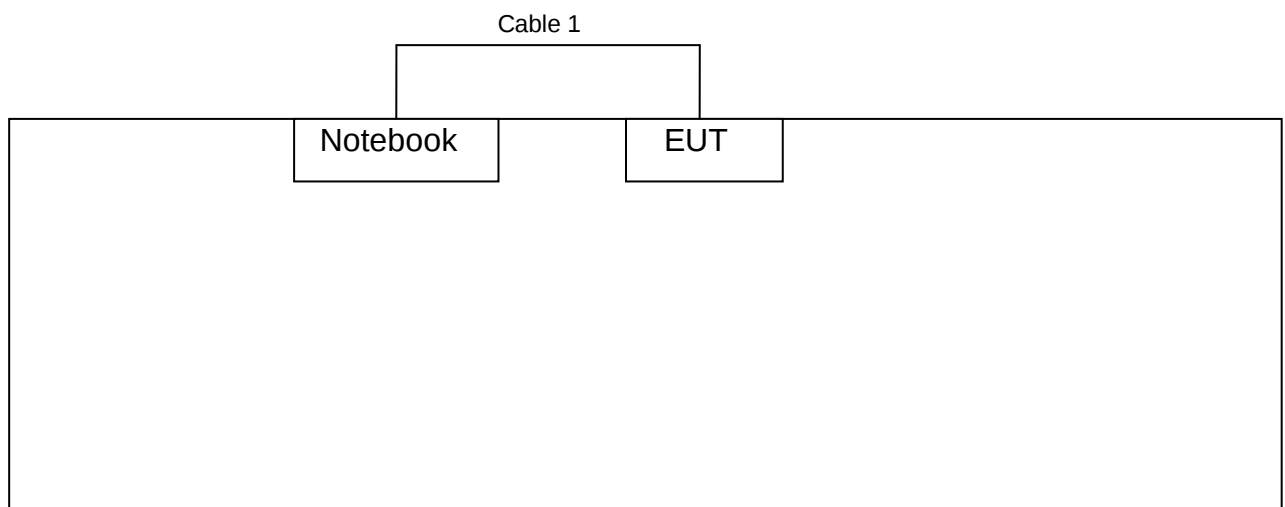

## 1.4 Description of Support Units

| Equipment Information |               |              |              |            |
|-----------------------|---------------|--------------|--------------|------------|
| Name                  | Model         | S/N          | Manufacturer | FCC DOC/ID |
| Notebook              | B470A2450     | VNF3G06957   | Lenovo       | DOC        |
| Cable Information     |               |              |              |            |
| Number                | Shielded Type | Ferrite Core | Length       | Note       |

|         |    |    |      |           |
|---------|----|----|------|-----------|
| Cable 1 | NO | NO | 1.0M | USB Calbe |
|         |    |    |      |           |

## 1.5 Description of Operating Mode

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| For Conducted Test |                   |
|--------------------|-------------------|
| Final Test Mode    | Description       |
| Mode 1             | USB Charging Mode |

| For Radiated Test |             |
|-------------------|-------------|
| Final Test Mode   | Description |
| Mode 2            | BLE TX Mode |

### Note:

- (1) For all test, we have verified the construction and function in typical operation. And all the test modes were carried out with the EUT in transmitting operation in maximum power with all kinds of data rate.  
According to ANSI C63.4 standards, the measurements are performed at the highest, middle, lowest available channels, and the worst case data rate as follows:  
Bluetooth BLE Mode: GFSK Modulation Transmitting mode.
- (2) During the testing procedure, the continuously transmitting with the maximum power mode was programmed by the customer.
- (3) The EUT is considered a mobile unit; in normal use it was positioned on X-plane. The worst case was found positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.

## 1.6 Description of Test Software Setting

During testing channel& Power controlling software provided by the customer was used to control operating channel as well as the output power level. The RF output power selection is for setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of Bluetooth mode.

|                       |                               |
|-----------------------|-------------------------------|
| Test Software Version | Test Program: BLE RF Test.exe |
|-----------------------|-------------------------------|

---

---

| Channel  | CH 01 | CH 20 | CH 39 |
|----------|-------|-------|-------|
| BLE Mode | DEF   | DEF   | DEF   |

## 1.7 Test Facility

The reports were prepared by the Shenzhen iPEN Testing Technology Co., Ltd., in their facilities located at 8/F Haoyunlai Building B, 2 Baomin Road Xixiang Street, Bao'an District, Shenzhen, China.

The testing was performed by the Shenzhen Toby Technology Co., Ltd., and the FCC List No. is 811562.

## 2 TEST RESULTS SUMMARY

| FCC Part 15 Subpart C(15.247)/RSS-210: 2010                                                           |                              |                                           |          |        |
|-------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------------------|----------|--------|
| Standard Section                                                                                      |                              | Test Item                                 | Judgment | Remark |
| FCC                                                                                                   | IC                           |                                           |          |        |
| 15.203                                                                                                | /                            | Antenna Requirement                       | PASS     | N/A    |
| 15.207                                                                                                | RSS-GEN<br>7.2.4             | Conducted Emission                        | PASS     | N/A    |
| 15.205                                                                                                | RSS-GEN<br>7.2.2             | Restricted Bands                          | PASS     | N/A    |
| 15.247(a)(2)                                                                                          | RSS-210<br>A.8.2(a)          | 6dB Bandwidth                             | PASS     | N/A    |
| 15.247(b)                                                                                             | RSS-210<br>A.8.4(4)          | Peak Output Power                         | PASS     | N/A    |
| 15.247(e)                                                                                             | RSS-210<br>A.8.2(b)          | Power Spectral Density                    | PASS     | N/A    |
| 15.247(d)                                                                                             | RSS-210<br>Annex 8<br>(A8.5) | Transmitter Radiated<br>Spurious Emission | PASS     | N/A    |
| <b>Note:</b> "/" for no requirement for this test item.<br>N/A is an abbreviation for Not Applicable. |                              |                                           |          |        |

### 3 TEST EQUIPMENT

| No.        | Equipment              | Manufacturer    | Model No.      | Last Cal.   | Cal. Interval |
|------------|------------------------|-----------------|----------------|-------------|---------------|
| IP-EMC001  | EMI Test Receiver      | Rohde & Schwarz | ESCS30         | Jan.06,2015 | 1 Year        |
| IP -EMC002 | AMN                    | Rohde & Schwarz | ESH3-Z5        | Jan.06,2015 | 1 Year        |
| IP -EMC003 | ANN                    | SCHWARZBECK     | NNBL<br>8226-2 | Jan.06,2015 | 1 Year        |
| IP -EMC004 | EMI Test Receiver      | Rohde & Schwarz | ESI26          | Jan.06,2015 | 1 Year        |
| IP -EMC005 | Bilog Antenna          | Chase           | CBL6112B       | Jan.06,2015 | 1 Year        |
| IP -EMC006 | Positioning Controller | C&C             | CC-C-1F        | Jan.06,2015 | 1 Year        |
| IP -EMC007 | Spectrum Analyzer      | Agilent         | E4407B         | Jan.06,2015 | 1 Year        |
| IP -EMC008 | Pre-amplifier          | Agilent         | 8449B          | Jan.06,2015 | 1 Year        |
| IP -EMC009 | Pre-amplifier          | Agilent         | 8447D          | Jan.06,2015 | 1 Year        |
| IP -EMC010 | Horn Antenna           | ETS LINDGREN    | 3117           | Jan.06,2015 | 1 Year        |

## 4 Conducted Emission

### 4.1 Test Standard and Limit

#### 4.1.1 Test Standard

##### **FCC 15.207**

#### 4.1.2 Test Limit


Conducted Emission Test Limit

| Frequency     | Maximum RF Line Voltage (dB $\mu$ V) |               |
|---------------|--------------------------------------|---------------|
|               | Quasi-peak Level                     | Average Level |
| 150kHz~500kHz | 66 ~ 56 *                            | 56 ~ 46 *     |
| 500kHz~5MHz   | 56                                   | 46            |
| 5MHz~30MHz    | 60                                   | 50            |

Notes:

- (1) \*Decreasing linearly with logarithm of the frequency.
- (2) The lower limit shall apply at the transition frequencies.
- (3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2 Test Setup

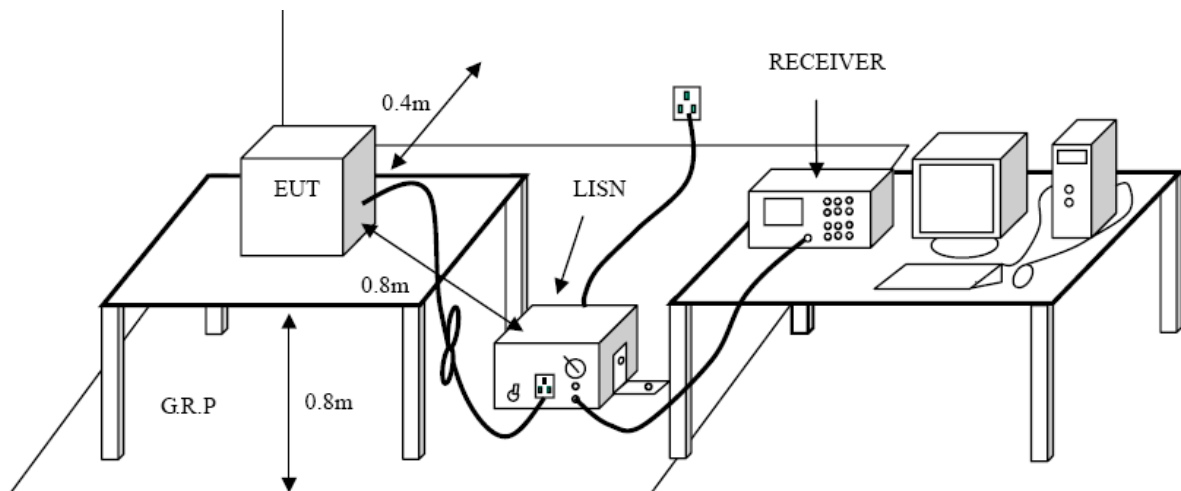

### 4.3 Test Procedure

The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.


I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

LISN at least 80 cm from the nearest part of EUT chassis.

The bandwidth of EMI test receiver is set at 9kHz, and the test frequency band is from 0.15MHz to 30MHz.


#### 4.4 Test Data

|                |                |                     |           |
|----------------|----------------|---------------------|-----------|
| EUT:           | Fit Active Air | Model Name:         | FITACTAIR |
| Temperature :  | 23°C           | Relative Humidity : | 48 %      |
| Terminal       | Line           |                     |           |
| Test Voltage : | AC120V/60Hz    |                     |           |
| Test Mode :    | Mode 1         |                     |           |

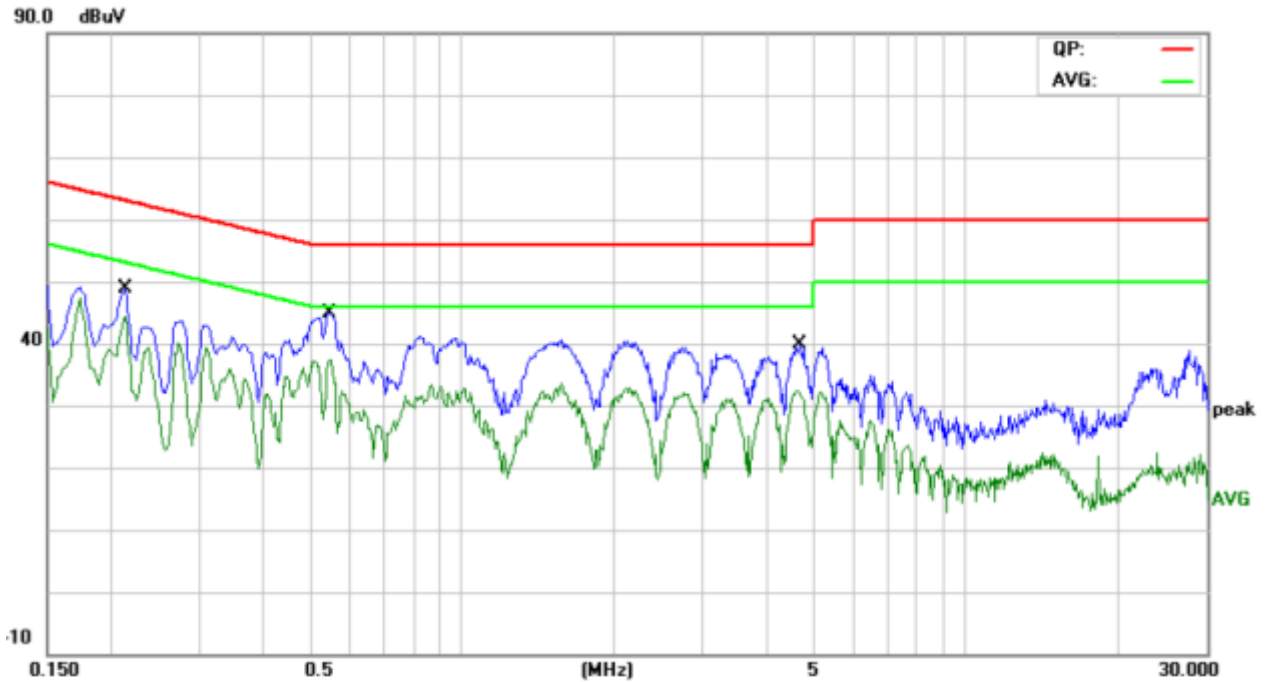

| No. | Mk. | Freq.  | Reading Level | Correct Factor | Measure-ment | Limit | Over   | Detector | Comment |
|-----|-----|--------|---------------|----------------|--------------|-------|--------|----------|---------|
|     |     | MHz    | dBuV          | dB             | dBuV         | dBuV  | dB     |          |         |
| 1   |     | 0.2140 | 37.27         | 10.02          | 47.29        | 63.04 | -15.75 | QP       |         |
| 2   |     | 0.2140 | 33.99         | 10.02          | 44.01        | 53.04 | -9.03  | AVG      |         |
| 3   |     | 0.5460 | 34.45         | 10.04          | 44.49        | 56.00 | -11.51 | QP       |         |
| 4   | *   | 0.5460 | 27.27         | 10.04          | 37.31        | 46.00 | -8.69  | AVG      |         |
| 5   |     | 4.6860 | 26.34         | 9.97           | 36.31        | 56.00 | -19.69 | QP       |         |
| 6   |     | 4.6860 | 22.12         | 9.97           | 32.09        | 46.00 | -13.91 | AVG      |         |

|                |                |                     |           |
|----------------|----------------|---------------------|-----------|
| EUT:           | Fit Active Air | Model Name:         | FITACTAIR |
| Temperature :  | 23°C           | Relative Humidity : | 48 %      |
| Terminal       | Neutral        |                     |           |
| Test Voltage : | AC120V/60Hz    |                     |           |
| Test Mode :    | Mode 1         |                     |           |

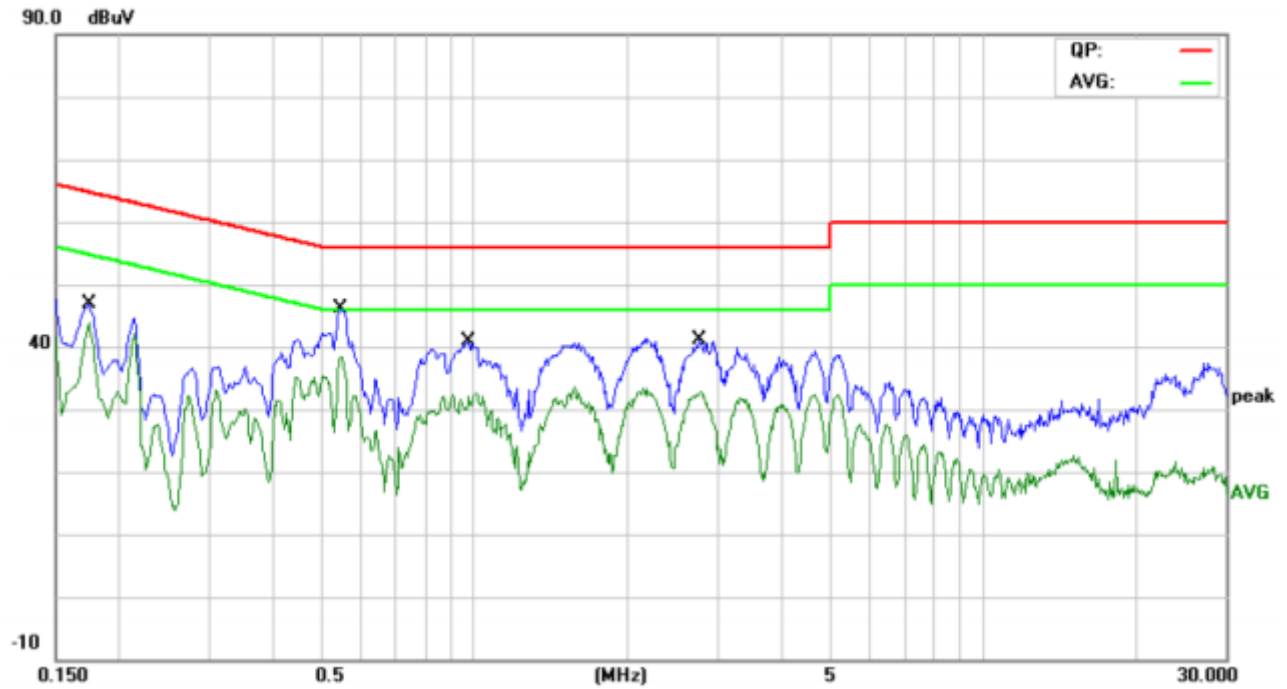

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|---------|
| 1   |     | 0.1740       | 34.47                    | 10.12                   | 44.59                    | 64.76         | -20.17     | QP       |         |
| 2   |     | 0.1740       | 33.73                    | 10.12                   | 43.85                    | 54.76         | -10.91     | AVG      |         |
| 3   |     | 0.5460       | 35.54                    | 10.02                   | 45.56                    | 56.00         | -10.44     | QP       |         |
| 4   | *   | 0.5460       | 28.31                    | 10.02                   | 38.33                    | 46.00         | -7.67      | AVG      |         |
| 5   |     | 0.9780       | 28.67                    | 10.15                   | 38.82                    | 56.00         | -17.18     | QP       |         |
| 6   |     | 0.9780       | 21.85                    | 10.15                   | 32.00                    | 46.00         | -14.00     | AVG      |         |
| 7   |     | 2.7700       | 26.95                    | 10.06                   | 37.01                    | 56.00         | -18.99     | QP       |         |
| 8   |     | 2.7700       | 22.20                    | 10.06                   | 32.26                    | 46.00         | -13.74     | AVG      |         |

## 5 Radiate Emission Test

### 5.1 Test Standard and Limit

#### 5.1.1 Test Standard

##### **FCC 15.209**

#### 5.1.2 Test Limit

**Radiated Emission Limits (9kHz~1000MHz)**

| <b>Frequency<br/>(MHz)</b> | <b>Field Strength<br/>(microvolt/meter)</b> | <b>Measurement<br/>Distance<br/>(meters)</b> |
|----------------------------|---------------------------------------------|----------------------------------------------|
| 0.009~0.490                | 2400/F(KHz)                                 | 300                                          |
| 0.490~1.705                | 24000/F(KHz)                                | 30                                           |
| 1.705~30.0                 | 30                                          | 30                                           |
| 30~88                      | 100                                         | 3                                            |
| 88~216                     | 150                                         | 3                                            |
| 216~960                    | 200                                         | 3                                            |
| Above 960                  | 500                                         | 3                                            |

**Radiated Emission Limit (Above 1000MHz)**


|            | <b>Peak</b> | <b>Average</b> |
|------------|-------------|----------------|
| Above 1000 | 74          | 54             |

**Note:**


- (1) The tighter limit applies at the band edges.
- (2) Emission Level(dBuV/m)=20log Emission Level(uV/m)

### 5.2 Test Setup


Test Below 30MHz:

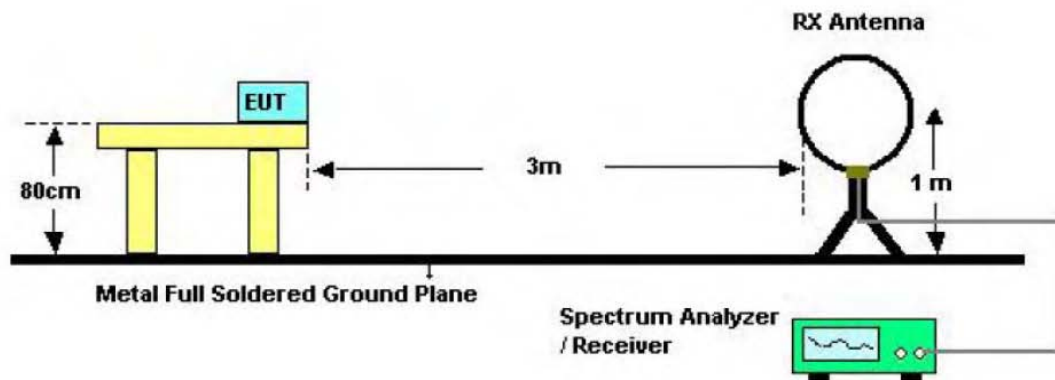

Test above 30MHz and below 1 GHz

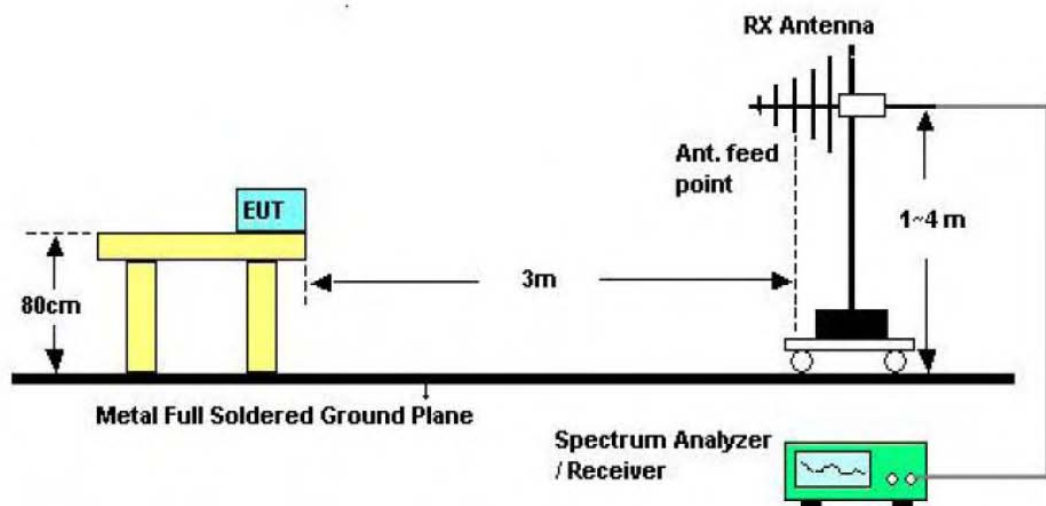

Test above 1 GHz

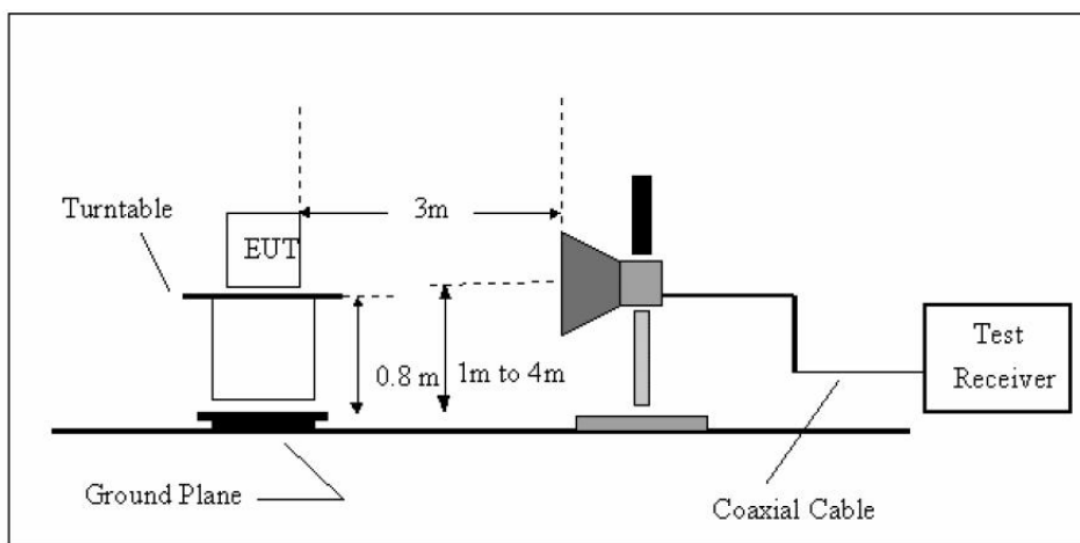

### 5.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above the ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (3) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (4) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (5) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (6) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (7) For the actual test configuration, please see the test setup photo.


### 5.4 Test Data

- (1) 9kHz~30MHz

Note: The emissions of 9kHz~30MHz are not reported, because the levels are too low against the limit.


(2) 30MHz~ 1GHz

|                |                                            |                     |      |
|----------------|--------------------------------------------|---------------------|------|
| Temperature :  | 23℃                                        | Relative Humidity : | 48 % |
| Antenna.       | Horizontal                                 |                     |      |
| Test Voltage : | AC120V/60Hz                                |                     |      |
| Test Mode :    | Mode 1: USB Charging Mode                  |                     |      |
| Remark:        | Emission Level= Read Level+ Correct Factor |                     |      |

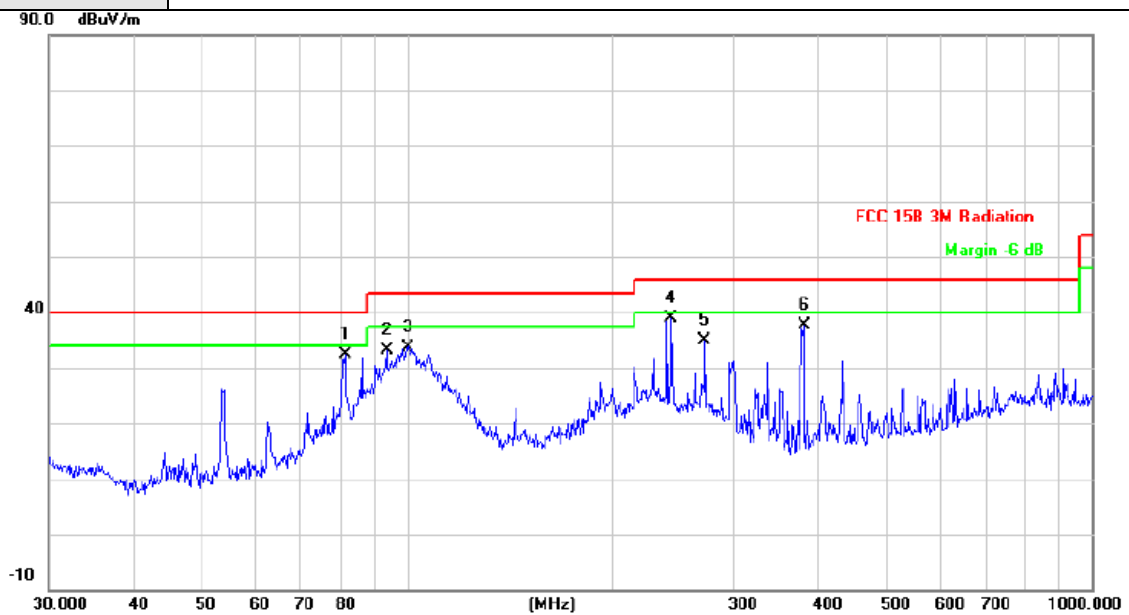


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------|------------|----------|
| 1   |     | 81.2116      | 55.55                    | -23.21                    | 32.34                      | 40.00           | -7.66      | peak     |
| 2   |     | 93.4402      | 55.45                    | -22.39                    | 33.06                      | 43.50           | -10.44     | peak     |
| 3   |     | 100.2286     | 55.57                    | -21.82                    | 33.75                      | 43.50           | -9.75      | peak     |
| 4   | *   | 243.3771     | 57.27                    | -18.43                    | 38.84                      | 46.00           | -7.16      | peak     |
| 5   |     | 272.2776     | 52.60                    | -17.63                    | 34.97                      | 46.00           | -11.03     | peak     |
| 6   |     | 379.9141     | 51.69                    | -14.14                    | 37.55                      | 46.00           | -8.45      | peak     |

|                |                                            |                     |      |
|----------------|--------------------------------------------|---------------------|------|
| Temperature :  | 23°C                                       | Relative Humidity : | 48 % |
| Antenna.       | Vertical                                   |                     |      |
| Test Voltage : | AC120V/60Hz                                |                     |      |
| Test Mode :    | Mode 1: USB Charging Mode                  |                     |      |
| Remark:        | Emission Level= Read Level+ Correct Factor |                     |      |

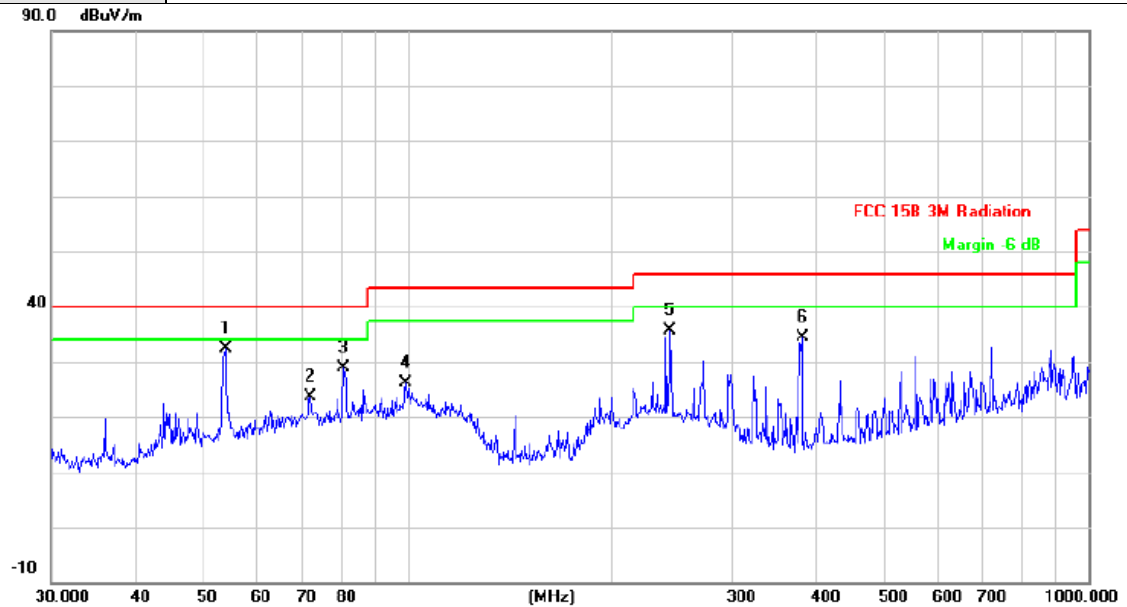


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m       | dBuV/m | dB     | Detector |
| 1   | *   | 54.0711  | 56.93         | -24.45         | 32.48        | 40.00  | -7.52  | peak     |
| 2   |     | 72.0843  | 47.13         | -23.54         | 23.59        | 40.00  | -16.41 | peak     |
| 3   |     | 80.6442  | 52.03         | -23.25         | 28.78        | 40.00  | -11.22 | peak     |
| 4   |     | 99.5281  | 48.10         | -21.86         | 26.24        | 43.50  | -17.26 | peak     |
| 5   |     | 243.3772 | 54.03         | -18.43         | 35.60        | 46.00  | -10.40 | peak     |
| 6   |     | 379.9141 | 48.57         | -14.14         | 34.43        | 46.00  | -11.57 | peak     |

|                |                                            |                     |      |
|----------------|--------------------------------------------|---------------------|------|
| Temperature :  | 23°C                                       | Relative Humidity : | 48 % |
| Antenna.       | Horizontal                                 |                     |      |
| Test Voltage : | DC 3.7V                                    |                     |      |
| Test Mode :    | Mode 2: BLE TX2402MHz Mode                 |                     |      |
| Remark:        | Emission Level= Read Level+ Correct Factor |                     |      |

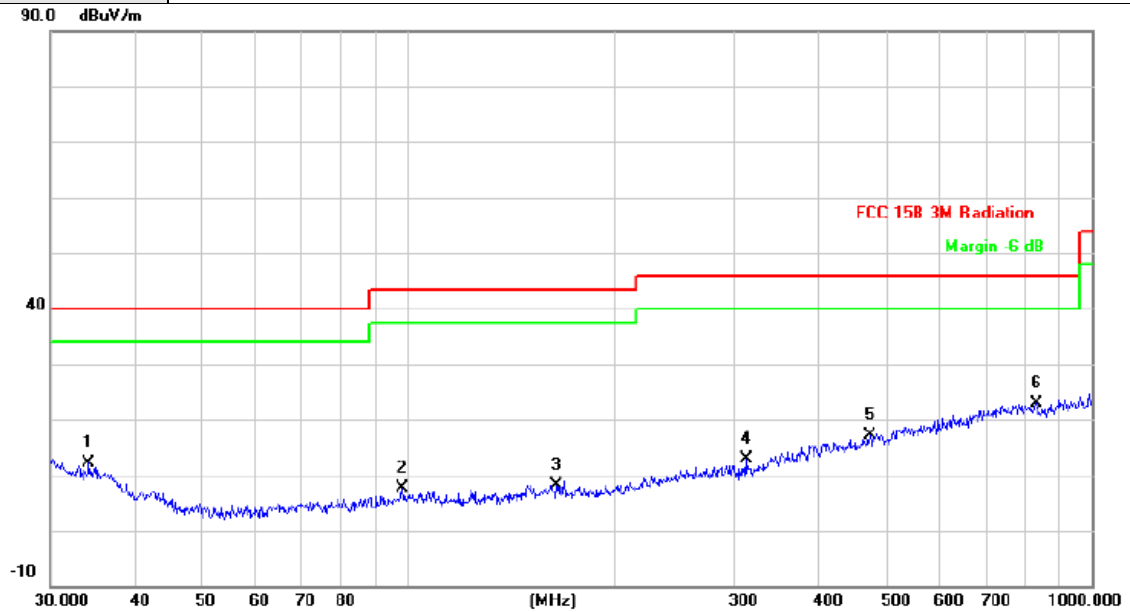

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   | Detector |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     |          |
| 1   |     | 34.1561  | 28.54         | -16.53         | 12.01       | 40.00  | -27.99 | peak     |
| 2   |     | 98.1419  | 29.53         | -21.98         | 7.55        | 43.50  | -35.95 | peak     |
| 3   |     | 164.9075 | 29.04         | -20.84         | 8.20        | 43.50  | -35.30 | peak     |
| 4   |     | 312.1794 | 29.43         | -16.63         | 12.80       | 46.00  | -33.20 | peak     |
| 5   |     | 473.8347 | 28.66         | -11.64         | 17.02       | 46.00  | -28.98 | peak     |
| 6   | *   | 830.4002 | 29.30         | -6.38          | 22.92       | 46.00  | -23.08 | peak     |

|                |                                            |                     |      |
|----------------|--------------------------------------------|---------------------|------|
| Temperature :  | 23°C                                       | Relative Humidity : | 48 % |
| Antenna.       | Vertical                                   |                     |      |
| Test Voltage : | DC 3.7V                                    |                     |      |
| Test Mode :    | Mode 2: BLE TX2402MHz Mode                 |                     |      |
| Remark:        | Emission Level= Read Level+ Correct Factor |                     |      |

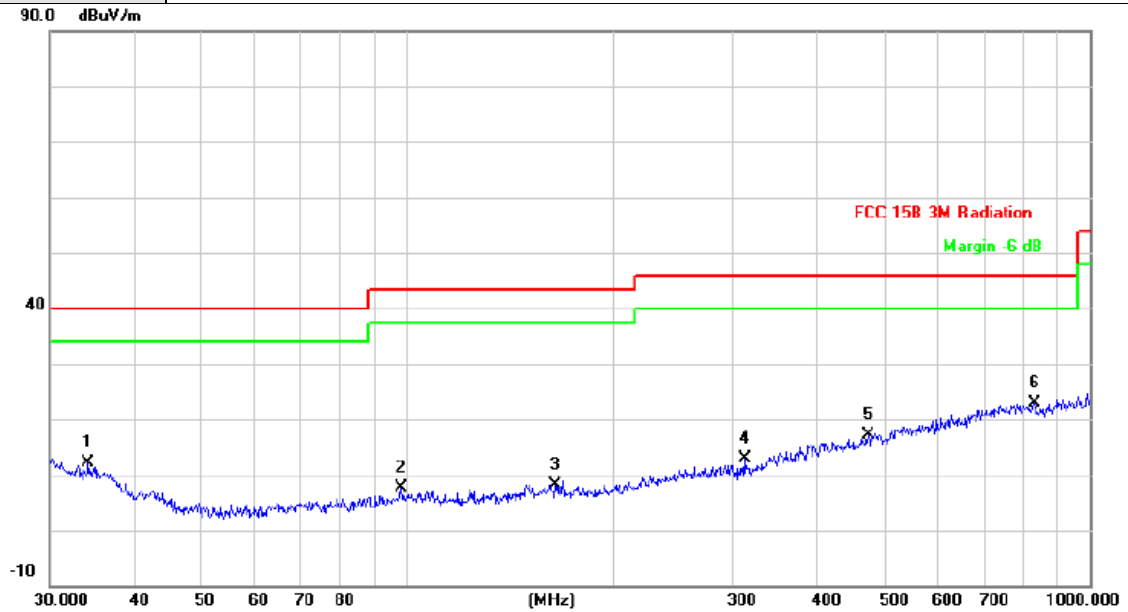

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   | Detector |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     |          |
| 1   |     | 34.1561  | 28.54         | -16.53         | 12.01       | 40.00  | -27.99 | peak     |
| 2   |     | 98.1419  | 29.53         | -21.98         | 7.55        | 43.50  | -35.95 | peak     |
| 3   |     | 164.9075 | 29.04         | -20.84         | 8.20        | 43.50  | -35.30 | peak     |
| 4   |     | 312.1794 | 29.43         | -16.63         | 12.80       | 46.00  | -33.20 | peak     |
| 5   |     | 473.8347 | 28.66         | -11.64         | 17.02       | 46.00  | -28.98 | peak     |
| 6   | *   | 830.4002 | 29.30         | -6.38          | 22.92       | 46.00  | -23.08 | peak     |

## (3) 1GHz~26.5 GHz

|                |                                            |                     |      |
|----------------|--------------------------------------------|---------------------|------|
| Temperature :  | 23℃                                        | Relative Humidity : | 48 % |
| Antenna.       | Horizontal                                 |                     |      |
| Test Voltage : | DC 3.7V                                    |                     |      |
| Test Mode :    | Mode 2: BLE TX2402MHz Mode                 |                     |      |
| Remark:        | Emission Level= Read Level+ Correct Factor |                     |      |

| No. Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   |          |
|---------|----------|---------------|----------------|--------------|--------|--------|----------|
|         | MHz      | dBuV          | dB             | dBuV/m       | dBuV/m | dB     | Detector |
| 1       | 4803.403 | 47.09         | 8.18           | 55.27        | 74.00  | -18.73 | peak     |
| 2 *     | 4803.850 | 35.93         | 8.18           | 44.11        | 54.00  | -9.89  | AVG      |

|                |                                            |                     |      |
|----------------|--------------------------------------------|---------------------|------|
| Temperature :  | 23℃                                        | Relative Humidity : | 48 % |
| Antenna.       | Vertical                                   |                     |      |
| Test Voltage : | DC 3.7V                                    |                     |      |
| Test Mode :    | Mode 2: BLE TX2402MHz Mode                 |                     |      |
| Remark:        | Emission Level= Read Level+ Correct Factor |                     |      |

| No. Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   |          |
|---------|----------|---------------|----------------|--------------|--------|--------|----------|
|         | MHz      | dBuV          | dB             | dBuV/m       | dBuV/m | dB     | Detector |
| 1       | 4803.442 | 48.27         | 8.18           | 56.45        | 74.00  | -17.55 | peak     |
| 2 *     | 4803.889 | 36.99         | 8.18           | 45.17        | 54.00  | -8.83  | AVG      |

|                |                                            |                     |      |
|----------------|--------------------------------------------|---------------------|------|
| Temperature :  | 23°C                                       | Relative Humidity : | 48 % |
| Antenna.       | Horizontal                                 |                     |      |
| Test Voltage : | DC 3.7V                                    |                     |      |
| Test Mode :    | Mode 2: BLE TX2442MHz Mode                 |                     |      |
| Remark:        | Emission Level= Read Level+ Correct Factor |                     |      |

| No. Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   |          |
|---------|----------|---------------|----------------|--------------|--------|--------|----------|
|         | MHz      | dBuV          | dB             | dBuV/m       | dBuV/m | dB     | Detector |
| 1       | 4883.535 | 47.59         | 8.22           | 55.81        | 74.00  | -18.19 | peak     |
| 2 *     | 4883.871 | 36.01         | 8.22           | 44.23        | 54.00  | -9.77  | AVG      |

|                |                                            |                     |      |
|----------------|--------------------------------------------|---------------------|------|
| Temperature :  | 23°C                                       | Relative Humidity : | 48 % |
| Antenna.       | Vertical                                   |                     |      |
| Test Voltage : | DC 3.7V                                    |                     |      |
| Test Mode :    | Mode 2: BLE TX2442MHz Mode                 |                     |      |
| Remark:        | Emission Level= Read Level+ Correct Factor |                     |      |

| No. Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   |          |
|---------|----------|---------------|----------------|--------------|--------|--------|----------|
|         | MHz      | dBuV          | dB             | dBuV/m       | dBuV/m | dB     | Detector |
| 1 *     | 4883.871 | 38.01         | 8.22           | 46.23        | 54.00  | -7.77  | AVG      |
| 2       | 4884.261 | 47.50         | 8.21           | 55.71        | 74.00  | -18.29 | peak     |

|                |                                            |                     |      |
|----------------|--------------------------------------------|---------------------|------|
| Temperature :  | 23°C                                       | Relative Humidity : | 48 % |
| Antenna.       | Horizontal                                 |                     |      |
| Test Voltage : | DC 3.7V                                    |                     |      |
| Test Mode :    | Mode 2: BLE TX2480MHz Mode                 |                     |      |
| Remark:        | Emission Level= Read Level+ Correct Factor |                     |      |

| No. Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   |          |
|---------|----------|---------------|----------------|--------------|--------|--------|----------|
|         | MHz      | dBuV          | dB             | dBuV/m       | dBuV/m | dB     | Detector |
| 1       | 4959.388 | 48.88         | 8.23           | 57.11        | 74.00  | -16.89 | peak     |
| 2 *     | 4959.871 | 38.22         | 8.23           | 46.45        | 54.00  | -7.55  | AVG      |

|                |                                            |                     |      |
|----------------|--------------------------------------------|---------------------|------|
| Temperature :  | 23°C                                       | Relative Humidity : | 48 % |
| Antenna.       | Vertical                                   |                     |      |
| Test Voltage : | DC 3.7V                                    |                     |      |
| Test Mode :    | Mode 2: BLE TX2480MHz Mode                 |                     |      |
| Remark:        | Emission Level= Read Level+ Correct Factor |                     |      |

| No. Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   |          |
|---------|----------|---------------|----------------|--------------|--------|--------|----------|
|         | MHz      | dBuV          | dB             | dBuV/m       | dBuV/m | dB     | Detector |
| 1       | 4959.580 | 48.11         | 8.23           | 56.34        | 74.00  | -17.66 | peak     |
| 2 *     | 4959.871 | 36.31         | 8.23           | 44.54        | 54.00  | -9.46  | AVG      |

## 6 Band Edge

### 6.1 Test Standard and Limit


#### 6.1.1 Test Standard

**FCC 15.209/FCC 15.247**

#### 6.1.2 Limits

| Restricted Frequency Band (MHz) | Class B (dBuV/m)(at 3 M) |         |
|---------------------------------|--------------------------|---------|
|                                 | Peak                     | Average |
| 2310 ~2390                      | 74                       | 54      |
| 2483.5 ~2500                    | 74                       | 54      |

### 6.2 Test Setup

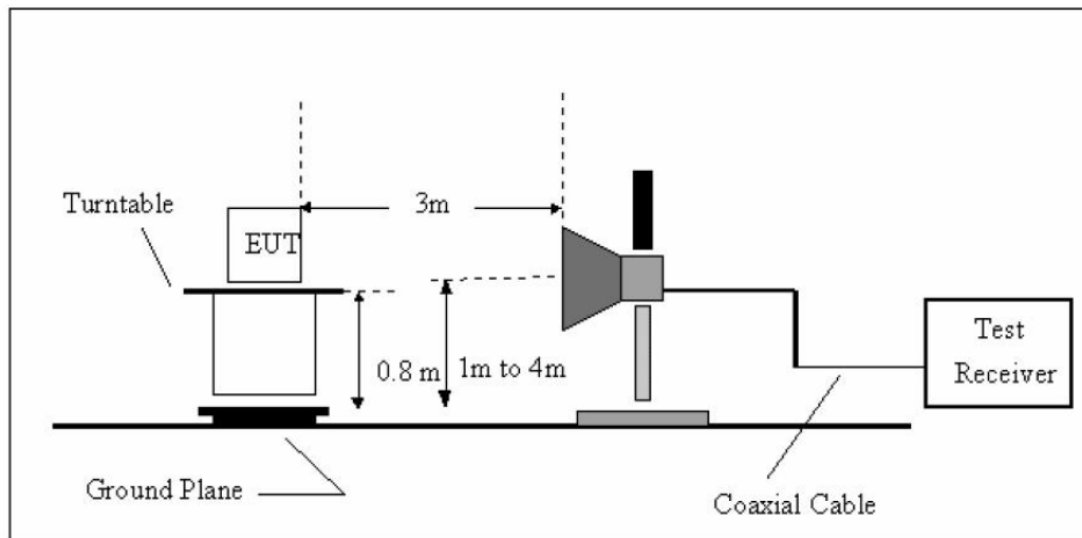

### 6.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (3) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (4) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit

Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.

- (5) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (6) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (7) For the actual test configuration, please see the test setup photo.

## 6.4 Test Data

## (1) Radiation Test

|                |                                            |                     |      |
|----------------|--------------------------------------------|---------------------|------|
| Temperature :  | 23℃                                        | Relative Humidity : | 48 % |
| Antenna.       | Horizontal                                 |                     |      |
| Test Voltage : | DC 3.7V                                    |                     |      |
| Test Mode :    | Mode 2: BLE TX2402MHz Mode                 |                     |      |
| Remark:        | Emission Level= Read Level+ Correct Factor |                     |      |

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   |          |                       |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------|-----------------------|
|     |     | MHz      | dBuV          | dB             | dBuV/m       | dBuV/m | dB     | Detector | Comment               |
| 1   |     | 2390.000 | 45.67         | 0.77           | 46.44        | 74.00  | -27.56 | peak     |                       |
| 2   |     | 2390.000 | 32.58         | 0.77           | 33.35        | 54.00  | -20.65 | AVG      |                       |
| 3   | X   | 2401.800 | 83.29         | 0.82           | 84.11        | 74.00  | 10.11  | peak     | Fundamental Frequency |
| 4   | *   | 2402.000 | 81.85         | 0.82           | 82.67        | 54.00  | 28.67  | AVG      | Fundamental Frequency |

|                |                                            |                     |      |
|----------------|--------------------------------------------|---------------------|------|
| Temperature :  | 23℃                                        | Relative Humidity : | 48 % |
| Antenna.       | Vertical                                   |                     |      |
| Test Voltage : | DC 3.7V                                    |                     |      |
| Test Mode :    | Mode 2: BLE TX2402MHz Mode                 |                     |      |
| Remark:        | Emission Level= Read Level+ Correct Factor |                     |      |

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   |          |                       |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------|-----------------------|
|     |     | MHz      | dBuV          | dB             | dBuV/m       | dBuV/m | dB     | Detector | Comment               |
| 1   |     | 2390.000 | 45.58         | 0.77           | 46.35        | 74.00  | -27.65 | peak     |                       |
| 2   |     | 2390.000 | 32.65         | 0.77           | 33.42        | 54.00  | -20.58 | AVG      |                       |
| 3   | X   | 2401.700 | 84.85         | 0.82           | 85.67        | 74.00  | 11.67  | peak     | Fundamental Frequency |
| 4   | *   | 2402.000 | 83.64         | 0.82           | 84.46        | 54.00  | 30.46  | AVG      | Fundamental Frequency |

|                |                                            |                     |      |
|----------------|--------------------------------------------|---------------------|------|
| Temperature :  | 23°C                                       | Relative Humidity : | 48 % |
| Antenna.       | Horizontal                                 |                     |      |
| Test Voltage : | DC 3.7V                                    |                     |      |
| Test Mode :    | Mode 2: BLE TX2480MHz Mode                 |                     |      |
| Remark:        | Emission Level= Read Level+ Correct Factor |                     |      |


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   |          |                       |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------|-----------------------|
|     |     | MHz      | dBuV          | dB             | dBuV/m       | dBuV/m | dB     | Detector | Comment               |
| 1   | X   | 2479.700 | 84.53         | 1.15           | 85.68        | 74.00  | 11.68  | peak     | Fundamental Frequency |
| 2   | *   | 2479.900 | 83.20         | 1.15           | 84.35        | 54.00  | 30.35  | AVG      | Fundamental Frequency |
| 3   |     | 2483.500 | 53.60         | 1.17           | 54.77        | 74.00  | -19.23 | peak     |                       |
| 4   |     | 2483.500 | 34.51         | 1.17           | 35.68        | 54.00  | -18.32 | AVG      |                       |
| 5   |     | 2500.000 | 44.55         | 1.23           | 45.78        | 74.00  | -28.22 | peak     |                       |
| 6   |     | 2500.000 | 32.35         | 1.23           | 33.58        | 54.00  | -20.42 | AVG      |                       |

|                |                                            |                     |      |
|----------------|--------------------------------------------|---------------------|------|
| Temperature :  | 23°C                                       | Relative Humidity : | 48 % |
| Antenna.       | Vertical                                   |                     |      |
| Test Voltage : | DC 3.7V                                    |                     |      |
| Test Mode :    | Mode 2: BLE TX2480MHz Mode                 |                     |      |
| Remark:        | Emission Level= Read Level+ Correct Factor |                     |      |


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   |          |                       |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------|-----------------------|
|     |     | MHz      | dBuV          | dB             | dBuV/m       | dBuV/m | dB     | Detector | Comment               |
| 1   | X   | 2479.700 | 81.29         | 3.50           | 84.79        | 74.00  | 10.79  | peak     | Fundamental Frequency |
| 2   | *   | 2479.900 | 80.31         | 3.50           | 83.81        | 54.00  | 29.81  | AVG      | Fundamental Frequency |
| 3   |     | 2483.500 | 49.71         | 3.51           | 53.22        | 74.00  | -20.78 | peak     |                       |
| 4   |     | 2483.500 | 32.54         | 3.51           | 36.05        | 54.00  | -17.95 | AVG      |                       |
| 5   |     | 2500.000 | 40.69         | 3.52           | 44.21        | 74.00  | -29.79 | peak     |                       |
| 6   |     | 2500.000 | 29.36         | 3.52           | 32.88        | 54.00  | -21.12 | AVG      |                       |

## (2) Conducted Test

|                |                            |                     |      |
|----------------|----------------------------|---------------------|------|
| Temperature :  | 23°C                       | Relative Humidity : | 48 % |
| Test Voltage : | DC 3.7V                    |                     |      |
| Test Mode :    | Mode 2: BLE TX2402MHz Mode |                     |      |
| Remark:        |                            |                     |      |

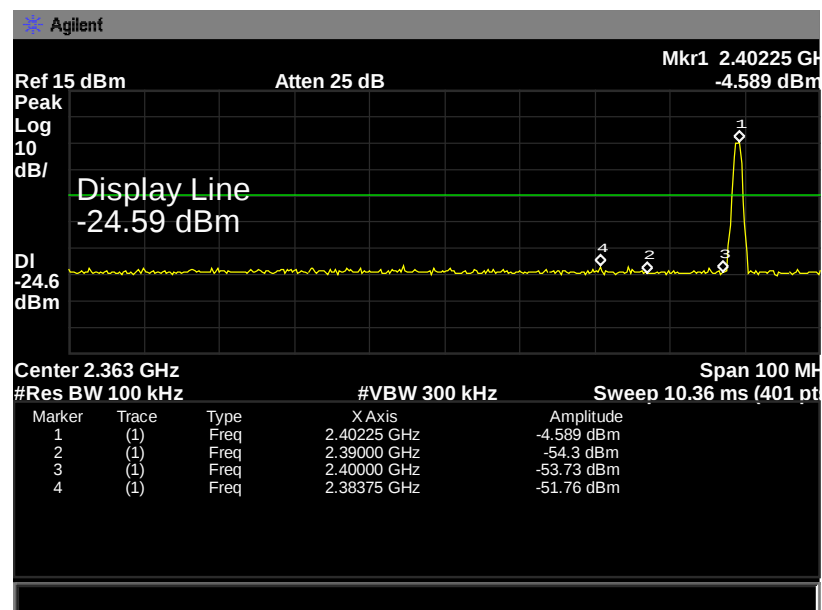

|                |                            |                     |      |
|----------------|----------------------------|---------------------|------|
| Temperature :  | 23°C                       | Relative Humidity : | 48 % |
| Test Voltage : | DC 3.7V                    |                     |      |
| Test Mode :    | Mode 2: BLE TX2480MHz Mode |                     |      |
| Remark:        |                            |                     |      |

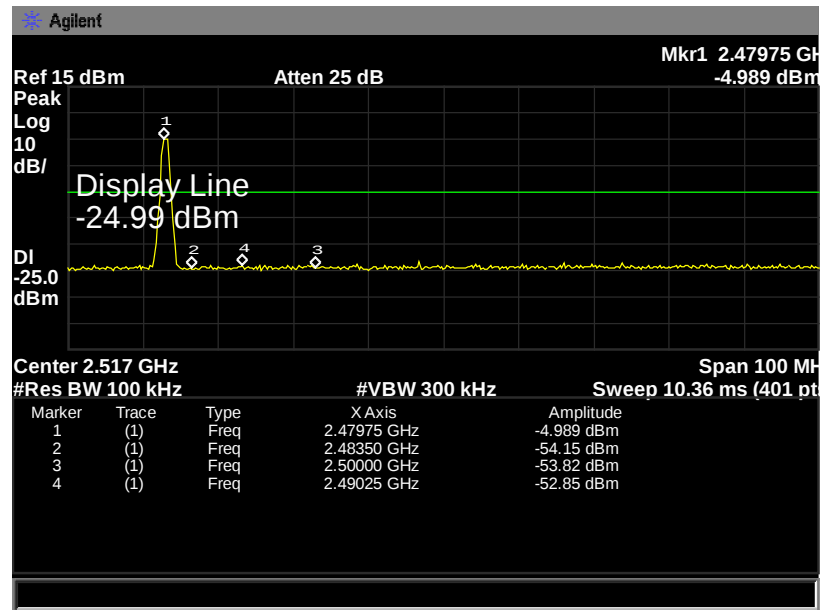

## 7 Peak Power Test

### 7.1 Test Standard and Limit


#### 7.1.1 Test Standard

**FCC 15.247**

#### 7.1.2 Limits

| FCC Part 15 Subpart C(15.247) |                  |                      |
|-------------------------------|------------------|----------------------|
| Test Item                     | Limit            | Frequency Range(MHz) |
| Peak Output Power             | 1 Watt or 30 dBm | 2400~2483.5          |

### 7.2 Test Setup



### 7.3 Test Procedure


The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement is according to section 9.1.1 of KDB 558074 D01 DTS Meas Guidance v03r02.

- (1) Set the  $RBW \geq DTS \text{ Bandwidth}$
- (2) Set  $VBW \geq 3 * RBW$
- (3) Set  $Span \geq 3 * RBW$
- (4) Sweep time=auto
- (5) Detector= peak
- (6) Trace mode= maxhold.
- (7) Allow trace to fully stabilize, and then use peak marker function to determine the peak amplitude level.


### 7.4 Test Data

| Peak Power              |                   |             |
|-------------------------|-------------------|-------------|
| Channel frequency (MHz) | Test Result (dBm) | Limit (dBm) |
| 2402                    | -3.923            | 30          |
| 2442                    | -3.938            |             |
| 2480                    | -4.435            |             |


2402 MHz

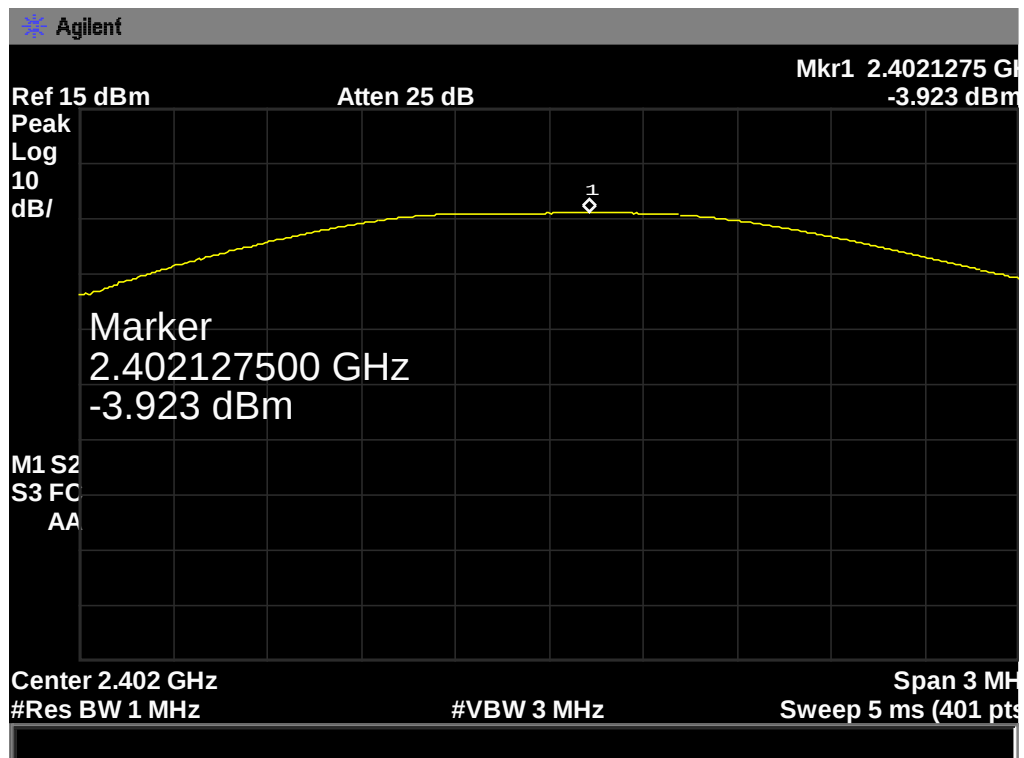

2442 MHz

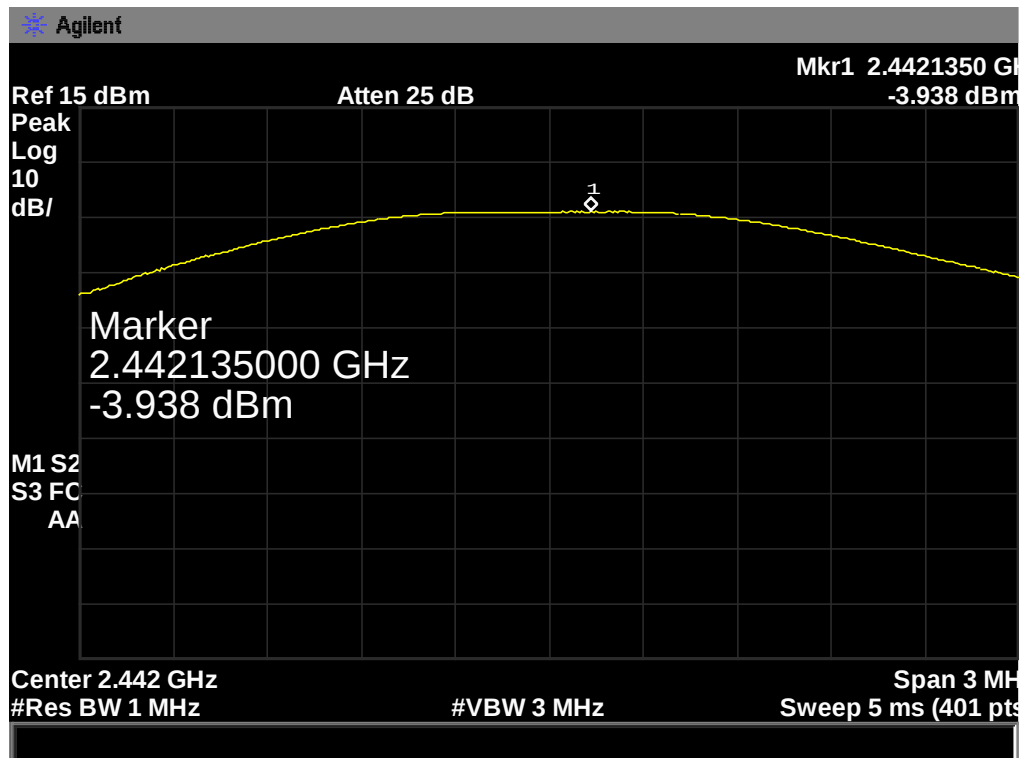

2480 MHz

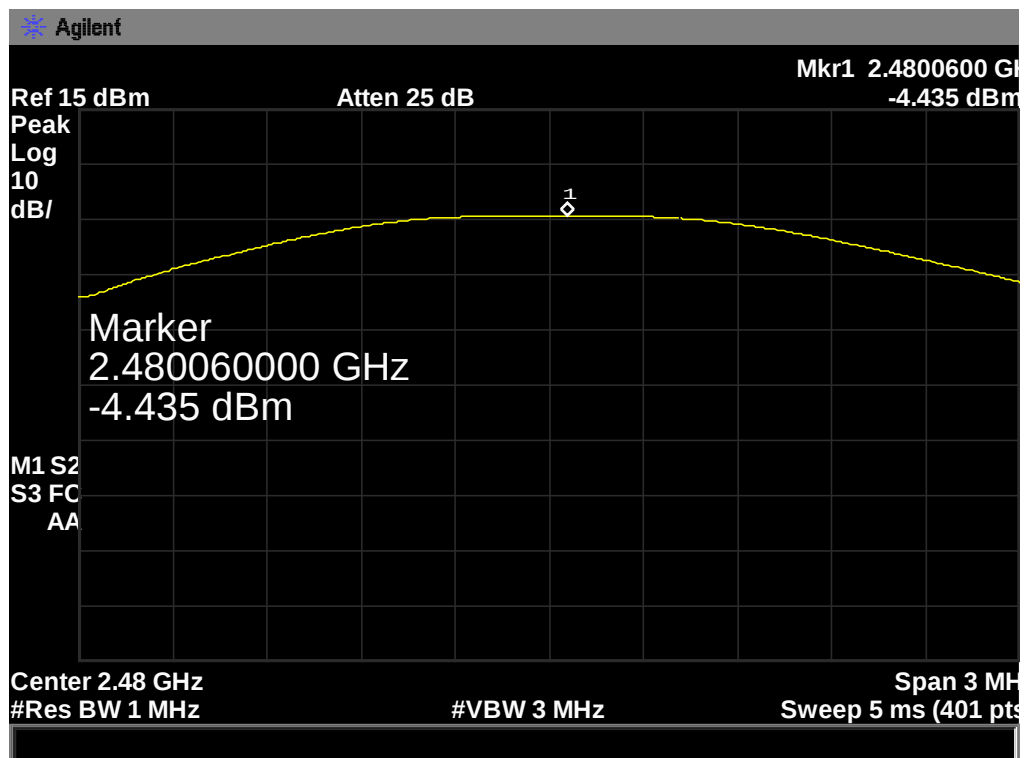

## 8 Bandwidth

### 8.1 Test Standard and Limit


#### 8.1.1 Test Standard

##### **FCC 15.247**

#### 8.1.2 Limits

| FCC Part 15 Subpart C(15.247)/RSS-210 |                                   |                      |
|---------------------------------------|-----------------------------------|----------------------|
| Test Item                             | Limit                             | Frequency Range(MHz) |
| Bandwidth                             | $\geq 500$ KHz<br>(6dB bandwidth) | 2400~2483.5          |

### 8.2 Test Setup




### 8.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) The bandwidth is measured at an amplitude level reduced 6dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst –case (i.e the widest) bandwidth.
- (3) Measure the channel separation the spectrum analyzer was set to Resolution Bandwidth:100 kHz, and Video Bandwidth:300 kHz, Detector: Peak, Sweep Time set auto.


### 8.4 Test Data

| -6 dB Bandwidth         |                   |             |
|-------------------------|-------------------|-------------|
| Channel frequency (MHz) | Test Result (kHz) | Limit (kHz) |
| 2402                    | 730.259           | >500        |
| 2442                    | 705.210           |             |
| 2480                    | 694.380           |             |


2402 MHz

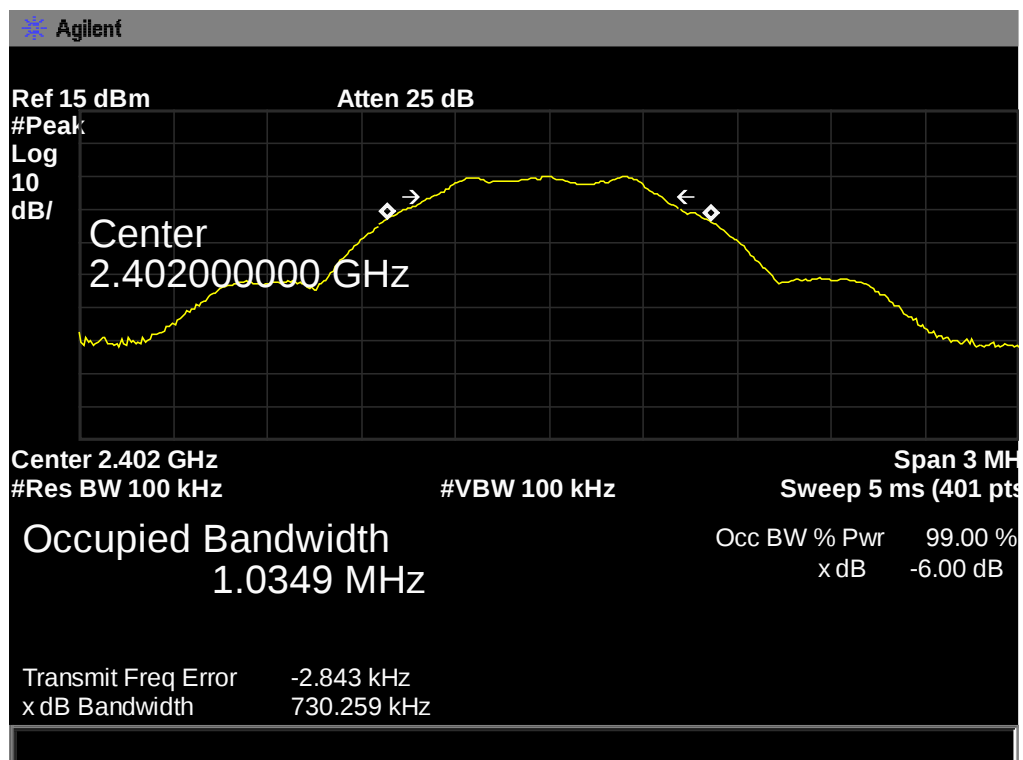

2442 MHz

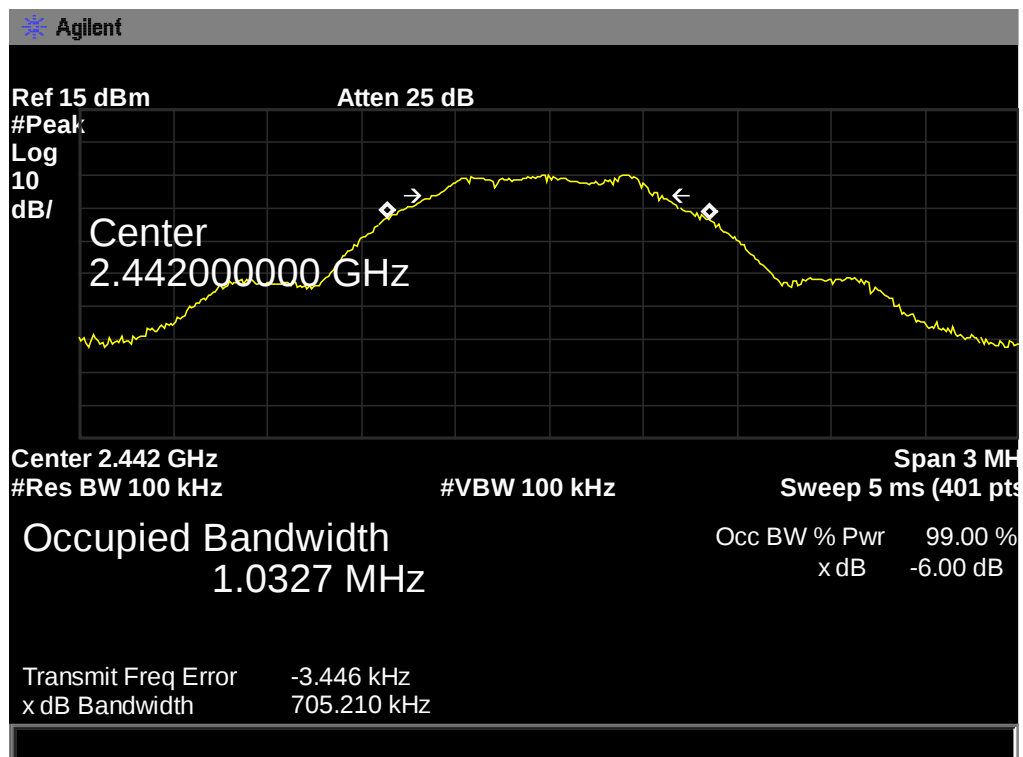

2480 MHz

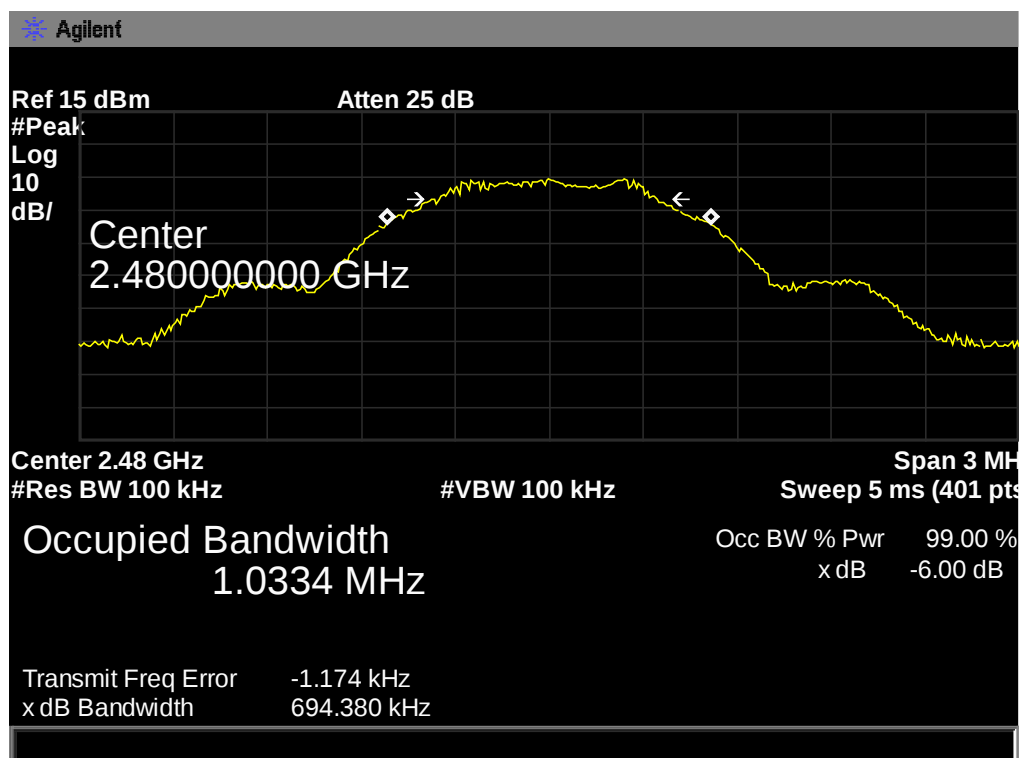

## 9 Power Density

### 9.1 Test Standard and Limit


#### 9.1.1 Test Standard

##### **FCC 15.247**

#### 9.1.2 Limits

| FCC Part 15 Subpart C(15.247) |                    |                      |
|-------------------------------|--------------------|----------------------|
| Test Item                     | Limit              | Frequency Range(MHz) |
| Power Spectral Density        | 8dBm(in any 3 kHz) | 2400~2483.5          |

### 9.2 Test Setup



### 9.3 Test Procedure


The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v03r02.

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Set analyser center frequency to DTS channel center frequenyc.
- (3) Set the span to 1.5 times the DTS bandwidth.
- (4) Set the RBW to: 3 kHz
- (5) Set the VBW to: 10 kHz
- (6) Detector: peak
- (7) Sweep time: auto
- (8) Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.


### 9.4 Test Data

| Power Density           |                   |             |
|-------------------------|-------------------|-------------|
| Channel frequency (MHz) | Test Result (dBm) | Limit (dBm) |
| 2402                    | -18.65            | <8          |
| 2442                    | -18.67            |             |
| 2480                    | -19.14            |             |


2402 MHz

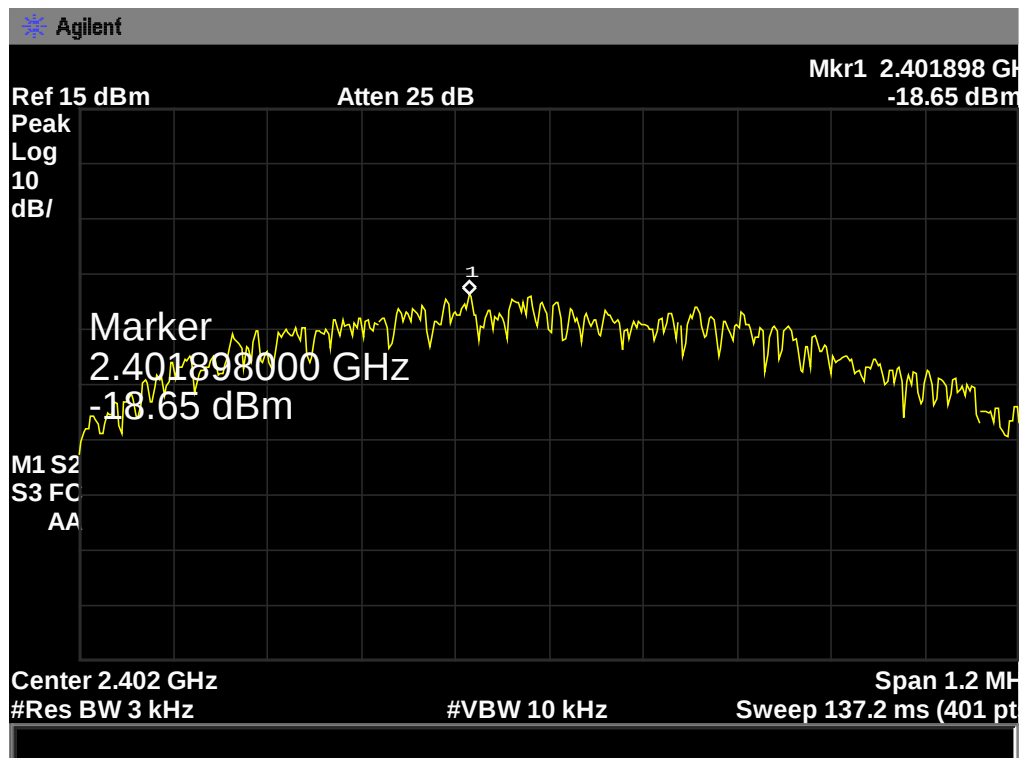

2442 MHz

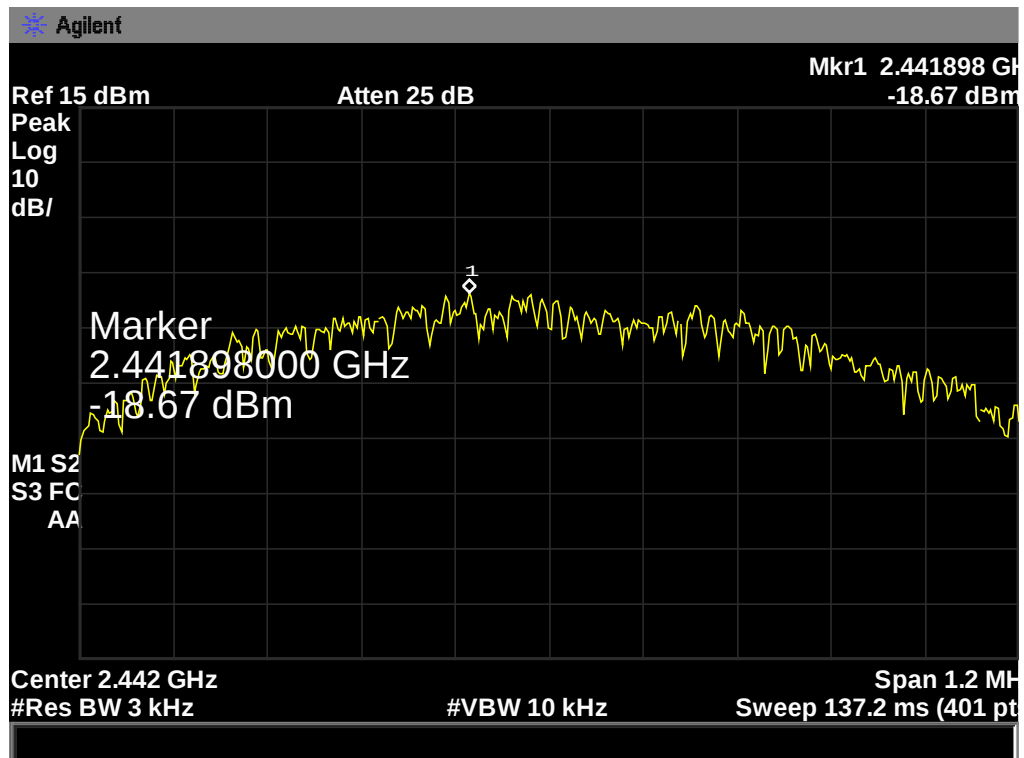

2480 MHz

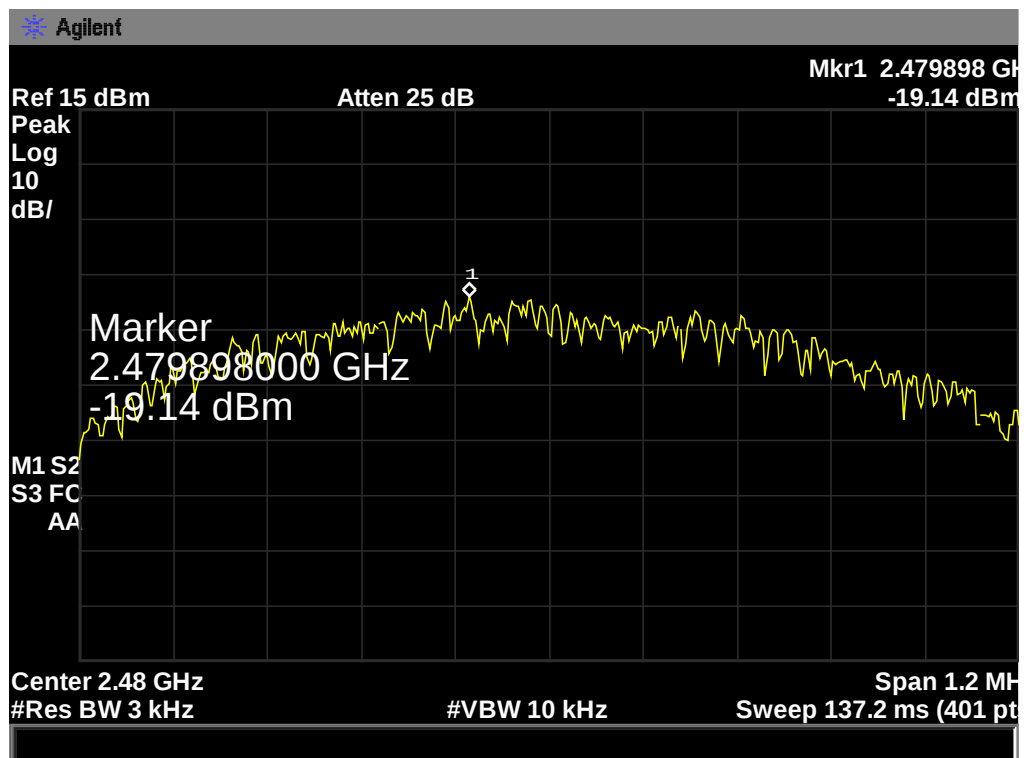

## 10 Antenna Conducted Emissions

### 10.1 Test Standard and Limit

#### 10.1.1 Test Standard


##### **FCC 15.247**

#### 10.1.2 Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies (MHz) | Field Strength (microvolt/meter) | Measurement Distance (meters) |
|-------------------|----------------------------------|-------------------------------|
| 0.009~0.490       | 2400/F(KHz)                      | 300                           |
| 0.490~1.705       | 24000/F(KHz)                     | 30                            |
| 1.705~30.0        | 30                               | 30                            |
| 30~88             | 100                              | 3                             |
| 88~216            | 150                              | 3                             |
| 216~960           | 200                              | 3                             |
| Above~960         | 500                              | 3                             |

### 10.2 Test Setup




### 10.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:  
RBW=100 KHz, VBW=300 KHz.


Frequency range: from 30 MHz to 25 GHz.

#### 10.4 Test Data


## TX 2402 MHz Conducted Spurious Emission (1GHz~26.5GHz)

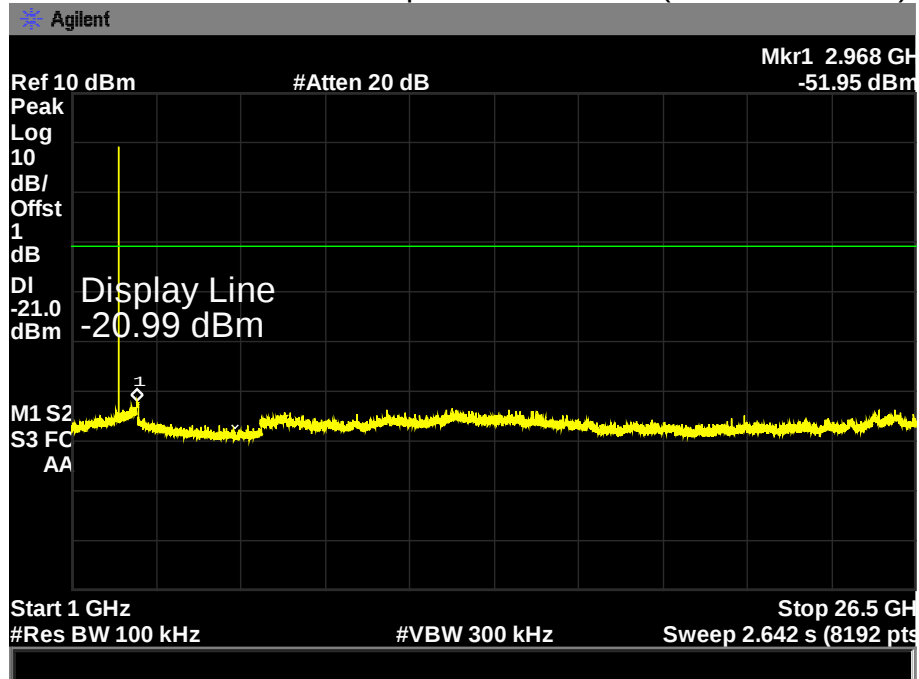


## TX 2402 MHz Conducted Spurious Emission (30MHz~1GHz)

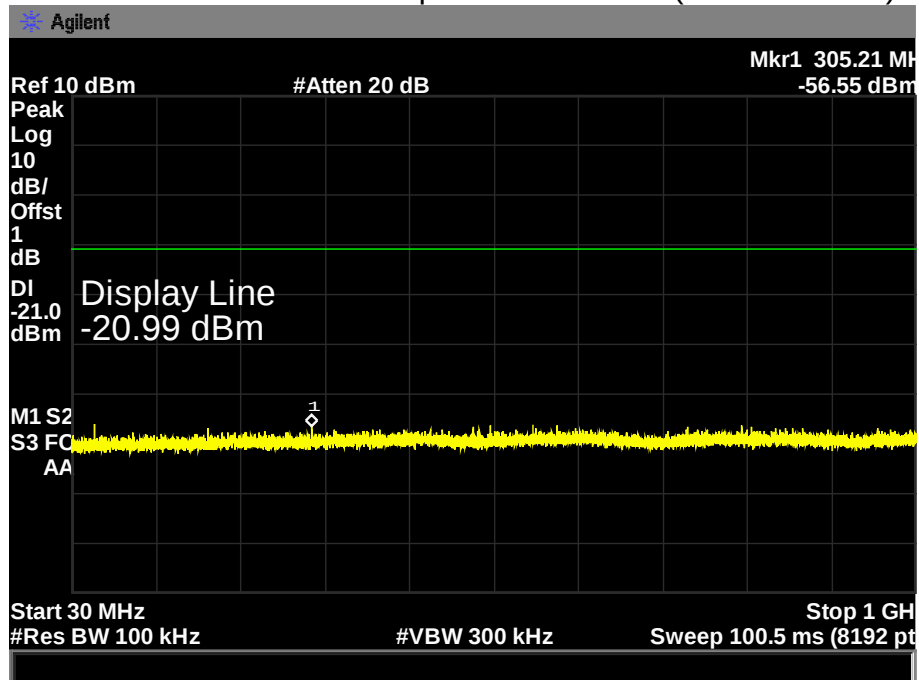


## TX 2442 MHz Conducted Spurious Emission (1GHz~26.5GHz)

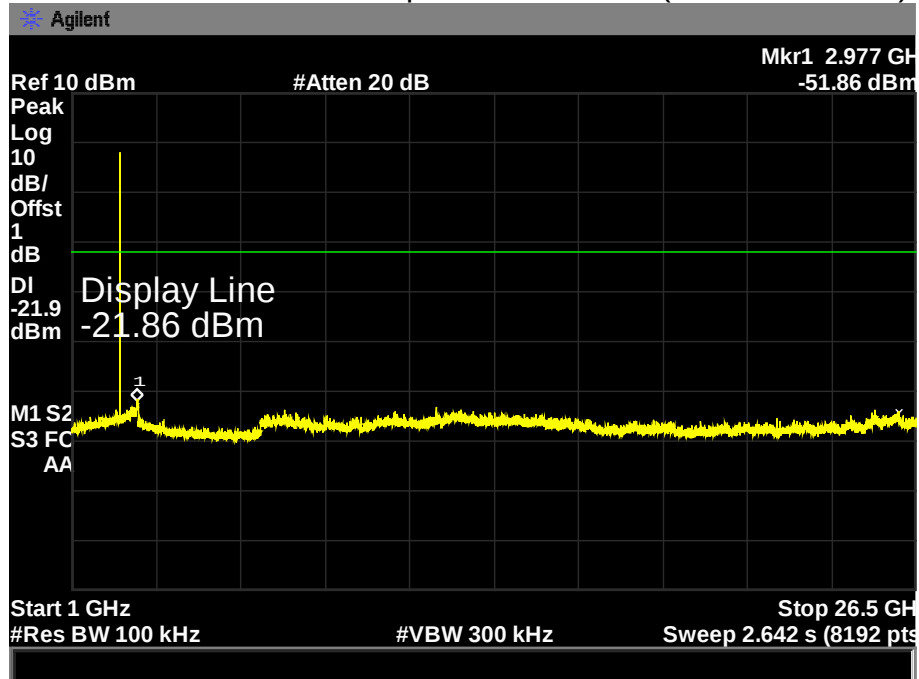


## TX 2442 MHz Conducted Spurious Emission (30MHz~1GHz)

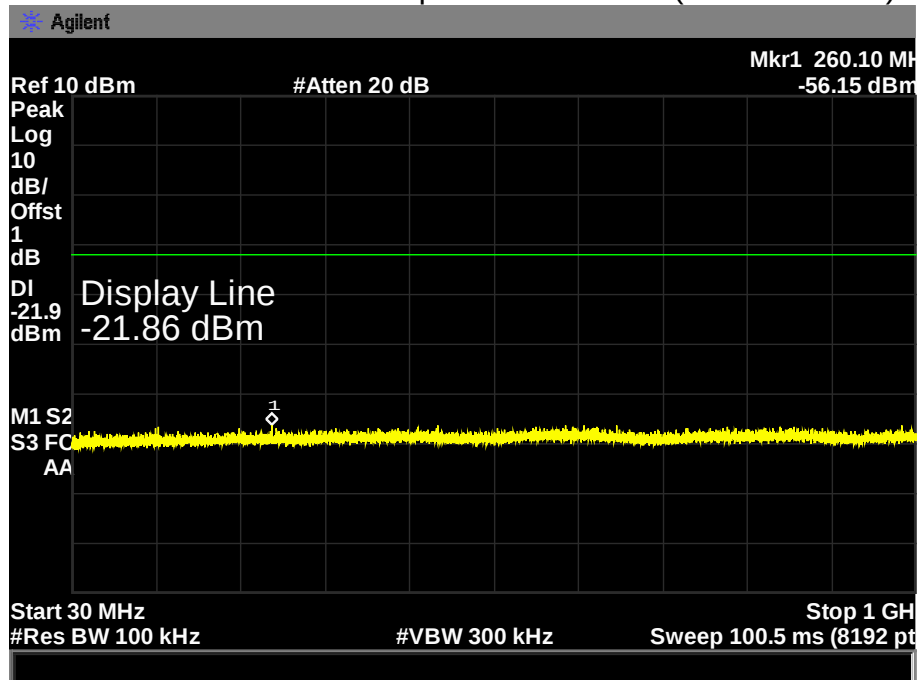

## TX 2480 MHz Conducted Spurious Emission (1GHz~26.5GHz)

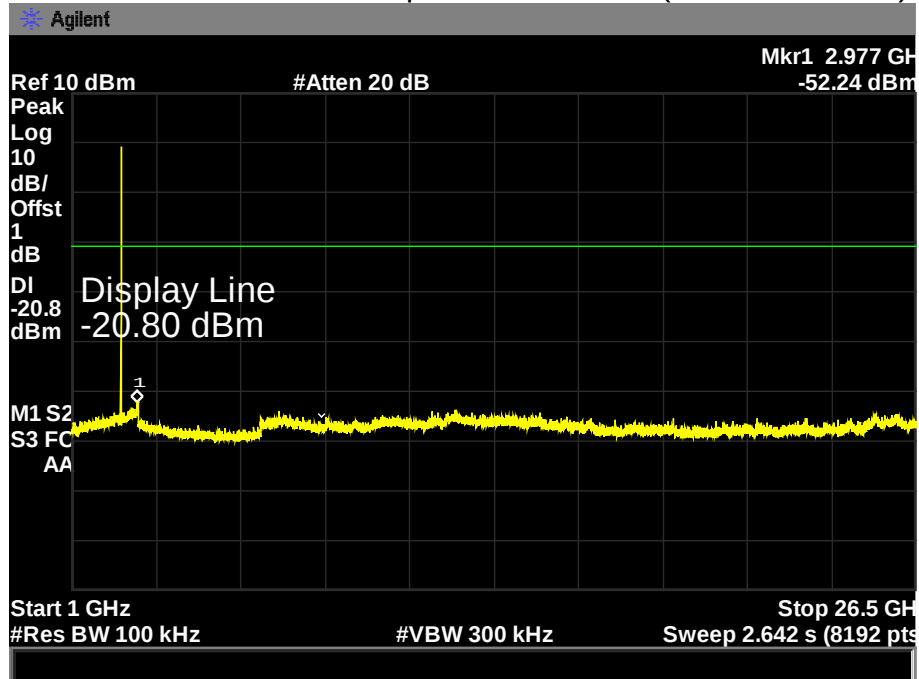

## TX 2480 MHz Conducted Spurious Emission (30MHz~1GHz)

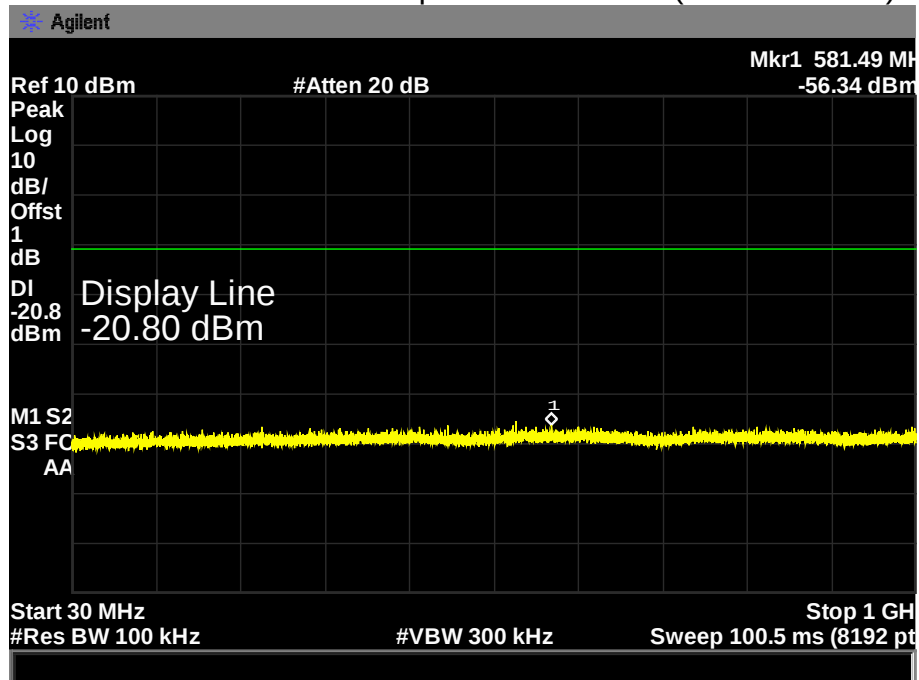

## 11 Antenna Requirement

### 11.1 Standard and Limit

#### 11.1.1 Requirement Standard

##### **FCC 15.203**

#### 11.1.2 Requirement Description

According to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 11.2 Antenna Construction

The Antenna is an Integral Antenna, with gain of 0 dBi. No consideration of replacement.

Therefore, the equipment complies with the antenna requirement of Section 15.203