

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)

Report No.: RFBCZY-WTW-P22110731-1

FCC ID: AU792U22L14872

Product: MiniPCIe 802.11ac WiFi module

Brand: Multi-Tech Systems Inc. , www.multitech.com

Model No.: MTWM-0000T0

Received Date: 2022/12/5

Test Date: 2023/2/1 ~ 2023/2/15

Issued Date: 2023/3/3

Applicant: Multi-Tech Systems Inc.

Address: 2205 Woodale Drive, Mounds View, MN 55112 U.S.A

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan

FCC Registration / 723255 / TW2022

Designation Number:

Approved by: _____, **Date:** 2023/3/3
May Chen / Manager

This test report consists of 91 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.

Prepared by : Vivian Huang / Specialist



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	4
1 Certificate.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Supplementary Information	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Antenna Description of EUT	8
3.3 Channel List.....	9
3.4 Test Mode Applicability and Tested Channel Detail.....	10
3.5 Duty Cycle of Test Signal.....	11
3.6 Test Program Used and Operation Descriptions	13
3.7 Connection Diagram of EUT and Peripheral Devices	13
3.8 Configuration of Peripheral Devices and Cable Connections	14
4 Test Instruments	15
4.1 RF Output Power.....	15
4.2 Power Spectral Density	15
4.3 6 dB Bandwidth	15
4.4 Occupied Bandwidth.....	15
4.5 Frequency Stability	16
4.6 AC Power Conducted Emissions	16
4.7 Unwanted Emissions below 1 GHz	17
4.8 Unwanted Emissions above 1 GHz.....	18
5 Limits of Test Items.....	19
5.1 RF Output Power.....	19
5.2 Power Spectral Density	19
5.3 6 dB Bandwidth	19
5.4 Occupied Bandwidth.....	19
5.5 Frequency Stability	19
5.6 AC Power Conducted Emissions	20
5.7 Unwanted Emissions below 1 GHz	20
5.8 Unwanted Emissions above 1 GHz.....	21
6 Test Arrangements.....	22
6.1 RF Output Power.....	22
6.1.1 Test Setup	22
6.1.2 Test Procedure	22
6.2 Power Spectral Density	22
6.2.1 Test Setup	22
6.2.2 Test Procedure	22
6.3 6 dB Bandwidth	23
6.3.1 Test Setup	23
6.3.2 Test Procedure	23
6.4 Occupied Bandwidth.....	23
6.4.1 Test Setup	23
6.4.2 Test Procedure	23
6.5 Frequency Stability	24
6.5.1 Test Setup	24
6.5.2 Test Procedure	24
6.6 AC Power Conducted Emissions	25
6.6.1 Test Setup	25
6.6.2 Test Procedure	25
6.7 Unwanted Emissions below 1 GHz	26
6.7.1 Test Setup	26
6.7.2 Test Procedure	27

6.8	Unwanted Emissions above 1 GHz.....	28
6.8.1	Test Setup	28
6.8.2	Test Procedure	28
7	Test Results of Test Item	29
7.1	RF Output Power.....	29
7.2	Power Spectral Density	31
7.3	6 dB Bandwidth	35
7.4	Occupied Bandwidth.....	37
7.5	Frequency Stability	42
7.6	AC Power Conducted Emissions	43
7.7	Unwanted Emissions below 1 GHz	45
7.8	Unwanted Emissions above 1 GHz.....	47
8	Pictures of Test Arrangements	90
9	Information of the Testing Laboratories	91

Release Control Record

Issue No.	Description	Date Issued
RFBCZY-WTW-P22110731-1	Original release.	2023/3/3

1 Certificate

Product: MiniPCIe 802.11ac WiFi module

Brand: Multi-Tech Systems Inc. , www.multitech.com

Test Model: MTWM-0000T0

Sample Status: Mass product

Applicant: Multi-Tech Systems Inc.

Test Date: 2023/2/1 ~ 2023/2/15

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)

Measurement ANSI C63.10-2013

procedure: KDB 789033 D02 General UNII Test Procedure New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
Clause	Test Item	Result	Remark
15.407(a)(1) 15.407(a)(3)	RF Output Power	Pass	Meet the requirement of limit.
15.407(a)(1) 15.407(a)(3)	Power Spectral Density	Pass	Meet the requirement of limit.
15.407(e)	6 dB Bandwidth	Pass	Meet the requirement of limit. (U-NII-3 Band only)
---	Occupied Bandwidth	-	Reference only.
15.407(g)	Frequency Stability	Pass	Meet the requirement of limit.
15.407(b)(9)	AC Power Conducted Emissions	Pass	Minimum passing margin is -10.83 dB at 0.42344 MHz
15.407(b)(9)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -5.7 dB at 41.79 MHz
15.407(b) (1/10) 15.407(b) (4(i)/10)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -0.2 dB at 5150.00 MHz
15.203	Antenna Requirement	Pass	Antenna connector is R-SMA not a standard connector.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Specification	Expanded Uncertainty (k=2) (±)
AC Power Conducted Emissions	150 kHz ~ 30 MHz	1.9 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	3.1 dB
	30 MHz ~ 1 GHz	5.4 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 18 GHz	5.0 dB
	18 GHz ~ 40 GHz	5.3 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	MiniPCIe 802.11ac WiFi module
Brand	Multi-Tech Systems Inc. , www.multitech.com
Test Model	MTWM-0000T0
Status of EUT	Mass product
Power Supply Rating	3.3 Vdc from host equipment
Modulation Type	64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode
Modulation Technology	OFDM
Transfer Rate	802.11a: up to 54Mbps 802.11n: up to 300Mbps 802.11ac: up to 866.7 Mbps
Operating Frequency	5.18 GHz ~ 5.24 GHz 5.745 GHz ~ 5.825 GHz
Number of Channel	802.11a, 802.11n (HT20), 802.11ac (VHT20): 9 802.11n (HT40), 802.11ac (VHT40): 4 802.11ac (VHT80): 2
Output Power	5.18 GHz ~ 5.24 GHz : 53.546 mW (17.29 dBm), EIRP: 106.838 mW (20.29 dBm) 5.745 GHz ~ 5.825 GHz : 302.504 mW (24.81 dBm)
EUT Category	Indoor & Outdoor Access Point

Note:

1. Simultaneously transmission condition.

Condition	Technology	
1	WLAN (2.4 GHz)	WLAN (5 GHz)

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

2. The EUT has below SKUs designs as following table:

SKU No.	Description
A	2.4GHz With Jump
B	2.4GHz Without Jump

Note: From the above SKUs, **SKU No.A** was selected as representative SKU for the test and its data was recorded in this report.

3. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna NO.	RF Chain NO.	Brand	Model	Antenna Net Gain(dBi)	Frequency range	Antenna Type	Connector Type	Cable Length	Cable Loss(dB)	excluding cable loss Antenna Gain(dBi)
1	0	ARISTO TLE	RFA-25-F17M3-B-10069	2 3	2.4~2.4835GHz 5.15~5.85GHz	Dipole	R-SMA	10cm	0.5	2.5 3.5
2	1	ARISTO TLE	RFA-25-F17M3-B-10069	2 3	2.4~2.4835GHz 5.15~5.85GHz	Dipole	R-SMA	10cm	0.5	2.5 3.5
3	2	ARISTO TLE	RFA-25-F17M3-B-10069	2 3	2.4~2.4835GHz 5.15~5.85GHz	Dipole	R-SMA	10cm	0.5	2.5 3.5
4	3	ARISTO TLE	RFA-25-F17M3-B-10069	2 3	2.4~2.4835GHz 5.15~5.85GHz	Dipole	R-SMA	10cm	0.5	2.5 3.5

* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

2. The EUT incorporates a MIMO function:

5 GHz Band		
Modulation Mode	TX & RX Configuration	
802.11a	2TX	2RX
802.11n (HT20)	2TX	2RX
802.11n (HT40)	2TX	2RX
802.11ac (VHT20)	2TX	2RX
802.11ac (VHT40)	2TX	2RX
802.11ac (VHT80)	2TX	2RX

Note:

- The modulation and bandwidth are similar for 802.11n mode for 20 MHz (40 MHz), 802.11ac mode for 20 MHz (40 MHz), therefore the manufacturer will control the power for 802.11n mode is the same as the 802.11ac or more lower than it and investigated worst case to representative mode in test report.

3.3 Channel List

FOR 5180 ~ 5240MHz

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
42	5210 MHz

FOR 5745 ~ 5825 MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
151	5755 MHz	159	5795 MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
155	5775 MHz

3.4 Test Mode Applicability and Tested Channel Detail

Following channel(s) was (were) selected for the final test as listed below:

Test Item	Mode	Tested Channel	Modulation	Data Rate Parameter
RF Output Power	802.11a	36, 40, 48, 149, 157, 165	BPSK	6Mb/s
	802.11ac (VHT20)	36, 40, 48, 149, 157, 165	BPSK	MCS0
	802.11ac (VHT40)	38, 46, 151, 159	BPSK	MCS0
	802.11ac (VHT80)	42, 155	BPSK	MCS0
6 dB Bandwidth	802.11a	149, 157, 165	BPSK	6Mb/s
	802.11ac (VHT20)	149, 157, 165	BPSK	MCS0
	802.11ac (VHT40)	151, 159	BPSK	MCS0
	802.11ac (VHT80)	155	BPSK	MCS0
Occupied Bandwidth / Power Spectral Density	802.11a	36, 40, 48, 149, 157, 165	BPSK	6Mb/s
	802.11ac (VHT20)	36, 40, 48, 149, 157, 165	BPSK	MCS0
	802.11ac (VHT40)	38, 46, 151, 159	BPSK	MCS0
	802.11ac (VHT80)	42, 155	BPSK	MCS0
Frequency Stability	802.11a	36	un-modulation	-
AC Power Conducted Emissions	802.11ac (VHT40)	159	BPSK	MCS0
Unwanted Emissions below 1 GHz	802.11ac (VHT40)	159	BPSK	MCS0
Unwanted Emissions above 1 GHz	802.11a	36, 40, 48, 149, 157, 165	BPSK	6Mb/s
	802.11ac (VHT20)	36, 40, 48, 149, 157, 165	BPSK	MCS0
	802.11ac (VHT40)	38, 46, 151, 159	BPSK	MCS0
	802.11ac (VHT80)	42, 155	BPSK	MCS0


3.5 Duty Cycle of Test Signal

802.11a: Duty cycle = $1.397 \text{ ms} / 1.447 \text{ ms} \times 100\% = 96.5\%$, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.15 \text{ dB}$


802.11ac (VHT20): Duty cycle = $1.317 \text{ ms} / 1.367 \text{ ms} \times 100\% = 96.3\%$, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.16 \text{ dB}$

802.11ac (VHT40): Duty cycle = $0.657 \text{ ms} / 0.707 \text{ ms} \times 100\% = 92.9\%$, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.32 \text{ dB}$


802.11ac (VHT80): Duty cycle = $0.325 \text{ ms} / 0.375 \text{ ms} \times 100\% = 86.7\%$, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.62 \text{ dB}$

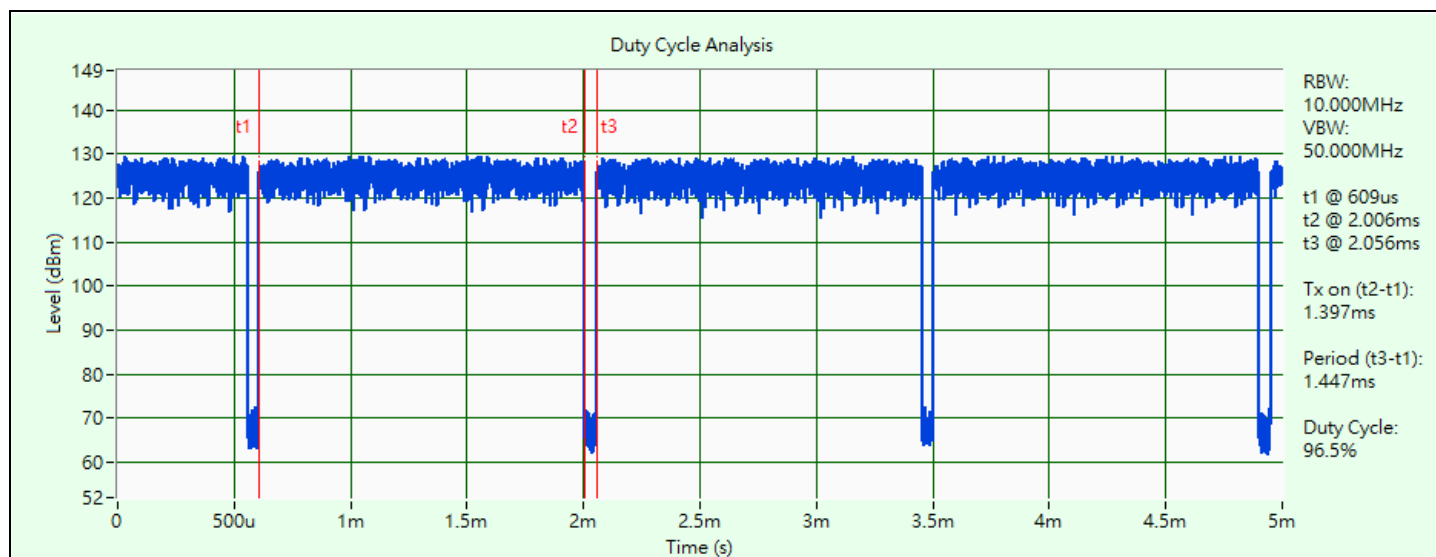


802.11a

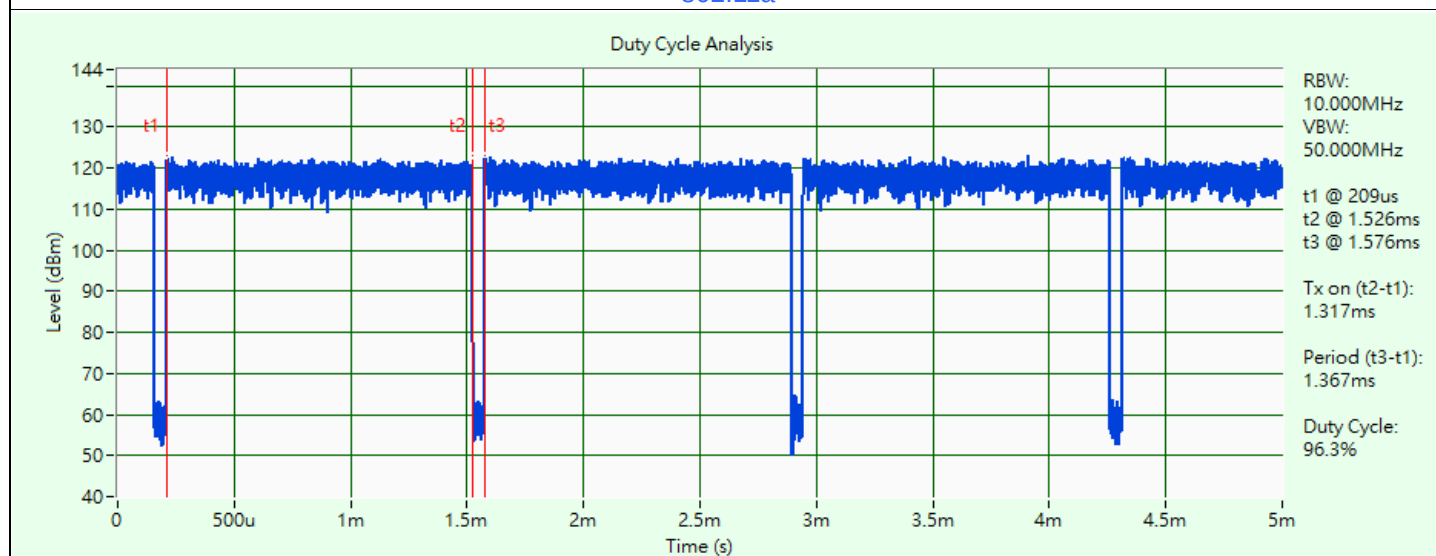

802.11ac (VHT20)

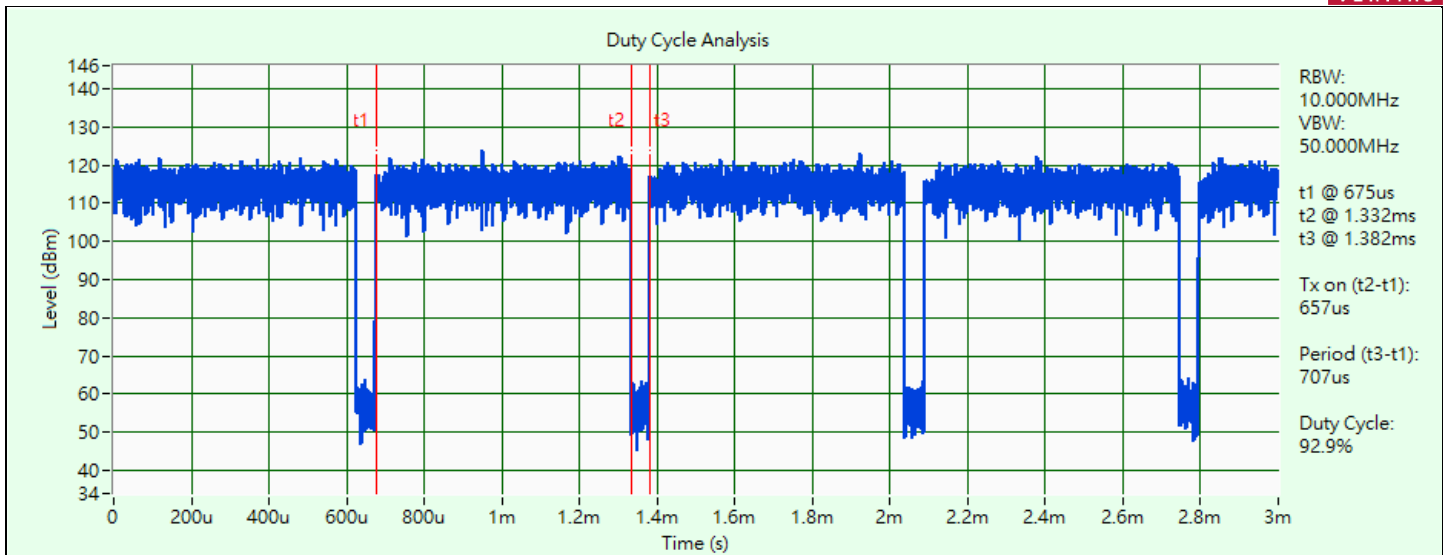

802.11ac (VHT40)

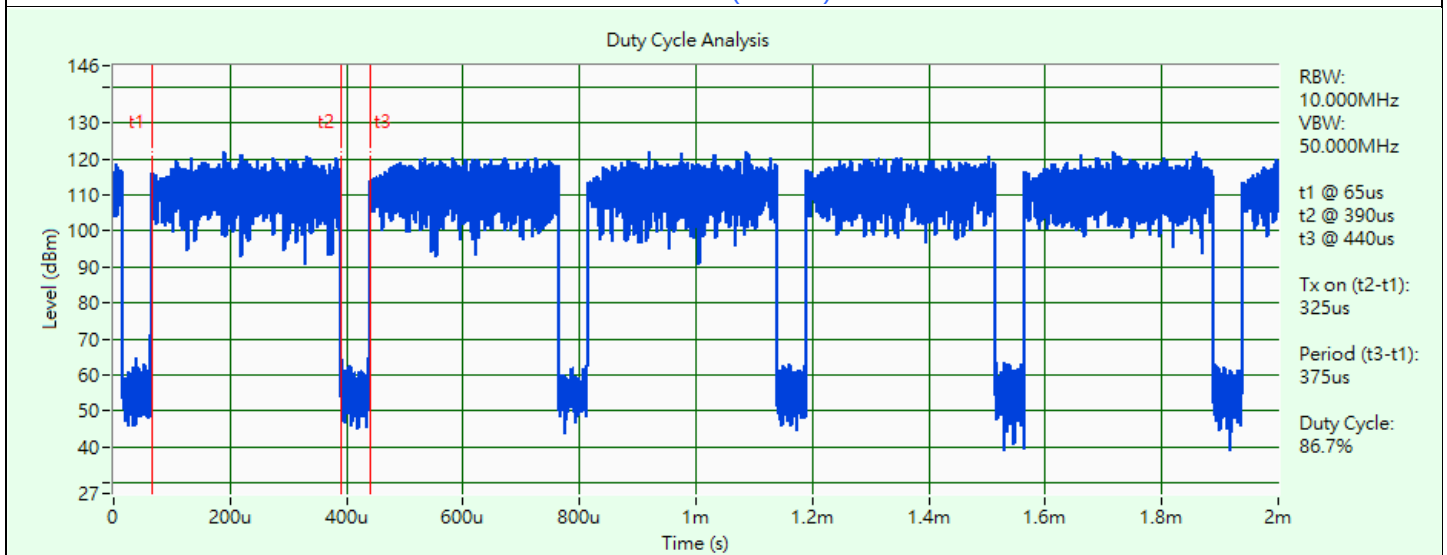


802.11ac (VHT80)

3.6 Test Program Used and Operation Descriptions

Controlling software (MT7615 QA 0.0.2.0) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

3.7 Connection Diagram of EUT and Peripheral Devices

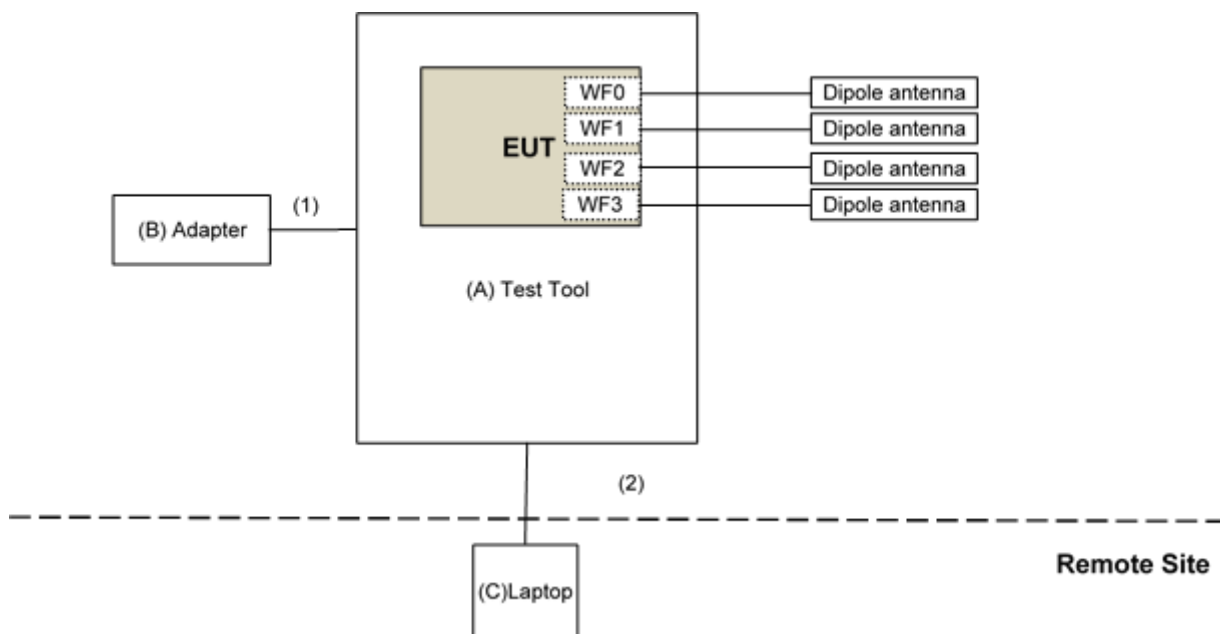

3.8 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Test Tool	Multi-Tech Systems Inc.	N/A	N/A	N/A	Supplied by applicant
B	Adapter	POWERTRON Electronics Corp.	PA1024-120IB200	N/A	N/A	Supplied by applicant
C	Laptop	Lenovo	20U5S01X00 L14	PF-28LKK7	N/A	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	DC Cable	1	1.5	No	0	Supplied by applicant
2	RJ45 Cable	1	10	No	0	Provided by Lab

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Power Meter Anritsu	ML2495A	1529002	2022/6/22	2023/6/21
Pulse Power Sensor Anritsu	MA2411B	1726434	2022/6/22	2023/6/21
Attenuator WOKEN	MDCS18N-10	MDCS18N-10-01	2022/4/5	2023/4/4
Software	ADT_RF Test Software V6.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2023/2/12

4.2 Power Spectral Density

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Attenuator WOKEN	MDCS18N-10	MDCS18N-10-01	2022/4/5	2023/4/4
Software	ADT_RF Test Software V6.6.5.4	N/A	N/A	N/A
Spectrum Analyzer Keysight	N9020B	MY60112409	2022/3/11	2023/3/10

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2023/2/12

4.3 6 dB Bandwidth

Refer to section 4.2 to get information of the instruments.

4.4 Occupied Bandwidth

Refer to section 4.2 to get information of the instruments.

4.5 Frequency Stability

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Attenuator WOKEN	MDCS18N-10	MDCS18N-10-01	2022/4/5	2023/4/4
DC POWER SUPPLY Topward	6603D	795558	N/A	N/A
Software	ADT_RF Test Software V6.6.5.4	N/A	N/A	N/A
Spectrum Analyzer Keysight	N9020B	MY60112409	2022/3/11	2023/3/10
Temperature & Humidity Chamber Giant Force	GTH-150-40-SP-AR	MAA0812-008	2022/12/26	2023/12/25
True RMS Clamp Meter Fluke	325	31130711WS	2022/6/9	2023/6/8

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2023/2/12

4.6 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohm terminal resistance	N/A	EMC-01	2022/9/27	2023/9/26
Fixed attenuator STI	STI02-2200-10	005	2022/8/24	2023/8/23
LISN R&S	ESH3-Z5	848773/004	2022/10/18	2023/10/17
RF Coaxial Cable JYEBO	5D-FB	COCCAB-001	2022/8/24	2023/8/23
Software BVADT	BVADT_Cond_V7.3.7.4	N/A	N/A	N/A
TEST RECEIVER R&S	ESCS 30	847124/029	2022/10/14	2023/10/13

Notes:

1. The test was performed in Conduction 1
2. Tested Date: 2023/2/15

4.7 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	N/A	N/A
Fix tool for Boresight antenna tower BV	FBA-01	FBA_SIP01	N/A	N/A
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-3-01	2022/9/14	2023/9/13
LOOP ANTENNA Electro-Metrics	EM-6879	264	2022/3/18	2023/3/17
Pre_Amplifier Agilent	8447D	2944A10636	2022/3/19	2023/3/18
Pre_Amplifier Mini-Circuits	ZFL-1000VH2	QA0838008	2022/10/4	2023/10/3
RF Coaxial Cable COMMATE/PEWC	8D	966-3-2	2022/2/26	2023/2/25
		966-3-3	2022/2/26	2023/2/25
		966-4-1	2022/3/8	2023/3/7
RF Coaxial Cable JYEBO	5D-FB	LOOPCAB-001	2022/12/19	2023/12/18
		LOOPCAB-002	2022/12/19	2023/12/18
Software	ADT_Radiated_V8.7.08	N/A	N/A	N/A
Spectrum Analyzer KEYSIGHT	N9030B	MY57142938	2022/4/26	2023/4/25
Test Receiver KEYSIGHT	N9038A	MY59050100	2022/6/20	2023/6/19
Trilog Broadband Antenna Schwarzbeck	VULB 9168	9168-361	2022/10/21	2023/10/20

Notes:

1. The test was performed in 966 Chamber No. 3.
2. Tested Date: 2023/2/15

4.8 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	N/A	N/A
Fix tool for Boresight antenna tower BV	FBA-01	FBA_SIP01	N/A	N/A
Horn Antenna Schwarzbeck	BBHA 9170	9170-739	2022/11/13	2023/11/12
	BBHA9120-D	9120D-406	2022/11/13	2023/11/12
Pre_Amplifier EMCI	EMC12630SE	980384	2022/12/28	2023/12/27
	EMC184045SE	980387	2022/12/28	2023/12/27
RF Cable EMCI	EMC104-SM-SM-6000	210201	2022/5/10	2023/5/9
RF Cable-Frequency range: 1- 40GHz EMCI	EMC102-KM-KM-1200	160924	2022/12/28	2023/12/27
RF Coaxial Cable EMCI	EMC-KM-KM-4000	200214	2022/3/8	2023/3/7
	EMC104-SM-SM-1500	180504	2022/4/25	2023/4/24
	EMC104-SM-SM-2000	180601	2022/6/6	2023/6/5
Software	ADT_Radiated_V8.7.08	N/A	N/A	N/A
Spectrum Analyzer KEYSIGHT	N9030B	MY57142938	2022/4/26	2023/4/25
Test Receiver KEYSIGHT	N9038A	MY59050100	2022/6/20	2023/6/19

Notes:

1. The test was performed in 966 Chamber No. 3.
2. Tested Date: 2023/2/1 ~ 2023/2/15

5 Limits of Test Items

5.1 RF Output Power

Operation Band	EUT Category	Limit
U-NII-1	Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p $\leq$ 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
	Fixed point-to-point Access Point	1 Watt (30 dBm)
	Indoor Access Point	1 Watt (30 dBm)
	Mobile and Portable client device	250mW (24 dBm)

Operation Band	Limit
U-NII-3	1 Watt (30 dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less, for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

5.2 Power Spectral Density

Operation Band	EUT Category	Limit
U-NII-1	Outdoor Access Point	17 dBm/MHz
	Fixed point-to-point Access Point	
	Indoor Access Point	
	Mobile and Portable client device	11 dBm/MHz

Operation Band	Limit
U-NII-3	30 dBm/500 kHz

5.3 6 dB Bandwidth

Within the 5.725-5.850 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

5.4 Occupied Bandwidth

The results are for reference only.

5.5 Frequency Stability

The frequency of the carrier signal shall be maintained within band of operation.

5.6 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.7 Unwanted Emissions below 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

5.8 Unwanted Emissions above 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To	Limit	
789033 D02 General UNII Test Procedure New Rules v02r01	Field Strength at 3 m	
	PK: 74 (dBμV/m)	AV: 54 (dBμV/m)

For transmitters operating in the 5.15-5.25 GHz band:

Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
15.407(b)(1)	PK: -27 (dBm/MHz)	PK: 68.2 (dBμV/m)

For transmitters operating in the 5.725-5.850 GHz band:

Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
15.407(b)(4)(i)	PK: -27 (dBm/MHz) ^{*1} PK: 10 (dBm/MHz) ^{*2} PK: 15.6 (dBm/MHz) ^{*3} PK: 27 (dBm/MHz) ^{*4}	PK: 68.2 (dBμV/m) ^{*1} PK: 105.2 (dBμV/m) ^{*2} PK: 110.8 (dBμV/m) ^{*3} PK: 122.2 (dBμV/m) ^{*4}

^{*1} beyond 75 MHz or more above of the band edge.

^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.

^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.

^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.


Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

6 Test Arrangements

6.1 RF Output Power

6.1.1 Test Setup




6.1.2 Test Procedure

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst and set the detector to average. Duty factor is not added to measured value.

6.2 Power Spectral Density

6.2.1 Test Setup



6.2.2 Test Procedure

For specified measurement bandwidth 1 MHz:

Method SA-2

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz, Set VBW $\geq$ 3 MHz, Detector = RMS
- Sweep points $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging mode.
- Use the peak search function on the instrument to find the peak of the spectrum and record its value.
- Record the max value and add $10 \log (1/\text{duty cycle})$.


For specified measurement bandwidth 500 kHz:

Method SA-2

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 300 kHz, Set VBW $\geq$ 1 MHz, Detector = RMS
- Scale the observed power level to an equivalent value in 500 kHz by adjusting (increasing) the measured power by a bandwidth correction factor (BWCF) where $\text{BWCF} = 10\log(500 \text{ kHz}/300 \text{ kHz})$
- Sweep points $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging mode.
- Use the peak search function on the instrument to find the peak of the spectrum and record its value.
- Record the max value and add $10 \log (1/\text{duty cycle})$.

6.3 6 dB Bandwidth

6.3.1 Test Setup




6.3.2 Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.4 Occupied Bandwidth

6.4.1 Test Setup




6.4.2 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to Sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean power of a given emission.

6.5 Frequency Stability

6.5.1 Test Setup

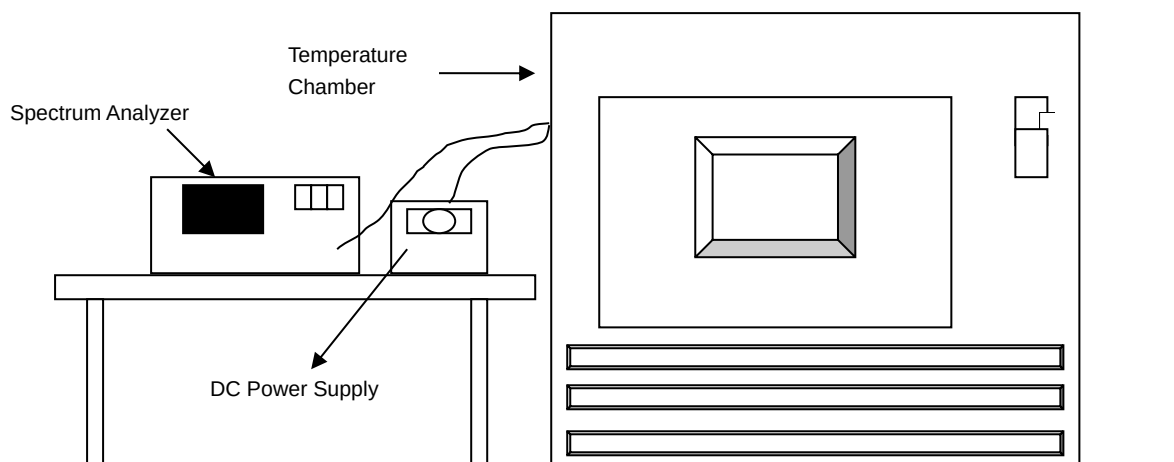


6.5.2 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 Minutes.
- Repeat step (d) with the temperature chamber set to the next desired temperature until measurements down to the lowest specified temperature have been completed.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 Minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

6.6 AC Power Conducted Emissions

6.6.1 Test Setup

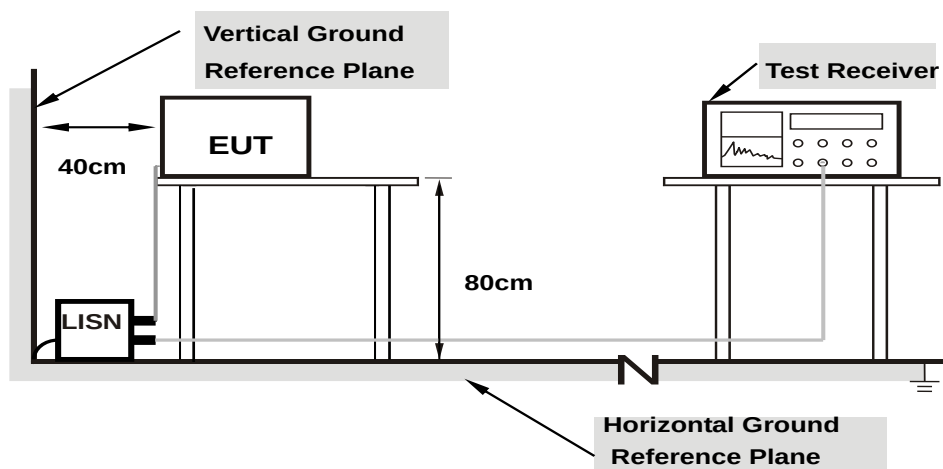

Note: 1. Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.6.2 Test Procedure


- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.


6.7 Unwanted Emissions below 1 GHz

6.7.1 Test Setup

For Radiated emission below 30 MHz

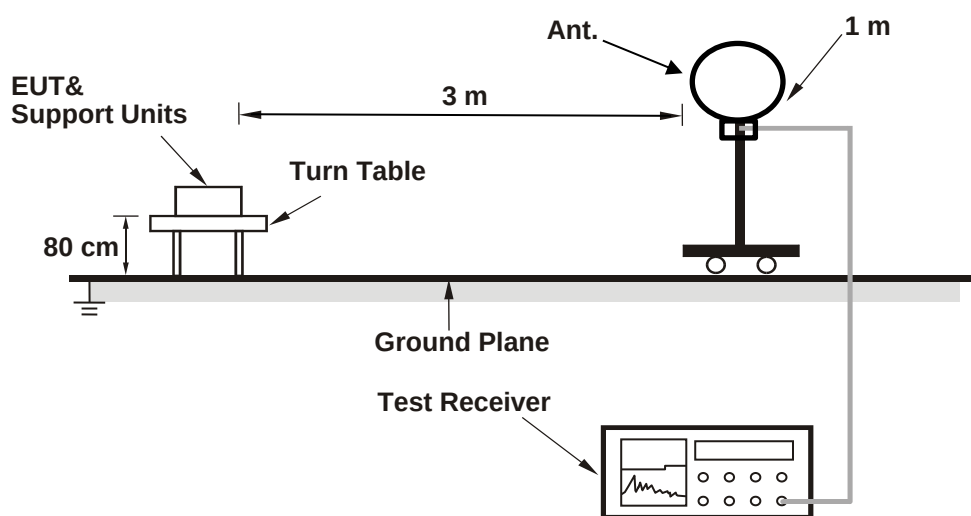

For Radiated emission above 30 MHz

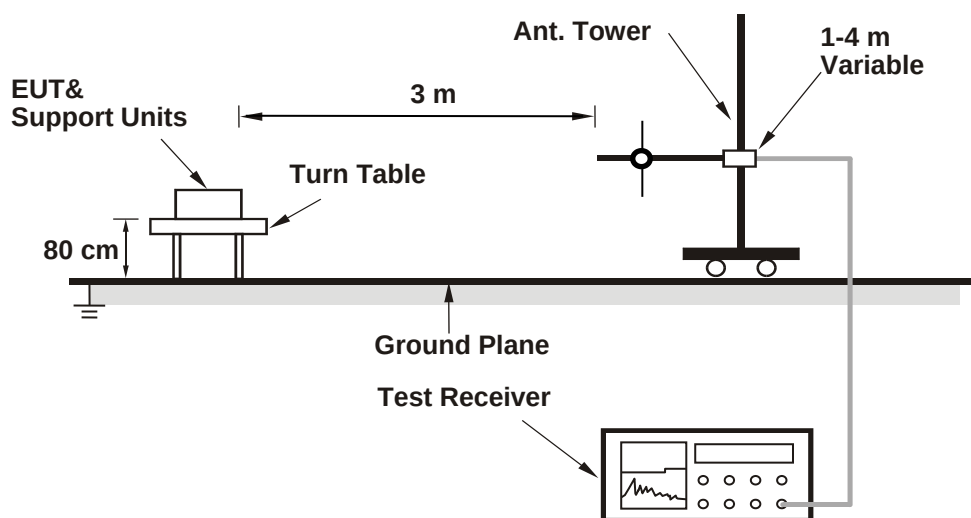

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.7.2 Test Procedure

For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 30 MHz


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

6.8 Unwanted Emissions above 1 GHz

6.8.1 Test Setup

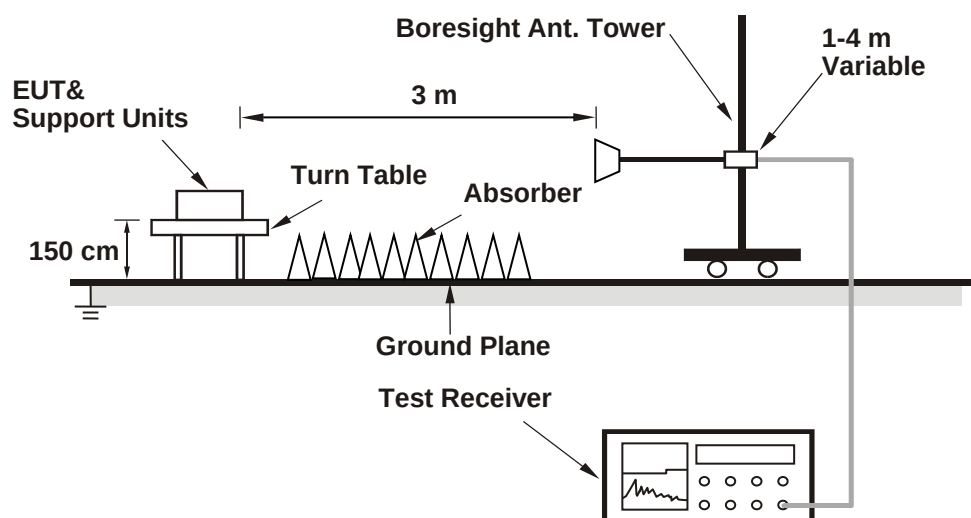

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.8.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

7 Test Results of Test Item

7.1 RF Output Power

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Katina Lu
--------------	----------------	---------------------------	--------------	------------	-----------

802.11a

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Maximum Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1								
36	5180	14.73	13.73	53.321	17.27	30	3	106.389	20.27	21	Pass
40	5200	14.89	13.44	52.912	17.24	30	3	105.573	20.24	21	Pass
48	5240	14.68	13.47	51.61	17.13	30	3	102.975	20.13	21	Pass

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
149	5745	21.78	20.76	269.785	24.31	30	Pass
157	5785	21.91	20.72	273.271	24.37	30	Pass
165	5825	21.97	20.68	274.348	24.38	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. For U-NII-1, the maximum gain is 3 dBi < 6 dBi, so the output power limit shall not be reduced.
3. For U-NII-3, the maximum gain is 3 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11ac (VHT20)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Maximum Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1								
36	5180	14.78	13.55	52.707	17.22	30	3	105.164	20.22	21	Pass
40	5200	14.69	13.45	51.575	17.12	30	3	102.906	20.12	21	Pass
48	5240	14.71	13.42	51.559	17.12	30	3	102.874	20.12	21	Pass

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
149	5745	21.81	20.68	268.655	24.29	30	Pass
157	5785	21.88	20.54	267.41	24.27	30	Pass
165	5825	21.98	20.55	271.262	24.33	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. For U-NII-1, the maximum gain is 3 dBi < 6 dBi, so the output power limit shall not be reduced.
3. For U-NII-3, the maximum gain is 3 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11ac (VHT40)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Maximum Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1								
38	5190	14.92	13.42	53.024	17.24	30	3	105.797	20.24	21	Pass
46	5230	13.79	13.31	45.362	16.57	30	3	90.509	19.57	21	Pass

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
151	5755	21.37	19.93	235.489	23.72	30	Pass
159	5795	22.36	21.15	302.504	24.81	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. For U-NII-1, the maximum gain is 3 dBi < 6 dBi, so the output power limit shall not be reduced.
3. For U-NII-3, the maximum gain is 3 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11ac (VHT80)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Maximum Gain (dBi)	EIRP (mW)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
		Chain 0	Chain 1								
42	5210	14.87	13.59	53.546	17.29	30	3	106.838	20.29	21	Pass

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
155	5775	15.88	14.71	68.306	18.34	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. For U-NII-1, the maximum gain is 3 dBi < 6 dBi, so the output power limit shall not be reduced.
3. For U-NII-3, the maximum gain is 3 dBi < 6 dBi, so the output power limit shall not be reduced.

7.2 Power Spectral Density

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Katina Lu
--------------	----------------	---------------------------	--------------	------------	-----------

802.11a

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1				
36	5180	5.41	5.50	0.15	8.62	16.99	Pass
40	5200	9.65	10.14	0.15	13.06	16.99	Pass
48	5240	8.61	8.97	0.15	11.95	16.99	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-1, the directional gain is 6.01 dBi > 6dBi, so the power density limit shall be reduced to $17-(6.01-6) = 16.99$ dBm/MHz.

802.11ac (VHT20)

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1				
36	5180	5.51	5.72	0.16	8.79	16.99	Pass
40	5200	8.88	9.86	0.16	12.57	16.99	Pass
48	5240	7.92	8.78	0.16	11.54	16.99	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-1, the directional gain is 6.01 dBi > 6dBi, so the power density limit shall be reduced to $17-(6.01-6) = 16.99$ dBm/MHz.

802.11ac (VHT40)

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1				
38	5190	0.69	1.41	0.32	4.40	16.99	Pass
46	5230	4.13	4.87	0.32	7.85	16.99	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-1, the directional gain is 6.01 dBi > 6dBi, so the power density limit shall be reduced to $17-(6.01-6) = 16.99$ dBm/MHz.

802.11ac (VHT80)

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1				
42	5210	-3.79	-3.32	0.62	0.08	16.99	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-1, the directional gain is 6.01 dBi > 6dBi, so the power density limit shall be reduced to $17 - (6.01 - 6) = 16.99$ dBm/MHz.

802.11a

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/300kHz)		Total PSD w/o Duty Factor (dBm/300kHz)	Duty Factor (dB)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1					
149	5745	4.41	3.74	7.1	0.15	9.47	29.99	Pass
157	5785	4.34	3.42	6.91	0.15	9.28	29.99	Pass
165	5825	4.40	3.48	6.97	0.15	9.34	29.99	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-3, the directional gain is 6.01 dBi > 6 dBi, so the power density limit shall be reduced to $30 - (6.01 - 6) = 29.99$ dBm/500kHz.

802.11ac (VHT20)

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/300kHz)		Total PSD w/o Duty Factor (dBm/300kHz)	Duty Factor (dB)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1					
149	5745	4.17	3.82	7.01	0.16	9.39	29.99	Pass
157	5785	3.93	3.77	6.86	0.16	9.24	29.99	Pass
165	5825	3.84	3.87	6.87	0.16	9.25	29.99	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-3, the directional gain is 6.01 dBi > 6 dBi, so the power density limit shall be reduced to $30 - (6.01 - 6) = 29.99$ dBm/500kHz.

802.11ac (VHT40)

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/300kHz)		Total PSD w/o Duty Factor (dBm/300kHz)	Duty Factor (dB)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1					
151	5755	0.05	-0.46	2.81	0.32	5.35	29.99	Pass
159	5795	1.15	0.86	4.02	0.32	6.56	29.99	Pass

Notes:


1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-3, the directional gain is 6.01 dBi > 6 dBi, so the power density limit shall be reduced to 30-(6.01-6) = 29.99 dBm/500kHz.

802.11ac (VHT80)







Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/300kHz)		Total PSD w/o Duty Factor (dBm/300kHz)	Duty Factor (dB)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1					
155	5775	-8.19	-8.89	-5.52	0.62	-2.68	29.99	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-3, the directional gain is 6.01 dBi > 6 dBi, so the power density limit shall be reduced to 30-(6.01-6) = 29.99 dBm/500kHz.

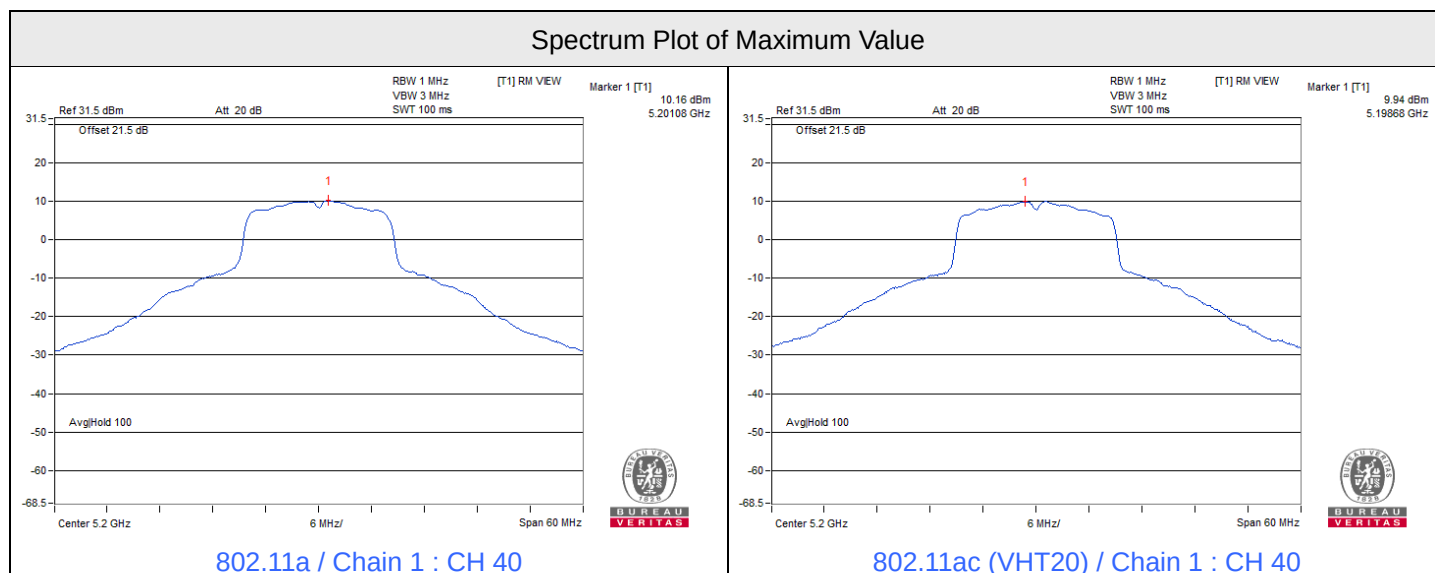

Spectrum Plot of Maximum Value

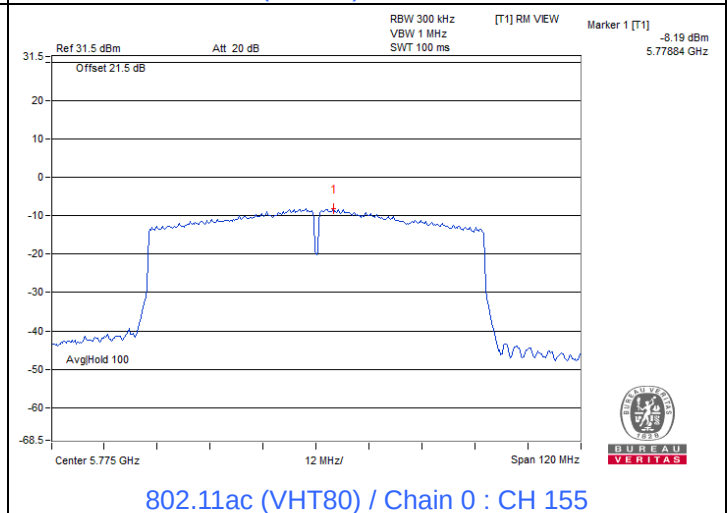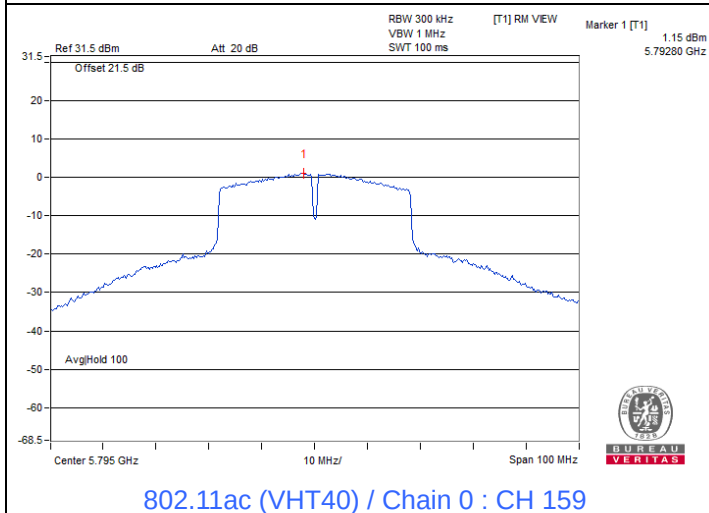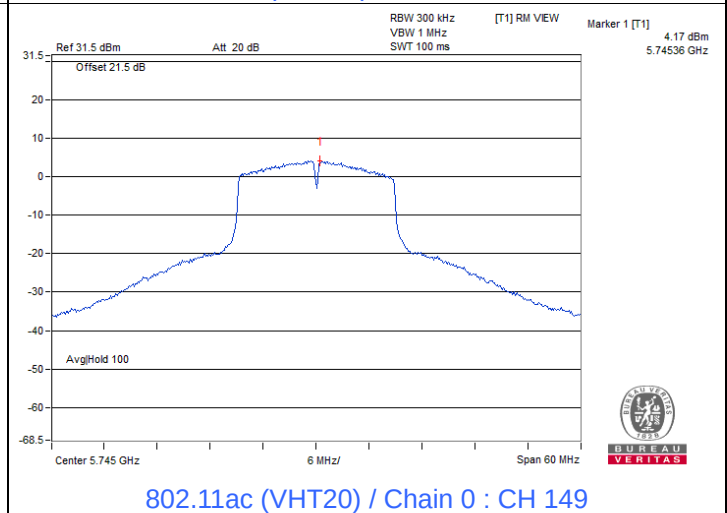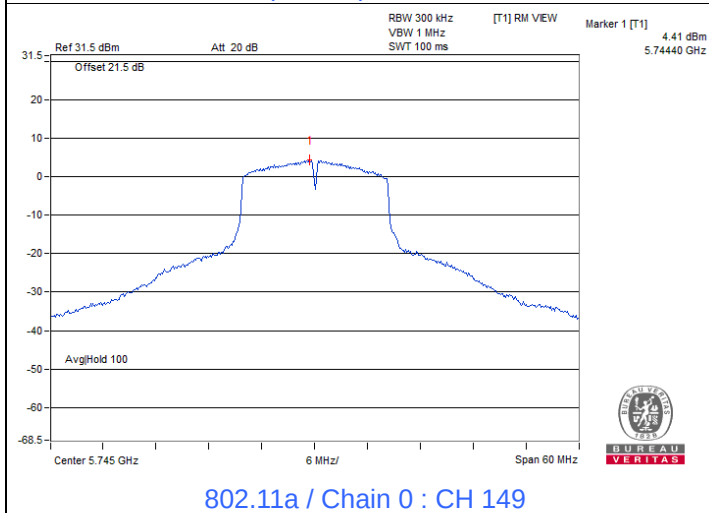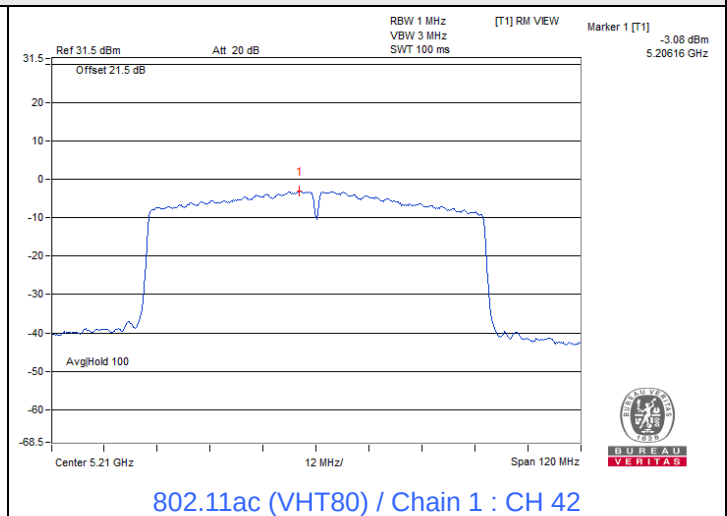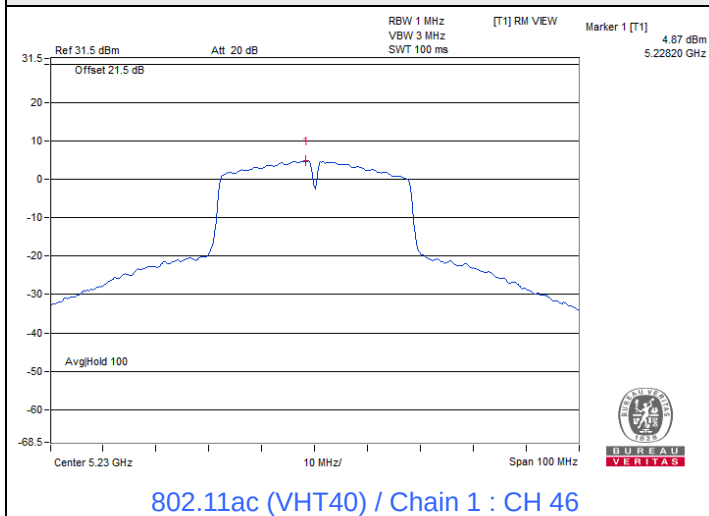

7.3 6 dB Bandwidth

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Katina Lu
--------------	----------------	---------------------------	--------------	------------	-----------

802.11a

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
149	5745	14.08	15.03	0.5	Pass
157	5785	15.12	15.07	0.5	Pass
165	5825	15.01	15.04	0.5	Pass

802.11ac (VHT20)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
149	5745	15.06	15.27	0.5	Pass
157	5785	15.02	13.90	0.5	Pass
165	5825	15.07	14.06	0.5	Pass





802.11ac (VHT40)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
151	5755	32.53	35.03	0.5	Pass
159	5795	33.80	35.02	0.5	Pass

802.11ac (VHT80)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
155	5775	73.83	72.63	0.5	Pass

Spectrum Plot of Minimum Value

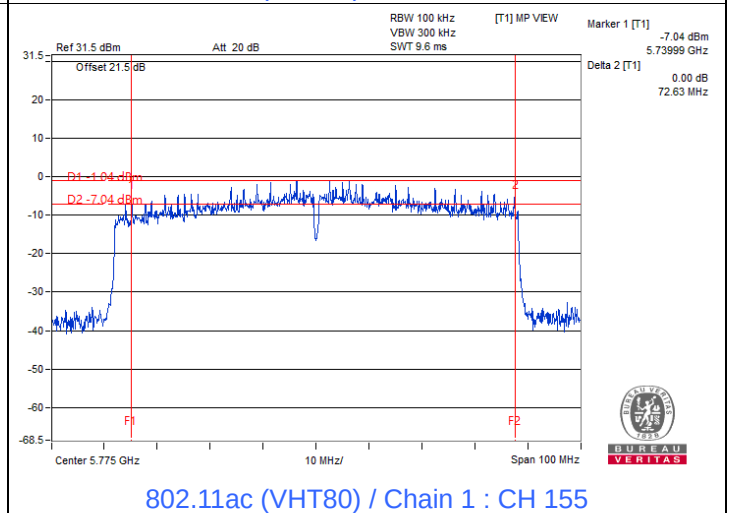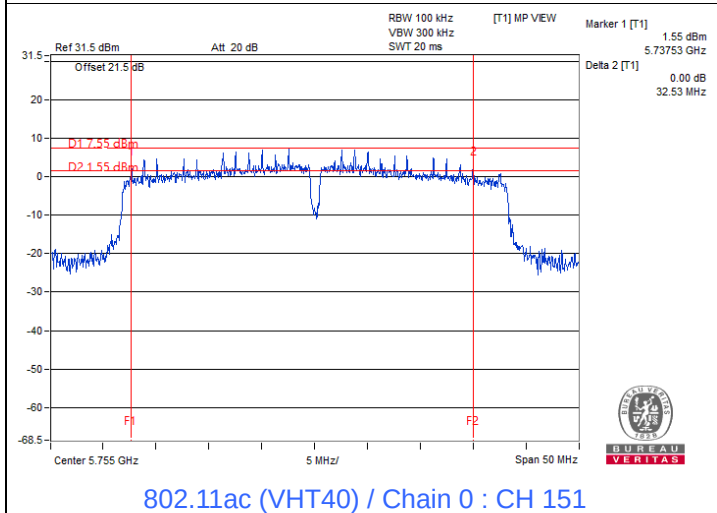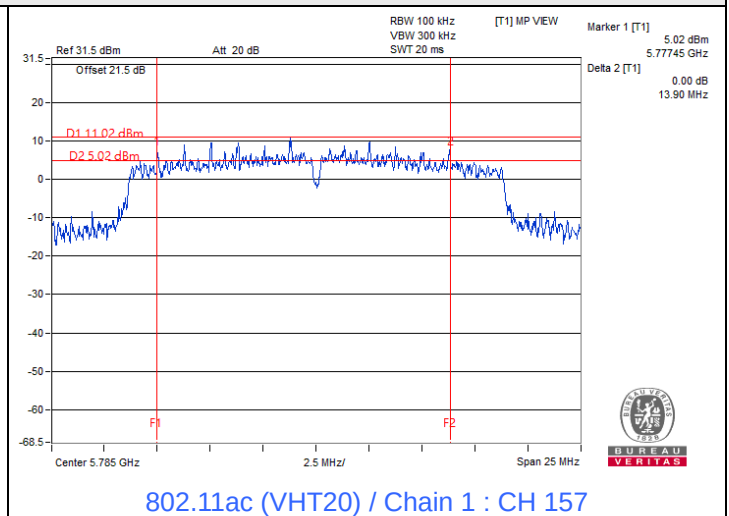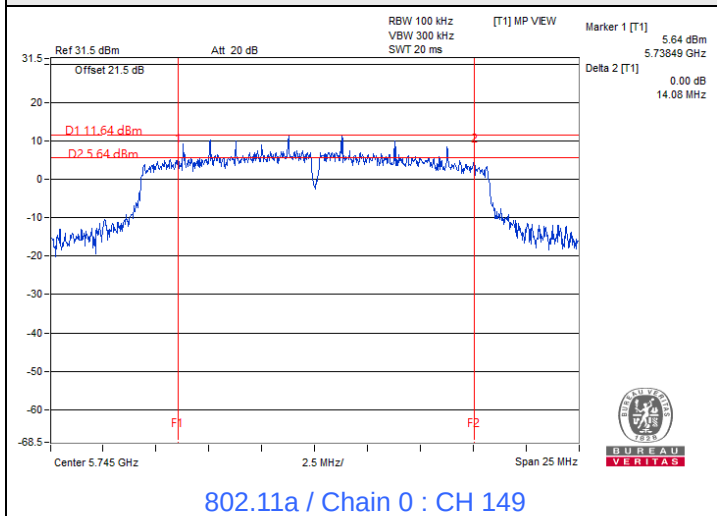

7.4 Occupied Bandwidth

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Katina Lu
--------------	----------------	---------------------------	--------------	------------	-----------

802.11a

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	16.50	16.56
40	5200	18.48	25.80
48	5240	16.74	17.58
149	5745	17.52	19.80
157	5785	17.76	19.74
165	5825	17.82	22.26

802.11ac (VHT20)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	17.70	17.64
40	5200	19.74	26.70
48	5240	17.82	18.90
149	5745	18.48	20.64
157	5785	18.42	22.68
165	5825	18.54	24.24


802.11ac (VHT40)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
38	5190	36.12	35.88
46	5230	36.36	36.72
151	5755	36.72	39.12
159	5795	40.68	48.72


802.11ac (VHT80)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
42	5210	74.88	75.12
155	5775	75.12	74.88


Spectrum Plot of Maximum Value

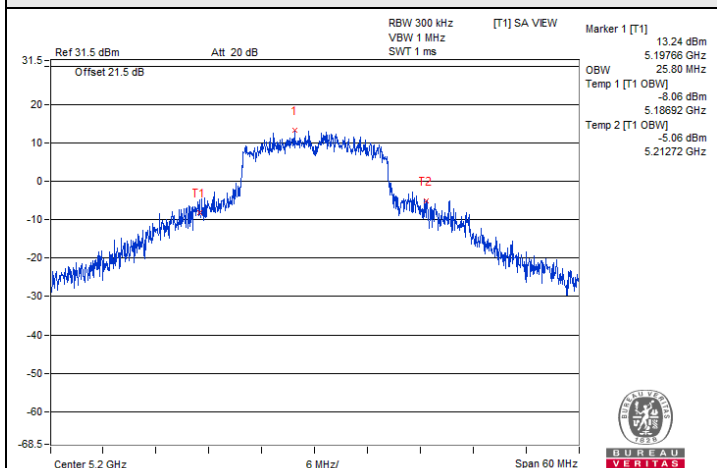


802.11a / Chain 1 : CH 40

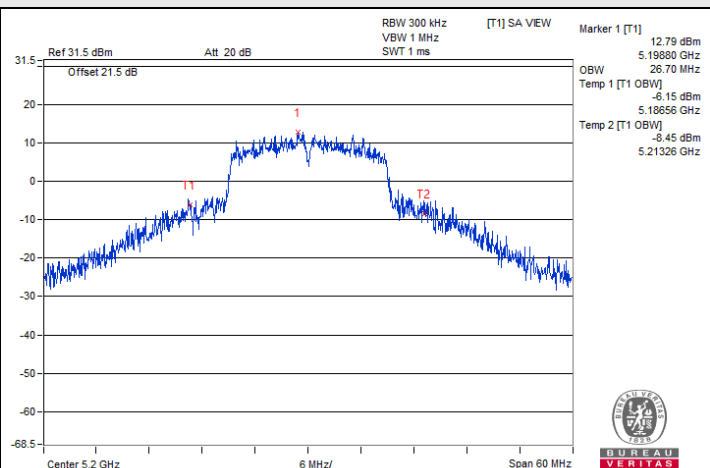

802.11ac (VHT20) / Chain 1 : CH 40

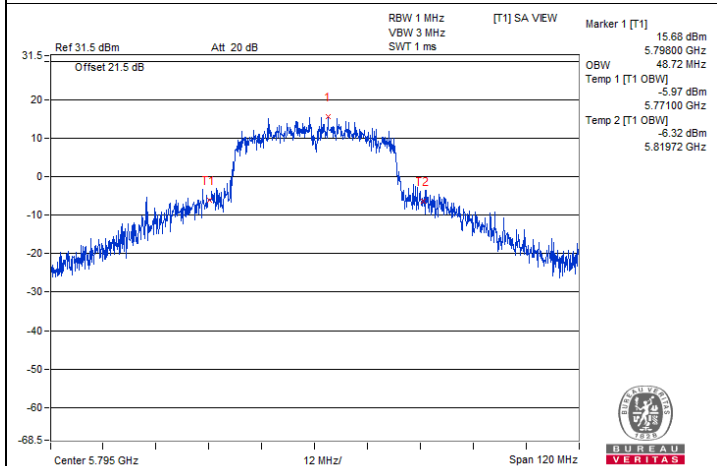


802.11ac (VHT40) / Chain 1 : CH 159

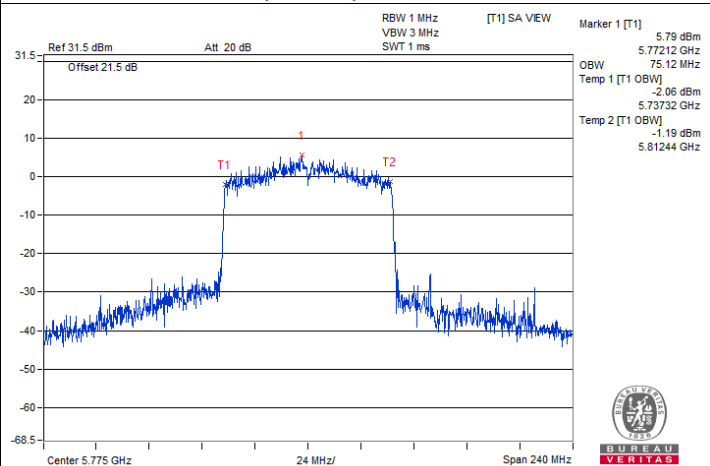


802.11ac (VHT80) / Chain 0 : CH 155

Spectrum Plot for nearby DFS band (DFS is required, if 99% OCP straddle into U-NII-2A)

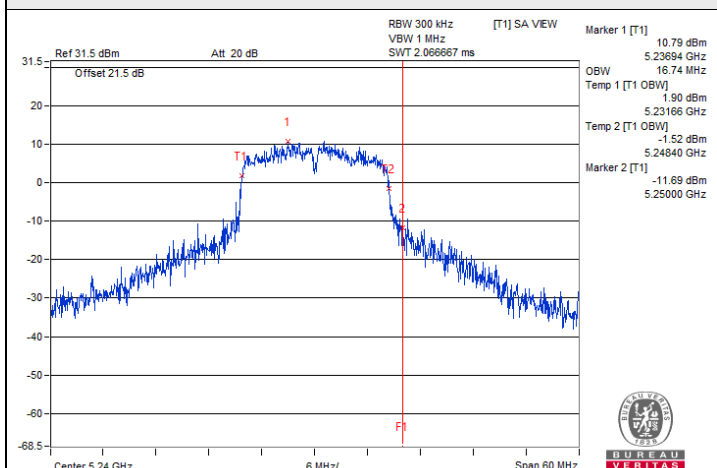


802.11a / Chain 0 : CH 48

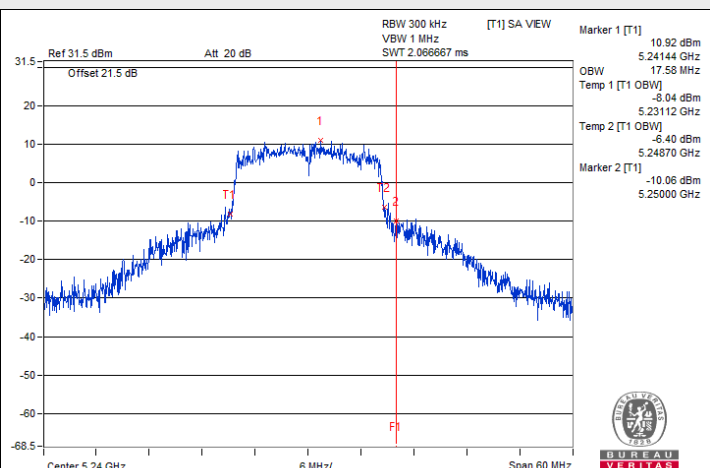


802.11a / Chain 1 : CH 48


Spectrum Plot for nearby DFS band
(DFS is required, if 99% OCP straddle into U-NII-2A)

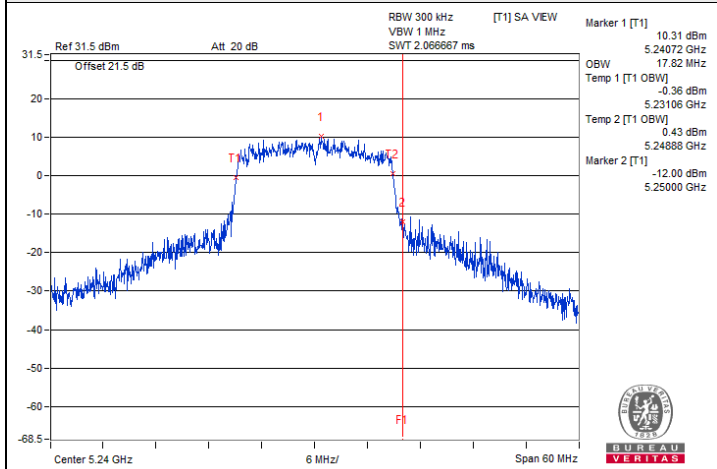


802.11ac (VHT20) / Chain 0 : CH 48

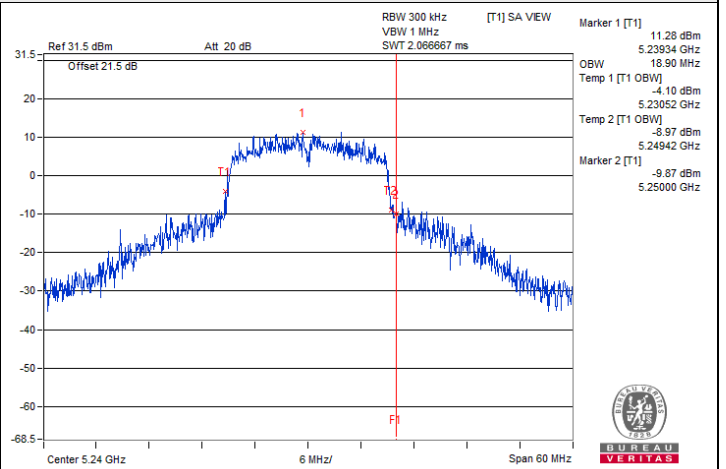


802.11ac (VHT20) / Chain 1 : CH 48

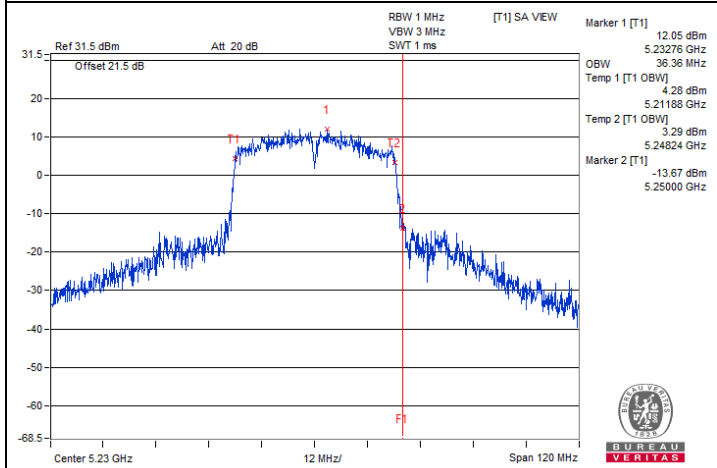


802.11ac (VHT40) / Chain 0 : CH 46

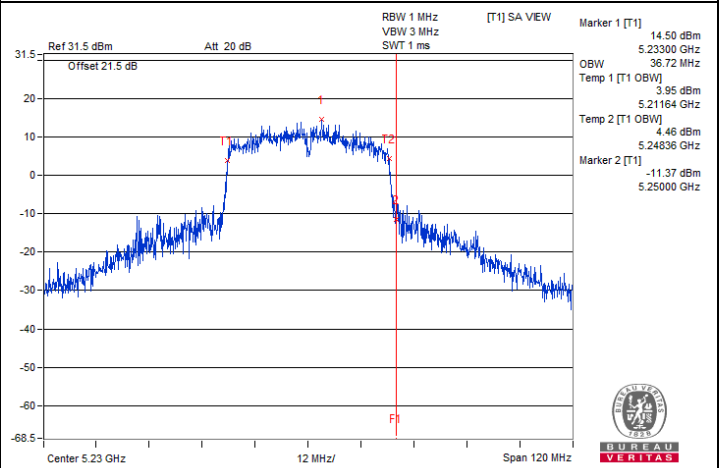

802.11ac (VHT40) / Chain 1 : CH 46

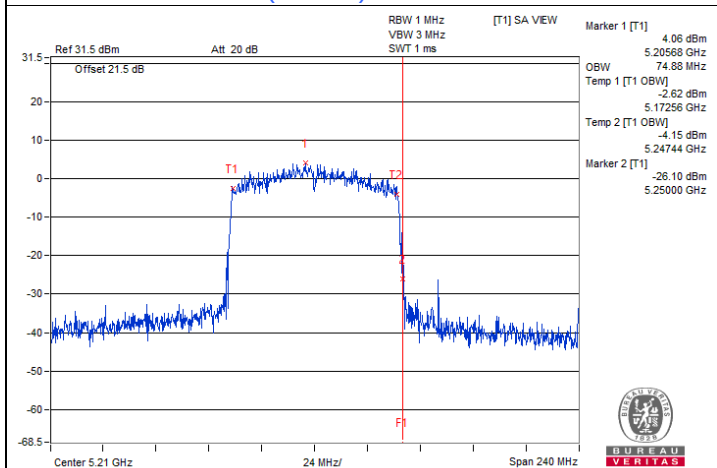


802.11ac (VHT80) / Chain 0 : CH 42

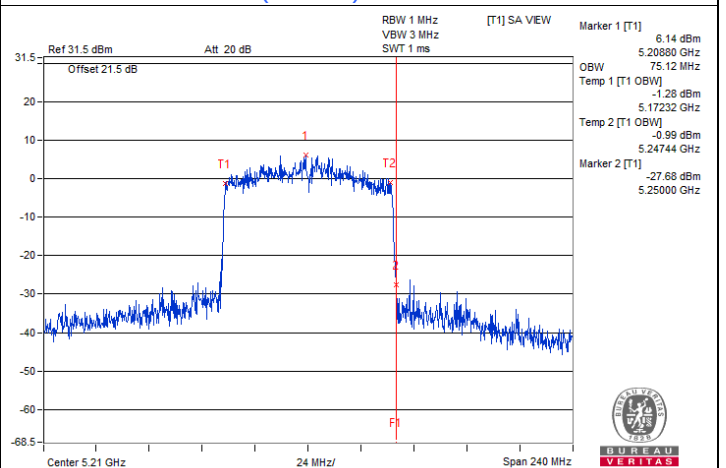


802.11ac (VHT80) / Chain 1 : CH 42


Spectrum Plot for nearby DFS band (DFS is required, if 99% OCP straddle into U-NII-2C)

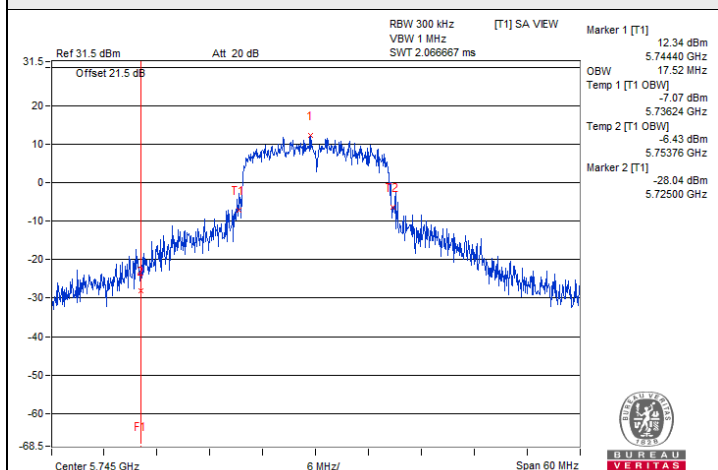


802.11a / Chain 0 : CH 149

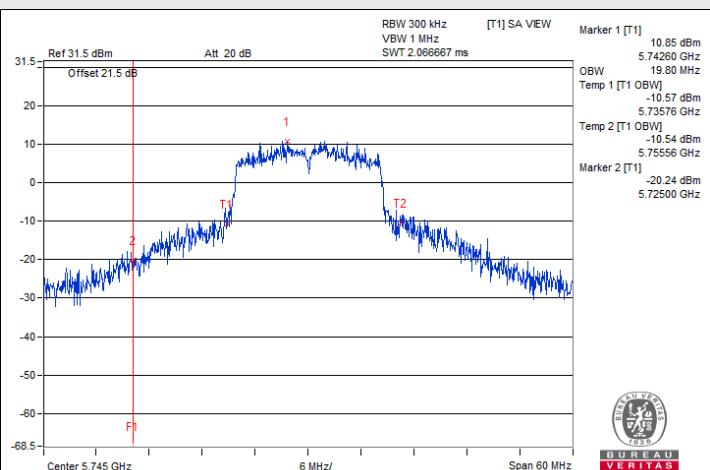


802.11a / Chain 1 : CH 149

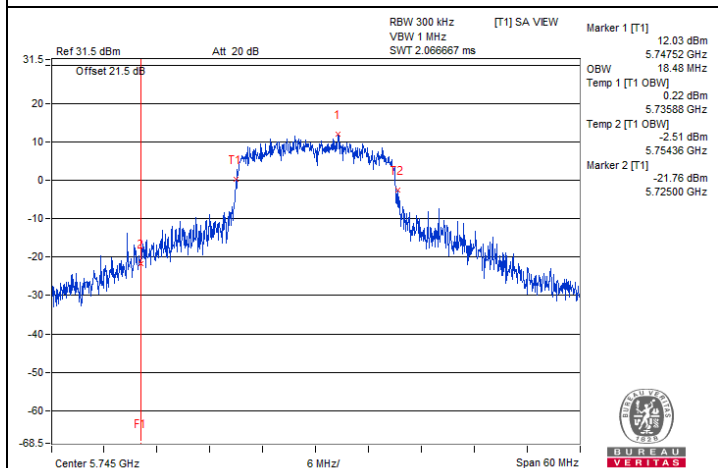


802.11ac (VHT20) / Chain 0 : CH 149

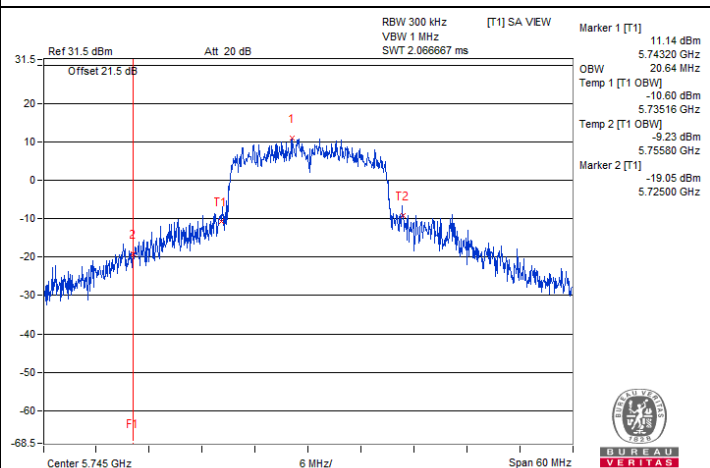

802.11ac (VHT20) / Chain 1 : CH 149

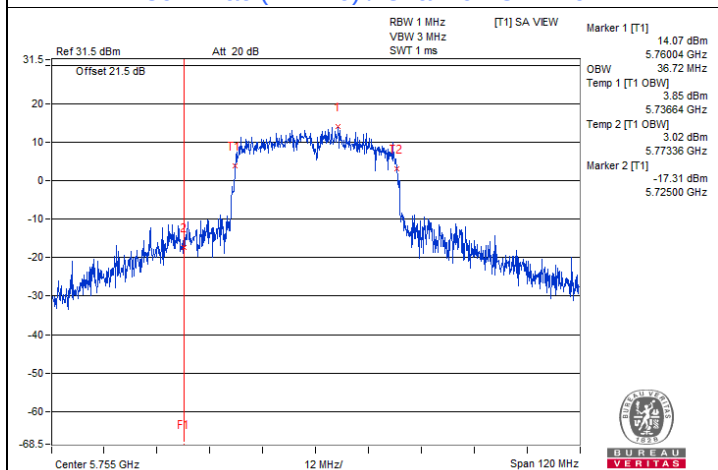


802.11ac (VHT40) / Chain 0 : CH 151

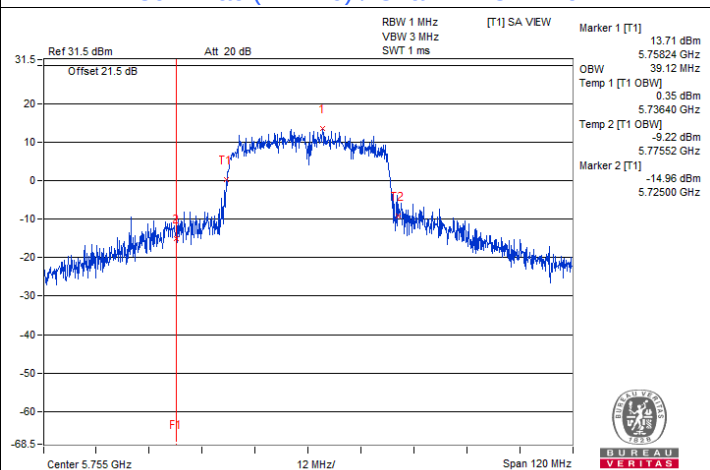


802.11ac (VHT40) / Chain 1 : CH 151

Spectrum Plot for nearby DFS band
(DFS is required, if 99% OCP straddle into U-NII-2C)

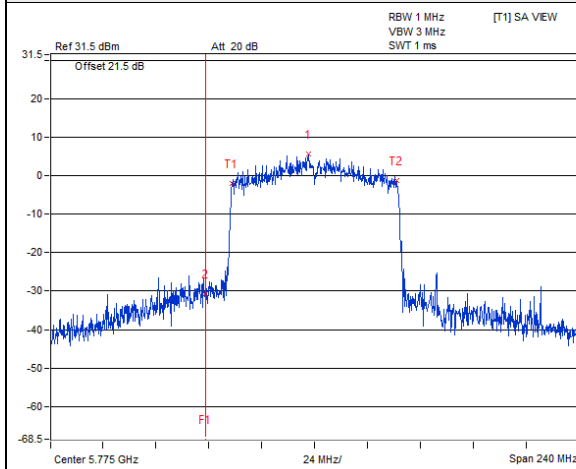

802.11ac (VHT80) / Chain 0 : CH 155

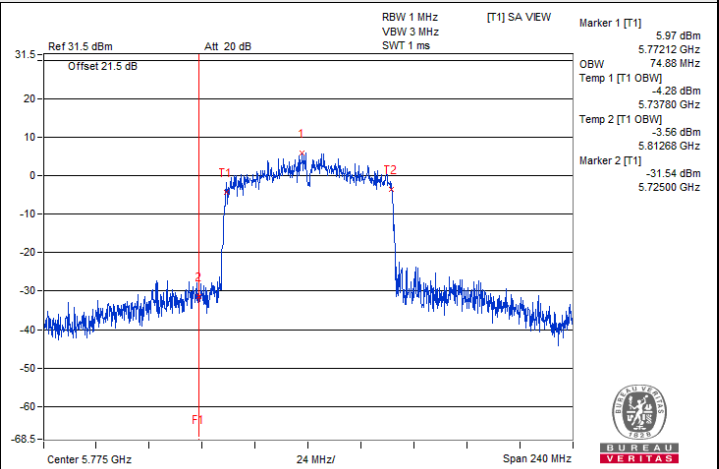

802.11ac (VHT80) / Chain 1 : CH 155

7.5 Frequency Stability

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Katina Lu
--------------	----------------	---------------------------	--------------	------------	-----------

802.11a

Frequency Stability Versus Temperature									
Operating Frequency: 5180 MHz									
Temp. (°C)	Power Supply (Vdc)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result
70	3.3	5179.9801	Pass	5179.979	Pass	5179.9758	Pass	5179.9801	Pass
60	3.3	5180.013	Pass	5180.0141	Pass	5180.0175	Pass	5180.0175	Pass
50	3.3	5180.0088	Pass	5180.0115	Pass	5180.0085	Pass	5180.0098	Pass
40	3.3	5180.0201	Pass	5180.0219	Pass	5180.0205	Pass	5180.0209	Pass
30	3.3	5179.9852	Pass	5179.9849	Pass	5179.9843	Pass	5179.981	Pass
20	3.3	5179.9777	Pass	5179.9799	Pass	5179.9772	Pass	5179.9778	Pass
10	3.3	5179.9977	Pass	5179.9981	Pass	5179.9944	Pass	5179.9965	Pass
0	3.3	5179.9981	Pass	5179.9991	Pass	5179.9985	Pass	5179.9963	Pass
-10	3.3	5180.0069	Pass	5180.0038	Pass	5180.0057	Pass	5180.0051	Pass

Frequency Stability Versus Voltage									
Operating Frequency: 5180 MHz									
Temp. (°C)	Power Supply (Vdc)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result
20	3.795	5179.9854	Pass	5179.9832	Pass	5179.9835	Pass	5179.9838	Pass
	3.3	5179.9777	Pass	5179.9799	Pass	5179.9772	Pass	5179.9778	Pass
	2.805	5179.9757	Pass	5179.972	Pass	5179.9765	Pass	5179.9749	Pass


7.6 AC Power Conducted Emissions

RF Mode	802.11ac (VHT40)	Channel	CH 159 : 5795 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 66% RH
Tested By	Sampson Chen		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.95	37.05	21.37	47.00	31.32	66.00	56.00	-19.00	-24.68
2	0.18125	9.96	31.63	15.22	41.59	25.18	64.43	54.43	-22.84	-29.25
3	0.41563	9.96	30.44	23.79	40.40	33.75	57.54	47.54	-17.14	-13.79
4	6.09375	10.34	22.75	15.87	33.09	26.21	60.00	50.00	-26.91	-23.79
5	20.25781	11.20	25.67	22.36	36.87	33.56	60.00	50.00	-23.13	-16.44
6	23.12891	11.25	27.89	25.29	39.14	36.54	60.00	50.00	-20.86	-13.46

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

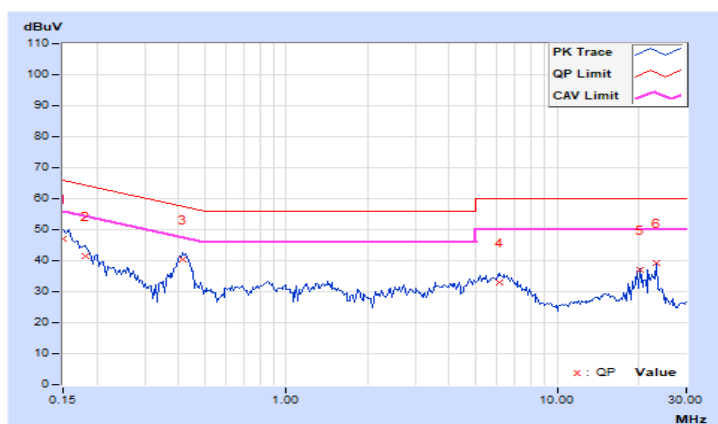


RF Mode	802.11ac (VHT40)	Channel	CH 159 : 5795 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 66% RH
Tested By	Sampson Chen		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	9.95	37.37	22.80	47.32	32.75	65.79	55.79	-18.47	-23.04
2	0.27109	9.96	27.45	17.53	37.41	27.49	61.08	51.08	-23.67	-23.59
3	0.42344	9.96	33.21	26.59	43.17	36.55	57.38	47.38	-14.21	-10.83
4	2.24609	10.07	19.11	11.65	29.18	21.72	56.00	46.00	-26.82	-24.28
5	6.28516	10.31	21.00	13.71	31.31	24.02	60.00	50.00	-28.69	-25.98
6	23.12891	11.00	28.12	25.30	39.12	36.30	60.00	50.00	-20.88	-13.70

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

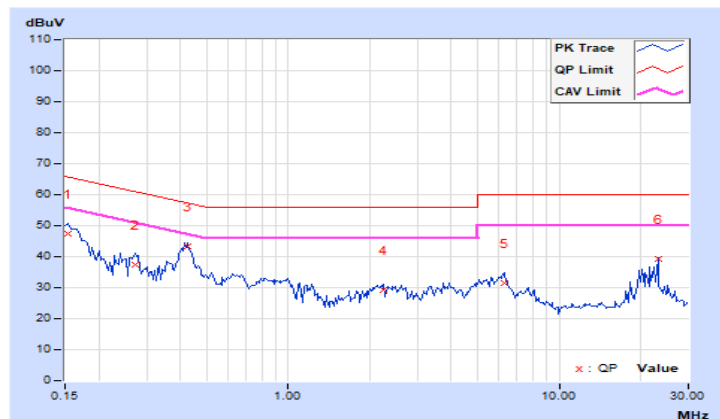


7.7 Unwanted Emissions below 1 GHz

RF Mode	802.11ac (VHT40)	Channel	CH 159 : 5795 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	24°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.97	34.0 QP	40.0	-6.0	1.00 H	141	42.8	-8.8
2	114.61	31.3 QP	43.5	-12.2	3.00 H	95	41.8	-10.5
3	155.34	27.0 QP	43.5	-16.5	1.50 H	46	35.2	-8.2
4	285.64	36.9 QP	46.0	-9.1	1.00 H	100	44.9	-8.0
5	499.03	29.9 QP	46.0	-16.1	1.00 H	333	32.7	-2.8
6	767.61	32.8 QP	46.0	-13.2	2.00 H	355	30.5	2.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

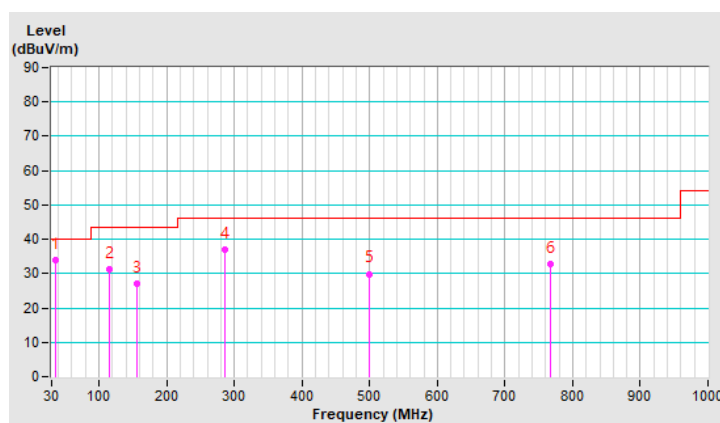


RF Mode	802.11ac (VHT40)	Channel	CH 159 : 5795 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	24°C, 71% RH
Tested By	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.79	34.3 QP	40.0	-5.7	1.00 V	250	42.5	-8.2
2	138.31	28.8 QP	43.5	-14.7	1.00 V	70	37.3	-8.5
3	288.05	31.9 QP	46.0	-14.1	1.50 V	255	39.9	-8.0
4	539.50	29.5 QP	46.0	-16.5	1.00 V	259	31.7	-2.2
5	637.31	31.2 QP	46.0	-14.8	1.50 V	195	30.9	0.3
6	747.33	33.2 QP	46.0	-12.8	3.00 V	59	31.1	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

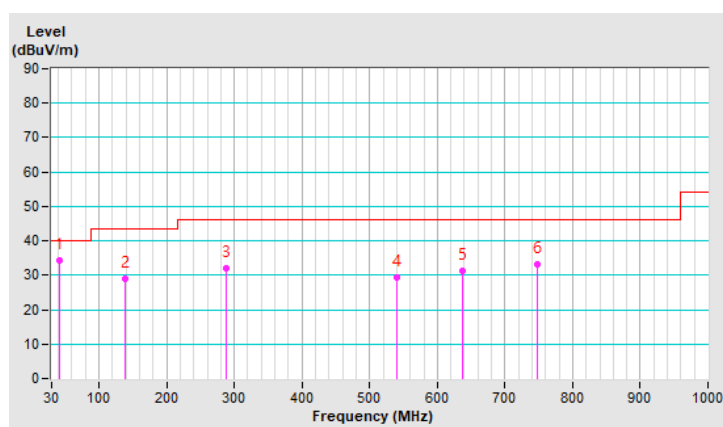


7.8 Unwanted Emissions above 1 GHz

RF Mode	802.11a	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Nelson Teng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	66.8 PK	74.0	-7.2	1.07 H	360	62.2	4.6
2	5150.00	52.4 AV	54.0	-1.6	1.07 H	360	47.8	4.6
3	*5180.00	108.5 PK			1.07 H	360	103.9	4.6
4	*5180.00	98.6 AV			1.07 H	360	94.0	4.6
5	#10360.00	47.0 PK	68.2	-21.2	2.05 H	241	32.8	14.2
6	15540.00	54.3 PK	74.0	-19.7	2.47 H	330	40.5	13.8
7	15540.00	42.7 AV	54.0	-11.3	2.47 H	330	28.9	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

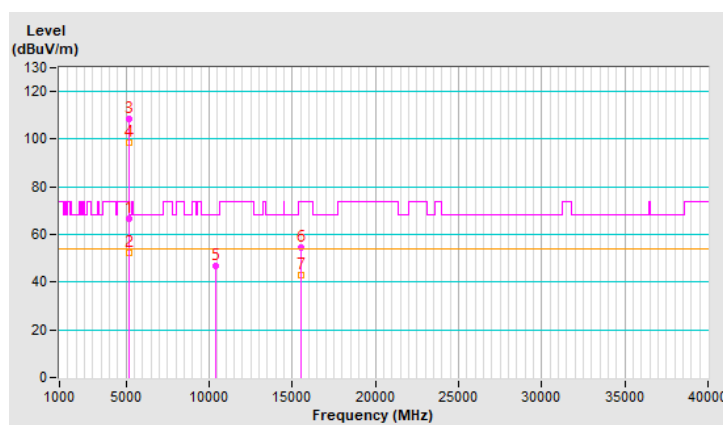


RF Mode	802.11a	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Nelson Teng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	69.6 PK	74.0	-4.4	2.45 V	12	65.0	4.6
2	5150.00	53.8 AV	54.0	-0.2	2.45 V	12	49.2	4.6
3	*5180.00	110.3 PK			2.45 V	12	105.7	4.6
4	*5180.00	102.2 AV			2.45 V	12	97.6	4.6
5	#10360.00	48.0 PK	68.2	-20.2	3.58 V	206	33.8	14.2
6	15540.00	55.1 PK	74.0	-18.9	1.60 V	211	41.3	13.8
7	15540.00	43.0 AV	54.0	-11.0	1.60 V	211	29.2	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

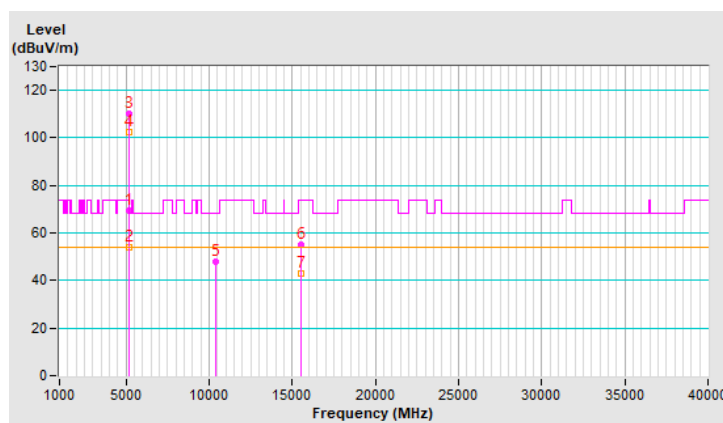


RF Mode	802.11a	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Nelson Teng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	111.3 PK			1.11 H	360	106.7	4.6
2	*5200.00	102.3 AV			1.11 H	360	97.7	4.6
3	#10400.00	46.5 PK	68.2	-21.7	2.03 H	249	32.1	14.4
4	15600.00	54.1 PK	74.0	-19.9	2.43 H	329	40.4	13.7
5	15600.00	42.4 AV	54.0	-11.6	2.43 H	329	28.7	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

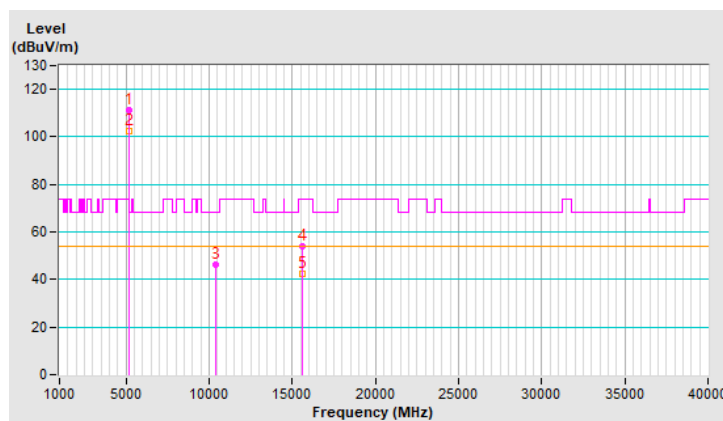


RF Mode	802.11a	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Nelson Teng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	116.1 PK			2.40 V	20	111.5	4.6
2	*5200.00	108.9 AV			2.40 V	20	104.3	4.6
3	#10400.00	48.0 PK	68.2	-20.2	3.53 V	192	33.6	14.4
4	15600.00	55.3 PK	74.0	-18.7	1.61 V	201	41.6	13.7
5	15600.00	43.0 AV	54.0	-11.0	1.61 V	201	29.3	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

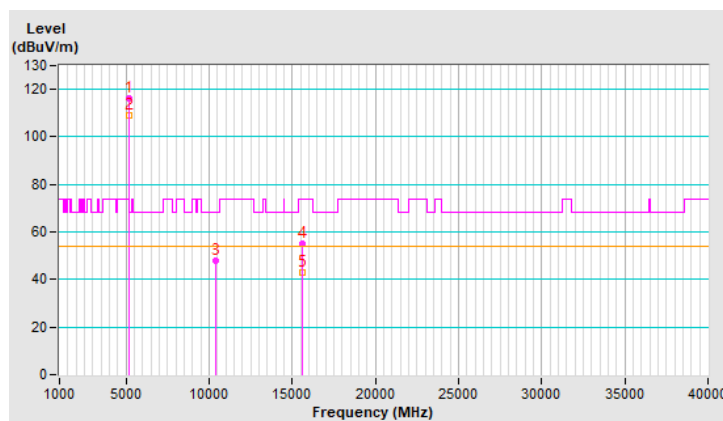


RF Mode	802.11a	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Nelson Teng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	109.3 PK			1.05 H	10	104.9	4.4
2	*5240.00	100.7 AV			1.05 H	10	96.3	4.4
3	5350.00	49.6 PK	74.0	-24.4	1.05 H	10	45.0	4.6
4	5350.00	39.0 AV	54.0	-15.0	1.05 H	10	34.4	4.6
5	#10480.00	47.2 PK	68.2	-21.0	2.06 H	228	32.8	14.4
6	15720.00	54.7 PK	74.0	-19.3	2.47 H	338	41.3	13.4
7	15720.00	42.8 AV	54.0	-11.2	2.47 H	338	29.4	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

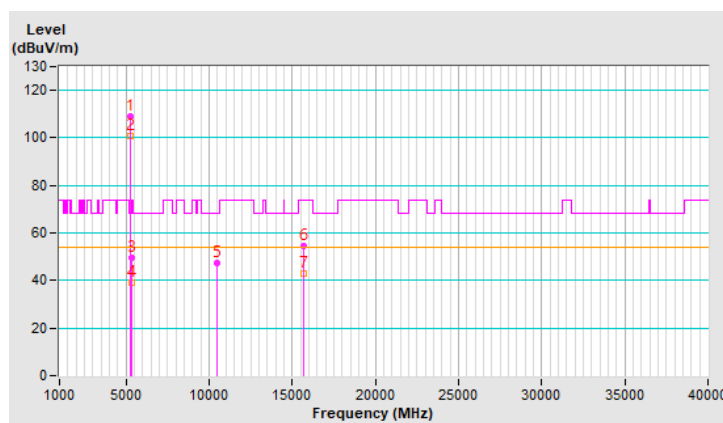


RF Mode	802.11a	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Nelson Teng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	115.4 PK			2.58 V	338	111.0	4.4
2	*5240.00	106.5 AV			2.58 V	338	102.1	4.4
3	5350.00	53.4 PK	74.0	-20.6	2.58 V	338	48.8	4.6
4	5350.00	42.3 AV	54.0	-11.7	2.58 V	338	37.7	4.6
5	#10480.00	47.5 PK	68.2	-20.7	3.61 V	217	33.1	14.4
6	15720.00	55.2 PK	74.0	-18.8	1.61 V	207	41.8	13.4
7	15720.00	43.0 AV	54.0	-11.0	1.61 V	207	29.6	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

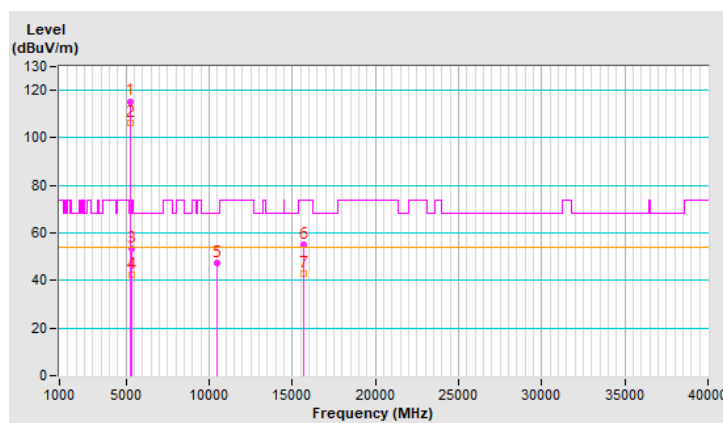


RF Mode	802.11a	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Nelson Teng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5565.68	49.9 PK	68.2	-18.3	1.04 H	18	45.0	4.9
2	*5745.00	104.7 PK			1.04 H	18	99.8	4.9
3	*5745.00	95.7 AV			1.04 H	18	90.8	4.9
4	#5967.93	50.5 PK	68.2	-17.7	1.04 H	18	44.9	5.6
5	11490.00	48.2 PK	74.0	-25.8	2.03 H	255	33.1	15.1
6	11490.00	36.9 AV	54.0	-17.1	2.03 H	255	21.8	15.1
7	#17235.00	57.4 PK	68.2	-10.8	2.41 H	316	38.8	18.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

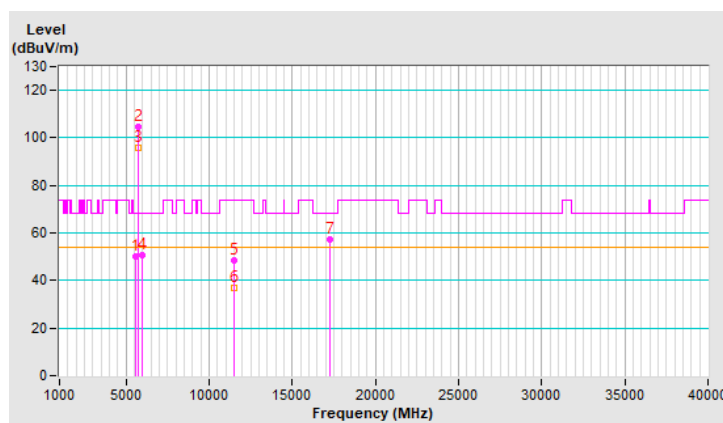


RF Mode	802.11a	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Nelson Teng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5646.79	58.5 PK	68.2	-9.7	1.02 V	359	53.5	5.0
2	*5745.00	116.5 PK			1.02 V	359	111.6	4.9
3	*5745.00	109.4 AV			1.02 V	359	104.5	4.9
4	#5994.05	52.0 PK	68.2	-16.2	1.02 V	359	46.5	5.5
5	11490.00	49.6 PK	74.0	-24.4	3.61 V	210	34.5	15.1
6	11490.00	38.2 AV	54.0	-15.8	3.61 V	210	23.1	15.1
7	#17235.00	57.0 PK	68.2	-11.2	1.52 V	216	38.4	18.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

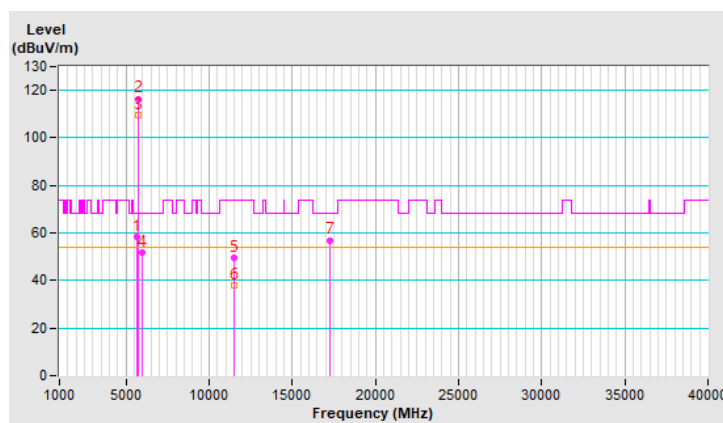


RF Mode	802.11a	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Nelson Teng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5632.65	49.9 PK	68.2	-18.3	1.08 H	282	44.9	5.0
2	*5785.00	104.2 PK			1.08 H	282	99.1	5.1
3	*5785.00	95.3 AV			1.08 H	282	90.2	5.1
4	#5942.58	50.8 PK	68.2	-17.4	1.08 H	282	45.0	5.8
5	11570.00	48.5 PK	74.0	-25.5	2.07 H	246	33.5	15.0
6	11570.00	37.1 AV	54.0	-16.9	2.07 H	246	22.1	15.0
7	#17355.00	58.0 PK	68.2	-10.2	2.45 H	328	39.4	18.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

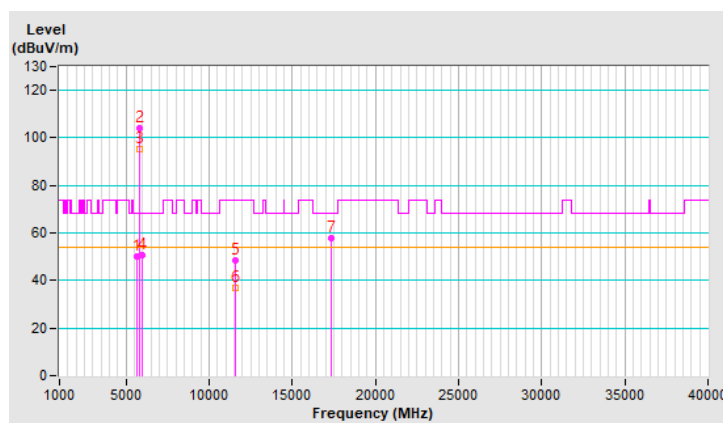


RF Mode	802.11a	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Nelson Teng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5647.69	55.9 PK	68.2	-12.3	1.00 V	351	50.9	5.0
2	*5785.00	116.0 PK			1.00 V	351	110.9	5.1
3	*5785.00	108.8 AV			1.00 V	351	103.7	5.1
4	#5927.12	53.3 PK	68.2	-14.9	1.00 V	351	47.6	5.7
5	11570.00	49.5 PK	74.0	-24.5	3.67 V	222	34.5	15.0
6	11570.00	38.1 AV	54.0	-15.9	3.67 V	222	23.1	15.0
7	#17355.00	57.4 PK	68.2	-10.8	1.53 V	210	38.8	18.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

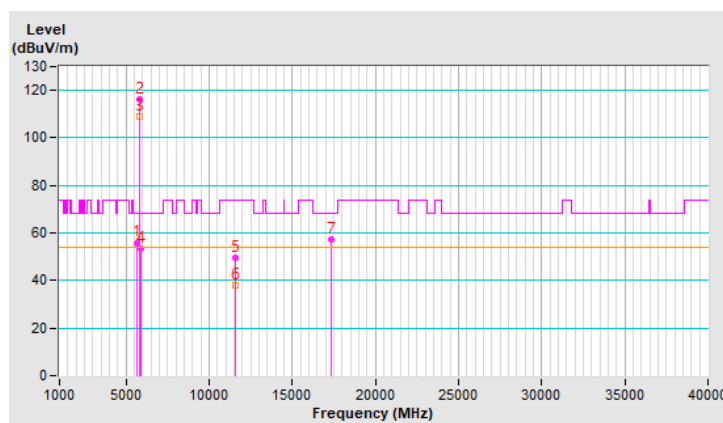


RF Mode	802.11a	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Nelson Teng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5649.75	50.2 PK	68.2	-18.0	1.09 H	283	45.1	5.1
2	*5825.00	104.5 PK			1.09 H	283	99.1	5.4
3	*5825.00	95.5 AV			1.09 H	283	90.1	5.4
4	#5979.71	50.8 PK	68.2	-17.4	1.09 H	283	45.2	5.6
5	11650.00	48.3 PK	74.0	-25.7	2.02 H	246	33.5	14.8
6	11650.00	37.2 AV	54.0	-16.8	2.02 H	246	22.4	14.8
7	#17475.00	57.9 PK	68.2	-10.3	2.40 H	324	39.4	18.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

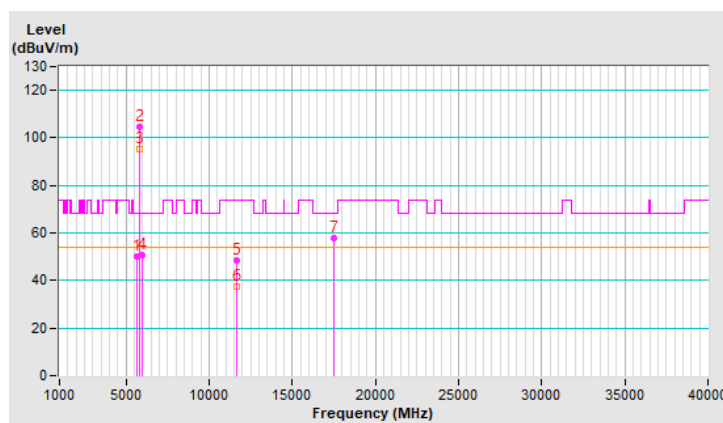


RF Mode	802.11a	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Nelson Teng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5644.74	53.6 PK	68.2	-14.6	1.12 V	347	48.6	5.0
2	*5825.00	116.3 PK			1.12 V	347	110.9	5.4
3	*5825.00	109.3 AV			1.12 V	347	103.9	5.4
4	#5928.59	56.9 PK	68.2	-11.3	1.12 V	347	51.2	5.7
5	11650.00	49.3 PK	74.0	-24.7	3.57 V	224	34.5	14.8
6	11650.00	37.7 AV	54.0	-16.3	3.57 V	224	22.9	14.8
7	#17475.00	56.8 PK	68.2	-11.4	1.51 V	204	38.3	18.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

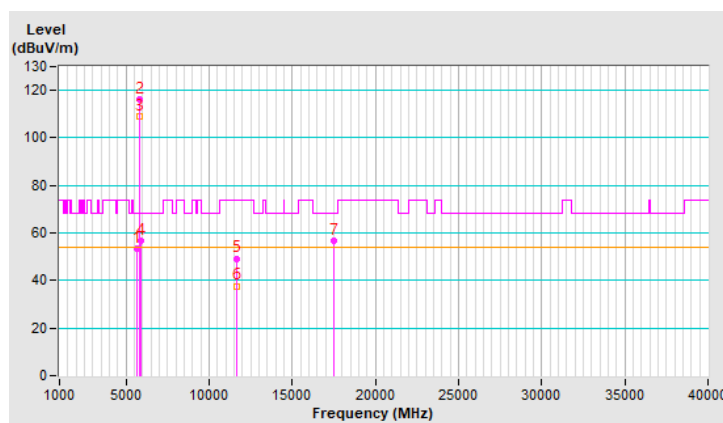


RF Mode	802.11ac (VHT20)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Nelson Teng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	63.4 PK	74.0	-10.6	1.06 H	9	58.8	4.6
2	5150.00	47.5 AV	54.0	-6.5	1.06 H	9	42.9	4.6
3	*5180.00	106.5 PK			1.06 H	9	101.9	4.6
4	*5180.00	97.9 AV			1.06 H	9	93.3	4.6
5	#10360.00	47.3 PK	68.2	-20.9	2.07 H	251	33.1	14.2
6	15540.00	54.3 PK	74.0	-19.7	2.43 H	337	40.5	13.8
7	15540.00	42.7 AV	54.0	-11.3	2.43 H	337	28.9	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

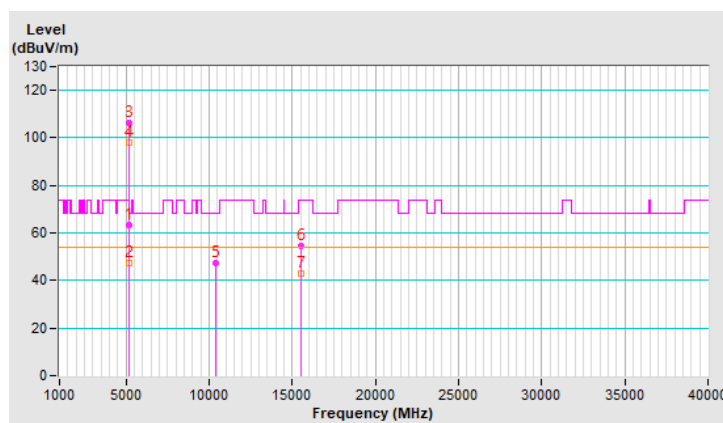


RF Mode	802.11ac (VHT20)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Nelson Teng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	69.2 PK	74.0	-4.8	2.42 V	202	64.6	4.6
2	5150.00	52.2 AV	54.0	-1.8	2.42 V	202	47.6	4.6
3	*5180.00	111.3 PK			2.42 V	202	106.7	4.6
4	*5180.00	102.1 AV			2.42 V	202	97.5	4.6
5	#10360.00	48.2 PK	68.2	-20.0	3.57 V	199	34.0	14.2
6	15540.00	55.2 PK	74.0	-18.8	1.56 V	211	41.4	13.8
7	15540.00	43.0 AV	54.0	-11.0	1.56 V	211	29.2	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

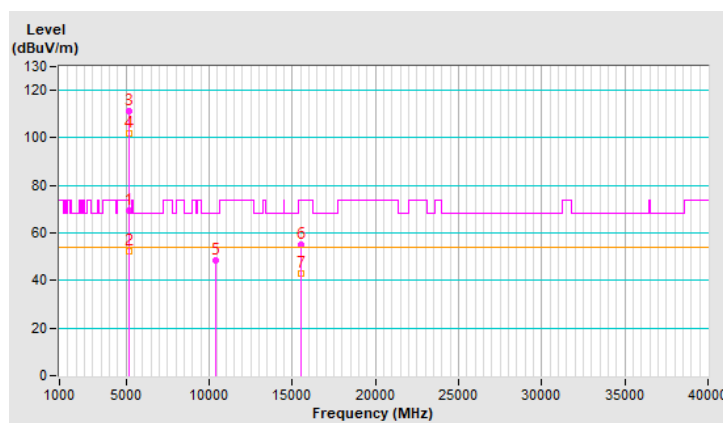


RF Mode	802.11ac (VHT20)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Nelson Teng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	110.7 PK			1.17 H	359	106.1	4.6
2	*5200.00	102.0 AV			1.17 H	359	97.4	4.6
3	#10400.00	47.4 PK	68.2	-20.8	2.09 H	231	33.0	14.4
4	15600.00	54.1 PK	74.0	-19.9	2.42 H	331	40.4	13.7
5	15600.00	42.5 AV	54.0	-11.5	2.42 H	331	28.8	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

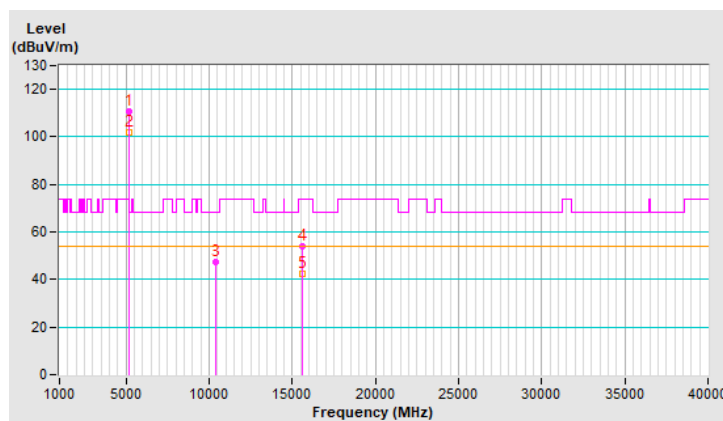


RF Mode	802.11ac (VHT20)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Nelson Teng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	116.1 PK			2.35 V	12	111.5	4.6
2	*5200.00	109.2 AV			2.35 V	12	104.6	4.6
3	#10400.00	47.7 PK	68.2	-20.5	3.53 V	208	33.3	14.4
4	15600.00	54.5 PK	74.0	-19.5	1.61 V	222	40.8	13.7
5	15600.00	42.6 AV	54.0	-11.4	1.61 V	222	28.9	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

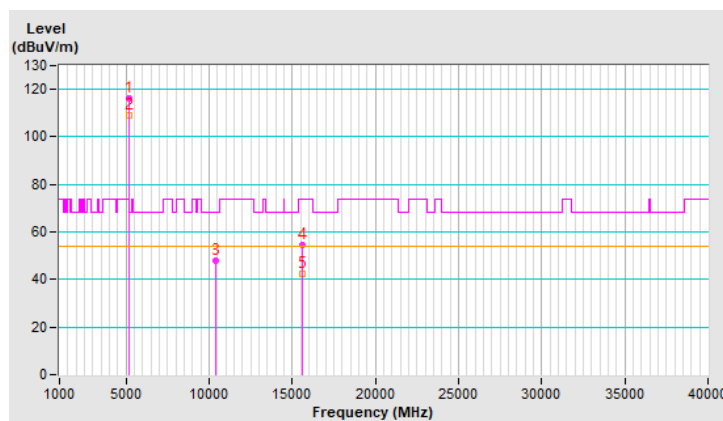


RF Mode	802.11ac (VHT20)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Nelson Teng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	107.9 PK			1.04 H	4	103.5	4.4
2	*5240.00	99.7 AV			1.04 H	4	95.3	4.4
3	5350.00	51.0 PK	74.0	-23.0	1.04 H	4	46.4	4.6
4	5350.00	39.2 AV	54.0	-14.8	1.04 H	4	34.6	4.6
5	#10480.00	46.8 PK	68.2	-21.4	2.04 H	250	32.4	14.4
6	15720.00	54.1 PK	74.0	-19.9	2.41 H	321	40.7	13.4
7	15720.00	42.6 AV	54.0	-11.4	2.41 H	321	29.2	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

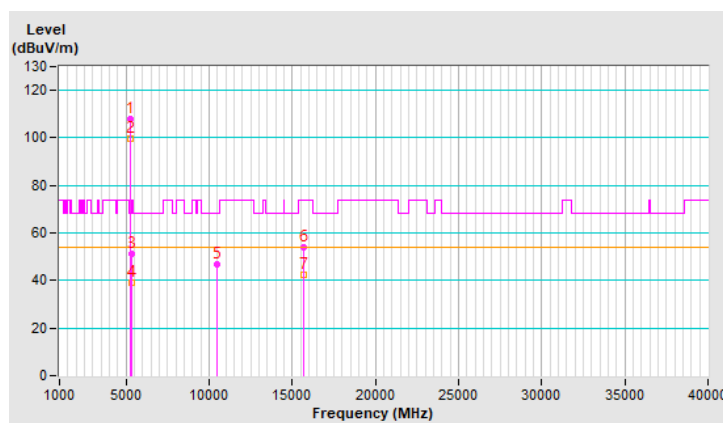


RF Mode	802.11ac (VHT20)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Nelson Teng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	115.1 PK			2.57 V	341	110.7	4.4
2	*5240.00	105.8 AV			2.57 V	341	101.4	4.4
3	5350.00	53.8 PK	74.0	-20.2	2.57 V	341	49.2	4.6
4	5350.00	42.4 AV	54.0	-11.6	2.57 V	341	37.8	4.6
5	#10480.00	48.1 PK	68.2	-20.1	3.61 V	215	33.7	14.4
6	15720.00	55.1 PK	74.0	-18.9	1.59 V	214	41.7	13.4
7	15720.00	43.0 AV	54.0	-11.0	1.59 V	214	29.6	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

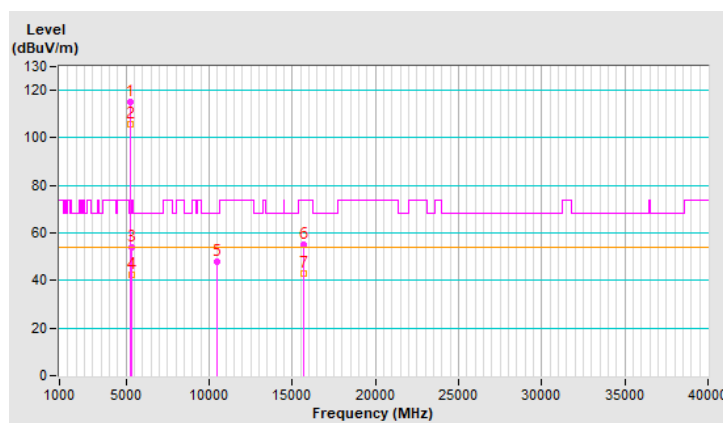


RF Mode	802.11ac (VHT20)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Nelson Teng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5621.18	49.4 PK	68.2	-18.8	1.03 H	17	44.5	4.9
2	*5745.00	103.9 PK			1.03 H	17	99.0	4.9
3	*5745.00	94.7 AV			1.03 H	17	89.8	4.9
4	#5973.39	50.2 PK	68.2	-18.0	1.03 H	17	44.6	5.6
5	11490.00	47.9 PK	74.0	-26.1	1.99 H	244	32.8	15.1
6	11490.00	36.8 AV	54.0	-17.2	1.99 H	244	21.7	15.1
7	#17235.00	57.5 PK	68.2	-10.7	2.35 H	314	38.9	18.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

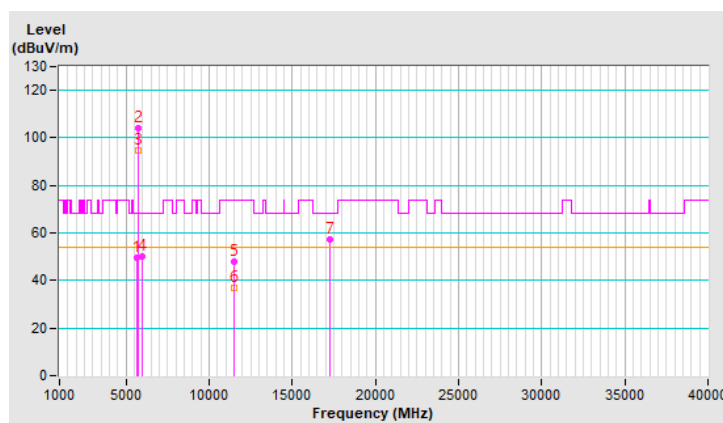


RF Mode	802.11ac (VHT20)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Nelson Teng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5647.47	58.7 PK	68.2	-9.5	1.15 V	341	53.7	5.0
2	*5745.00	115.3 PK			1.15 V	341	110.4	4.9
3	*5745.00	108.9 AV			1.15 V	341	104.0	4.9
4	#5939.85	52.0 PK	68.2	-16.2	1.15 V	341	46.3	5.7
5	11490.00	49.7 PK	74.0	-24.3	3.58 V	209	34.6	15.1
6	11490.00	38.5 AV	54.0	-15.5	3.58 V	209	23.4	15.1
7	#17235.00	57.1 PK	68.2	-11.1	1.56 V	218	38.5	18.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

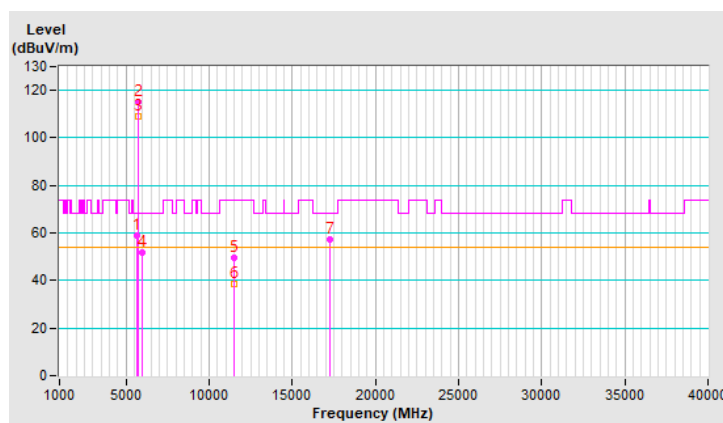


RF Mode	802.11ac (VHT20)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Nelson Teng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5598.10	49.3 PK	68.2	-18.9	1.04 H	282	44.5	4.8
2	*5785.00	103.8 PK			1.04 H	282	98.7	5.1
3	*5785.00	94.6 AV			1.04 H	282	89.5	5.1
4	#5957.81	50.8 PK	68.2	-17.4	1.04 H	282	45.1	5.7
5	11570.00	47.9 PK	74.0	-26.1	1.99 H	249	32.9	15.0
6	11570.00	36.5 AV	54.0	-17.5	1.99 H	249	21.5	15.0
7	#17355.00	58.0 PK	68.2	-10.2	2.38 H	322	39.4	18.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

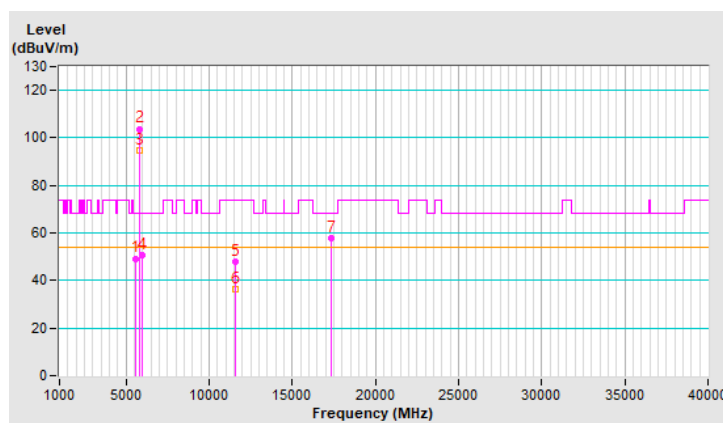


RF Mode	802.11ac (VHT20)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Nelson Teng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5648.97	55.4 PK	68.2	-12.8	1.17 V	333	50.3	5.1
2	*5785.00	115.6 PK			1.17 V	333	110.5	5.1
3	*5785.00	108.8 AV			1.17 V	333	103.7	5.1
4	#5942.70	52.5 PK	68.2	-15.7	1.17 V	333	46.7	5.8
5	11570.00	49.1 PK	74.0	-24.9	3.62 V	214	34.1	15.0
6	11570.00	37.8 AV	54.0	-16.2	3.62 V	214	22.8	15.0
7	#17355.00	56.8 PK	68.2	-11.4	1.53 V	214	38.2	18.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

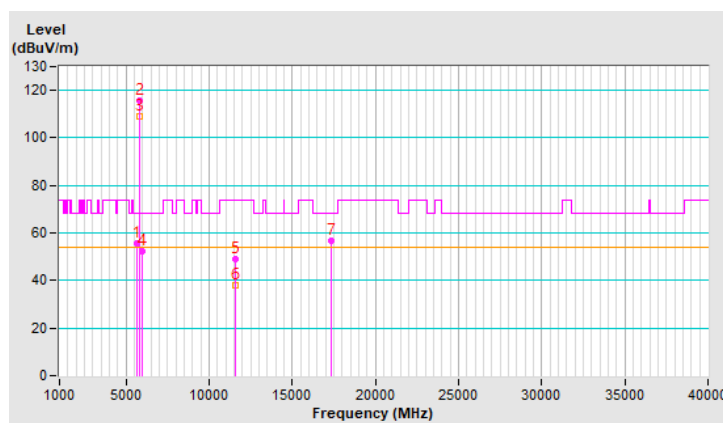


RF Mode	802.11ac (VHT20)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Nelson Teng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5635.48	49.5 PK	68.2	-18.7	1.02 H	281	44.5	5.0
2	*5825.00	103.3 PK			1.02 H	281	97.9	5.4
3	*5825.00	94.3 AV			1.02 H	281	88.9	5.4
4	#5965.84	50.7 PK	68.2	-17.5	1.02 H	281	45.1	5.6
5	11650.00	48.4 PK	74.0	-25.6	2.05 H	265	33.6	14.8
6	11650.00	37.1 AV	54.0	-16.9	2.05 H	265	22.3	14.8
7	#17475.00	57.7 PK	68.2	-10.5	2.45 H	311	39.2	18.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

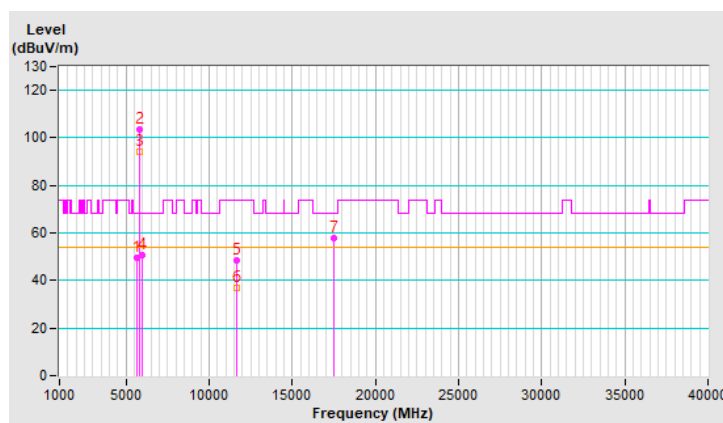


RF Mode	802.11ac (VHT20)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Nelson Teng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5641.28	53.0 PK	68.2	-15.2	1.12 V	344	48.0	5.0
2	*5825.00	115.5 PK			1.12 V	344	110.1	5.4
3	*5825.00	108.0 AV			1.12 V	344	102.6	5.4
4	#5930.45	59.4 PK	68.2	-8.8	1.12 V	344	53.7	5.7
5	11650.00	49.3 PK	74.0	-24.7	3.59 V	212	34.5	14.8
6	11650.00	38.0 AV	54.0	-16.0	3.59 V	212	23.2	14.8
7	#17475.00	57.0 PK	68.2	-11.2	1.49 V	202	38.5	18.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

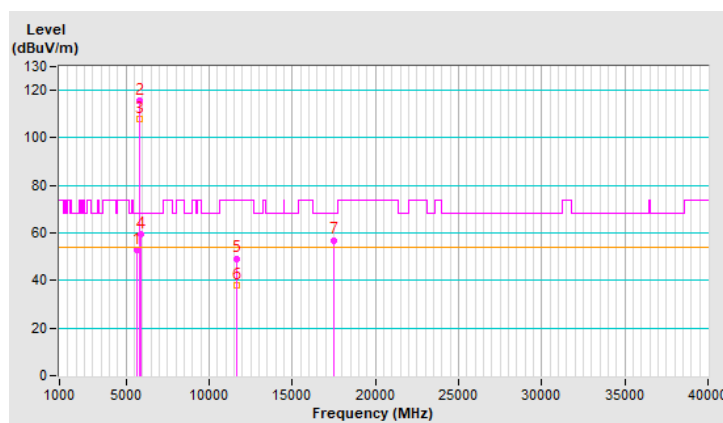


RF Mode	802.11ac (VHT40)	Channel	CH 38 : 5190 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Nelson Teng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.3 PK	74.0	-8.7	1.08 H	10	60.7	4.6
2	5150.00	48.2 AV	54.0	-5.8	1.08 H	10	43.6	4.6
3	*5190.00	102.7 PK			1.08 H	10	98.2	4.5
4	*5190.00	94.0 AV			1.08 H	10	89.5	4.5
5	#10380.00	46.3 PK	68.2	-21.9	2.03 H	238	32.0	14.3
6	15570.00	54.8 PK	74.0	-19.2	2.52 H	330	41.1	13.7
7	15570.00	43.2 AV	54.0	-10.8	2.52 H	330	29.5	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

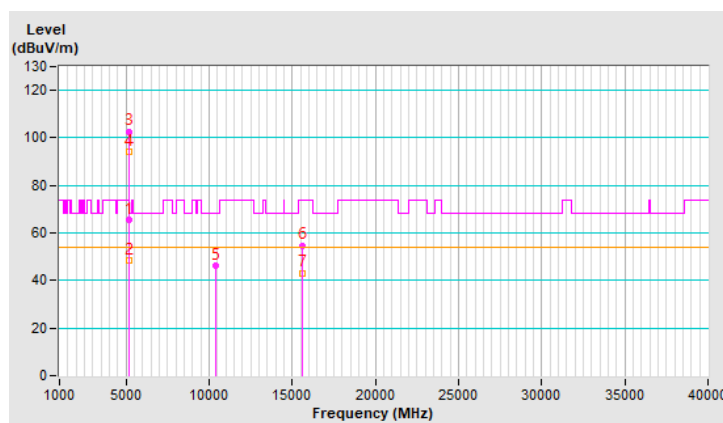


RF Mode	802.11ac (VHT40)	Channel	CH 38 : 5190 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Nelson Teng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	72.0 PK	74.0	-2.0	2.68 V	200	67.4	4.6
2	5150.00	53.6 AV	54.0	-0.4	2.68 V	200	49.0	4.6
3	*5190.00	109.3 PK			2.68 V	200	104.8	4.5
4	*5190.00	98.3 AV			2.68 V	200	93.8	4.5
5	#10380.00	47.8 PK	68.2	-20.4	3.53 V	208	33.5	14.3
6	15570.00	54.3 PK	74.0	-19.7	1.61 V	204	40.6	13.7
7	15570.00	42.5 AV	54.0	-11.5	1.61 V	204	28.8	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

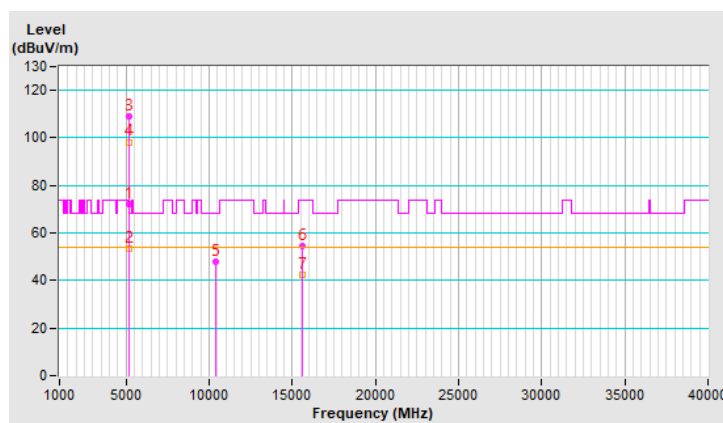


RF Mode	802.11ac (VHT40)	Channel	CH 46 : 5230 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Nelson Teng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.1 PK	74.0	-13.9	1.03 H	10	55.5	4.6
2	5150.00	48.8 AV	54.0	-5.2	1.03 H	10	44.2	4.6
3	*5230.00	104.7 PK			1.03 H	10	100.2	4.5
4	*5230.00	97.5 AV			1.03 H	10	93.0	4.5
5	5350.00	53.1 PK	74.0	-20.9	1.03 H	10	48.5	4.6
6	5350.00	40.4 AV	54.0	-13.6	1.03 H	10	35.8	4.6
7	#10460.00	47.2 PK	68.2	-21.0	1.99 H	251	32.8	14.4
8	15690.00	54.8 PK	74.0	-19.2	2.45 H	344	41.4	13.4
9	15690.00	43.1 AV	54.0	-10.9	2.45 H	344	29.7	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

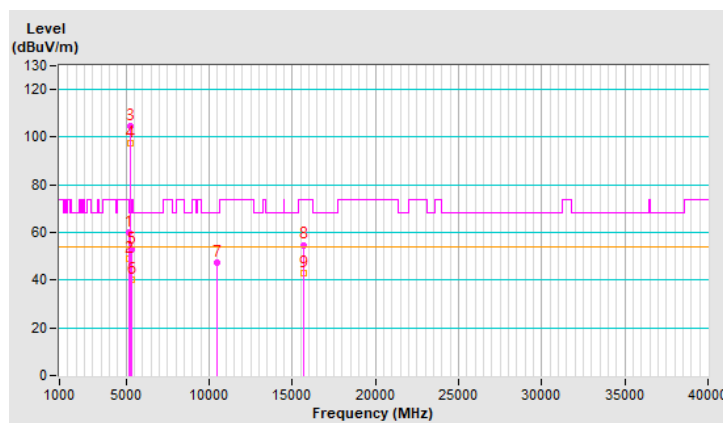


RF Mode	802.11ac (VHT40)	Channel	CH 46 : 5230 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Nelson Teng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	64.5 PK	74.0	-9.5	2.74 V	201	59.9	4.6
2	5150.00	53.2 AV	54.0	-0.8	2.74 V	201	48.6	4.6
3	*5230.00	112.0 PK			2.74 V	201	107.5	4.5
4	*5230.00	102.9 AV			2.74 V	201	98.4	4.5
5	5350.00	58.9 PK	74.0	-15.1	2.74 V	201	54.3	4.6
6	5350.00	44.3 AV	54.0	-9.7	2.74 V	201	39.7	4.6
7	#10460.00	48.5 PK	68.2	-19.7	3.60 V	219	34.1	14.4
8	15690.00	54.9 PK	74.0	-19.1	1.60 V	212	41.5	13.4
9	15690.00	43.0 AV	54.0	-11.0	1.60 V	212	29.6	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

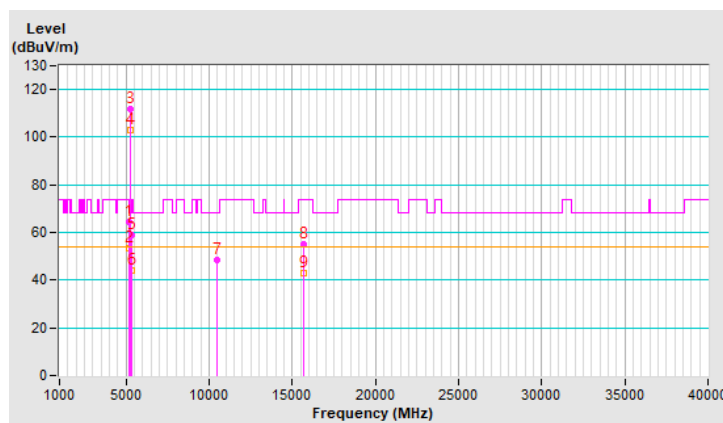


RF Mode	802.11ac (VHT40)	Channel	CH 151 : 5755 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Nelson Teng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5650.04	53.4 PK	68.2	-14.8	1.04 H	20	48.3	5.1
2	*5755.00	99.2 PK			1.04 H	20	94.3	4.9
3	*5755.00	91.7 AV			1.04 H	20	86.8	4.9
4	#5978.92	51.0 PK	68.2	-17.2	1.04 H	20	45.4	5.6
5	11510.00	47.8 PK	74.0	-26.2	2.03 H	249	32.8	15.0
6	11510.00	36.5 AV	54.0	-17.5	2.03 H	249	21.5	15.0
7	#17265.00	56.9 PK	68.2	-11.3	2.36 H	303	38.3	18.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

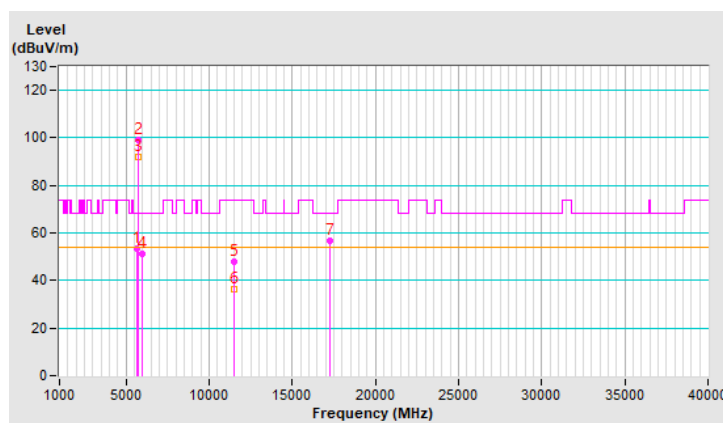


RF Mode	802.11ac (VHT40)	Channel	CH 151 : 5755 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Nelson Teng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5645.74	66.6 PK	68.2	-1.6	1.02 V	360	61.6	5.0
2	*5755.00	112.6 PK			1.02 V	360	107.7	4.9
3	*5755.00	105.4 AV			1.02 V	360	100.5	4.9
4	#5929.40	54.3 PK	68.2	-13.9	1.02 V	360	48.6	5.7
5	11510.00	50.0 PK	74.0	-24.0	3.64 V	209	35.0	15.0
6	11510.00	38.4 AV	54.0	-15.6	3.64 V	209	23.4	15.0
7	#17265.00	56.3 PK	68.2	-11.9	1.53 V	227	37.7	18.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

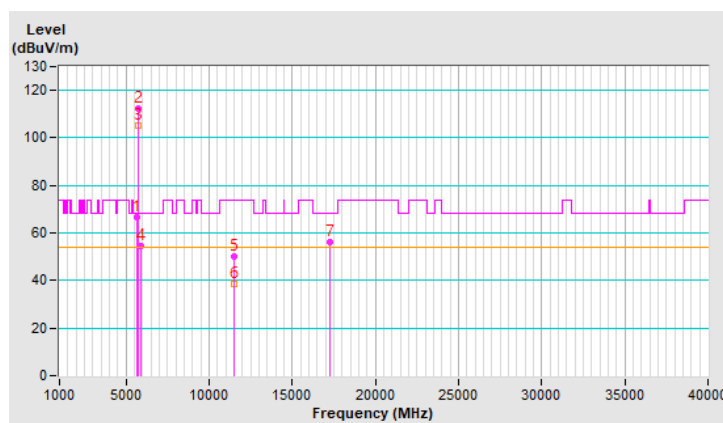


RF Mode	802.11ac (VHT40)	Channel	CH 159 : 5795 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Nelson Teng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5642.61	53.4 PK	68.2	-14.8	1.02 H	281	48.4	5.0
2	*5795.00	102.1 PK			1.02 H	281	97.0	5.1
3	*5795.00	93.0 AV			1.02 H	281	87.9	5.1
4	#5927.67	53.9 PK	68.2	-14.3	1.02 H	281	48.2	5.7
5	11590.00	47.5 PK	74.0	-26.5	2.07 H	251	32.6	14.9
6	11590.00	36.5 AV	54.0	-17.5	2.07 H	251	21.6	14.9
7	#17385.00	57.7 PK	68.2	-10.5	2.36 H	328	39.1	18.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

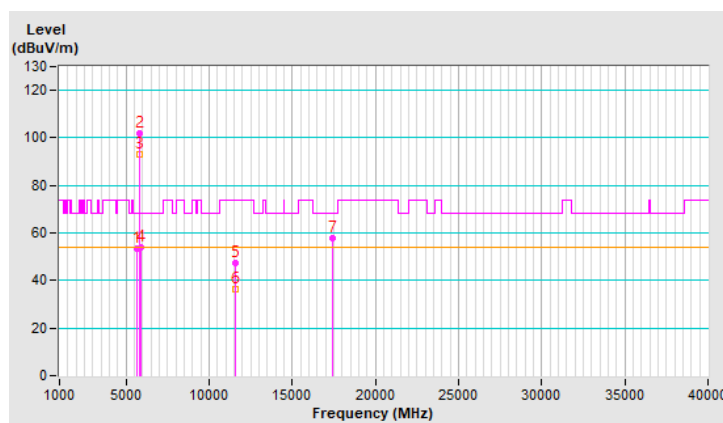


RF Mode	802.11ac (VHT40)	Channel	CH 159 : 5795 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 2 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Nelson Teng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5648.73	64.9 PK	68.2	-3.3	1.06 V	359	59.8	5.1
2	*5795.00	113.7 PK			1.06 V	359	108.6	5.1
3	*5795.00	106.4 AV			1.06 V	359	101.3	5.1
4	#5925.74	59.9 PK	68.2	-8.3	1.06 V	359	54.2	5.7
5	11590.00	49.9 PK	74.0	-24.1	3.66 V	214	35.0	14.9
6	11590.00	38.6 AV	54.0	-15.4	3.66 V	214	23.7	14.9
7	#17385.00	56.6 PK	68.2	-11.6	1.55 V	211	38.0	18.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

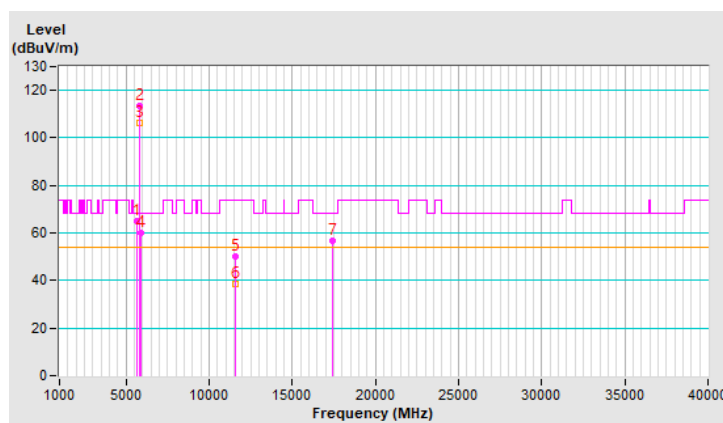


RF Mode	802.11ac (VHT80)	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Nelson Teng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	64.0 PK	74.0	-10.0	1.34 H	80	59.4	4.6
2	5150.00	50.6 AV	54.0	-3.4	1.34 H	80	46.0	4.6
3	*5210.00	95.6 PK			1.34 H	80	91.1	4.5
4	*5210.00	88.3 AV			1.34 H	80	83.8	4.5
5	5350.00	58.3 PK	74.0	-15.7	1.34 H	80	53.7	4.6
6	5350.00	40.1 AV	54.0	-13.9	1.34 H	80	35.5	4.6
7	#10420.00	47.0 PK	68.2	-21.2	2.07 H	252	32.6	14.4
8	15630.00	54.7 PK	74.0	-19.3	2.51 H	341	41.2	13.5
9	15630.00	43.2 AV	54.0	-10.8	2.51 H	341	29.7	13.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

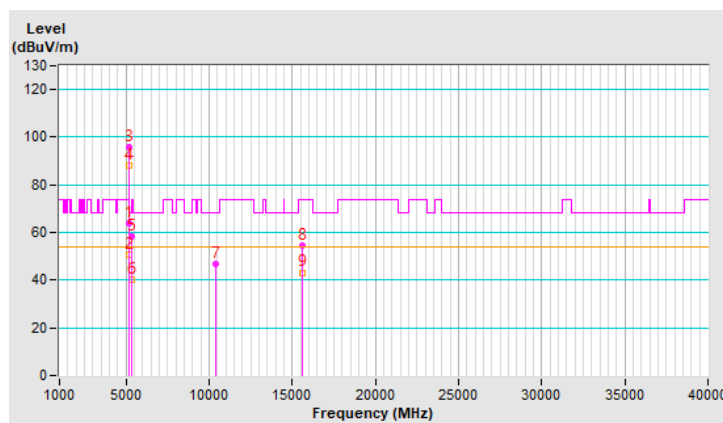


RF Mode	802.11ac (VHT80)	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Nelson Teng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	66.8 PK	74.0	-7.2	2.62 V	341	62.2	4.6
2	5150.00	53.5 AV	54.0	-0.5	2.62 V	341	48.9	4.6
3	*5210.00	104.1 PK			2.62 V	341	99.6	4.5
4	*5210.00	95.4 AV			2.62 V	341	90.9	4.5
5	5350.00	65.3 PK	74.0	-8.7	2.62 V	341	60.7	4.6
6	5350.00	46.0 AV	54.0	-8.0	2.62 V	341	41.4	4.6
7	#10420.00	48.2 PK	68.2	-20.0	3.58 V	220	33.8	14.4
8	15630.00	55.4 PK	74.0	-18.6	1.56 V	199	41.9	13.5
9	15630.00	43.5 AV	54.0	-10.5	1.56 V	199	30.0	13.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

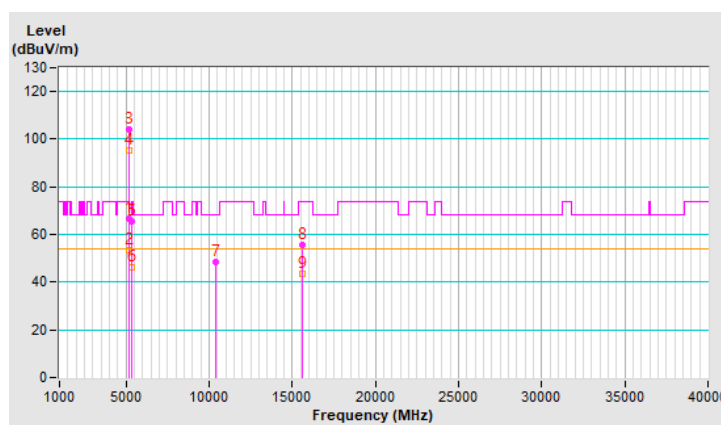


RF Mode	802.11ac (VHT80)	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Nelson Teng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5640.02	51.9 PK	68.2	-16.3	1.00 H	284	46.9	5.0
2	*5775.00	92.0 PK			1.00 H	284	87.0	5.0
3	*5775.00	84.3 AV			1.00 H	284	79.3	5.0
4	#5940.54	51.3 PK	68.2	-16.9	1.00 H	284	45.6	5.7
5	11550.00	47.9 PK	74.0	-26.1	2.00 H	249	32.9	15.0
6	11550.00	36.5 AV	54.0	-17.5	2.00 H	249	21.5	15.0
7	#17325.00	57.8 PK	68.2	-10.4	2.37 H	319	39.2	18.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

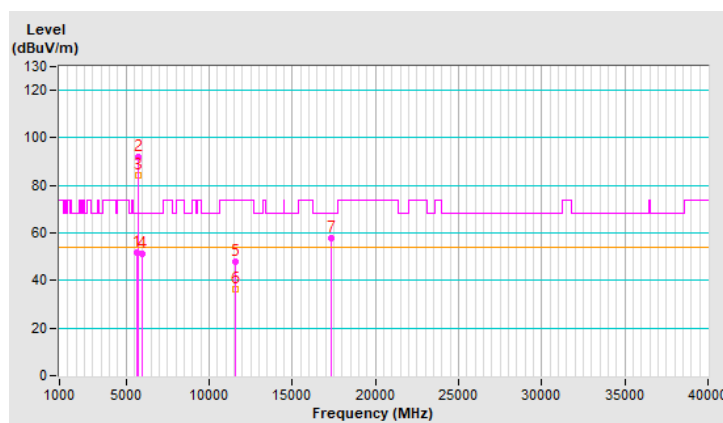


RF Mode	802.11ac (VHT80)	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 5.1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 71% RH
Tested By	Nelson Teng		


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5631.32	67.2 PK	68.2	-1.0	1.08 V	351	62.2	5.0
2	*5775.00	104.6 PK			1.08 V	351	99.6	5.0
3	*5775.00	97.3 AV			1.08 V	351	92.3	5.0
4	#5927.22	61.4 PK	68.2	-6.8	1.08 V	351	55.7	5.7
5	11550.00	49.8 PK	74.0	-24.2	3.61 V	209	34.8	15.0
6	11550.00	38.6 AV	54.0	-15.4	3.61 V	209	23.6	15.0
7	#17325.00	56.5 PK	68.2	-11.7	1.47 V	203	37.9	18.6


Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

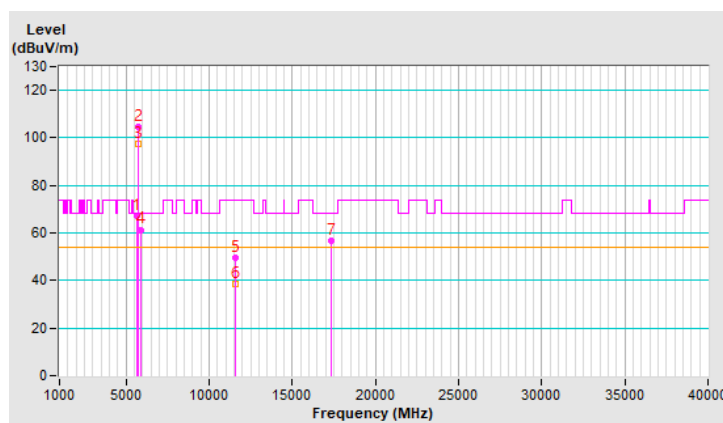



Plot of Band Edge

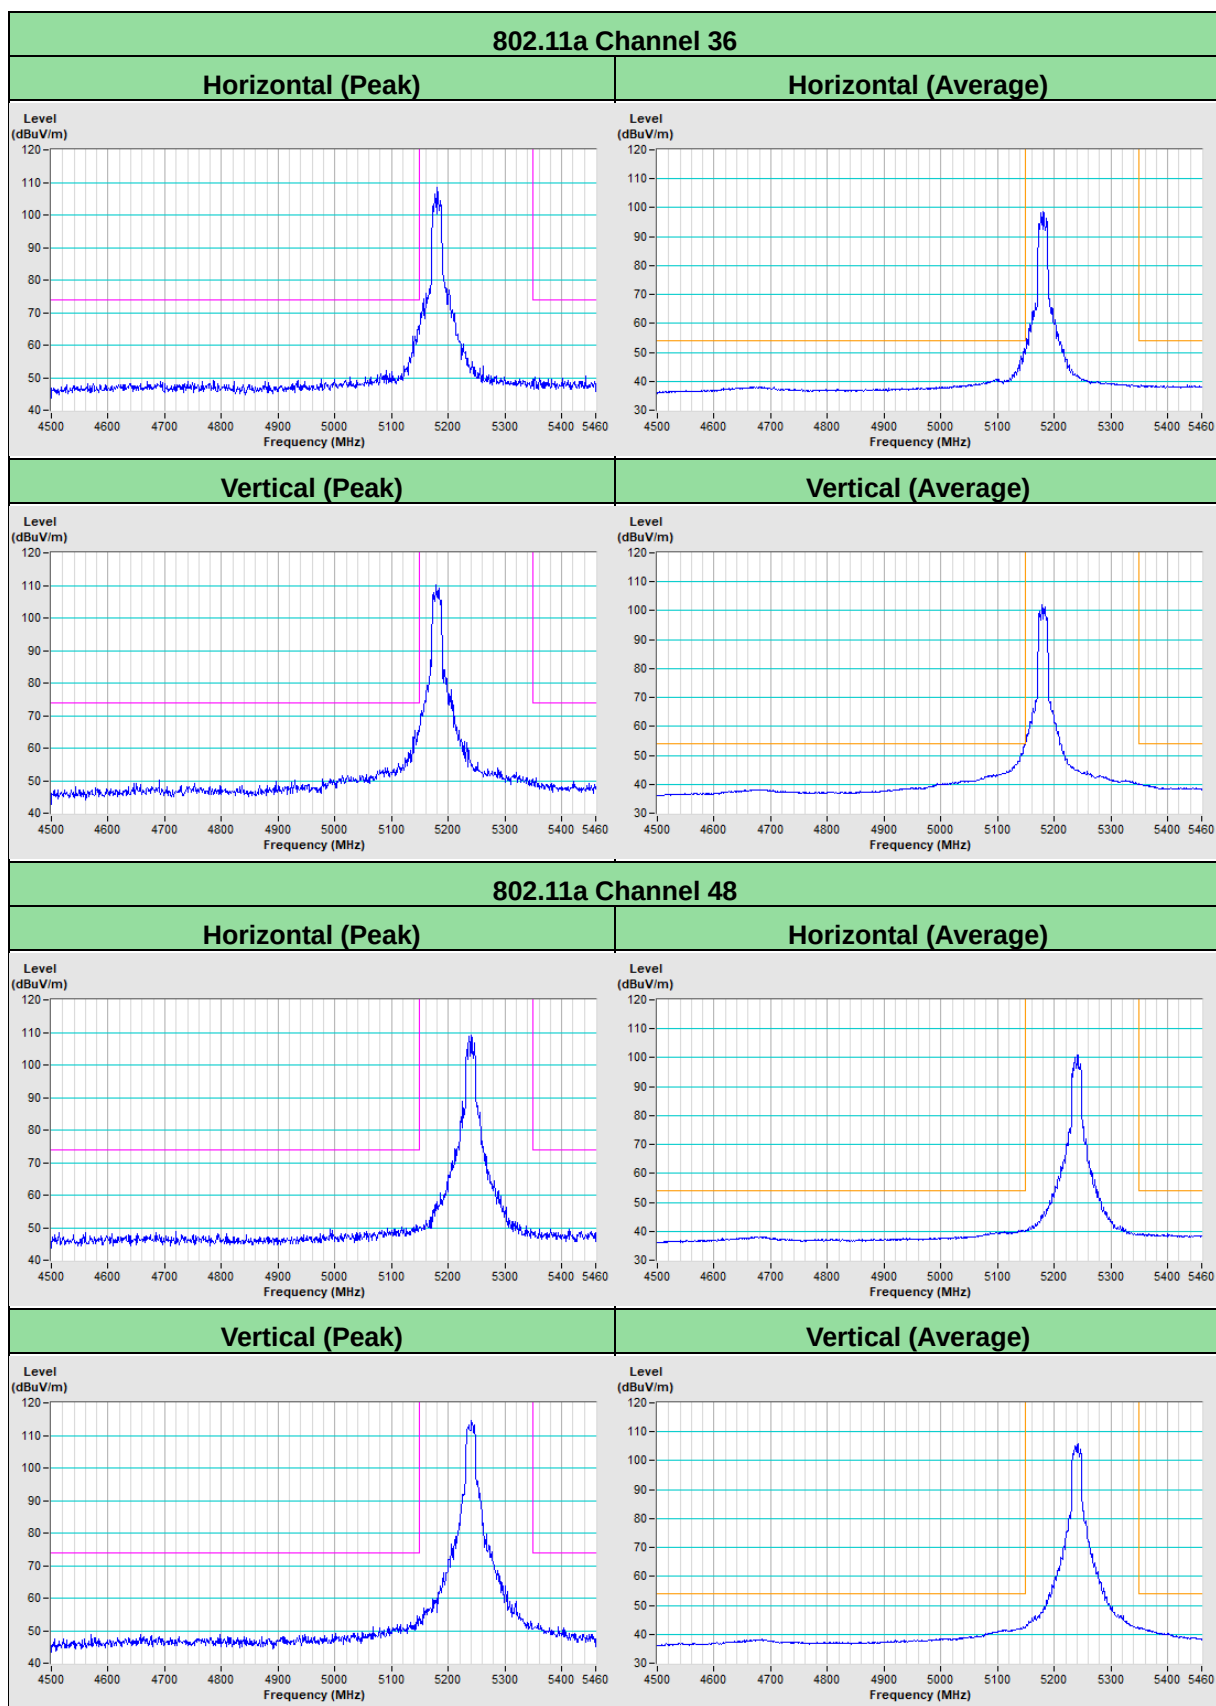


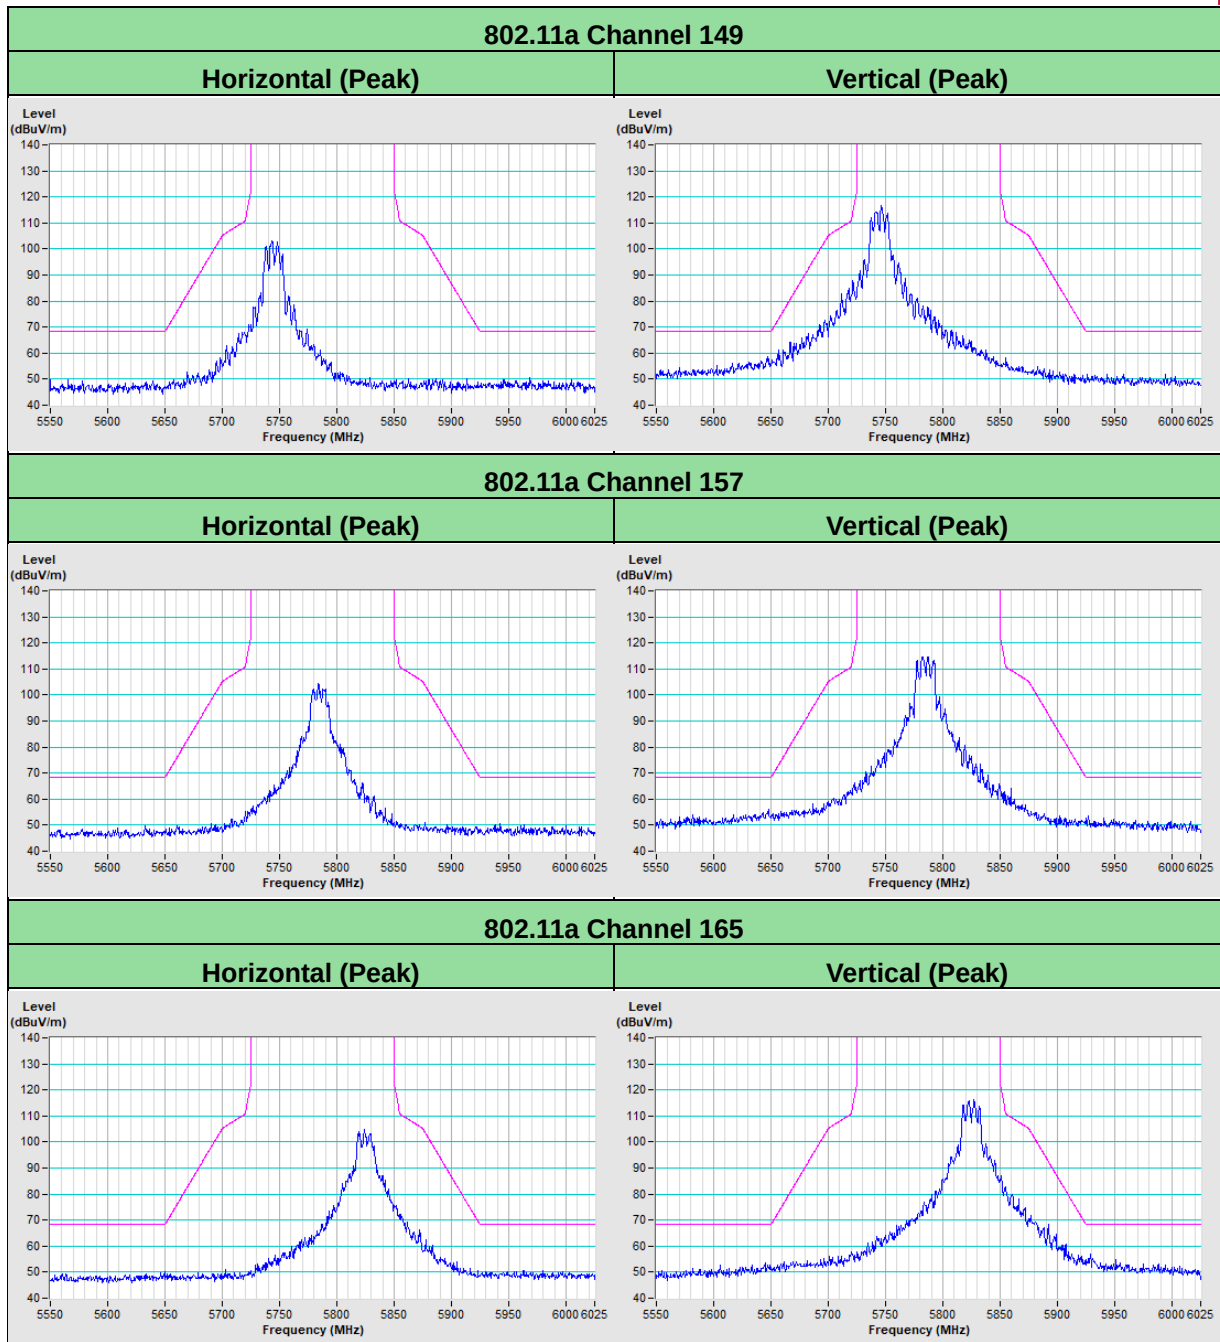


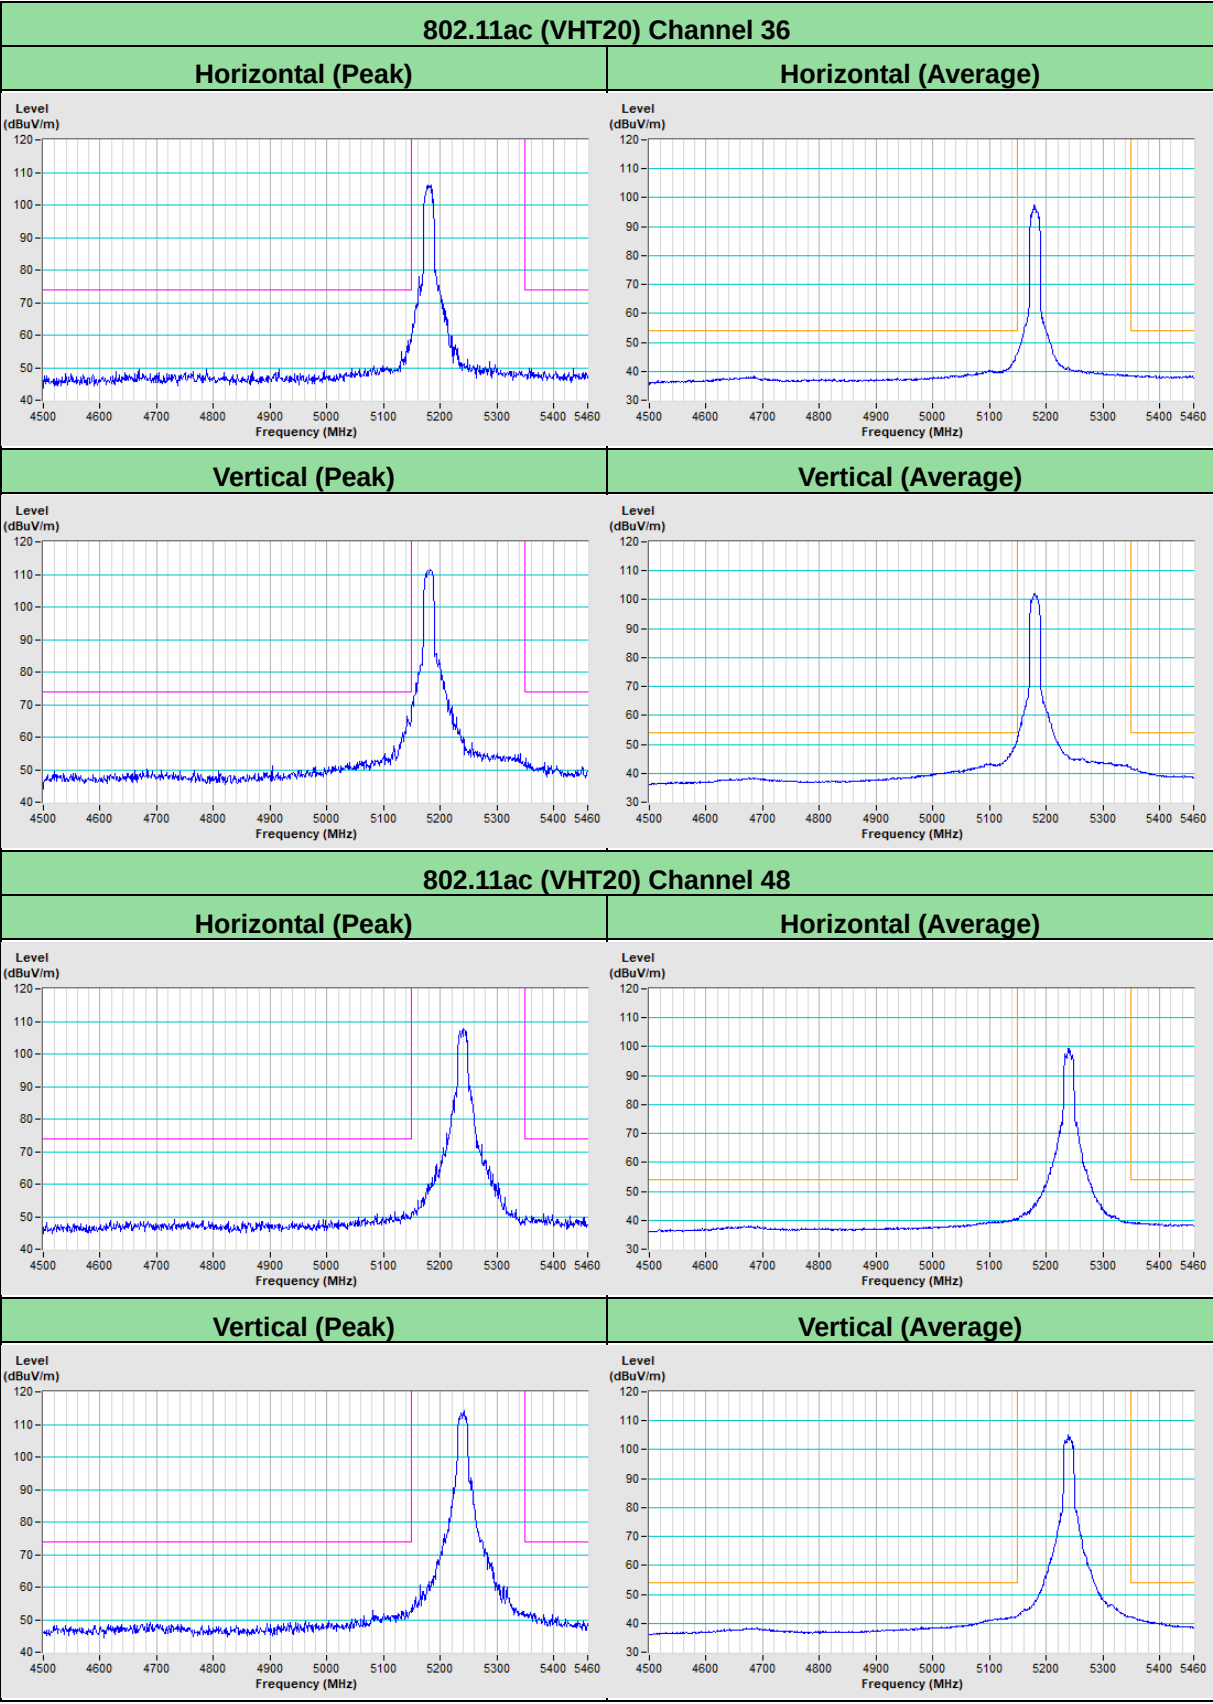

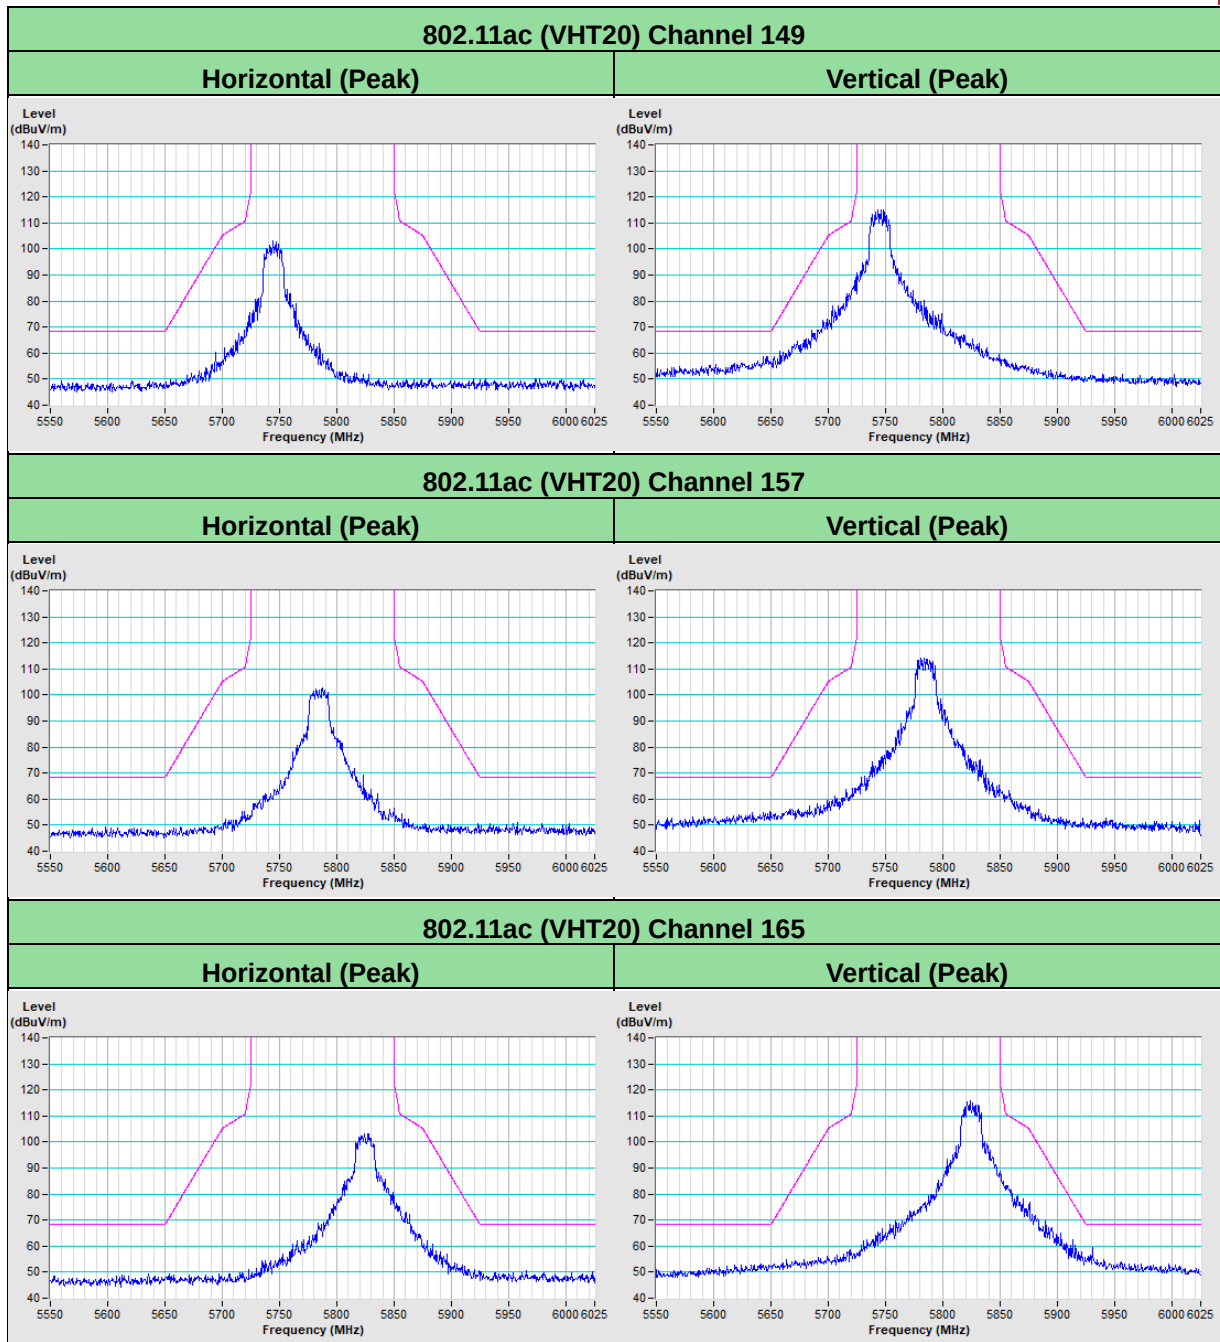

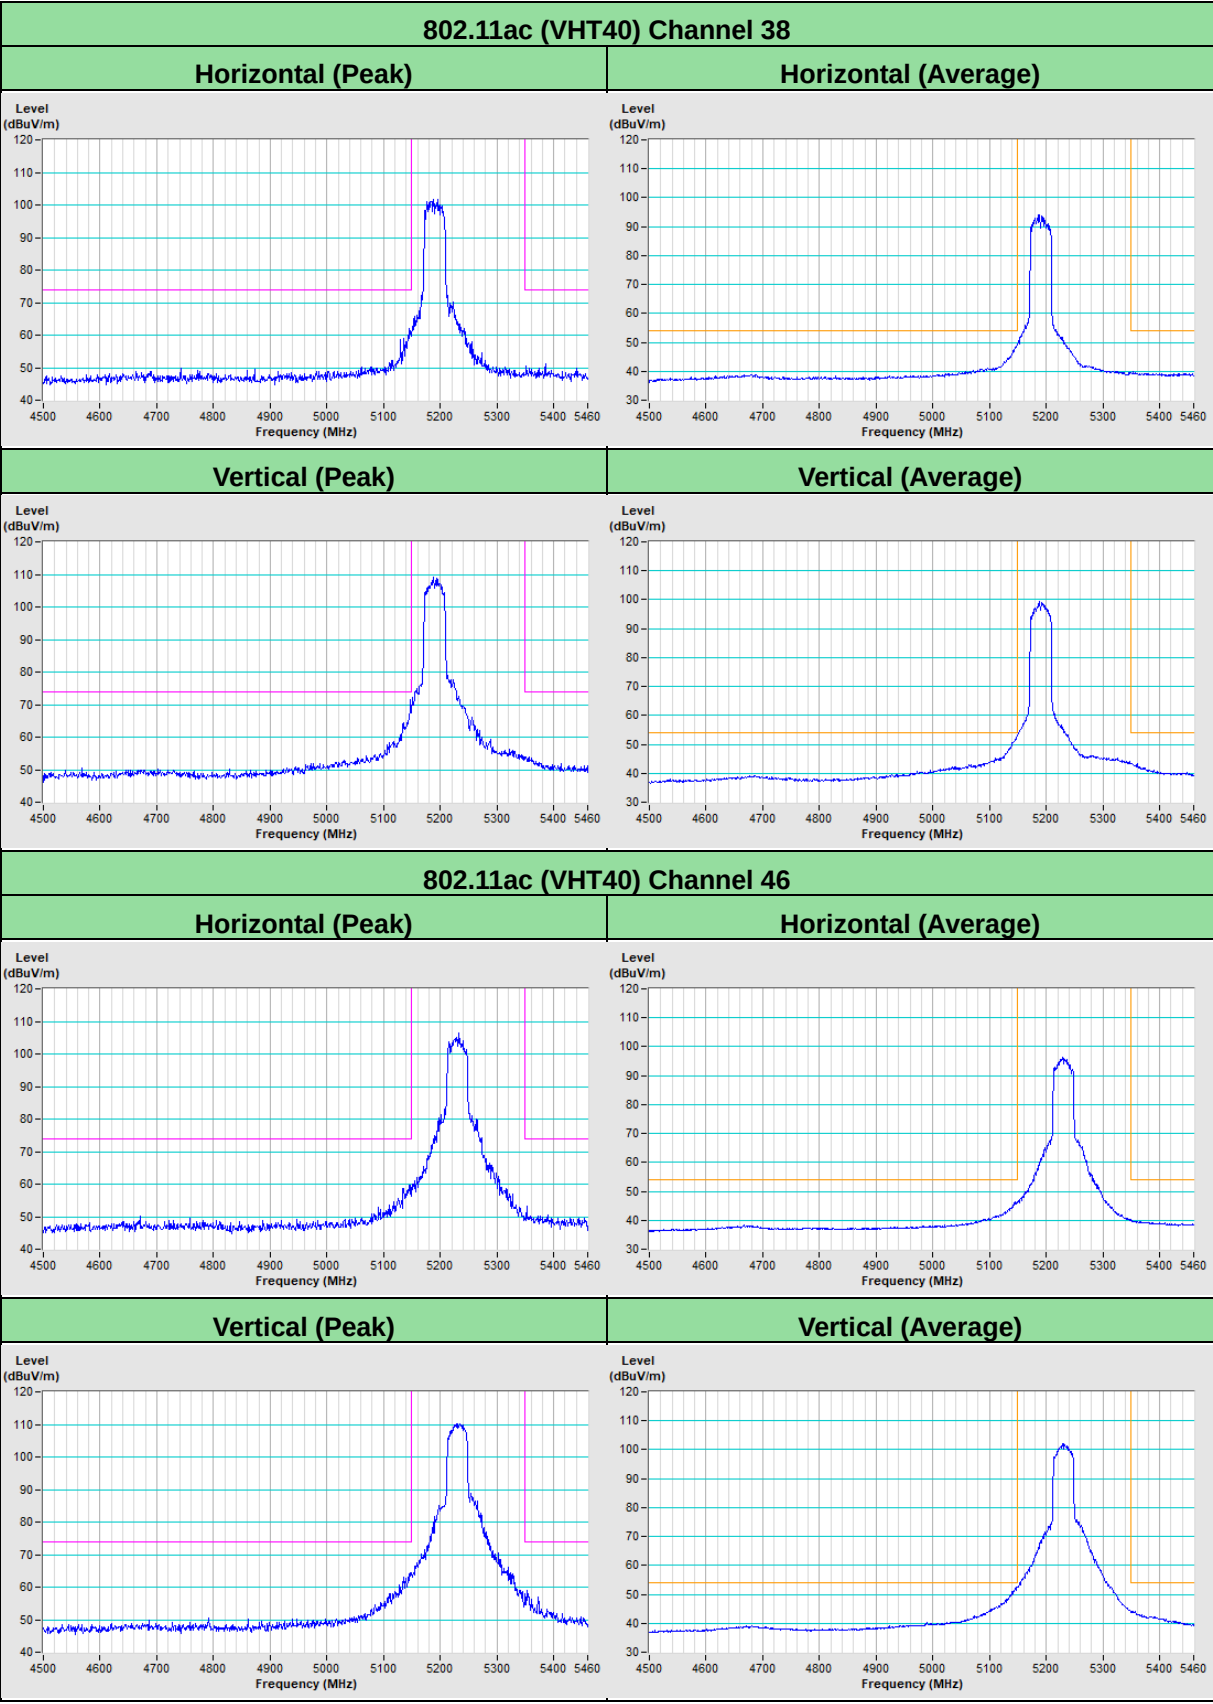

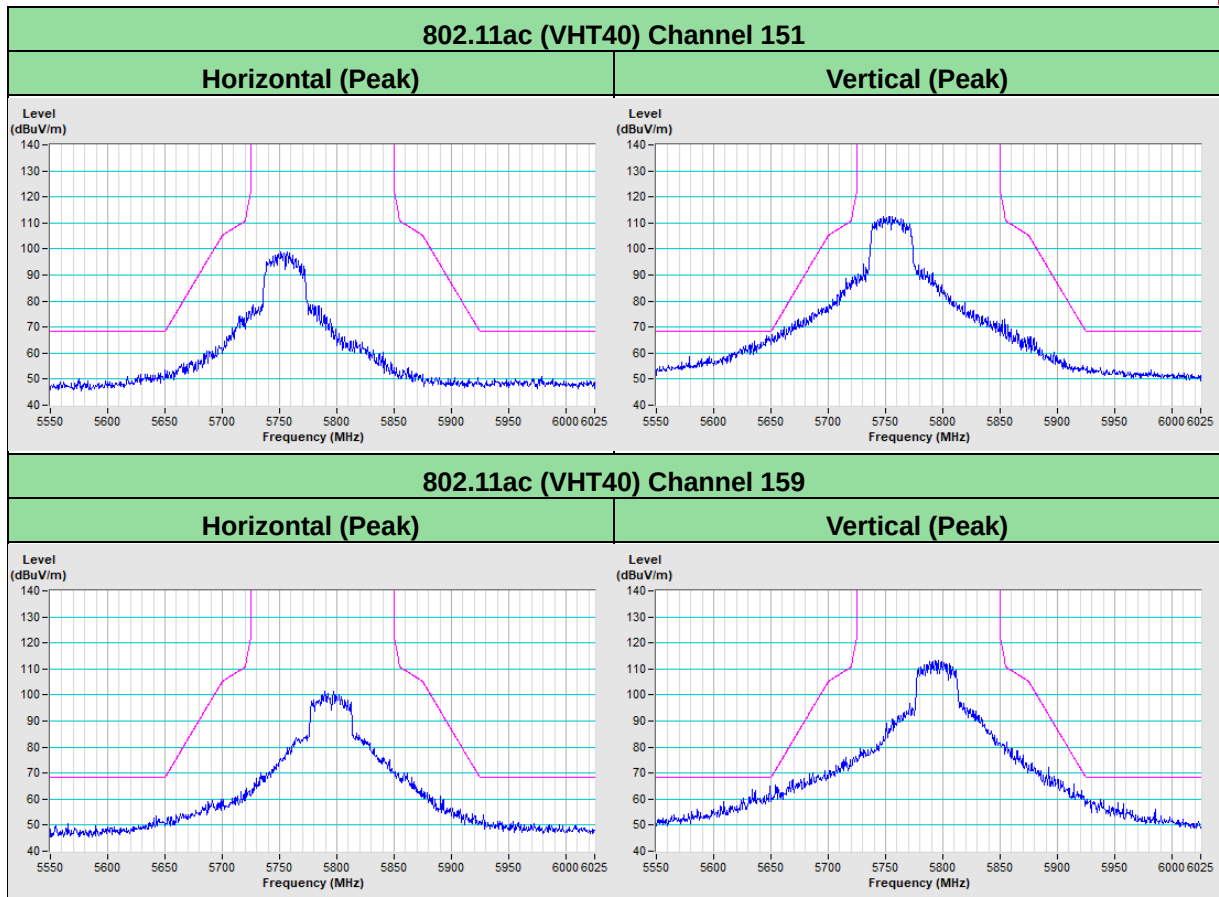

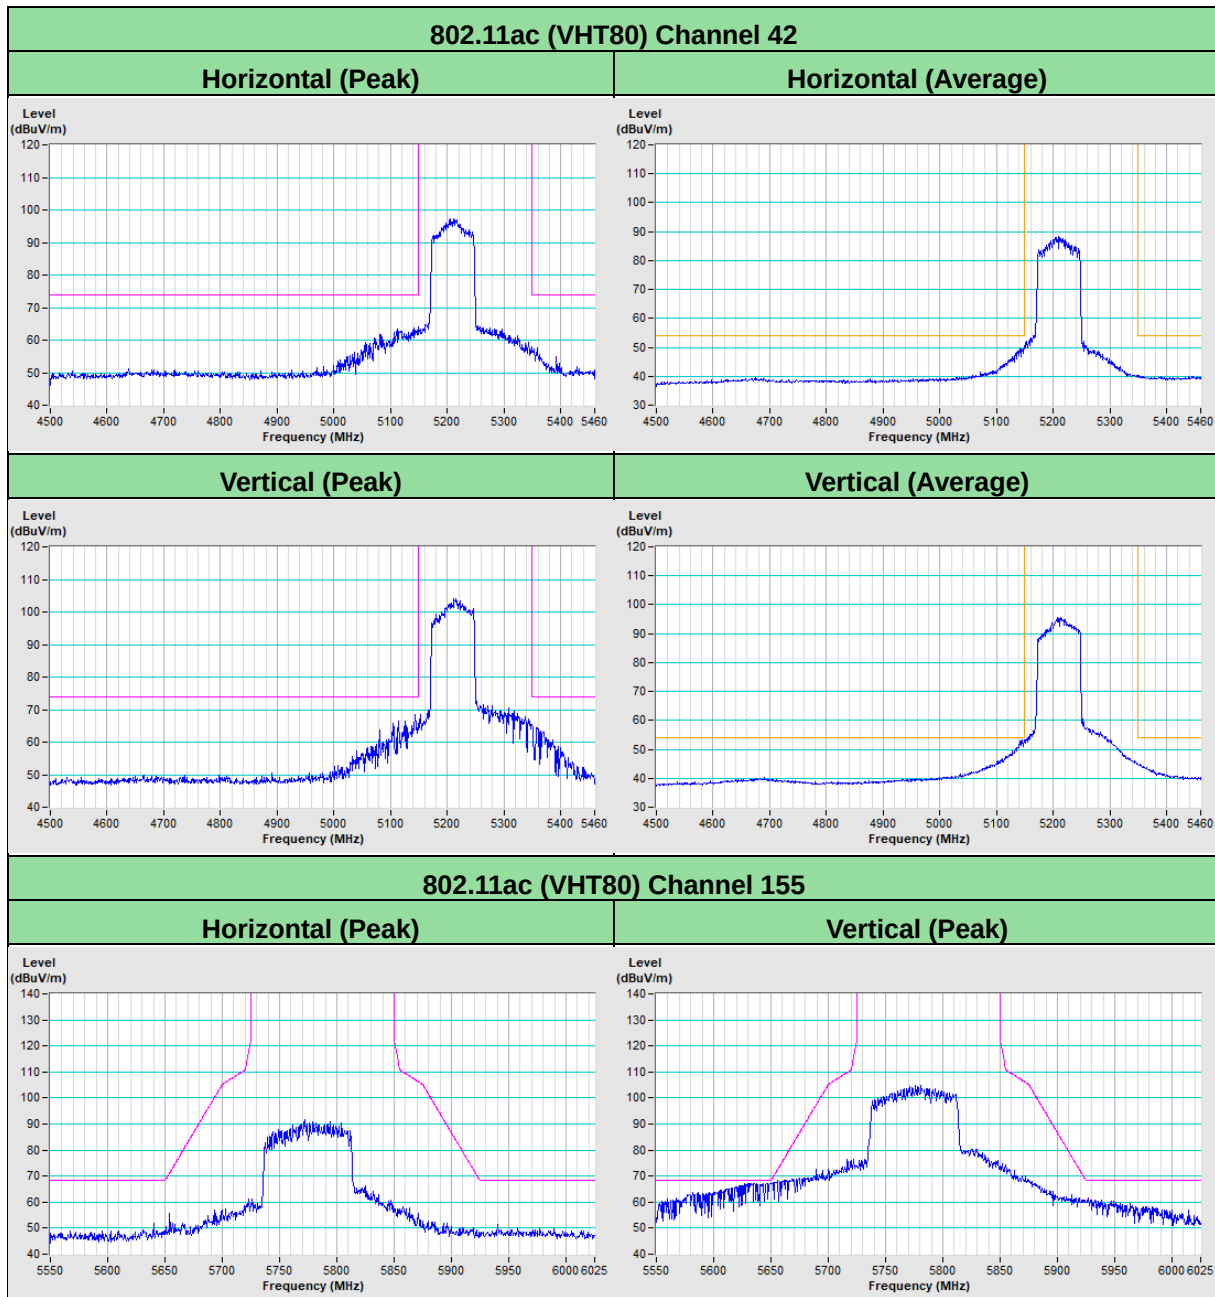

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---