




element

Multi-Tech Systems, Inc.

MTS504

OTA Report

Report: F3EN0288.0 Rev. 01 Issue Date: March 30, 2026

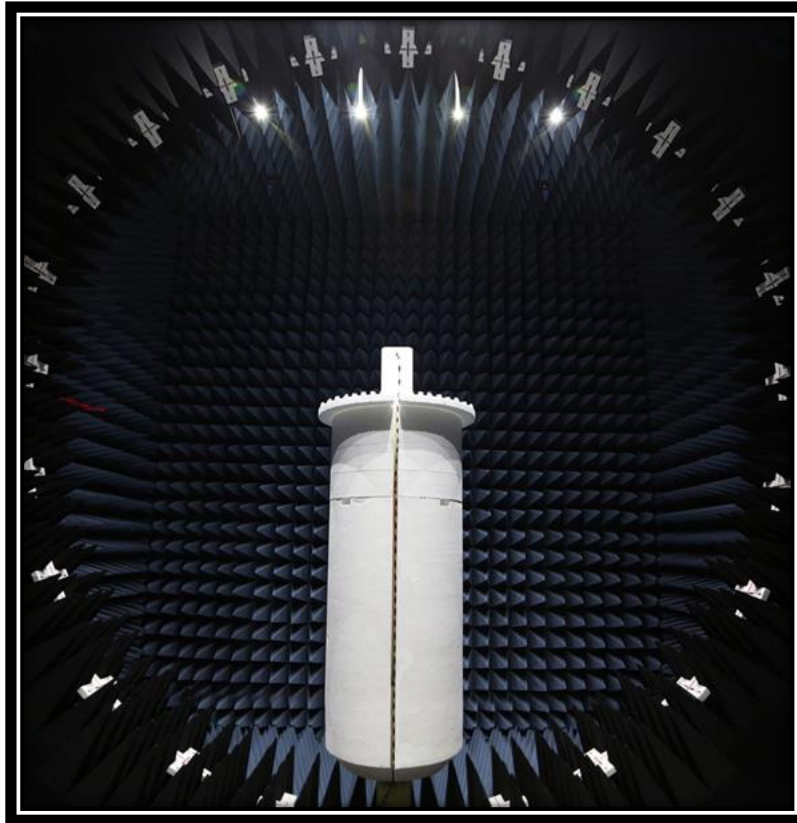

Approved by:

Trevor Buls, Principal EMC Test Engineer
Signed for and on behalf of Element

TABLE OF CONTENTS



Section	Page Number
Revision History	3
Facilities	4
Product Description	5
Modifications	6
OTA Measurement Summary.....	7
Passive 3D Antenna Pattern Measurements.....	9
End of Report.....	22

REVISION HISTORY

Revision Number	Description	Date (yyyy-mm-dd)	Page Number
00	Original		
01	Removed duplicate data	2026-03-30	21-32
	Added Test Description page		9




FACILITIES

Testing was performed at the following location(s)

	Location	Labs ⁽¹⁾	Address	A2LA ⁽²⁾	ISED ⁽³⁾	BSMI ⁽⁴⁾	VCCI ⁽⁵⁾	CAB	FDA ⁽⁶⁾
☐	California	OC01-17	41 Tesla Irvine, CA 92618 (949) 861-8918	3310.04	2834B	SL2-IN-E-1154R	A-0029	US0158	TL-55
☒	Minnesota	MN01-11	9349 W Broadway Ave. Brooklyn Park, MN 55445 (612) 638-5136	3310.05	2834E	SL2-IN-E-1152R	A-0109	US0175	TL-57
☐	Oregon	EV01-12	6775 NE Evergreen Pkwy #400 Hillsboro, OR 97124 (503) 844-4066	3310.02	2834D	SL2-IN-E-1017	A-0108	US0017	TL-56
☐	Washington	NC01-05	19201 120th Ave NE Bothell, WA 98011 (425) 984-6600	3310.06	2834F	SL2-IN-E-1153R	A-0110	US0157	TL-67
☐	Offsite	N/A	See Product Description	N/A	N/A	N/A	N/A	N/A	N/A

See data sheets for specific labs

- (1) The lab designations denote individual rooms within each location. (OC01, OC02, OC03, etc.)
- (2) A2LA Certificate No.
- (3) ISED Company No.
- (4) BSMI No.
- (5) VCCI Site Filing No.
- (6) FDA ASCA No.

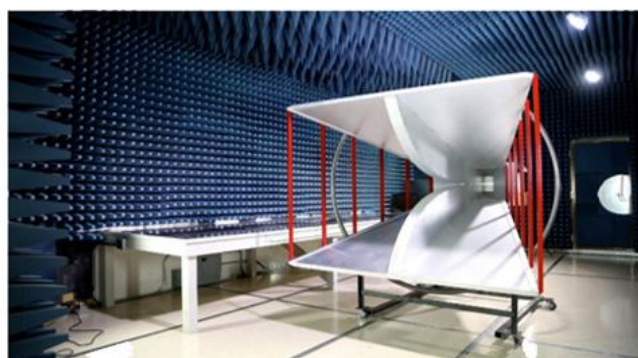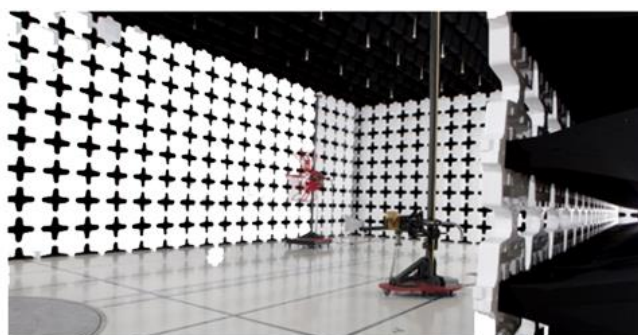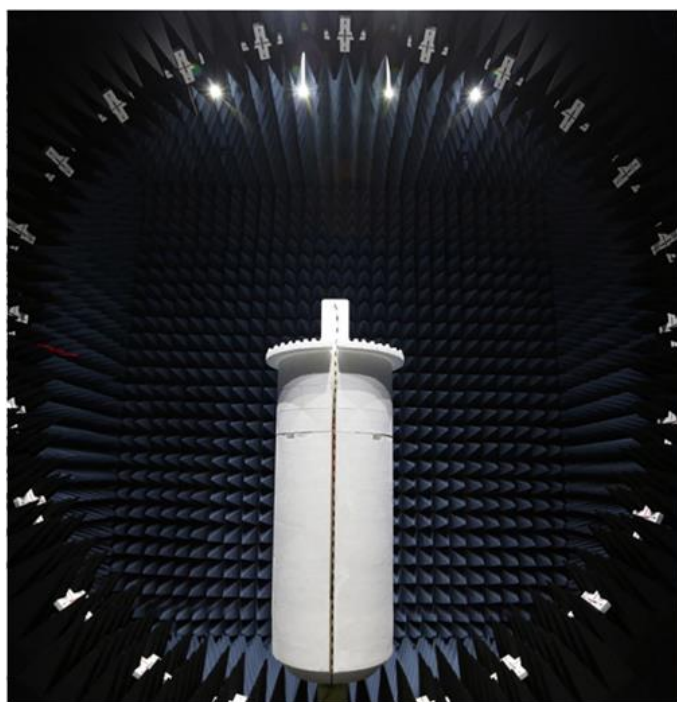

PRODUCT DESCRIPTION



Client and Equipment under Test (EUT) Information

Company Name:	Multi-Tech Systems, Inc.
Address:	2205 Woodale Dr.
City, State, Zip:	Mounds View, MN 55112
Test Requested By:	Dustin Morris
EUT:	MTS504
First Date of Test:	January 28, 2026
Last Date of Test:	January 28, 2026
Receipt Date of Samples:	January 28, 2026
Equipment Design Stage:	Production
Equipment Condition:	No Damage
Purchase Authorization:	Verified

Information Provided by the Party Requesting the Test

Functional Description of the EUT:
Monopole PCB Trace Antennas
Testing Objective:
To obtain 3D antenna pattern measurements and calculated antenna performance values (gain, efficiency, TRP, etc)

MODIFICATIONS



Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	2026-01-28	Passive 3D Antenna Pattern Measurements	Tested as delivered to test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

OTA MEASUREMENT SUMMARY





TEST DEFINITIONS

Phi Polarity	The detector antennas that are pointing in the same direction as the phi axis positioner rotates. See following page for photos.
Theta Polarity	The detector antennas that are pointing in the same direction as when the ring of detector antennas. See following page for photos.
Phi Angle	The position of the phi axis positioner, usually between 0° and 180°
Theta Angle	The position of the detector antenna, usually between -165° and 165°
Antenna Port Input Power (APIP)	The absolute power going into the antenna. This is used to calculate Efficiency and Gain.
Effective Isotropic Radiated Power (EIRP)	After combining phi and theta polarity measurements, the highest reading seen at any phi and theta angle during the measurement is the Effective Isotropic Radiated Power.
Total Radiated Power (TRP)	The sum of the power seen at all measuring antennas at all Theta and Phi angles and at both polarities. Represented in equation form by: $TRP = \frac{1}{4\pi} \int_0^{2\pi} \int_0^{\pi} (EIRP_{\theta}(\theta, \phi) + EIRP_{\phi}(\theta, \phi)) * \sin(\theta) d\theta d\phi$ Where θ is the theta angle of the measurement, ϕ is the phi angle of the measurement, $EIRP_{\theta}(\theta, \phi)$ is the reading on the theta polarity at a given theta and phi angle, and $EIRP_{\phi}(\theta, \phi)$ is the reading on the phi polarity at a given theta and phi angle.
Minimum Effective Isotropic Sensitivity (Min. EIS)	After finding the inverse of the sum of the inverses of the phi and theta polarity measurements for each single phi and theta angle, the lowest value is the Min. EIS. EIS is represented in equation form as: $EIS = (EIS_{\theta}(\theta_n, \phi_n)^{-1} + EIS_{\phi}(\theta_n, \phi_n)^{-1})^{-1}$ Where θ is the theta angle of the measurement, ϕ is the phi angle of the measurement, $EIS_{\theta}(\theta, \phi)$ is the reading on the theta polarity at a given theta and phi angle, and $EIS_{\phi}(\theta, \phi)$ is the reading on the phi polarity at a given theta and phi angle. The lowest value found across all EIS values is the Minimum Effective Isotropic Sensitivity.
Total Isotropic Sensitivity (TIS)	The inverse of the sum of the inverses of all the individual EIS readings. Represented in equation form as: $TIS = \frac{4\pi}{\int_0^{2\pi} \int_0^{\pi} (EIS_{\theta}(\theta, \phi)^{-1} + EIS_{\phi}(\theta, \phi)^{-1}) * \sin(\theta) d\theta d\phi}$ Where θ is the theta angle of the measurement, ϕ is the phi angle of the measurement, $EIS_{\theta}(\theta, \phi)$ is the reading on the theta polarity at a given theta and phi angle, and $EIS_{\phi}(\theta, \phi)$ is the reading on the phi polarity at a given theta and phi angle.
Directivity	The difference between the EIRP and the TRP or the Min. EIS and the TIS.
Efficiency	The difference between the TRP and the APIP.
Gain (also called Peak Gain)	The difference between the EIRP and the APIP.
3 dB Beamwidth	The angle between the locations of the half-power (3 dB down) points referenced against the location of the highest EIRP of the azimuth cut.



OTA MEASUREMENT SUMMARY

PHI POLARITY AND THETA POLARITY VISUALIZATION

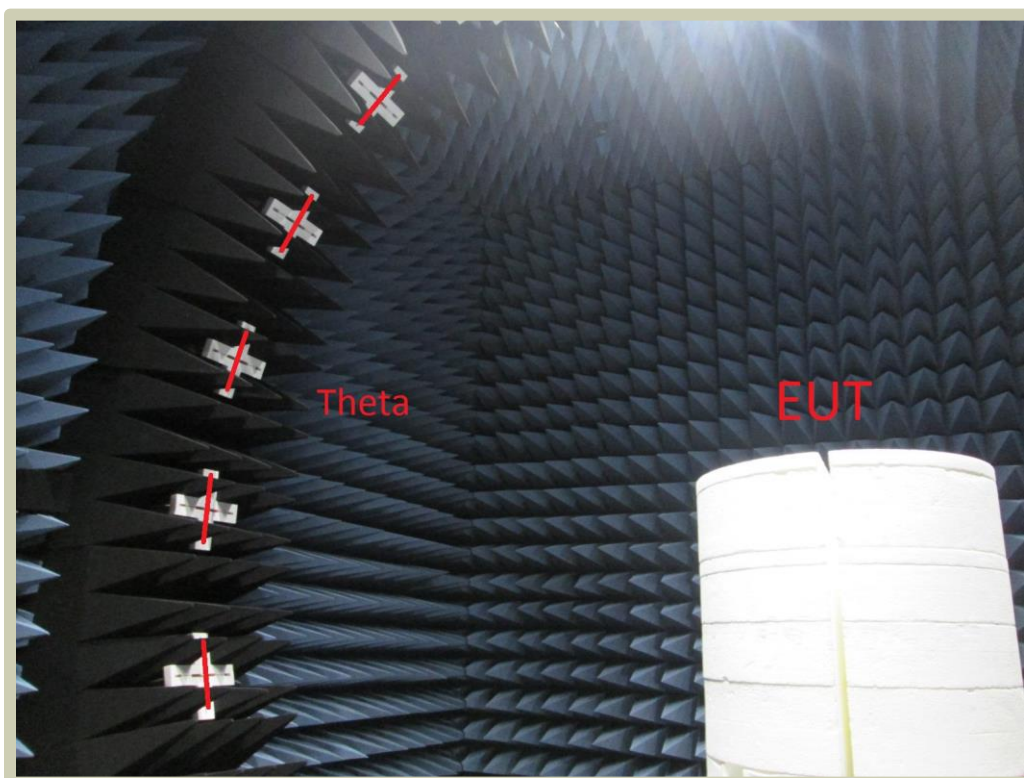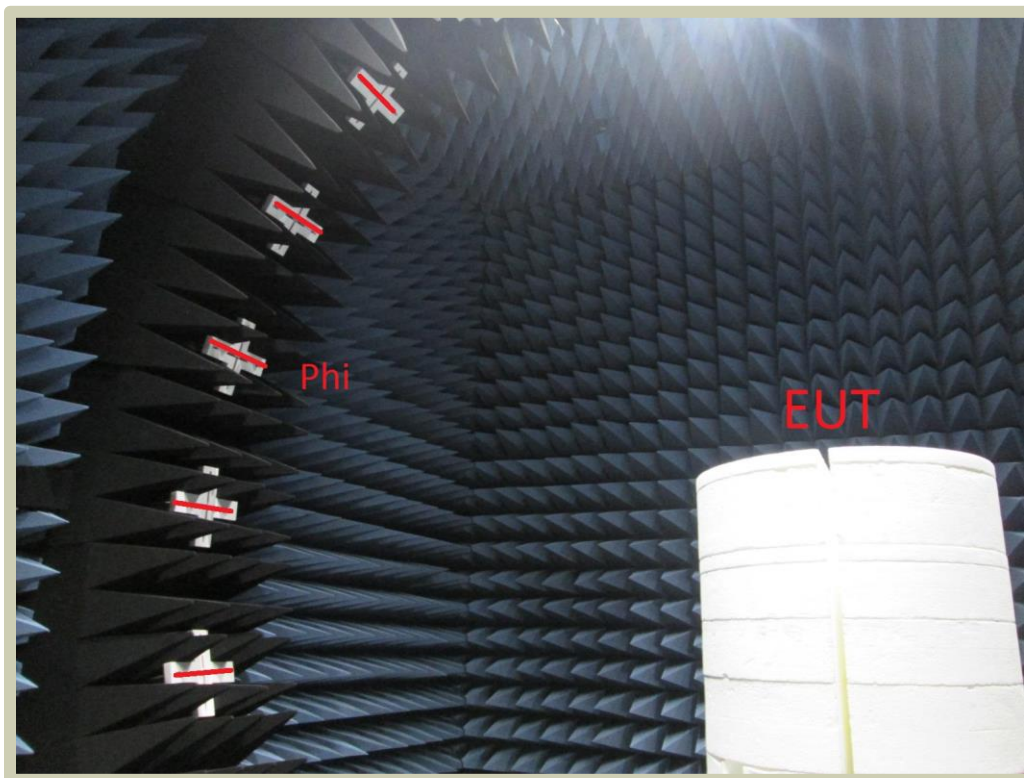

PASSIVE 3D ANTENNA PATTERN MEASUREMENTS



OTA 2018.01.04

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Analyzer - Network Analyzer	Agilent	E5071C	NAM	5/23/2025	36 mo
Antenna - Dipole	ETS Lindgren	3126-2450	OTF2	4/18/2024	36 mo
Antenna - Dipole	ETS Lindgren	3126-800	OTD	2/15/2023	36 mo
Antenna - Dipole	ETS Lindgren	3126-900	OTI	2/15/2023	36 mo
Antenna - Dipole	ETS Lindgren	3126-950	OTK	11/17/2025	36 mo
Antenna - Dipole	ETS Lindgren	3126-2150	OTG	2/15/2023	36 mo
Chamber - OTA	ETS Lindgren	AMS-8923-195	OTA	10/8/2024	36 mo

TEST DESCRIPTION

Using the modes of operation and configurations noted within this report, a radiated pattern measurement test was performed. The frequency ranges investigated (scanned), are also noted in this report.

The EUT was placed on a low dielectric constant support structure (Phi Axis Positioner) in the 3D center of the measurement zone using a laser alignment system. The antenna port of the EUT is connected to an RF feed cable which is connected to a Vector Network Analyzer (VNA) at its opposite end.

The test begins with a measurement path configured (via ETS-Lindgren EMQuest Data Acquisition and Analysis Software) such that an electrical path is present from the Theta polarization element of the -165° detector antenna, to port 2 of the VNA. The VNA drives the EUT through the desired frequency range at the desired IFBW and an insertion loss measurement is obtained. The measurement path is then reconfigured (again via EMQuest) such that an electrical path is present from the Phi polarization element of the -165° detector antenna, to port 2 of the VNA. The VNA drives the EUT through the desired frequency range at the desired IFBW and an insertion loss measurement is obtained. This process is repeated at each of the 23 detector antennas in turn. This process is repeated for every rotation of the Phi Axis Positioner up to 180° - Phi Axis Resolution. When this process is complete, EMQuest applies factors from a Range Calibration and Normalization to produce a final data set with 1D/2D/3D patterns and tabular values such as antenna efficiency, Equivalent Isotropic Radiated Power (EIRP), Total Radiated Power (TRP), etc.

PASSIVE 3D ANTENNA PATTERN MEASUREMENTS



OTA 2018.01.04

EUT:	MTS504
Serial Number:	None
Customer:	Multi-Tech Systems, Inc.
Attendees:	Dustin Morris
Customer Project:	None
Tested By:	Christopher Heintzelman
Test Run Description:	Run1

Work Order:	F3EN0281
Date:	1/28/2026
Temperature:	22.7 °C
Relative Humidity:	14.6% RH
Bar. Pressure:	1026 mbar
Job Site:	MN10



COMMENTS

LoRa antenna.

3D PATTERN DATA

Frequency (MHz)	Ant. Port Input Pwr. (dBm)	Tot. Rad. Pwr. (dBm)	Peak EIRP (dBm)	Directivity (dBi)	Efficiency (dB)	Efficiency (%)	Gain (dBi)	Average Gain (dB)	E-Plane 3 dB BW (°)
800	0.00	-11.35	-8.70	2.66	-11.35	7.32	-8.70	-11.35	90.00
805	0.00	-10.90	-8.40	2.50	-10.90	8.14	-8.40	-10.90	92.00
810	0.00	-10.48	-7.97	2.52	-10.48	8.95	-7.97	-10.48	92.00
815	0.00	-9.98	-7.59	2.39	-9.98	10.04	-7.59	-9.98	96.00
820	0.00	-9.49	-7.01	2.48	-9.49	11.25	-7.01	-9.49	96.00
825	0.00	-9.04	-6.60	2.44	-9.04	12.46	-6.60	-9.04	97.00
830	0.00	-8.52	-6.03	2.48	-8.52	14.07	-6.03	-8.52	97.00
835	0.00	-8.20	-5.81	2.39	-8.20	15.14	-5.81	-8.20	100.00
840	0.00	-7.71	-5.28	2.43	-7.71	16.94	-5.28	-7.71	100.00
845	0.00	-7.39	-4.84	2.54	-7.39	18.26	-4.84	-7.39	90.00
850	0.00	-6.98	-4.37	2.61	-6.98	20.05	-4.37	-6.98	89.00
855	0.00	-6.64	-4.00	2.64	-6.64	21.68	-4.00	-6.64	90.00
860	0.00	-6.29	-3.69	2.60	-6.29	23.50	-3.69	-6.29	93.00
865	0.00	-5.93	-3.33	2.60	-5.93	25.51	-3.33	-5.93	98.00
870	0.00	-5.63	-2.98	2.65	-5.63	27.36	-2.98	-5.63	98.00
875	0.00	-5.35	-2.69	2.65	-5.35	29.21	-2.69	-5.35	97.00
880	0.00	-5.04	-2.48	2.57	-5.04	31.31	-2.48	-5.04	98.00
885	0.00	-4.81	-2.27	2.54	-4.81	33.01	-2.27	-4.81	97.00
890	0.00	-4.50	-2.04	2.46	-4.50	35.46	-2.04	-4.50	95.00
895	0.00	-4.29	-1.68	2.61	-4.29	37.20	-1.68	-4.29	98.00
900	0.00	-3.96	-1.41	2.55	-3.96	40.15	-1.41	-3.96	98.00
905	0.00	-3.65	-0.84	2.81	-3.65	43.15	-0.84	-3.65	94.00
910	0.00	-3.29	-0.64	2.65	-3.29	46.88	-0.64	-3.29	97.00
915	0.00	-3.02	-0.24	2.78	-3.02	49.93	-0.24	-3.02	95.00
920	0.00	-2.84	-0.22	2.63	-2.84	51.98	-0.22	-2.84	98.00
925	0.00	-2.75	-0.17	2.57	-2.75	53.12	-0.17	-2.75	96.00
930	0.00	-2.74	-0.19	2.55	-2.74	53.26	-0.19	-2.74	105.00
935	0.00	-2.74	-0.18	2.56	-2.74	53.20	-0.18	-2.74	105.00
940	0.00	-2.74	-0.15	2.59	-2.74	53.23	-0.15	-2.74	106.00
945	0.00	-2.75	-0.17	2.58	-2.75	53.07	-0.17	-2.75	106.00
950	0.00	-2.67	-0.05	2.62	-2.67	54.02	-0.05	-2.67	95.00
955	0.00	-2.63	-0.03	2.60	-2.63	54.61	-0.03	-2.63	95.00
960	0.00	-2.53	0.14	2.67	-2.53	55.79	0.14	-2.53	96.00
965	0.00	-2.43	0.26	2.69	-2.43	57.17	0.26	-2.43	95.00
970	0.00	-2.45	0.22	2.67	-2.45	56.85	0.22	-2.45	97.00
975	0.00	-2.43	0.19	2.62	-2.43	57.10	0.19	-2.43	93.00
980	0.00	-2.61	0.17	2.78	-2.61	54.85	0.17	-2.61	92.00
985	0.00	-2.61	0.10	2.71	-2.61	54.86	0.10	-2.61	80.00
990	0.00	-2.82	-0.02	2.80	-2.82	52.25	-0.02	-2.82	79.00
995	0.00	-2.82	-0.01	2.81	-2.82	52.29	-0.01	-2.82	78.00
1000	0.00	-2.97	-0.25	2.72	-2.97	50.50	-0.25	-2.97	95.00
2300	0.00	-17.20	-13.34	3.87	-17.20	1.90	-13.34	-17.20	70.00
2310	0.00	-17.12	-13.06	4.06	-17.12	1.94	-13.06	-17.12	63.00
2320	0.00	-16.91	-12.81	4.10	-16.91	2.04	-12.81	-16.91	63.00
2330	0.00	-16.76	-12.56	4.19	-16.76	2.11	-12.56	-16.76	69.00
2340	0.00	-16.65	-12.22	4.44	-16.65	2.16	-12.22	-16.65	59.00
2350	0.00	-16.41	-11.77	4.64	-16.41	2.28	-11.77	-16.41	64.00
2360	0.00	-15.86	-11.00	4.86	-15.86	2.60	-11.00	-15.86	62.00
2370	0.00	-15.50	-10.82	4.68	-15.50	2.82	-10.82	-15.50	57.00
2380	0.00	-15.26	-10.51	4.75	-15.26	2.98	-10.51	-15.26	60.00
2390	0.00	-15.04	-10.63	4.41	-15.04	3.13	-10.63	-15.04	56.00
2400	0.00	-14.91	-10.73	4.18	-14.91	3.23	-10.73	-14.91	64.00
2410	0.00	-14.76	-10.84	3.93	-14.76	3.34	-10.84	-14.76	67.00
2420	0.00	-14.66	-11.03	3.64	-14.66	3.42	-11.03	-14.66	70.00
2430	0.00	-14.65	-10.98	3.67	-14.65	3.43	-10.98	-14.65	64.00
2440	0.00	-14.51	-10.90	3.60	-14.51	3.54	-10.90	-14.51	63.00
2450	0.00	-14.42	-10.68	3.74	-14.42	3.61	-10.68	-14.42	60.00
2460	0.00	-14.39	-10.64	3.76	-14.39	3.64	-10.64	-14.39	61.00
2470	0.00	-14.56	-10.69	3.87	-14.56	3.50	-10.69	-14.56	62.00
2480	0.00	-14.60	-10.75	3.85	-14.60	3.46	-10.75	-14.60	63.00
2490	0.00	-14.48	-10.57	3.91	-14.48	3.56	-10.57	-14.48	62.00
2500	0.00	-14.30	-10.36	3.94	-14.30	3.72	-10.36	-14.30	60.00
2510	0.00	-14.17	-10.04	4.13	-14.17	3.83	-10.04	-14.17	60.00
2520	0.00	-14.17	-10.10	4.07	-14.17	3.83	-10.10	-14.17	58.00
2530	0.00	-14.23	-10.00	4.23	-14.23	3.77	-10.00	-14.23	57.00
2540	0.00	-14.36	-10.31	4.05	-14.36	3.66	-10.31	-14.36	58.00

2550	0.00	-14.36	-10.20	4.16	-14.36	3.66	-10.20	-14.36	58.00
2560	0.00	-14.15	-9.98	4.17	-14.15	3.85	-9.98	-14.15	57.00
2570	0.00	-13.90	-9.83	4.07	-13.90	4.07	-9.83	-13.90	58.00
2580	0.00	-13.83	-9.67	4.16	-13.83	4.14	-9.67	-13.83	56.00
2590	0.00	-13.77	-9.66	4.11	-13.77	4.20	-9.66	-13.77	57.00
2600	0.00	-13.61	-9.53	4.08	-13.61	4.35	-9.53	-13.61	67.00

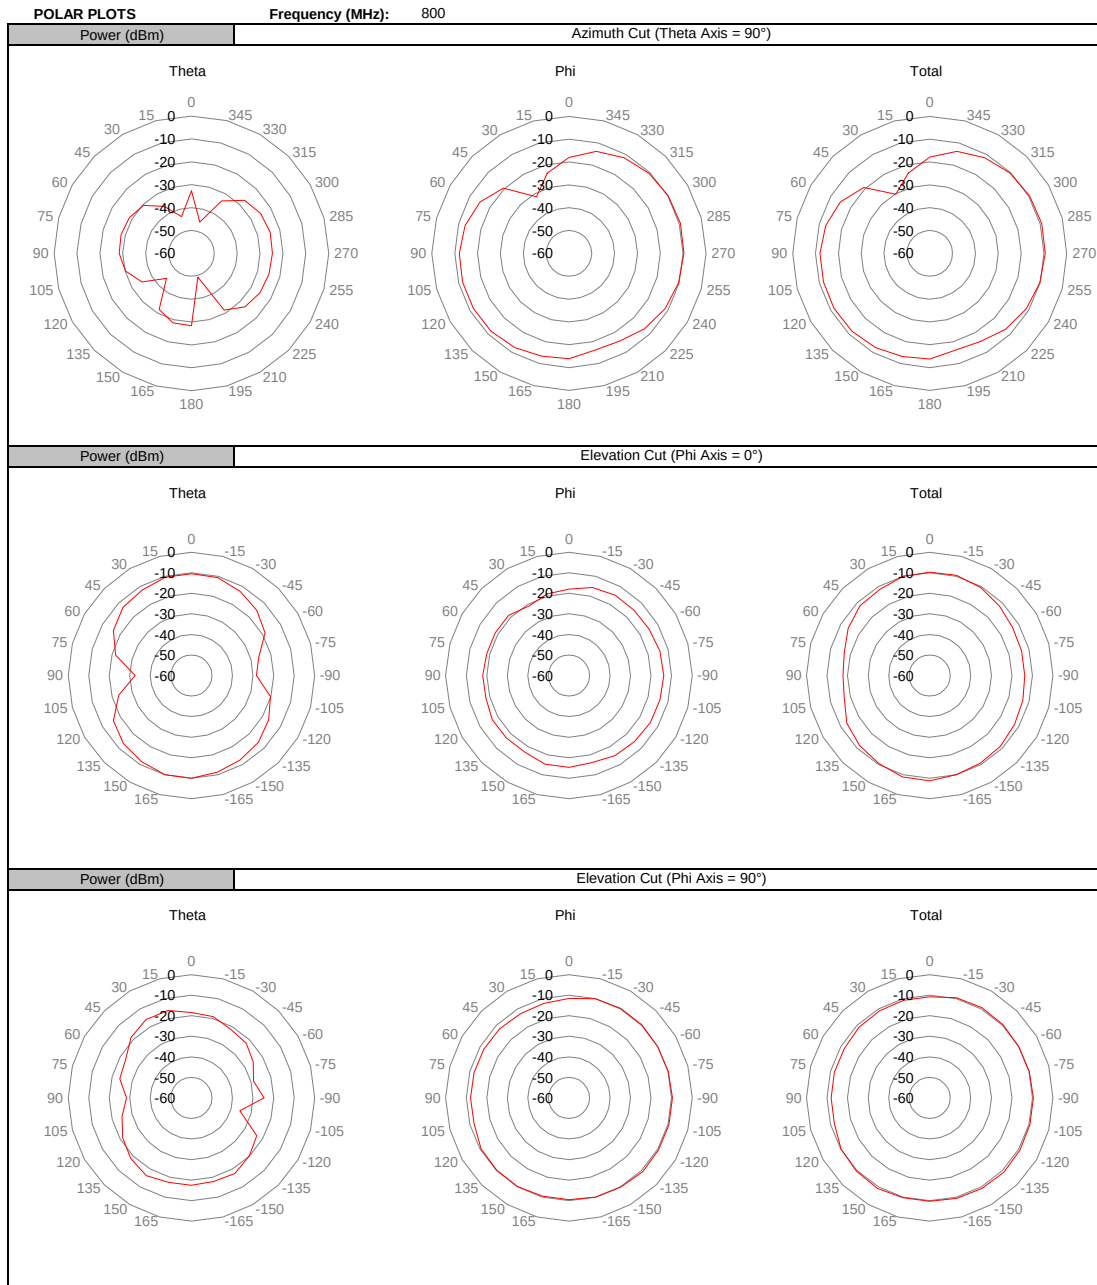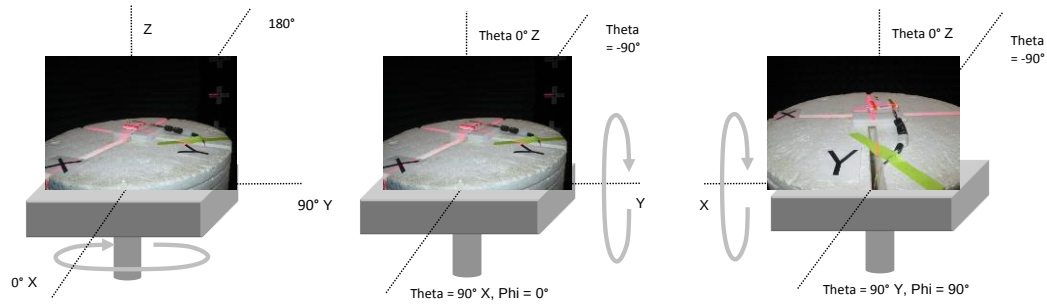

PASSIVE 3D ANTENNA PATTERN MEASUREMENTS



EUT:	MTS504
Serial Number:	None
Customer:	Multi-Tech Systems, Inc.
Attendees:	Dustin Morris
Customer Project:	None
Tested By:	Christopher Heintzelman
Test Run Description:	Run3

Work Order:	F3EN0281
Date:	1/28/2026
Temperature:	22.7 °C
Relative Humidity:	14.6% RH
Bar. Pressure:	1026 mbar
Job Site:	MN10

OTA 2018.01.04



COMMENTS

Bluetooth antenna. With Speag phantom.

3D PATTERN DATA

Frequency (MHz)	Ant. Port Input Pwr. (dBm)	Tot. Rad. Pwr. (dBm)	Peak EIRP (dBm)	Directivity (dBi)	Efficiency (dB)	Efficiency (%)	Gain (dBi)	Average Gain (dB)	E-Plane 3 dB BW (°)
800	0.00	-43.56	-30.28	13.28	-43.56	0.00	-30.28	-43.56	22.00
805	0.00	-43.94	-30.94	12.99	-43.94	0.00	-30.94	-43.94	26.00
810	0.00	-44.46	-31.18	13.28	-44.46	0.00	-31.18	-44.46	22.00
815	0.00	-44.55	-31.25	13.30	-44.55	0.00	-31.25	-44.55	1.00
820	0.00	-44.44	-31.83	12.61	-44.44	0.00	-31.83	-44.44	1.00
825	0.00	-44.55	-32.05	12.51	-44.55	0.00	-32.05	-44.55	1.00
830	0.00	-44.14	-31.62	12.51	-44.14	0.00	-31.62	-44.14	1.00
835	0.00	-43.62	-30.43	13.19	-43.62	0.00	-30.43	-43.62	1.00
840	0.00	-43.08	-30.15	12.94	-43.08	0.00	-30.15	-43.08	25.00
845	0.00	-43.20	-29.97	13.22	-43.20	0.00	-29.97	-43.20	26.00
850	0.00	-43.29	-29.98	13.31	-43.29	0.00	-29.98	-43.29	24.00
855	0.00	-43.85	-31.03	12.82	-43.85	0.00	-31.03	-43.85	28.00
860	0.00	-43.90	-31.13	12.78	-43.90	0.00	-31.13	-43.90	27.00
865	0.00	-43.52	-30.82	12.70	-43.52	0.00	-30.82	-43.52	26.00
870	0.00	-43.31	-30.75	12.56	-43.31	0.00	-30.75	-43.31	16.00
875	0.00	-43.23	-31.03	12.20	-43.23	0.00	-31.03	-43.23	31.00
880	0.00	-43.19	-31.25	11.94	-43.19	0.00	-31.25	-43.19	1.00
885	0.00	-43.26	-30.47	12.79	-43.26	0.00	-30.47	-43.26	1.00
890	0.00	-43.21	-29.52	13.69	-43.21	0.00	-29.52	-43.21	1.00
895	0.00	-43.22	-28.56	14.66	-43.22	0.00	-28.56	-43.22	1.00
900	0.00	-42.91	-27.73	15.18	-42.91	0.01	-27.73	-42.91	1.00
905	0.00	-42.52	-27.17	15.35	-42.52	0.01	-27.17	-42.52	1.00
910	0.00	-42.32	-26.80	15.52	-42.32	0.01	-26.80	-42.32	1.00
915	0.00	-42.22	-26.86	15.36	-42.22	0.01	-26.86	-42.22	1.00
920	0.00	-42.46	-27.01	15.44	-42.46	0.01	-27.01	-42.46	1.00
925	0.00	-42.57	-27.30	15.28	-42.57	0.01	-27.30	-42.57	1.00
930	0.00	-42.62	-27.31	15.32	-42.62	0.01	-27.31	-42.62	1.00
935	0.00	-42.78	-27.35	15.43	-42.78	0.01	-27.35	-42.78	1.00
940	0.00	-42.61	-27.01	15.60	-42.61	0.01	-27.01	-42.61	1.00
945	0.00	-42.67	-27.04	15.63	-42.67	0.01	-27.04	-42.67	1.00
950	0.00	-42.49	-26.95	15.54	-42.49	0.01	-26.95	-42.49	1.00
955	0.00	-42.33	-27.28	15.05	-42.33	0.01	-27.28	-42.33	1.00
960	0.00	-42.13	-27.49	14.63	-42.13	0.01	-27.49	-42.13	1.00
965	0.00	-41.80	-27.72	14.08	-41.80	0.01	-27.72	-41.80	1.00
970	0.00	-41.76	-28.00	13.75	-41.76	0.01	-28.00	-41.76	1.00
975	0.00	-41.83	-29.43	12.40	-41.83	0.01	-29.43	-41.83	22.00
980	0.00	-41.96	-30.14	11.81	-41.96	0.01	-30.14	-41.96	1.00
985	0.00	-41.67	-30.25	11.42	-41.67	0.01	-30.25	-41.67	1.00
990	0.00	-41.96	-30.26	11.70	-41.96	0.01	-30.26	-41.96	1.00
995	0.00	-42.10	-31.47	10.63	-42.10	0.01	-31.47	-42.10	1.00
1000	0.00	-42.12	-31.00	11.12	-42.12	0.01	-31.00	-42.12	1.00
2300	0.00	-12.09	-2.51	9.59	-12.09	6.17	-2.51	-12.09	60.00
2310	0.00	-11.84	-2.39	9.45	-11.84	6.55	-2.39	-11.84	62.00
2320	0.00	-11.42	-2.02	9.39	-11.42	7.21	-2.02	-11.42	61.00
2330	0.00	-10.98	-1.67	9.31	-10.98	7.98	-1.67	-10.98	62.00
2340	0.00	-10.60	-1.18	9.41	-10.60	8.72	-1.18	-10.60	61.00
2350	0.00	-10.37	-1.03	9.34	-10.37	9.19	-1.03	-10.37	61.00
2360	0.00	-9.94	-0.63	9.31	-9.94	10.13	-0.63	-9.94	61.00
2370	0.00	-9.58	-0.23	9.35	-9.58	11.01	-0.23	-9.58	60.00
2380	0.00	-9.26	0.07	9.34	-9.26	11.85	0.07	-9.26	60.00
2390	0.00	-9.09	0.20	9.29	-9.09	12.34	0.20	-9.09	60.00
2400	0.00	-8.94	0.43	9.37	-8.94	12.77	0.43	-8.94	58.00
2410	0.00	-8.64	0.60	9.24	-8.64	13.68	0.60	-8.64	59.00
2420	0.00	-8.30	0.93	9.24	-8.30	14.77	0.93	-8.30	59.00
2430	0.00	-8.05	1.13	9.18	-8.05	15.68	1.13	-8.05	58.00
2440	0.00	-7.79	1.39	9.18	-7.79	16.65	1.39	-7.79	58.00
2450	0.00	-7.55	1.62	9.18	-7.55	17.56	1.62	-7.55	58.00
2460	0.00	-7.38	1.67	9.05	-7.38	18.27	1.67	-7.38	59.00
2470	0.00	-7.33	1.64	8.97	-7.33	18.51	1.64	-7.33	59.00
2480	0.00	-7.32	1.59	8.91	-7.32	18.54	1.59	-7.32	59.00
2490	0.00	-7.18	1.67	8.85	-7.18	19.16	1.67	-7.18	59.00
2500	0.00	-6.93	1.88	8.81	-6.93	20.29	1.88	-6.93	59.00
2510	0.00	-6.69	2.11	8.81	-6.69	21.42	2.11	-6.69	59.00
2520	0.00	-6.66	2.11	8.77	-6.66	21.59	2.11	-6.66	56.00
2530	0.00	-6.78	2.03	8.80	-6.78	21.01	2.03	-6.78	55.00
2540	0.00	-6.92	1.81	8.73	-6.92	20.33	1.81	-6.92	55.00

2550	0.00	-6.94	1.84	8.77	-6.94	20.24	1.84	-6.94	54.00
2560	0.00	-6.84	1.85	8.69	-6.84	20.70	1.85	-6.84	55.00
2570	0.00	-6.80	1.88	8.68	-6.80	20.91	1.88	-6.80	54.00
2580	0.00	-6.84	1.85	8.69	-6.84	20.68	1.85	-6.84	55.00
2590	0.00	-6.95	1.68	8.63	-6.95	20.20	1.68	-6.95	55.00
2600	0.00	-7.01	1.59	8.59	-7.01	19.93	1.59	-7.01	55.00
Azimuth Cut (Theta Axis = 90°)									
Elevation Cut (Phi Axis = 0°)									
Elevation Cut (Phi Axis = 90°)									

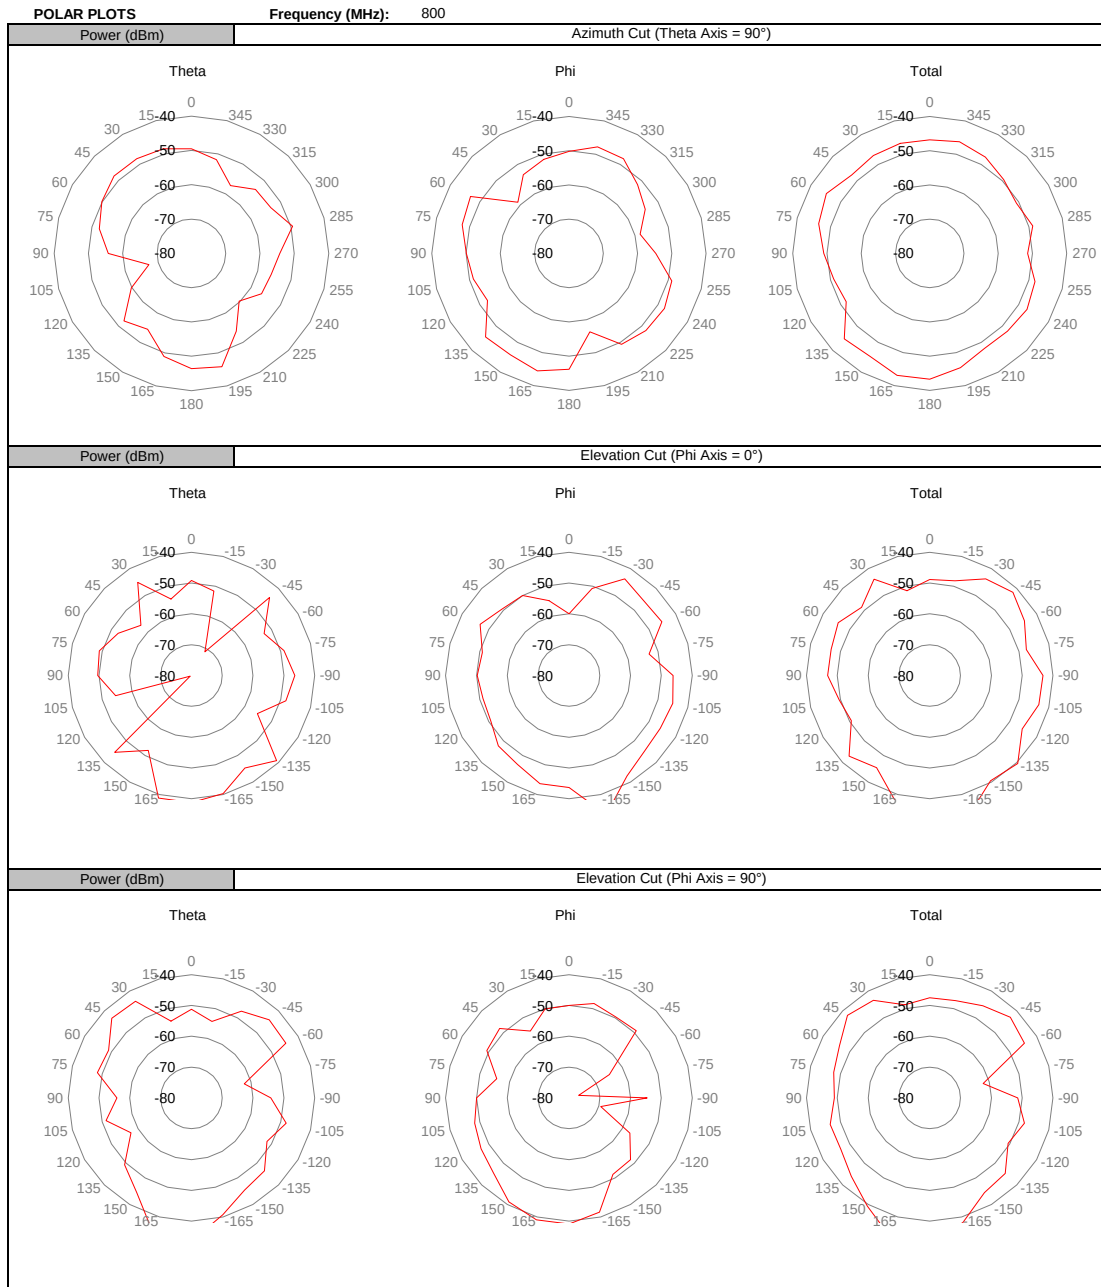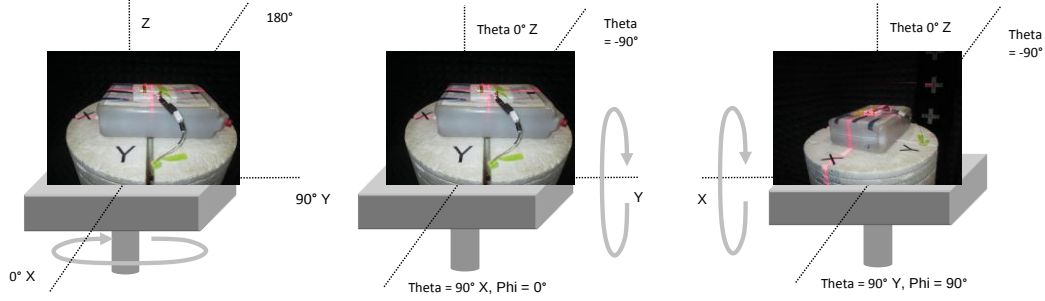

PASSIVE 3D ANTENNA PATTERN MEASUREMENTS



OTA 2018.01.04

EUT:	MTS504
Serial Number:	None
Customer:	Multi-Tech Systems, Inc.
Attendees:	Dustin Morris
Customer Project:	None
Tested By:	Christopher Heintzelman
Test Run Description:	Run2

Work Order:	F3EN0281
Date:	1/28/2026
Temperature:	22.7 °C
Relative Humidity:	14.6% RH
Bar. Pressure:	1026 mbar
Job Site:	MN10



COMMENTS

Bluetooth antenna.

3D PATTERN DATA

Frequency (MHz)	Ant. Port Input Pwr. (dBm)	Tot. Rad. Pwr. (dBm)	Peak EIRP (dBm)	Directivity (dBi)	Efficiency (dB)	Efficiency (%)	Gain (dBi)	Average Gain (dB)	E-Plane 3 dB BW (°)
800	0.00	-42.17	-31.17	11.00	-42.17	0.01	-31.17	-42.17	38.00
805	0.00	-42.57	-31.30	11.27	-42.57	0.01	-31.30	-42.57	35.00
810	0.00	-43.10	-31.72	11.38	-43.10	0.00	-31.72	-43.10	32.00
815	0.00	-43.36	-31.86	11.50	-43.36	0.00	-31.86	-43.36	21.00
820	0.00	-43.67	-32.39	11.29	-43.67	0.00	-32.39	-43.67	1.00
825	0.00	-43.66	-32.70	10.96	-43.66	0.00	-32.70	-43.66	1.00
830	0.00	-43.63	-32.42	11.21	-43.63	0.00	-32.42	-43.63	19.00
835	0.00	-43.25	-30.83	12.42	-43.25	0.00	-30.83	-43.25	1.00
840	0.00	-42.87	-30.75	12.12	-42.87	0.01	-30.75	-42.87	26.00
845	0.00	-43.21	-30.94	12.28	-43.21	0.00	-30.94	-43.21	32.00
850	0.00	-43.51	-30.86	12.65	-43.51	0.00	-30.86	-43.51	30.00
855	0.00	-44.19	-31.39	12.80	-44.19	0.00	-31.39	-44.19	28.00
860	0.00	-44.07	-31.41	12.67	-44.07	0.00	-31.41	-44.07	33.00
865	0.00	-43.66	-31.09	12.57	-43.66	0.00	-31.09	-43.66	36.00
870	0.00	-43.58	-31.72	11.86	-43.58	0.00	-31.72	-43.58	40.00
875	0.00	-43.60	-32.13	11.47	-43.60	0.00	-32.13	-43.60	41.00
880	0.00	-43.51	-31.74	11.77	-43.51	0.00	-31.74	-43.51	26.00
885	0.00	-43.56	-30.85	12.71	-43.56	0.00	-30.85	-43.56	1.00
890	0.00	-43.42	-29.35	14.07	-43.42	0.00	-29.35	-43.42	1.00
895	0.00	-43.33	-28.14	15.19	-43.33	0.00	-28.14	-43.33	1.00
900	0.00	-42.89	-27.21	15.67	-42.89	0.01	-27.21	-42.89	1.00
905	0.00	-42.49	-26.56	15.93	-42.49	0.01	-26.56	-42.49	1.00
910	0.00	-42.13	-26.49	15.65	-42.13	0.01	-26.49	-42.13	1.00
915	0.00	-42.10	-26.41	15.69	-42.10	0.01	-26.41	-42.10	1.00
920	0.00	-42.12	-26.36	15.75	-42.12	0.01	-26.36	-42.12	1.00
925	0.00	-42.22	-26.77	15.46	-42.22	0.01	-26.77	-42.22	1.00
930	0.00	-42.23	-26.80	15.43	-42.23	0.01	-26.80	-42.23	1.00
935	0.00	-42.13	-26.95	15.19	-42.13	0.01	-26.95	-42.13	1.00
940	0.00	-41.80	-26.96	14.84	-41.80	0.01	-26.96	-41.80	1.00
945	0.00	-41.42	-26.96	14.46	-41.42	0.01	-26.96	-41.42	1.00
950	0.00	-40.96	-27.15	13.81	-40.96	0.01	-27.15	-40.96	1.00
955	0.00	-40.46	-27.50	12.96	-40.46	0.01	-27.50	-40.46	1.00
960	0.00	-39.95	-27.57	12.38	-39.95	0.01	-27.57	-39.95	17.00
965	0.00	-39.36	-28.31	11.05	-39.36	0.01	-28.31	-39.36	20.00
970	0.00	-38.77	-27.80	10.97	-38.77	0.01	-27.80	-38.77	15.00
975	0.00	-38.33	-28.81	9.52	-38.33	0.01	-28.81	-38.33	13.00
980	0.00	-38.02	-30.24	7.79	-38.02	0.02	-30.24	-38.02	30.00
985	0.00	-37.52	-29.32	8.20	-37.52	0.02	-29.32	-37.52	1.00
990	0.00	-37.40	-28.94	8.46	-37.40	0.02	-28.94	-37.40	1.00
995	0.00	-37.15	-28.91	8.23	-37.15	0.02	-28.91	-37.15	1.00
1000	0.00	-37.04	-28.45	8.58	-37.04	0.02	-28.45	-37.04	1.00
2300	0.00	-7.32	-4.06	3.26	-7.32	18.54	-4.06	-7.32	95.00
2310	0.00	-7.14	-3.74	3.40	-7.14	19.33	-3.74	-7.14	68.00
2320	0.00	-6.80	-3.21	3.59	-6.80	20.91	-3.21	-6.80	64.00
2330	0.00	-6.41	-2.80	3.61	-6.41	22.87	-2.80	-6.41	66.00
2340	0.00	-6.08	-2.39	3.69	-6.08	24.64	-2.39	-6.08	64.00
2350	0.00	-5.88	-2.29	3.59	-5.88	25.81	-2.29	-5.88	57.00
2360	0.00	-5.55	-1.92	3.63	-5.55	27.86	-1.92	-5.55	57.00
2370	0.00	-5.27	-1.48	3.79	-5.27	29.70	-1.48	-5.27	55.00
2380	0.00	-5.03	-1.22	3.81	-5.03	31.40	-1.22	-5.03	54.00
2390	0.00	-4.87	-1.01	3.87	-4.87	32.57	-1.01	-4.87	53.00
2400	0.00	-4.74	-0.94	3.80	-4.74	33.57	-0.94	-4.74	88.00
2410	0.00	-4.44	-0.55	3.89	-4.44	36.01	-0.55	-4.44	84.00
2420	0.00	-4.11	-0.31	3.79	-4.11	38.86	-0.31	-4.11	87.00
2430	0.00	-3.83	-0.12	3.71	-3.83	41.41	-0.12	-3.83	58.00
2440	0.00	-3.57	0.11	3.68	-3.57	43.94	0.11	-3.57	57.00
2450	0.00	-3.35	0.38	3.73	-3.35	46.27	0.38	-3.35	57.00
2460	0.00	-3.21	0.47	3.68	-3.21	47.77	0.47	-3.21	58.00
2470	0.00	-3.15	0.48	3.63	-3.15	48.40	0.48	-3.15	58.00
2480	0.00	-3.13	0.47	3.59	-3.13	48.65	0.47	-3.13	58.00
2490	0.00	-2.94	0.59	3.53	-2.94	50.86	0.59	-2.94	59.00
2500	0.00	-2.66	0.86	3.51	-2.66	54.25	0.86	-2.66	59.00
2510	0.00	-2.39	1.15	3.54	-2.39	57.69	1.15	-2.39	60.00
2520	0.00	-2.39	1.17	3.56	-2.39	57.68	1.17	-2.39	61.00
2530	0.00	-2.51	0.99	3.49	-2.51	56.13	0.99	-2.51	63.00
2540	0.00	-2.63	0.83	3.46	-2.63	54.59	0.83	-2.63	64.00

2550	0.00	-2.66	0.93	3.59	-2.66	54.23	0.93	-2.66	61.00
2560	0.00	-2.55	0.89	3.44	-2.55	55.56	0.89	-2.55	64.00
2570	0.00	-2.53	0.89	3.42	-2.53	55.90	0.89	-2.53	65.00
2580	0.00	-2.61	0.79	3.40	-2.61	54.80	0.79	-2.61	106.00
2590	0.00	-2.76	0.77	3.53	-2.76	52.97	0.77	-2.76	68.00
2600	0.00	-2.84	0.76	3.60	-2.84	51.95	0.76	-2.84	64.00

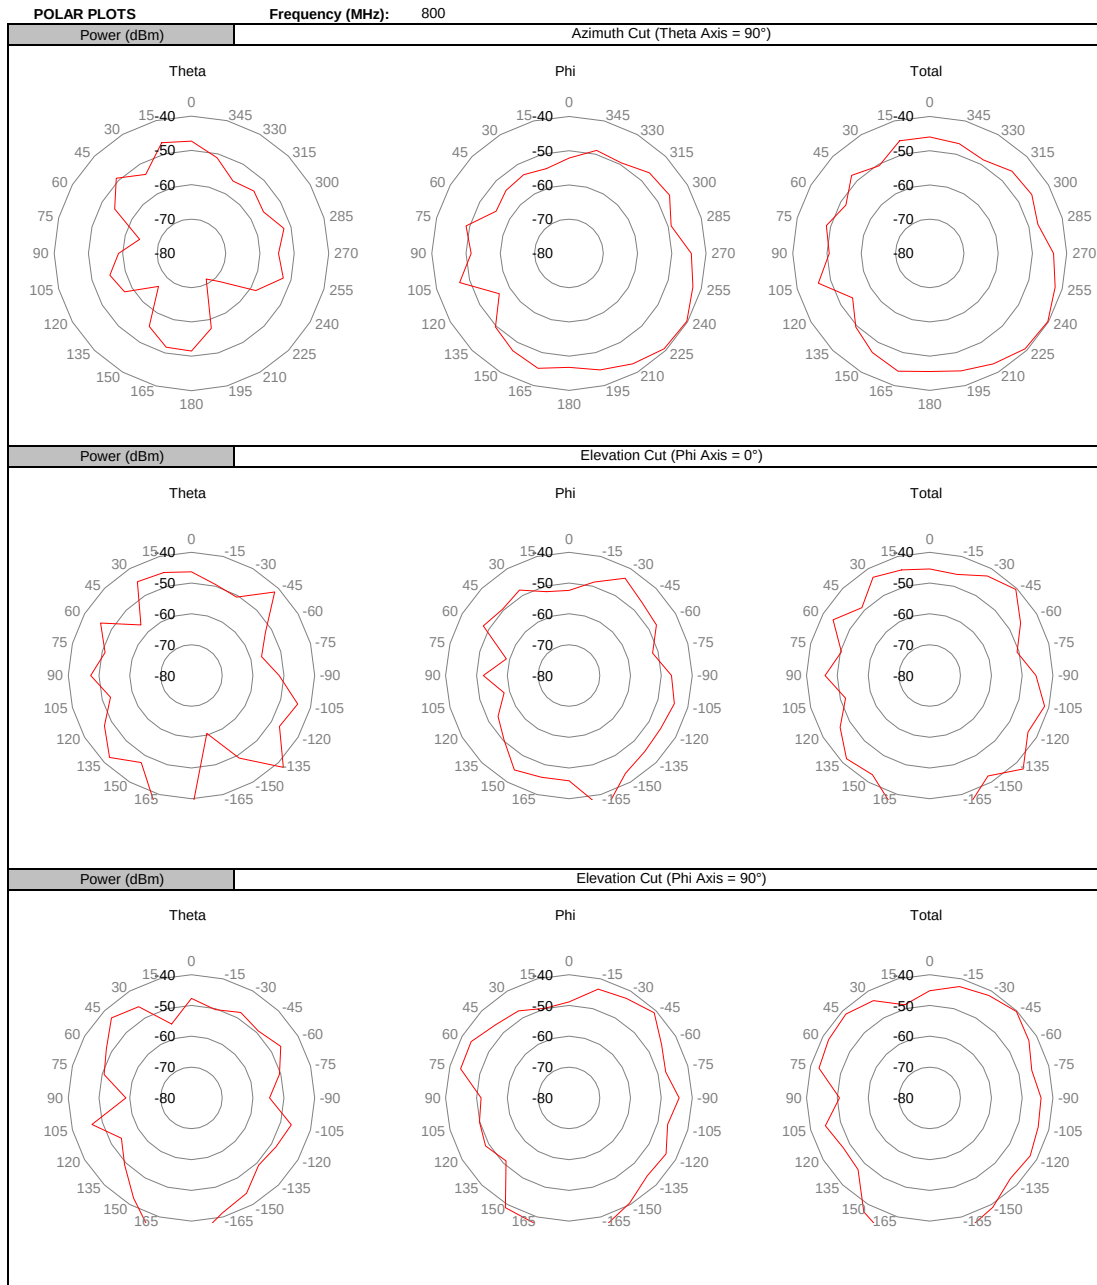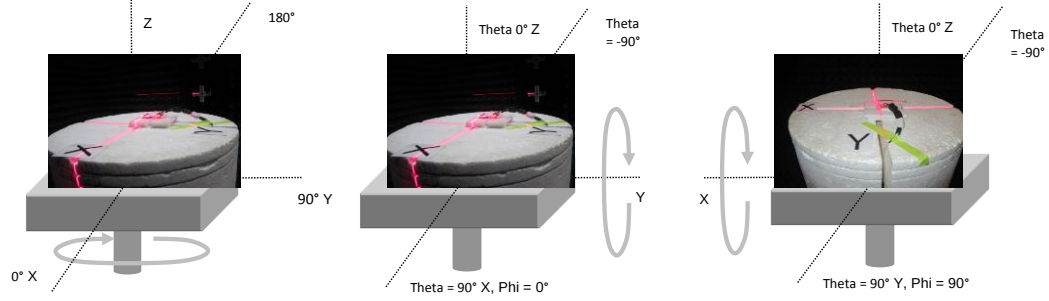

PASSIVE 3D ANTENNA PATTERN MEASUREMENTS



EUT:	MTS504
Serial Number:	None
Customer:	Multi-Tech Systems, Inc.
Attendees:	Dustin Morris
Customer Project:	None
Tested By:	Christopher Heintzelman
Test Run Description:	Run4

Work Order:	F3EN0281
Date:	1/28/2026
Temperature:	22.7 °C
Relative Humidity:	14.6% RH
Bar. Pressure:	1026 mbar
Job Site:	MN10

OTA 2018.01.04



COMMENTS

Bluetooth antenna. With Speag phantom and 1cm foam spacer.

3D PATTERN DATA

Frequency (MHz)	Ant. Port Input Pwr. (dBm)	Tot. Rad. Pwr. (dBm)	Peak EIRP (dBm)	Directivity (dBi)	Efficiency (dB)	Efficiency (%)	Gain (dBi)	Average Gain (dB)	E-Plane 3 dB BW (°)
800	0.00	-43.46	-30.31	13.16	-43.46	0.00	-30.31	-43.46	24.00
805	0.00	-43.73	-30.67	13.06	-43.73	0.00	-30.67	-43.73	20.00
810	0.00	-44.23	-31.12	13.11	-44.23	0.00	-31.12	-44.23	1.00
815	0.00	-44.40	-31.41	12.99	-44.40	0.00	-31.41	-44.40	1.00
820	0.00	-44.39	-31.76	12.63	-44.39	0.00	-31.76	-44.39	1.00
825	0.00	-44.49	-32.18	12.31	-44.49	0.00	-32.18	-44.49	1.00
830	0.00	-44.12	-31.77	12.35	-44.12	0.00	-31.77	-44.12	17.00
835	0.00	-43.61	-30.90	12.72	-43.61	0.00	-30.90	-43.61	26.00
840	0.00	-43.00	-30.42	12.58	-43.00	0.01	-30.42	-43.00	31.00
845	0.00	-43.11	-30.17	12.94	-43.11	0.00	-30.17	-43.11	29.00
850	0.00	-43.25	-30.05	13.20	-43.25	0.00	-30.05	-43.25	26.00
855	0.00	-43.99	-30.77	13.22	-43.99	0.00	-30.77	-43.99	24.00
860	0.00	-43.96	-31.28	12.68	-43.96	0.00	-31.28	-43.96	28.00
865	0.00	-43.51	-30.56	12.95	-43.51	0.00	-30.56	-43.51	26.00
870	0.00	-43.44	-30.68	12.76	-43.44	0.00	-30.68	-43.44	28.00
875	0.00	-43.37	-31.12	12.25	-43.37	0.00	-31.12	-43.37	31.00
880	0.00	-43.33	-31.21	12.13	-43.33	0.00	-31.21	-43.33	20.00
885	0.00	-43.43	-30.23	13.20	-43.43	0.00	-30.23	-43.43	1.00
890	0.00	-43.37	-29.40	13.97	-43.37	0.00	-29.40	-43.37	1.00
895	0.00	-43.24	-28.25	15.00	-43.24	0.00	-28.25	-43.24	1.00
900	0.00	-43.00	-27.49	15.51	-43.00	0.01	-27.49	-43.00	1.00
905	0.00	-42.64	-26.79	15.84	-42.64	0.01	-26.79	-42.64	1.00
910	0.00	-42.38	-27.15	15.23	-42.38	0.01	-27.15	-42.38	1.00
915	0.00	-42.44	-27.07	15.37	-42.44	0.01	-27.07	-42.44	1.00
920	0.00	-42.49	-27.51	14.99	-42.49	0.01	-27.51	-42.49	1.00
925	0.00	-42.68	-27.45	15.23	-42.68	0.01	-27.45	-42.68	1.00
930	0.00	-42.70	-27.26	15.43	-42.70	0.01	-27.26	-42.70	1.00
935	0.00	-42.76	-27.50	15.26	-42.76	0.01	-27.50	-42.76	1.00
940	0.00	-42.49	-27.23	15.26	-42.49	0.01	-27.23	-42.49	1.00
945	0.00	-42.43	-27.37	15.06	-42.43	0.01	-27.37	-42.43	1.00
950	0.00	-42.11	-27.29	14.82	-42.11	0.01	-27.29	-42.11	1.00
955	0.00	-41.85	-27.28	14.57	-41.85	0.01	-27.28	-41.85	1.00
960	0.00	-41.66	-27.34	14.32	-41.66	0.01	-27.34	-41.66	1.00
965	0.00	-41.39	-27.32	14.07	-41.39	0.01	-27.32	-41.39	1.00
970	0.00	-41.25	-28.00	13.25	-41.25	0.01	-28.00	-41.25	1.00
975	0.00	-41.40	-29.07	12.33	-41.40	0.01	-29.07	-41.40	18.00
980	0.00	-41.45	-30.63	10.82	-41.45	0.01	-30.63	-41.45	1.00
985	0.00	-41.33	-30.28	11.04	-41.33	0.01	-30.28	-41.33	1.00
990	0.00	-41.54	-30.75	10.80	-41.54	0.01	-30.75	-41.54	1.00
995	0.00	-41.67	-31.55	10.12	-41.67	0.01	-31.55	-41.67	1.00
1000	0.00	-41.50	-31.30	10.20	-41.50	0.01	-31.30	-41.50	1.00
2300	0.00	-10.41	-0.81	9.60	-10.41	9.10	-0.81	-10.41	56.00
2310	0.00	-10.13	-0.50	9.63	-10.13	9.72	-0.50	-10.13	56.00
2320	0.00	-9.70	0.02	9.71	-9.70	10.72	0.02	-9.70	54.00
2330	0.00	-9.20	0.44	9.64	-9.20	12.02	0.44	-9.20	55.00
2340	0.00	-8.79	0.82	9.62	-8.79	13.20	0.82	-8.79	55.00
2350	0.00	-8.53	1.18	9.70	-8.53	14.04	1.18	-8.53	53.00
2360	0.00	-8.09	1.45	9.54	-8.09	15.53	1.45	-8.09	54.00
2370	0.00	-7.71	1.81	9.52	-7.71	16.95	1.81	-7.71	54.00
2380	0.00	-7.36	2.10	9.46	-7.36	18.37	2.10	-7.36	54.00
2390	0.00	-7.15	2.30	9.45	-7.15	19.27	2.30	-7.15	53.00
2400	0.00	-6.97	2.42	9.38	-6.97	20.11	2.42	-6.97	53.00
2410	0.00	-6.65	2.71	9.36	-6.65	21.63	2.71	-6.65	52.00
2420	0.00	-6.30	3.02	9.32	-6.30	23.46	3.02	-6.30	52.00
2430	0.00	-6.03	3.20	9.23	-6.03	24.97	3.20	-6.03	52.00
2440	0.00	-5.77	3.43	9.20	-5.77	26.48	3.43	-5.77	52.00
2450	0.00	-5.54	3.68	9.22	-5.54	27.95	3.68	-5.54	52.00
2460	0.00	-5.36	3.78	9.14	-5.36	29.11	3.78	-5.36	51.00
2470	0.00	-5.30	3.76	9.07	-5.30	29.48	3.76	-5.30	51.00
2480	0.00	-5.31	3.69	8.99	-5.31	29.47	3.69	-5.31	51.00
2490	0.00	-5.15	3.78	8.92	-5.15	30.58	3.78	-5.15	52.00
2500	0.00	-4.90	3.97	8.87	-4.90	32.37	3.97	-4.90	52.00
2510	0.00	-4.64	4.16	8.80	-4.64	34.34	4.16	-4.64	51.00
2520	0.00	-4.64	4.10	8.73	-4.64	34.39	4.10	-4.64	52.00
2530	0.00	-4.78	3.91	8.69	-4.78	33.28	3.91	-4.78	52.00
2540	0.00	-4.94	3.66	8.61	-4.94	32.04	3.66	-4.94	52.00

2550	0.00	-5.01	3.51	8.51	-5.01	31.56	3.51	-5.01	51.00
2560	0.00	-4.92	3.60	8.52	-4.92	32.20	3.60	-4.92	51.00
2570	0.00	-4.90	3.54	8.44	-4.90	32.32	3.54	-4.90	48.00
2580	0.00	-4.99	3.37	8.35	-4.99	31.72	3.37	-4.99	48.00
2590	0.00	-5.13	3.15	8.28	-5.13	30.68	3.15	-5.13	48.00
2600	0.00	-5.23	2.95	8.18	-5.23	30.01	2.95	-5.23	49.00

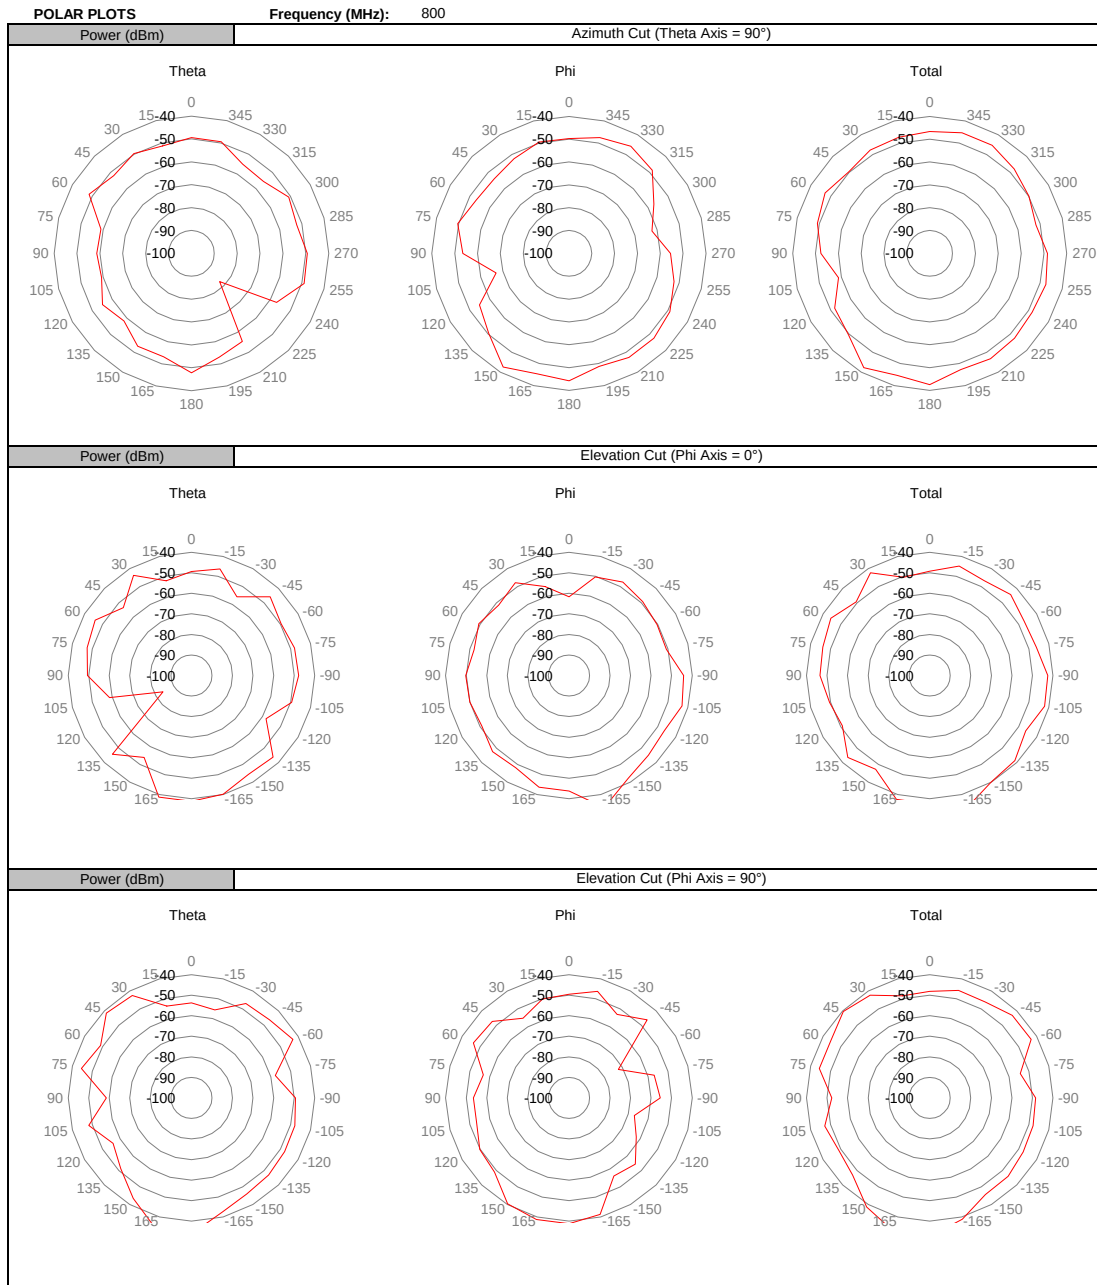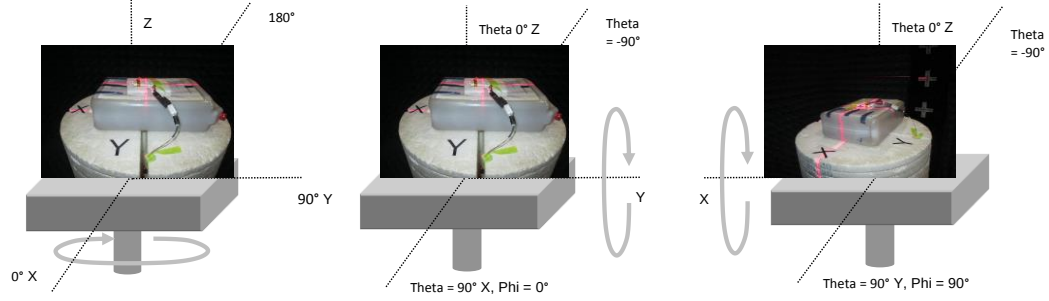

PASSIVE 3D ANTENNA PATTERN MEASUREMENTS



EUT:	MTS504
Serial Number:	None
Customer:	Multi-Tech Systems, Inc.
Attendees:	Dustin Morris
Customer Project:	None
Tested By:	Christopher Heintzelman
Test Run Description:	Run5

Work Order:	F3EN0281
Date:	1/28/2026
Temperature:	22.7 °C
Relative Humidity:	14.6% RH
Bar. Pressure:	1026 mbar
Job Site:	MN10

OTA 2018.01.04

COMMENTS

LoRa antenna. With Speag phantom and 1cm foam spacer.



3D PATTERN DATA									
Frequency (MHz)	Ant. Port Input Pwr. (dBm)	Tot. Rad. Pwr. (dBm)	Peak EIRP (dBm)	Directivity (dBi)	Efficiency (dB)	Efficiency (%)	Gain (dBi)	Average Gain (dB)	E-Plane 3 dB BW (°)
800	0.00	-18.14	-10.85	7.30	-18.14	1.53	-10.85	-18.14	74.00
805	0.00	-17.64	-10.36	7.28	-17.64	1.72	-10.36	-17.64	74.00
810	0.00	-17.18	-9.79	7.40	-17.18	1.91	-9.79	-17.18	77.00
815	0.00	-16.63	-9.22	7.40	-16.63	2.17	-9.22	-16.63	75.00
820	0.00	-16.09	-8.54	7.55	-16.09	2.46	-8.54	-16.09	74.00
825	0.00	-15.60	-8.06	7.54	-15.60	2.75	-8.06	-15.60	74.00
830	0.00	-15.01	-7.46	7.55	-15.01	3.16	-7.46	-15.01	74.00
835	0.00	-14.65	-7.10	7.54	-14.65	3.43	-7.10	-14.65	74.00
840	0.00	-14.07	-6.54	7.53	-14.07	3.92	-6.54	-14.07	74.00
845	0.00	-13.70	-6.19	7.51	-13.70	4.26	-6.19	-13.70	75.00
850	0.00	-13.21	-5.71	7.50	-13.21	4.78	-5.71	-13.21	75.00
855	0.00	-12.81	-5.31	7.50	-12.81	5.24	-5.31	-12.81	75.00
860	0.00	-12.36	-4.83	7.53	-12.36	5.80	-4.83	-12.36	75.00
865	0.00	-11.95	-4.34	7.60	-11.95	6.39	-4.34	-11.95	74.00
870	0.00	-11.57	-3.90	7.66	-11.57	6.97	-3.90	-11.57	74.00
875	0.00	-11.24	-3.48	7.76	-11.24	7.51	-3.48	-11.24	72.00
880	0.00	-10.91	-3.16	7.75	-10.91	8.11	-3.16	-10.91	72.00
885	0.00	-10.70	-2.84	7.86	-10.70	8.51	-2.84	-10.70	72.00
890	0.00	-10.41	-2.59	7.83	-10.41	9.09	-2.59	-10.41	71.00
895	0.00	-10.24	-2.36	7.89	-10.24	9.46	-2.36	-10.24	72.00
900	0.00	-9.97	-2.13	7.84	-9.97	10.07	-2.13	-9.97	72.00
905	0.00	-9.72	-1.83	7.89	-9.72	10.67	-1.83	-9.72	72.00
910	0.00	-9.46	-1.58	7.88	-9.46	11.32	-1.58	-9.46	72.00
915	0.00	-9.27	-1.32	7.95	-9.27	11.83	-1.32	-9.27	71.00
920	0.00	-9.20	-1.20	8.00	-9.20	12.02	-1.20	-9.20	71.00
925	0.00	-9.20	-1.13	8.07	-9.20	12.02	-1.13	-9.20	70.00
930	0.00	-9.30	-1.22	8.08	-9.30	11.75	-1.22	-9.30	69.00
935	0.00	-9.39	-1.33	8.06	-9.39	11.51	-1.33	-9.39	70.00
940	0.00	-9.47	-1.43	8.04	-9.47	11.29	-1.43	-9.47	71.00
945	0.00	-9.56	-1.51	8.05	-9.56	11.07	-1.51	-9.56	71.00
950	0.00	-9.53	-1.46	8.06	-9.53	11.15	-1.46	-9.53	71.00
955	0.00	-9.51	-1.43	8.09	-9.51	11.18	-1.43	-9.51	71.00
960	0.00	-9.42	-1.29	8.14	-9.42	11.42	-1.29	-9.42	69.00
965	0.00	-9.34	-1.23	8.10	-9.34	11.65	-1.23	-9.34	70.00
970	0.00	-9.35	-1.23	8.12	-9.35	11.62	-1.23	-9.35	71.00
975	0.00	-9.33	-1.26	8.07	-9.33	11.66	-1.26	-9.33	71.00
980	0.00	-9.50	-1.38	8.12	-9.50	11.22	-1.38	-9.50	71.00
985	0.00	-9.51	-1.44	8.07	-9.51	11.19	-1.44	-9.51	68.00
990	0.00	-9.74	-1.62	8.12	-9.74	10.62	-1.62	-9.74	68.00
995	0.00	-9.75	-1.62	8.12	-9.75	10.60	-1.62	-9.75	67.00
1000	0.00	-9.90	-1.81	8.09	-9.90	10.24	-1.81	-9.90	67.00
2300	0.00	-20.19	-12.21	7.98	-20.19	0.96	-12.21	-20.19	58.00
2310	0.00	-20.08	-11.93	8.15	-20.08	0.98	-11.93	-20.08	58.00
2320	0.00	-19.82	-11.74	8.08	-19.82	1.04	-11.74	-19.82	56.00
2330	0.00	-19.59	-11.31	8.28	-19.59	1.10	-11.31	-19.59	58.00
2340	0.00	-19.45	-11.04	8.41	-19.45	1.13	-11.04	-19.45	56.00
2350	0.00	-19.02	-10.60	8.42	-19.02	1.25	-10.60	-19.02	54.00
2360	0.00	-18.37	-9.98	8.38	-18.37	1.46	-9.98	-18.37	56.00
2370	0.00	-17.84	-9.44	8.40	-17.84	1.65	-9.44	-17.84	54.00
2380	0.00	-17.45	-9.18	8.27	-17.45	1.80	-9.18	-17.45	55.00
2390	0.00	-17.11	-8.83	8.28	-17.11	1.95	-8.83	-17.11	54.00
2400	0.00	-16.74	-8.52	8.23	-16.74	2.12	-8.52	-16.74	54.00
2410	0.00	-16.43	-8.16	8.27	-16.43	2.28	-8.16	-16.43	51.00
2420	0.00	-16.21	-8.11	8.10	-16.21	2.40	-8.11	-16.21	52.00
2430	0.00	-16.06	-7.99	8.07	-16.06	2.47	-7.99	-16.06	52.00
2440	0.00	-15.81	-7.75	8.05	-15.81	2.63	-7.75	-15.81	50.00
2450	0.00	-15.69	-7.73	7.96	-15.69	2.70	-7.73	-15.69	59.00
2460	0.00	-15.66	-7.68	7.98	-15.66	2.72	-7.68	-15.66	53.00
2470	0.00	-15.79	-7.87	7.91	-15.79	2.64	-7.87	-15.79	55.00
2480	0.00	-15.81	-7.96	7.85	-15.81	2.62	-7.96	-15.81	57.00
2490	0.00	-15.76	-8.05	7.71	-15.76	2.65	-8.05	-15.76	57.00
2500	0.00	-15.68	-8.02	7.66	-15.68	2.70	-8.02	-15.68	60.00
2510	0.00	-15.67	-7.86	7.80	-15.67	2.71	-7.86	-15.67	57.00
2520	0.00	-15.72	-8.15	7.57	-15.72	2.68	-8.15	-15.72	62.00
2530	0.00	-15.91	-8.20	7.71	-15.91	2.57	-8.20	-15.91	67.00
2540	0.00	-16.14	-8.15	7.99	-16.14	2.43	-8.15	-16.14	54.00

2550	0.00	-16.30	-8.43	7.87	-16.30	2.34	-8.43	-16.30	56.00
2560	0.00	-16.21	-8.50	7.71	-16.21	2.39	-8.50	-16.21	74.00
2570	0.00	-16.15	-8.41	7.74	-16.15	2.43	-8.41	-16.15	69.00
2580	0.00	-16.25	-8.43	7.82	-16.25	2.37	-8.43	-16.25	70.00
2590	0.00	-16.30	-8.29	8.01	-16.30	2.34	-8.29	-16.30	96.00
2600	0.00	-16.20	-8.01	8.19	-16.20	2.40	-8.01	-16.20	64.00

Azimuth Cut (Theta Axis = 90°)

Elevation Cut (Phi Axis = 0°)

Elevation Cut (Phi Axis = 90°)

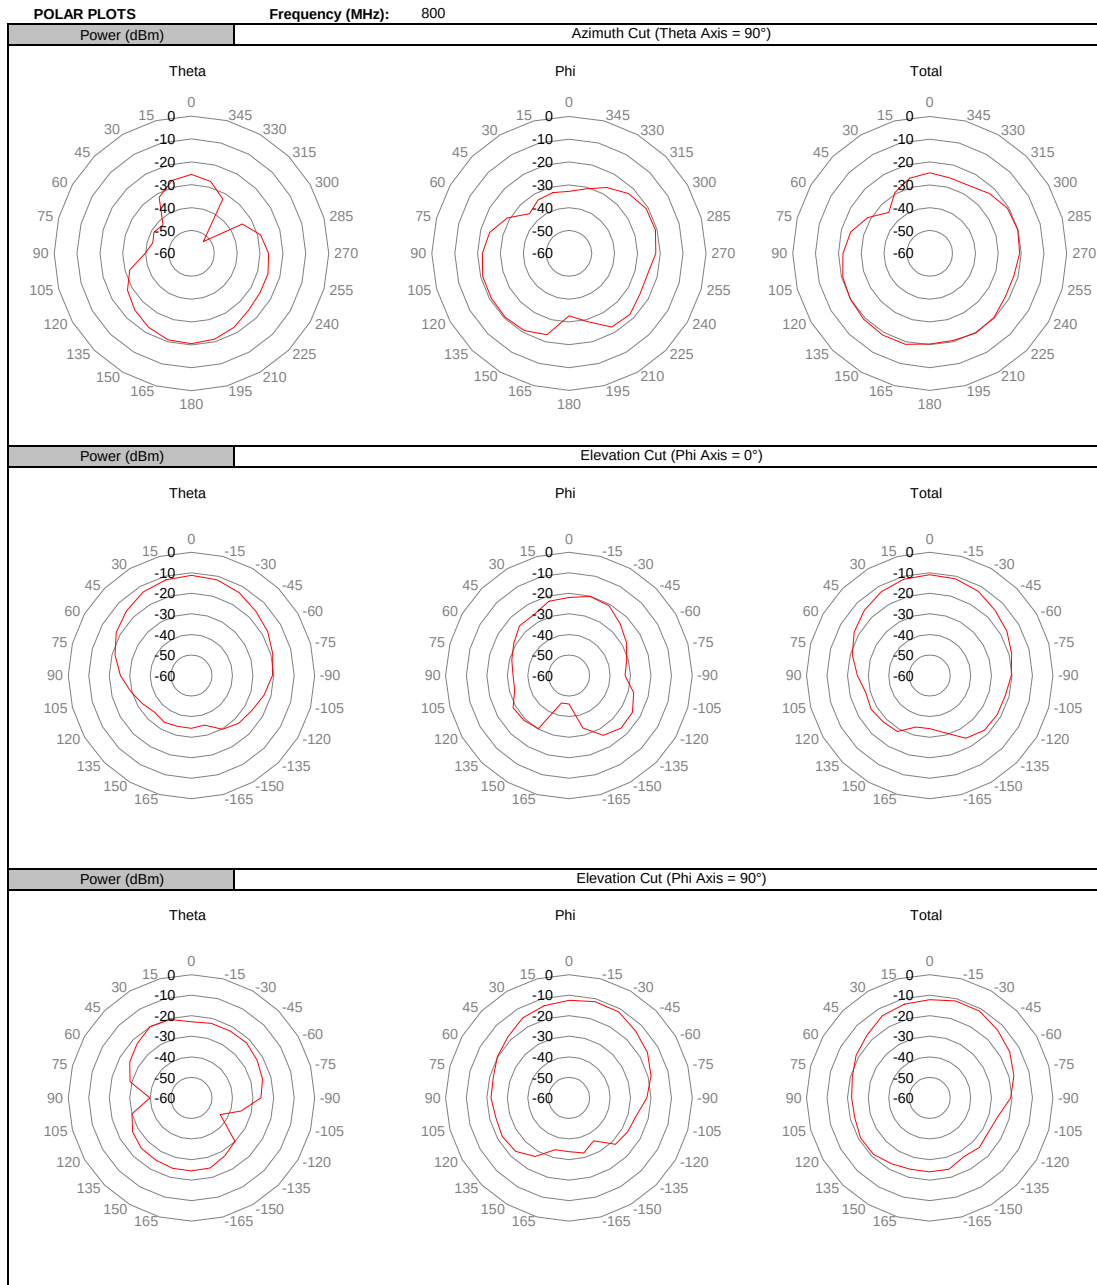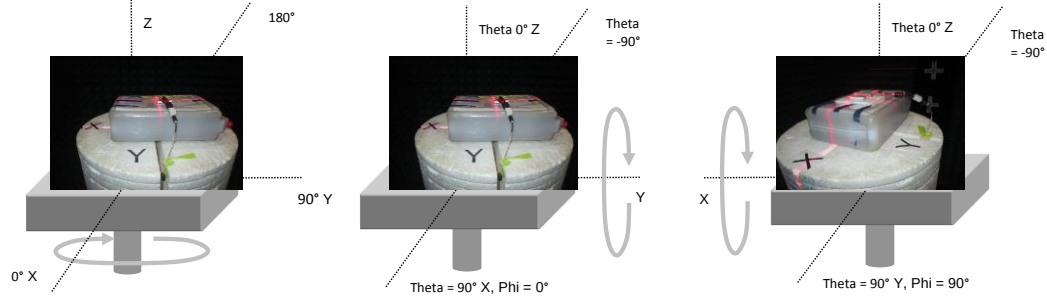

PASSIVE 3D ANTENNA PATTERN MEASUREMENTS



OTA 2018.01.04

EUT:	MTS504
Serial Number:	None
Customer:	Multi-Tech Systems, Inc.
Attendees:	Dustin Morris
Customer Project:	None
Tested By:	Christopher Heintzelman
Test Run Description:	Run6

Work Order:	F3EN0281
Date:	1/28/2026
Temperature:	22.7 °C
Relative Humidity:	14.6% RH
Bar. Pressure:	1026 mbar
Job Site:	MN10



COMMENTS

LoRa antenna. With Speag phantom without spacer.

3D PATTERN DATA

Frequency (MHz)	Ant. Port Input Pwr. (dBm)	Tot. Rad. Pwr. (dBm)	Peak EIRP (dBm)	Directivity (dBi)	Efficiency (dB)	Efficiency (%)	Gain (dBi)	Average Gain (dB)	E-Plane 3 dB BW (°)
800	0.00	-18.04	-11.89	6.15	-18.04	1.57	-11.89	-18.04	106.00
805	0.00	-17.62	-11.43	6.19	-17.62	1.73	-11.43	-17.62	105.00
810	0.00	-17.25	-10.99	6.25	-17.25	1.88	-10.99	-17.25	105.00
815	0.00	-16.80	-10.56	6.24	-16.80	2.09	-10.56	-16.80	104.00
820	0.00	-16.36	-10.06	6.30	-16.36	2.31	-10.06	-16.36	97.00
825	0.00	-15.99	-9.70	6.29	-15.99	2.52	-9.70	-15.99	106.00
830	0.00	-15.52	-9.24	6.28	-15.52	2.81	-9.24	-15.52	108.00
835	0.00	-15.28	-8.99	6.28	-15.28	2.97	-8.99	-15.28	108.00
840	0.00	-14.87	-8.64	6.23	-14.87	3.26	-8.64	-14.87	108.00
845	0.00	-14.66	-8.43	6.23	-14.66	3.42	-8.43	-14.66	107.00
850	0.00	-14.36	-8.16	6.20	-14.36	3.66	-8.16	-14.36	108.00
855	0.00	-14.14	-7.92	6.23	-14.14	3.85	-7.92	-14.14	108.00
860	0.00	-13.90	-7.62	6.28	-13.90	4.07	-7.62	-13.90	107.00
865	0.00	-13.71	-7.30	6.40	-13.71	4.26	-7.30	-13.71	102.00
870	0.00	-13.56	-7.16	6.40	-13.56	4.40	-7.16	-13.56	103.00
875	0.00	-13.48	-7.01	6.47	-13.48	4.49	-7.01	-13.48	99.00
880	0.00	-13.40	-6.91	6.50	-13.40	4.57	-6.91	-13.40	99.00
885	0.00	-13.43	-6.88	6.55	-13.43	4.54	-6.88	-13.43	97.00
890	0.00	-13.39	-6.86	6.53	-13.39	4.58	-6.86	-13.39	96.00
895	0.00	-13.41	-6.81	6.60	-13.41	4.56	-6.81	-13.41	95.00
900	0.00	-13.35	-6.78	6.56	-13.35	4.63	-6.78	-13.35	95.00
905	0.00	-13.28	-6.65	6.63	-13.28	4.70	-6.65	-13.28	95.00
910	0.00	-13.20	-6.50	6.71	-13.20	4.78	-6.50	-13.20	93.00
915	0.00	-13.16	-6.41	6.75	-13.16	4.83	-6.41	-13.16	93.00
920	0.00	-13.21	-6.39	6.82	-13.21	4.77	-6.39	-13.21	92.00
925	0.00	-13.33	-6.43	6.90	-13.33	4.65	-6.43	-13.33	91.00
930	0.00	-13.50	-6.47	7.03	-13.50	4.47	-6.47	-13.50	89.00
935	0.00	-13.66	-6.63	7.02	-13.66	4.31	-6.63	-13.66	88.00
940	0.00	-13.78	-6.64	7.14	-13.78	4.19	-6.64	-13.78	87.00
945	0.00	-13.89	-6.78	7.11	-13.89	4.09	-6.78	-13.89	87.00
950	0.00	-13.85	-6.67	7.18	-13.85	4.12	-6.67	-13.85	85.00
955	0.00	-13.82	-6.66	7.16	-13.82	4.15	-6.66	-13.82	86.00
960	0.00	-13.71	-6.51	7.20	-13.71	4.26	-6.51	-13.71	86.00
965	0.00	-13.60	-6.42	7.18	-13.60	4.36	-6.42	-13.60	85.00
970	0.00	-13.56	-6.33	7.23	-13.56	4.41	-6.33	-13.56	85.00
975	0.00	-13.51	-6.33	7.18	-13.51	4.46	-6.33	-13.51	85.00
980	0.00	-13.61	-6.36	7.25	-13.61	4.35	-6.36	-13.61	84.00
985	0.00	-13.59	-6.38	7.20	-13.59	4.38	-6.38	-13.59	84.00
990	0.00	-13.75	-6.47	7.28	-13.75	4.22	-6.47	-13.75	82.00
995	0.00	-13.72	-6.51	7.21	-13.72	4.25	-6.51	-13.72	83.00
1000	0.00	-13.82	-6.56	7.26	-13.82	4.15	-6.56	-13.82	81.00
2300	0.00	-22.10	-13.88	8.22	-22.10	0.62	-13.88	-22.10	62.00
2310	0.00	-22.01	-13.97	8.05	-22.01	0.63	-13.97	-22.01	69.00
2320	0.00	-21.67	-13.72	7.94	-21.67	0.68	-13.72	-21.67	66.00
2330	0.00	-21.34	-13.47	7.87	-21.34	0.73	-13.47	-21.34	58.00
2340	0.00	-21.08	-12.92	8.15	-21.08	0.78	-12.92	-21.08	63.00
2350	0.00	-20.61	-12.34	8.27	-20.61	0.87	-12.34	-20.61	62.00
2360	0.00	-19.87	-12.01	7.86	-19.87	1.03	-12.01	-19.87	55.00
2370	0.00	-19.38	-11.16	8.22	-19.38	1.15	-11.16	-19.38	58.00
2380	0.00	-19.07	-10.92	8.15	-19.07	1.24	-10.92	-19.07	55.00
2390	0.00	-18.79	-10.28	8.51	-18.79	1.32	-10.28	-18.79	52.00
2400	0.00	-18.60	-9.84	8.76	-18.60	1.38	-9.84	-18.60	49.00
2410	0.00	-18.43	-9.84	8.58	-18.43	1.44	-9.84	-18.43	51.00
2420	0.00	-18.30	-9.64	8.66	-18.30	1.48	-9.64	-18.30	50.00
2430	0.00	-18.25	-9.94	8.31	-18.25	1.50	-9.94	-18.25	54.00
2440	0.00	-18.14	-9.38	8.76	-18.14	1.54	-9.38	-18.14	50.00
2450	0.00	-18.08	-9.49	8.60	-18.08	1.55	-9.49	-18.08	50.00
2460	0.00	-18.10	-9.59	8.51	-18.10	1.55	-9.59	-18.10	51.00
2470	0.00	-18.26	-9.64	8.62	-18.26	1.49	-9.64	-18.26	49.00
2480	0.00	-18.37	-9.76	8.61	-18.37	1.46	-9.76	-18.37	48.00
2490	0.00	-18.37	-9.58	8.79	-18.37	1.46	-9.58	-18.37	46.00
2500	0.00	-18.31	-9.76	8.55	-18.31	1.48	-9.76	-18.31	48.00
2510	0.00	-18.30	-9.71	8.59	-18.30	1.48	-9.71	-18.30	47.00
2520	0.00	-18.37	-9.81	8.55	-18.37	1.46	-9.81	-18.37	48.00
2530	0.00	-18.53	-10.08	8.45	-18.53	1.40	-10.08	-18.53	49.00
2540	0.00	-18.79	-10.22	8.57	-18.79	1.32	-10.22	-18.79	48.00

	2550	0.00	-18.90	-10.62	8.28	-18.90	1.29	-10.62	-18.90	51.00
	2560	0.00	-18.82	-10.27	8.56	-18.82	1.31	-10.27	-18.82	46.00
	2570	0.00	-18.75	-10.51	8.24	-18.75	1.33	-10.51	-18.75	52.00
	2580	0.00	-18.81	-10.60	8.21	-18.81	1.32	-10.60	-18.81	53.00
	2590	0.00	-18.83	-10.53	8.30	-18.83	1.31	-10.53	-18.83	52.00
	2600	0.00	-18.74	-10.67	8.07	-18.74	1.34	-10.67	-18.74	57.00

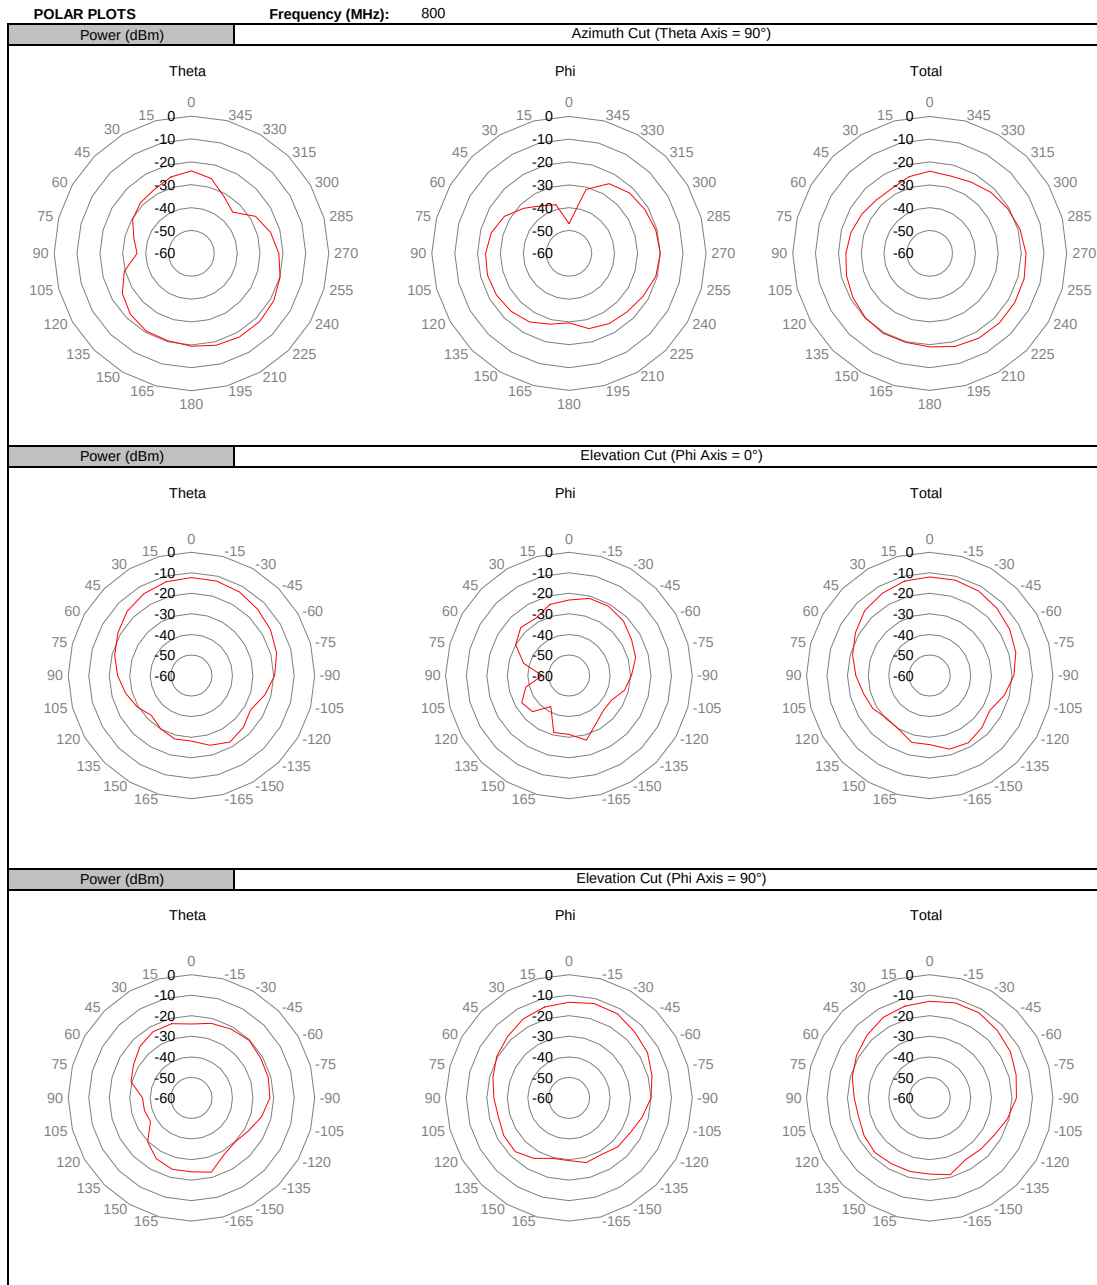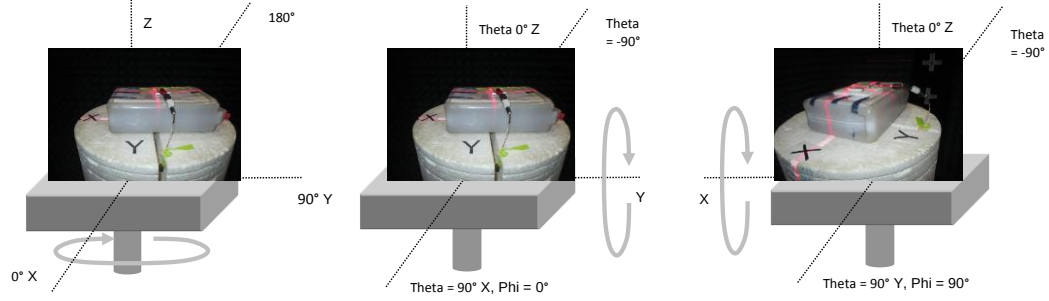

End of Test Report