

Musical Electronics Limited

Application For Certification (FCC ID: AUIGMRS1000H)

WO# 0111135
WL/Ann Choy
October 11, 2001

- The test results reported in this report shall refer only to the sample actually tested and shall not refer or be deemed a refer to bulk from which such a sample may be said to have been obtained.
- This report shall not be reproduced except in full without prior authorization from Intertek Testing Services Hong Kong Limited
- For Terms And Conditions of the services, it can be provided upon request.

SUMMARY OF CONTENTS

LIST OF EXHIBITS

<i>EXHIBIT 1:</i>	General Description
<i>EXHIBIT 2:</i>	System Test Configuration
<i>EXHIBIT 3:</i>	RF Power Output
<i>EXHIBIT 4:</i>	Modulation Characteristics
<i>EXHIBIT 5:</i>	Occupied Bandwidth
<i>EXHIBIT 6:</i>	Spurious Emission
<i>EXHIBIT 7:</i>	Frequency Stability
<i>EXHIBIT 8:</i>	Technical Specifications
<i>EXHIBIT 9:</i>	Product Labelling
<i>EXHIBIT 10:</i>	Photographs
<i>EXHIBIT 11:</i>	Instruction Manual
<i>EXHIBIT 12:</i>	Tune Up Procedure
<i>EXHIBIT 13:</i>	Part List
<i>EXHIBIT 14:</i>	RF Exposure Info

INTERTEK TESTING SERVICES

MEASUREMENT/TECHNICAL REPORT

Application : **Musical Electronics Limited**
Trade Name/Model No : **Musical GMRS1000H**
Unwired UGMR-3000
Date : **October 11, 2001**

This report concerns (check one:) Original Grant ☒ Class II Change _____

Equipment Type: General Mobile Radio Service, GMRS

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes _____ No ☒

If yes, defer until: _____
date

Company Name agrees to notify the Commission by: _____
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Report prepared by:

Wilson Loke
Intertek Testing Services
2/F., Garment Centre,
576 Castle Peak Road,
Kowloon, Hong Kong.
Phone: 852-2173-8575
Fax: 852-2745-8306

INTERTEK TESTING SERVICES

Table of Contents

1.0	<u>General Description</u>	2
1.1	Product Description	2
1.2	Related Submittal(s) Grants	3
1.3	Test Methodology	3
1.4	Test Facility	3
2.0	<u>System Test Configuration</u>	5
2.1	Justification	5
2.2	EUT Exercising Software	6
2.3	Special Accessories	6
2.4	Equipment Modification	6
3.0	<u>RF Output Power (Section 95.135)</u>	8
3.1	RF Output Power at the antenna terminal	9
3.2	RF Output Power by Substitution Method	11
4.0	<u>Modulation Characteristics (Section 95.637(a))</u>	15
4.1	Modulation Frequency Response	16
4.2	Modulation Limiting Characteristic	18
4.3	Audio Low Pass Filter Response	20
5.0	<u>Occupied Bandwidth (Section 95.633(a))</u>	22
6.0	<u>Spurious Emission (Section 95.635(b))</u>	24
6.1	Spurious emission at the antenna terminal	25
6.2	Field Strength of Spurious Radiation	28
7.0	<u>Frequency Stability (Section 95.627)</u>	33
7.1	Frequency Tolerance	34
7.2	Temperature Extreme Condition	36
7.3	Voltage Extreme Condition	39
8.0	<u>Technical Specifications</u>	42
9.0	<u>Product Labelling</u>	46
10.0	<u>Equipment Photographs</u>	49
11.0	<u>Instruction Mannal</u>	51
12.0	<u>Tune Up Procedure</u>	53
13.0	<u>Part List</u>	55
14.0	<u>RF Exposure Info</u>	57

INTERTEK TESTING SERVICES

List of attached file

Exhibit type	File Description	Filename
Operation Description	Technical Description	descri.pdf
Test Report	Bandwidth Plot	bw.pdf
Test Report	Modulation Frequency Response	mfr.pdf
Test Report	Modulation Limit Characteristic	mlc.pdf
Test Report	Spurious Emission	spurious.pdf
Block Diagram	Block Diagram	block.pdf
Schematics	Circuit Diagram	circuit.pdf
ID Label/Location	Label Artwork and Location	label.pdf
User Manual	User Manual	manual.pdf
Test Report	Test Report	report.doc
Test Setup Photo	Radiated Emission	Rconfig photos.doc
Internal Photo	Internal Photo	internal photos.doc
External Photo	External Photo	external photos.doc
Test Report	Tune Up Procedure	tuneup.pdf
Test Report	Part List	partlist.pdf
Test Report	Audio Low Pass Filter Response	lpf.pdf
RF Exposure Info	SAR Report	sar.pdf

INTERTEK TESTING SERVICES

EXHIBIT 1

GENERAL DESCRIPTION

INTERTEK TESTING SERVICES

1.0 **General Description**

1.1 Product Description

The Equipment Under Test (EUT) is a 23-channel General Mobile Radio Service (GMRS) operating between 462.5500 and 467.7250 MHz. The EUT is powered by 9V battery (6 x 1.5V “AAA” battery). The input current to the final r.f. stage at 9V d.c. is 0.78A.

Transmitter Portion:

- (i) Type of Emission: 10K4F3E
- (ii) Frequency Range: 462.5500 to 467.7250 MHz. Channel 1-14 are mail channels. Channel 15-21 are repeater-assisted communication channels. Channel 22-23(or Ech1-Ech2) are the emergency channels.
- (iii) Maximum Power Rating: 1.0W ERP or 2.0W conducted
- (iv) Channel Separation: 12.5kHz
- (v) Antenna type: detachable

Model: Unwired UGMR-3000 is same as Model: Musical GMRS1000H in hardware aspect except without AM/FM Radio.

The brief circuit description is saved with filename: descri.pdf

INTERTEK TESTING SERVICES

1.2 Related Submittal(s) Grants

This is an Application for Certification of the transmitter portion of a GMRS Transceiver. The receiver portion of the GMRS Transceiver is subject to verification process.

1.3 Test Methodology

Radiated emission measurements were performed according to the procedures in ANSI C63.4 (1992) and ANSI/TIA/EIA-603-1992. All measurement were performed in Open Area Test Sites. Preliminary scans were performed in the Open Area Test Sites only to determine worst case modes. For each scan, the procedure of maximizing emissions in Appendices D and E were followed. All Radiated tests were performed at an antenna the EUT distance of 3 meters, unless stated otherwise in the “**Justification Section**” of this Application.

1.4 Test Facility

The open area test site and conducted measurement facility used to collect the emission data is located at Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong. The test facility and site measurement data have been fully placed on file with the FCC.

EXHIBIT 2
SYSTEM TEST CONFIGURATION

2.0 **System Test Configuration**

2.1 Justification

The device was configured for testing in a typical fashion (as a customer would normally use it). The device was placed on a turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes. When the radiated emissions are measured.

The device was powered by 6 x fully charged 1.5V "AAA" battery.

The frequency range from 30 MHz to 10th harmonics was searched for spurious emissions from the device. Only those emissions reported were detected. All other emissions were at least 20 dB below the applicable limits.

INTERTEK TESTING SERVICES

2.2 EUT Exercising Software

There was no special software to exercise the device. Once the unit is powered on, a signal is transmitted.

2.3 Special Accessories

A special headset is provided by client for compliance of this device.

2.4 Equipment Modification

Any modification installed previous to testing by Musical Electronics Limited will be incorporated in each production model sold/leased in the United States.

No modification were installed by Intertek Testing Services.

Confirmed by:

*Wilson Loke
Manager
Intertek Testing Services
Agent for Musical Electronics Limited*



Signature

October 11, 2001 Date

EXHIBIT 3

RF POWER OUTPUT

3.0 **RF Power Output (Section 95.135)**

The RF power output from the antenna terminal and from the EUT are measured and shown in the Exhibit 3.1 & 3.2

INTERTEK TESTING SERVICES


3.1 RF Output Power at the antenna terminal

A. Equipment Used

Equipment	Brand Name	Model No.
Regulated Power Supply	PAD	35-30L
Voltmeter	Fluke	87
Spectrum Analyzer	Hewlett Packard	8591EM
20dB RF Load	Bird	8304-200-N

B. Testing Procedure

- 1) Setup the test equipment in the following configuration:

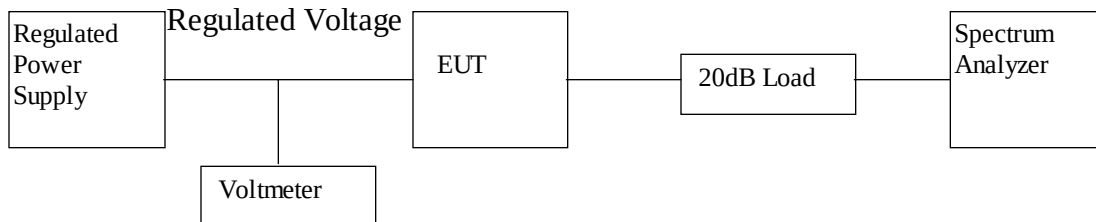

- 2) Measure the power of all channels (2 channels) by Spectrum Analyzer in Watt.
- 3) Calculate the actual power by times the measured power with a correction factor, 104.7*
i.e. Actual Power = measured Power $\times$ 104.7

* The Correction Factor is included the 20dB Load and cable loss between EUT and 20dB load.

INTERTEK TESTING SERVICES

Table 3.1

Musical Electronics Limited
Musical GMRS1000H

Conducted Power

Channel	Frequency (M Hz)	Conducted Power		Limit (W)	Margin (W)
		(dBm)	(W)		
1	462.5625	33.0	2.0	50	-48.0
2	462.5875	33.0	2.0	50	-48.0
3	462.6125	33.0	2.0	50	-48.0
4	462.6375	33.0	2.0	50	-48.0
5	462.6625	33.0	2.0	50	-48.0
6	462.6875	33.0	2.0	50	-48.0
7	462.7125	33.0	2.0	50	-48.0
8	462.5500	33.0	2.0	50	-48.0
9	462.5750	33.0	2.0	50	-48.0
10	462.6000	33.0	2.0	50	-48.0
11	462.6250	33.0	2.0	50	-48.0
12	462.6500	33.0	2.0	50	-48.0
13	462.7000	33.0	2.0	50	-48.0
14	462.7250	33.0	2.0	50	-48.0
15	467.5500	33.0	2.0	50	-48.0
16	467.5750	33.0	2.0	50	-48.0
17	467.6000	33.0	2.0	50	-48.0
18	467.6250	33.0	2.0	50	-48.0
19	467.6500	33.0	2.0	50	-48.0
20	467.7000	33.0	2.0	50	-48.0
21	467.7250	33.0	2.0	50	-48.0
22 (Ech1)	462.6750	33.0	2.0	50	-48.0
23 (Ech2)	467.6750	33.0	2.0	50	-48.0

Notes: Negative sign in the margin column shows the value below limits.

Test Engineer: Ben W. K. Ho

Date of Test: September 24, 2001

INTERTEK TESTING SERVICES

3.2 RF Output Power by Substitution Method

A. Equipment Used

Equipment	Brand Name	Model No.
Biconical Antenna	CDI	B300
Test receiver	Rohde & Schwarz	ESVS30
RF Filter	Tailithic	3VF
Tuned Dipole Antenna	CDI	Robert Antenna 4
Signal Generator	Maconi	2024

B. Testing Procedure

1. On a test site, the EUT shall be placed at 1.5m height on a turn table, and in the position closest to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarisation located 3m from EUT to correspond to the frequency of the transmitter.
3. The output of the test antenna shall be connected to the measuring receiver and the quasi-peak detector is used for the measurement.
4. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test.
5. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.

INTERTEK TESTING SERVICES

6. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
7. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
8. The maximum signal level detected by the measuring receiver shall be noted.
9. The transmitter shall be replaced by a tuned dipole (substitution antenna).
10. The substitution antenna shall be orientated for vertical polarisation and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
11. The substitution antenna shall be connected to a calibrated signal generator.
12. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
13. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
14. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
15. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
16. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarisation.
17. The measure of the effective radiated power is the larger of the two levels recorded, at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.

INTERTEK TESTING SERVICES

Table 3.2

Musical Electronics Limited
Musical GMRS1000H

Transmission Power

Channel	Frequency (M H z)	Effective Radiated Power		Limit (W)	Margin (W)
		(dBm)	(W)		
1	462.5625	29.8	1.0	5	-4.0
2	462.5875	29.8	1.0	5	-4.0
3	462.6125	29.8	1.0	5	-4.0
4	462.6375	29.8	1.0	5	-4.0
5	462.6625	29.8	1.0	5	-4.0
6	462.6875	29.8	1.0	5	-4.0
7	462.7125	29.8	1.0	5	-4.0
8	462.5500	29.8	1.0	5	-4.0
9	462.5750	29.8	1.0	5	-4.0
10	462.6000	29.8	1.0	5	-4.0
11	462.6250	29.8	1.0	5	-4.0
12	462.6500	29.8	1.0	5	-4.0
13	462.7000	29.8	1.0	5	-4.0
14	462.7250	29.8	1.0	5	-4.0
15	467.5500	29.8	1.0	5	-4.0
16	467.5750	29.8	1.0	5	-4.0
17	467.6000	29.8	1.0	5	-4.0
18	467.6250	29.8	1.0	5	-4.0
19	467.6500	29.8	1.0	5	-4.0
20	467.7000	29.8	1.0	5	-4.0
21	467.7250	29.8	1.0	5	-4.0
22 (Ech1)	462.6750	29.8	1.0	5	-4.0
23 (Ech2)	467.6750	29.8	1.0	5	-4.0

Notes: Negative sign in the margin column shows the value below limits.

Test Engineer: Ben W. K. Ho

Date of Test: September 24, 2001

EXHIBIT 4

MODULATION CHARACTERISTICS

4.0 **Modulation Characteristics**

In order to satisfy the 95.637(a) requirement, Modulation Frequency Response and Modulation Limit Characteristics are attached in Exhibit 4.1 & 4.2.

Plots for each tests are saved with filename: mfr.pdf and mlc.pdf


4.1 Modulation Frequency Response

A. Test Equipment

Equipment	Brand Name	Model No.
Audio Signal Generator	Leader	LFG-1300S
dB meter	Leader	LMV-182A
20 dB RF Load	Bird	8304-200-N
Modulation Meter	Marconi Instrument	2945

B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

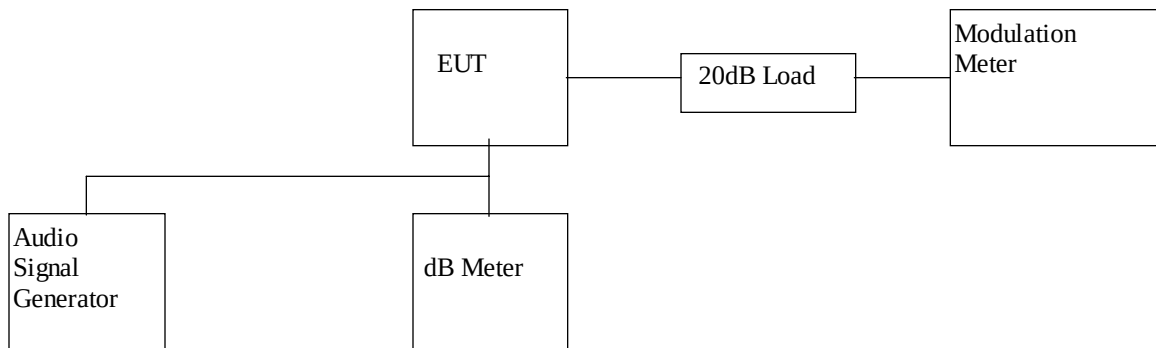

- 2) Set the audio signal generator frequency to the sound pressure level 97.0dB SPL at the microphone of the EUT.
- 3) The frequency of the audio signal generator is changed from 200Hz to 5kHz.
- 4) Record the frequency deviation.

INTERTEK TESTING SERVICES

C. Test Result

Table 4.1

**Musical Electronics Limited
Musical GMRS1000H**

Modulation Frequency Response

Test Channel : 11

Input level = 97.0dB SPL

Modulation Frequency (Hz)	Modulation index (%)
200	0.45
300	0.50
400	0.65
500	0.68
600	0.68
700	0.70
800	0.63
900	0.68
1000	0.70
1250	0.56
1500	0.48
1750	0.51
2000	0.61
2250	0.68
2500	0.66
2750	0.52
3000	0.39
3125	0.32
3250	0.27
3500	0.21
4000	0.14
5000	0.04

Test Engineer: Ben W. K. Ho


Date of Test: September 24, 2001

4.2 Modulation Limiting Characteristics (Section 2.1047(b))**A. Test Equipment**

Equipment	Brand Name	Model No.
Audio Signal Generator	Leader	LFG-1300S
20 dB RF Load	Bird	8304-200-N
Modulation Meter	Marconi	2950

B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

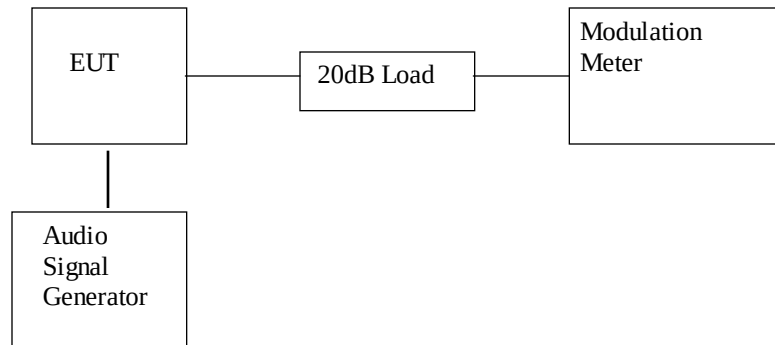

- 2) Set the frequency of the audio signal generator to 500Hz and adjust the level from 47dBSPL to 127dBSPL.
- 3) Record the maximum value of plus or minus peak frequency deviation.
- 4) Repeat the above procedure with frequency 1000Hz, 2500Hz & 3125Hz.

C. Test Result**Table 4.2****Musical Electronics Limited
Musical GMRS1000H****Modulation Limiting Characteristics**

Test Channel : 11

M odulation Input (dB SPL)	Peak Frequency Deviation (kH z) at 500H z	Peak Frequency Deviation (kH z) at 1000H z	Peak Frequency Deviation (kH z) at 2500H z	Peak Frequency Deviation (kH z) at 3125H z
47	0.08	0.08	0.08	0.08
57	0.08	0.10	0.08	0.12
67	0.08	0.12	0.12	0.16
77	0.08	0.12	0.25	0.25
87	0.13	0.20	0.66	0.51
97	0.30	0.53	1.49	1.00
107	0.82	1.40	1.90	1.31
117	1.75	2.26	2.04	1.36
127	2.33	2.40	2.26	1.37
137	2.33	2.42	2.30	1.37

Test Engineer: Ben W. K. Ho

Date of Test: September 24, 2001

INTERTEK TESTING SERVICES

4.3 Audio Low Pass Filter Response (Section 95.637(b))

A. Test Equipment

Equipment	Brand Name	Model No.
Audio Signal Generator	Leader	LFG-1300S
dB meter	Leader	LMV-182A

B. Testing Procedure

- 1) Connect the audio signal generator to the input of the post limiter low pass filter and the dB meter to the output of the post limiter low pass filter.
- 2) Apply a 1000 Hz tone from the audio signal generator and adjust the level per manufacturer's specifications. Record the dB level of the 1000 Hz tone as LEV_{REF} .
- 3) Set the audio signal generator to the desired test frequency between 3000 Hz and the upper low pass filter limit. Record the dB level at the test frequency as LEV_{FREQ} .
- 4) Calculate the audio frequency response at the test frequency as:

$$\text{low pass filter response} = LEV_{FREQ} - LEV_{REF}$$

- 5) Repeat the above procedure for all the desired test frequencies.

C. Test Result

For electronic filing, the audio low pass frequency response is saved with filename: lpf.pdf.

EXHIBIT 5

OCCUPIED BANDWIDTH

INTERTEK TESTING SERVICES


5.0 Occupied Bandwidth (Section 95.633(a))

A. Test Equipment

Equipment	Brand Name	Model No.
Audio Signal Generator	Leader	LFG-1300S
dB meter	Leader	LMV-182A
20 dB RF Load	Bird	8304-200-N
Spectrum Analyzer	Hewlett Packard	8951EM

B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

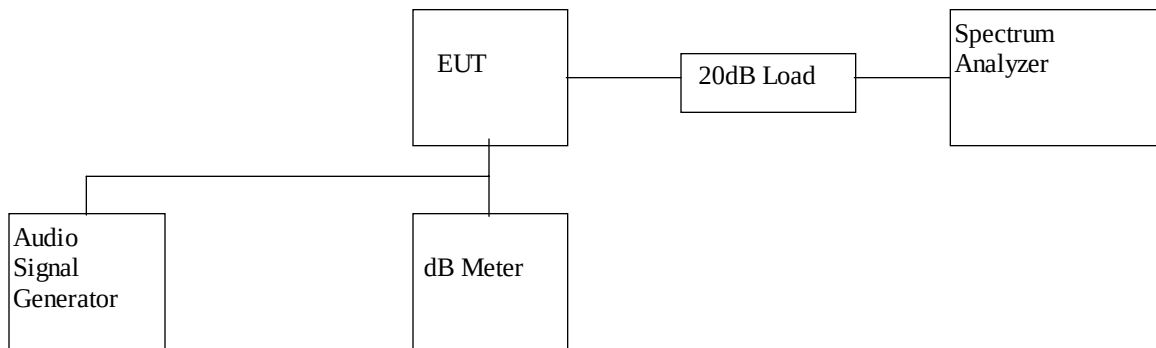

- 2) Set the level of audio signal generator to obtain 16 dB greater than required for 50% modulation.
- 3) The occupied bandwidth is measured with the spectrum analyzer set at 5kHz/div scan and 10dB/div.

C. Test Result

The occupied Bandwidth is measured to be 10.4 kHz.

For the electronic filing, the bandwidth plot is saved with filename:
bw.pdf

Test Engineer: Ben W. K. Ho

Date of Test: September 24, 2001

EXHIBIT 6

SPURIOUS EMISSION

6.0 **Spurious Emission (Section 95.635)**


In order to satisfy the 95.635 requirement, the spurious emission from the antenna terminal and from the EUT are measured and shown in the Exhibit 6.1 and 6.2

6.1 Spurious emission at the antenna terminal**A. Test Equipment**

Equipment	Brand Name	Model No.
Regulated Power Supply	PAD	30-35L
Audio Signal Generator	Leader	LFG-1300S
dB meter	Leader	LMV-182A
20 dB RF Load	Bird	8304-200-N
RF Filter	Tailithic	3VF
Spectrum Analyzer	Hewlett Packard	8951EM

B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

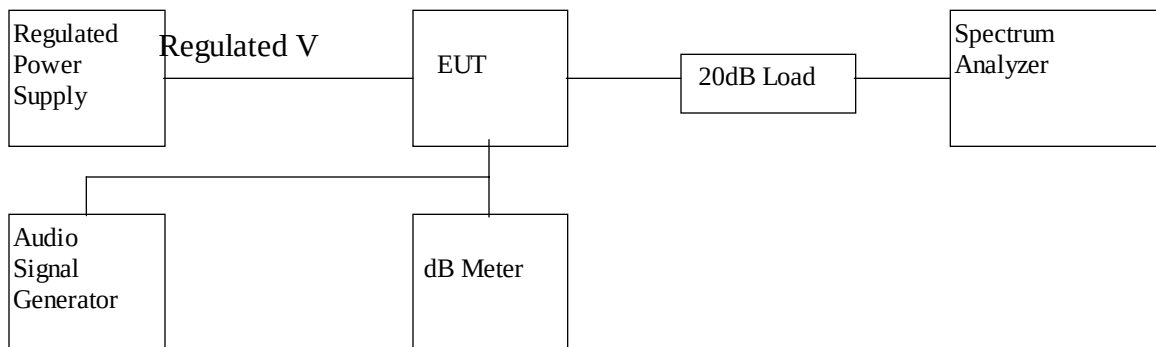

- 2) Set the level of audio signal generator to obtain 16 dB greater than required for 50% modulation.
- 3) Plot the graph of emissions with 100kHz span.
- 4) Measure the emissions relative to TP in region $\text{CARRIER} \pm 10\text{kHz}$ to $\text{CARRIER} \pm 20\text{kHz}$ from the plot.
- 5) Measure the emissions relative to TP from region $\text{CARRIER} \pm 20\text{kHz}$ to 50kHz.
- 6) Measure the emissions relative to TP from region $\text{CARRIER} \pm 50\text{kHz}$ to 1000MHz.

C. Test Result**Musical Electronics Limited
Musical GMRS1000H****Table 6.1(a)**

- 1) Unwanted emission from CARRIER $\pm 20\text{kHz}$ to Carrier $\pm 50\text{kHz}$ (Refer to the plots which is saved with filename: spurious.pdf)

Region	Unwanted emission	
	Channel 11	Channel 18
CARRIER $\pm 10\text{kHz}$ to $\pm 20\text{kHz}$	< 25dB	< 25dB
CARRIER $\pm 20\text{kHz}$ to $\pm 50\text{kHz}$	< 35dB	< 35dB

INTERTEK TESTING SERVICES

2) Unwanted emission from CARRIER $\pm 50\text{kHz}$ to 1000MHz

Table 6.1(b): Channel 11

Frequency (M H z)	Effective Radiated Power (dBm)	Transmission Power (dBm)	Attenuation (dB)	Limit (dB)	Margin (dB)
925.250	-30.1	33.0	63.1	46.0	17.1
1387.875	-45.3	33.0	78.3	46.0	32.3
1850.500	-53.2	33.0	86.2	46.0	40.2
2313.125	-45.2	33.0	78.2	46.0	32.2
2775.750	-54.1	33.0	87.1	46.0	41.1
3238.375	-54.6	33.0	87.6	46.0	41.6

Table 6.1(c): Channel 18

Frequency (M H z)	Effective Radiated Power (dBm)	Transmission Power (dBm)	Attenuation (dB)	Limit (dB)	Margin (dB)
935.250	-34.0	33.0	67.0	46.0	21.0
1402.875	-45.2	33.0	78.2	46.0	32.2
1870.500	-54.0	33.0	87.0	46.0	41.0
2338.125	-46.3	33.0	79.3	46.0	33.3
2805.750	-54.2	33.0	87.2	46.0	41.2
3273.375	-54.3	33.0	87.3	46.0	41.3

Remark: 1. Transmission power is 33 dBm or 3 dB(W).
2. According to Section 95.635(b7), the unwanted emission should be attenuated below TP by at least $43 + 10 \log_{10} (\text{TP})$ dB or 46 dB.

Test Engineer: Ben W. K. Ho

Date of Test: September 24, 2001

INTERTEK TESTING SERVICES

6.2 **Field Strength of Spurious Radiation**

A. Test Equipment

Equipment	Brand Name	Model No.
Antenna	CDI	B100,B200,B300, Horn
Test receiver	Rohde & Schwarz	ESVS30
RF Filter	Tailithic	3VF

B. Testing Procedure

Radiated emission measurements were performed according to the procedures in ANSI C63.4(1992). All measurements were performed in Open Area Test Sites located at Roof Top of Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.

INTERTEK TESTING SERVICES

C. Radiated Emission Configuration Photograph

Worst Case Radiated Emission

For electronic filing, the radiated emission configurations photograph is saved with filename: Rconfig photos.doc

INTERTEK TESTING SERVICES

D. Test Result

Musical Electronics Limited Musical GMRS1000H

Table 6.2(a): Channel 11

Frequency (M H z)	E ffective Radiated Power (dBm)	Transm ission Power (dBm)	A ttenuation (dB)	L in it (dB)	M argin (dB)
925.250	-17.6	29.8	47.4	42.8	4.6
1387.875	-30.9	29.8	60.7	42.8	17.9
1850.500	-29.2	29.8	59.0	42.8	16.2
2313.125	-27.2	29.8	57.0	42.8	14.2
2775.750	-34.4	29.8	64.2	42.8	21.4
3238.375	-36.6	29.8	66.4	42.8	23.6
3701.000	-37.4	29.8	67.2	42.8	24.4
4163.625	-37.9	29.8	67.7	42.8	24.9
4626.250	-38.2	29.8	68.0	42.8	25.2
5088.875	-38.6	29.8	68.4	42.8	25.6

- Remark:
1. Transmission power is 29.8 dBm or -0.2 dB(W).
 2. According to Section 95.635(b7), the unwanted emission should be attenuated below TP by at least $43 + 10 \log_{10} (TP)$ dB or 42.8 dB.
 3. The test is performed according to ANSI/TIA/EIA-603-1992.

Test Engineer: Ben W. K. Ho

Date of Test: September 24, 2001

INTERTEK TESTING SERVICES

Table 6.2(b): Channel 18

Frequency (M H z)	E ffective Radiated Power (dBm)	Transm ission Power (dBm)	A ttenuation (dB)	L in it (dB)	M argin (dB)
935.250	-17.2	29.8	47.0	42.8	4.2
1402.875	-30.2	29.8	60.0	42.8	17.2
1870.500	-29.3	29.8	59.1	42.8	16.3
2338.125	-26.8	29.8	56.6	42.8	13.8
2805.750	-34.2	29.8	64.0	42.8	21.2
3273.375	-36.6	29.8	66.4	42.8	23.6
3741.000	-37.3	29.8	67.1	42.8	24.3
4208.625	-37.8	29.8	67.6	42.8	24.8
4676.250	-38.1	29.8	67.9	42.8	25.1
5143.875	-38.4	29.8	68.2	42.8	25.4

- Remark:
1. Transmission power is 29.8 dBm or -0.2 dB(W).
 2. According to Section 95.635(b7), the unwanted emission should be attenuated below TP by at least $43 + 10 \log_{10} (TP)$ dB or 42.8 dB.
 3. The test is performed according to ANSI/TIA/EIA-603-1992.

Test Engineer: Ben W. K. Ho

Date of Test: September 24, 2001

EXHIBIT 7

FREQUENCY STABILITY

7.0 **Frequency Stability**

The frequency tolerance was tested in normal condition & over extreme ambient conditions with respect to voltage and temperature variation.

INTERTEK TESTING SERVICES


7.1 **Frequency Tolerance (Section 95.625)**

A. Test Equipment

Equipment	Brand Name	Model No.
Regulated Power Supply	PAD	30-35L
20 dB RF Load	Bird	8304-200-N
Frequency Counter	Phillips	PM6668

B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:



- 2) Measure all transmit channel frequencies in MHz.

INTERTEK TESTING SERVICES

C. Test Result

Table 7.1

Musical Electronics Limited
Musical GMRS1000H

Frequency Tolerance

Channel	Frequency (M H z)	M easured Frequency (M H z)	To l erance (%)
1	462.56250	462.56179	0.000153
2	462.58750	462.58678	0.000156
3	462.61250	462.61178	0.000156
4	462.63750	462.63678	0.000156
5	462.66250	462.66177	0.000158
6	462.68750	462.68678	0.000156
7	462.71250	462.71177	0.000158
8	462.55000	462.54928	0.000156
9	462.57500	462.57428	0.000156
10	462.60000	462.59927	0.000158
11	462.62500	462.62427	0.000158
12	462.65000	462.64927	0.000158
13	462.70000	462.69927	0.000158
14	462.72500	462.72427	0.000158
15	467.55000	467.54926	0.000158
16	467.57500	467.57426	0.000158
17	467.60000	467.59926	0.000158
18	467.62500	467.62426	0.000158
19	467.65000	467.64926	0.000158
20	467.70000	467.69926	0.000158
21	467.72500	467.72425	0.000160
22 (Ech1)	462.67500	462.67426	0.000160
23 (Ech2)	467.67500	467.67426	0.000158

INTERTEK TESTING SERVICES


7.2 Frequency Stability - Temperature (Section 2.1055)

A. Test Equipment

Equipment	Brand Name	Model No.
20 dB RF Load	Bird	8304-200-N
Frequency Counter	Phillips	PM6668

B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

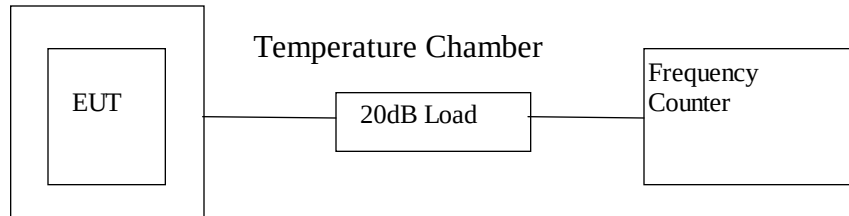

- 2) Set the Temperature Chamber to -20°C and stabilize the EUT temperature for one hour. Set transmitter ON for two minutes.
- 3) Measure the channel frequency of channel 4, 11 in MHz.
- 4) Turn the EUT OFF
- 5) Repeat the above procedure from -20°C to 50°C with 10°C increment.

C. Test Result**Table 7.2(a)**

**Musical Electronics Limited
Musical GMRS1000H**

Frequency Deviation with Temperature Variation

Channel : 11

Temperature (°C)	Assigned Frequency (M H z)	Measured Frequency (M H z)	% Deviation
-20	462.62500	462.62546	-0.000099
-10	462.62500	462.62573	-0.000158
0	462.62500	462.62558	-0.000125
10	462.62500	462.62562	-0.000134
20	462.62500	462.62427	0.000158
30	462.62500	462.62466	0.000073
40	462.62500	462.62409	0.000197
50	462.62500	462.62419	0.000175

Test Engineer: Ben W. K. Ho

Date of Test: September 24, 2001

C. Test Result**Table 7.2(b)**

**Musical Electronics Limited
Musical GMRS1000H**

Frequency Deviation with Temperature Variation

Channel : 18

Temperature (°C)	Assigned Frequency (M H z)	Measured Frequency (M H z)	% Deviation
-20	467.62500	467.62550	-0.000107
-10	467.62500	467.62580	-0.000171
0	467.62500	467.62563	-0.000135
10	467.62500	467.62565	-0.000139
20	467.62500	467.62426	0.000158
30	467.62500	467.62465	0.000075
40	467.62500	467.62410	0.000192
50	467.62500	467.62419	0.000173

Test Engineer: Ben W. K. Ho


Date of Test: September 24, 2001

7.3 Frequency Stability - Voltage (Section 2.995)**A. Test Equipment**

Equipment	Brand Name	Model No.
Regulated Power Supply	PAD	30-35L
20 dB RF Load	Bird	8304-200-N
Voltage meter	Fluke	87
Frequency Counter	Phillips	PM6668

B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

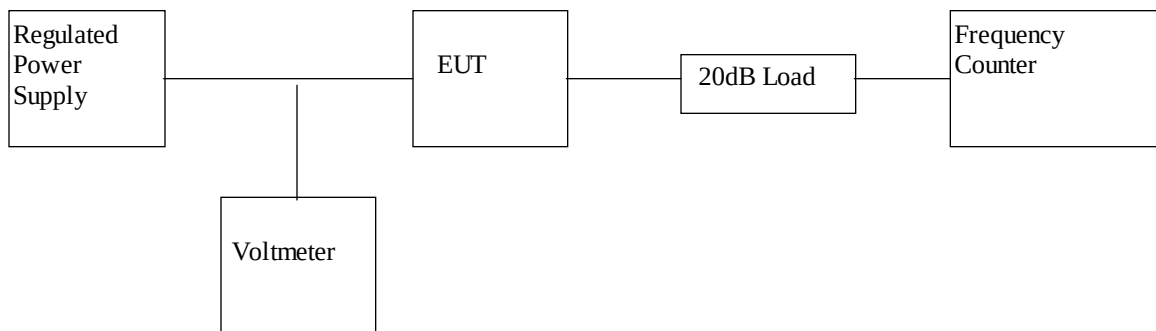

- 2) Vary the level of regulated power supply to the manufacturer specified battery end point of the EUT.
- 3) Measure the channel frequency from channel 1 to 14 in MHz.

C. Test Result**Table 7.3****Musical Electronics Limited
Musical GMRS1000H****Frequency Deviation with Voltage Variation**

The manufacturer specified battery end point 6.75V

Channel	Frequency (M H z)	Measured Frequency (M H z)	Tolerance (%)
11	462.62500	462.62434	-0.000143
18	467.62500	467.62434	-0.000141

EXHIBIT 8
TECHNICAL SPECIFICATIONS

8.0 **Technical Specifications**

8.1 Block Diagram

For electronic filing, the block diagram of the GMRS is saved with filename: block.pdf.

Figure 8.1 Block Diagram

8.2 Schematic Diagram

For electronic filing, the schematic diagram of the GMRS is saved with filename: circuit.pdf

Figure 8.2 Schematic Diagram

EXHIBIT 9

PRODUCT LABELLING

9.0 **Product Labelling**

9.1 Label Artwork & Location

Figure 9.1 Label Artwork & Location

An engineering drawing of the label which will be permanently affixed to the unit. For electronic filing, the label artwork & location are saved with filename: label.pdf

EXHIBIT 10
PHOTOGRAPHS

10.0 Equipment Photographs

For electronic filing, photographs of the tested EUT are saved with filename: external photos.doc and internal photos.doc

EXHIBIT 11
INSTRUCTION MANUAL

11.0 **Instruction Manual**

This manual will be provided to the end-user with each unit sold/leased in the United States.

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf

EXHIBIT 12

TUNE UP PROCEDURE

12.0 **Tune Up Procedure**

For electronic filing, a preliminary copy of the Tune Up Procedure is saved with filename: tuneup.pdf

EXHIBIT 13

PART LIST

13.0 **Part List**

For electronic filing, a preliminary copy of the Part List is saved with filename: partlist.pdf

EXHIBIT 14

RF EXPOSURE INFO

14.0 RF Exposure Info

For electronic filing, a preliminary copy of the SAR report is saved with filename: sar.pdf