

Technical Information and Intended use

Per 2.1033 and Part 15 of the Federal Communications Rules and Regulations, the following is submitted to substantiate adherence to those specifications.

- 1) Name of Manufacturer: Ericsson Inc.
- 2) Model number of Transceiver: FCC ID: AXATR-414-A2
- 3) Description of Transceiver: This portable transceiver is designed for use in the GSM 1900 cellular telephone system.
 - a) Transmitter range: 1850 MHz to 1910 MHz
 - b) Receiver range: 1930MHz to 1990MHz
 - c) IF Frequencies: 1st IF- 188MHz 2nd IF- 6MHz
- 4) Measurement procedure: reference Part 15, Subpart B as applicable to this unit and measurement standard as outlined in part 15.31. The unit was tested using ANSI C63.4 1992. The site where the measurements were performed is on file with the FCC.
 - a) Site location: Underwriters Laboratory Inc., 12 Laboratory Drive, Research Triangle Park, NC 27709
- 5) Date of measurement: August 31, 2000
- 6) Summary of measurements: No radiation was found to exceed the limit set forth in Part 15. Test results are plotted and attached.
- 7) On the basis of these requirements, this transceiver is certified as capable of complying with the radiation requirements of Part 15 under normal operation and with the usual maintenance.

Jim Sponsler
Regulatory Manager
9-29-00



Underwriters Laboratories Inc.®

12 Laboratory Drive
P.O. Box 13895
Research Triangle Park
North Carolina 27709-3995
(919) 549-1400
FAX No. (919) 549-1842



7 September, 2000

To: Mr. Jim Sponsler
Ericsson

From: Jim Marley
Underwriters Laboratories Inc.

Subject: Completion of R380 with Todd cable FCC Part 15 Class B on August 31, 2000

Dear Mr. Sponsler,

We have completed radiated emissions testing of the R380 with Todd cable and found the unit to meet FCC Part 15 Class B limits. One frequency measured and recorded on the data plots, at 1947.96 MHz (peak) and 1947.821 MHz (average), was investigated and found to be emitted from the cell station simulator hardware located in the test area during the measurements. Because the cell station simulator is necessary to operate the R380, measurements could not be performed with the cell station hardware powered off. Please disregard this frequency on the data plots and frequency list that we provided to you. Please give me a call if you have any questions.

Regards,

Jim Marley
(919) 549-1408
james.r.marley@us.ul.com

FCC PART 15, SUBPART B

RDE 2A 30-300MHz H

00LB453 HORIZONTAL

Chris Eckert

TESTED BY: CHRIS ECKERT

dB[uVolts/meter]

CLASS B (3M)


30

100

300

Frequency [MHz]

AXATR-414-A2 with RS232 cable

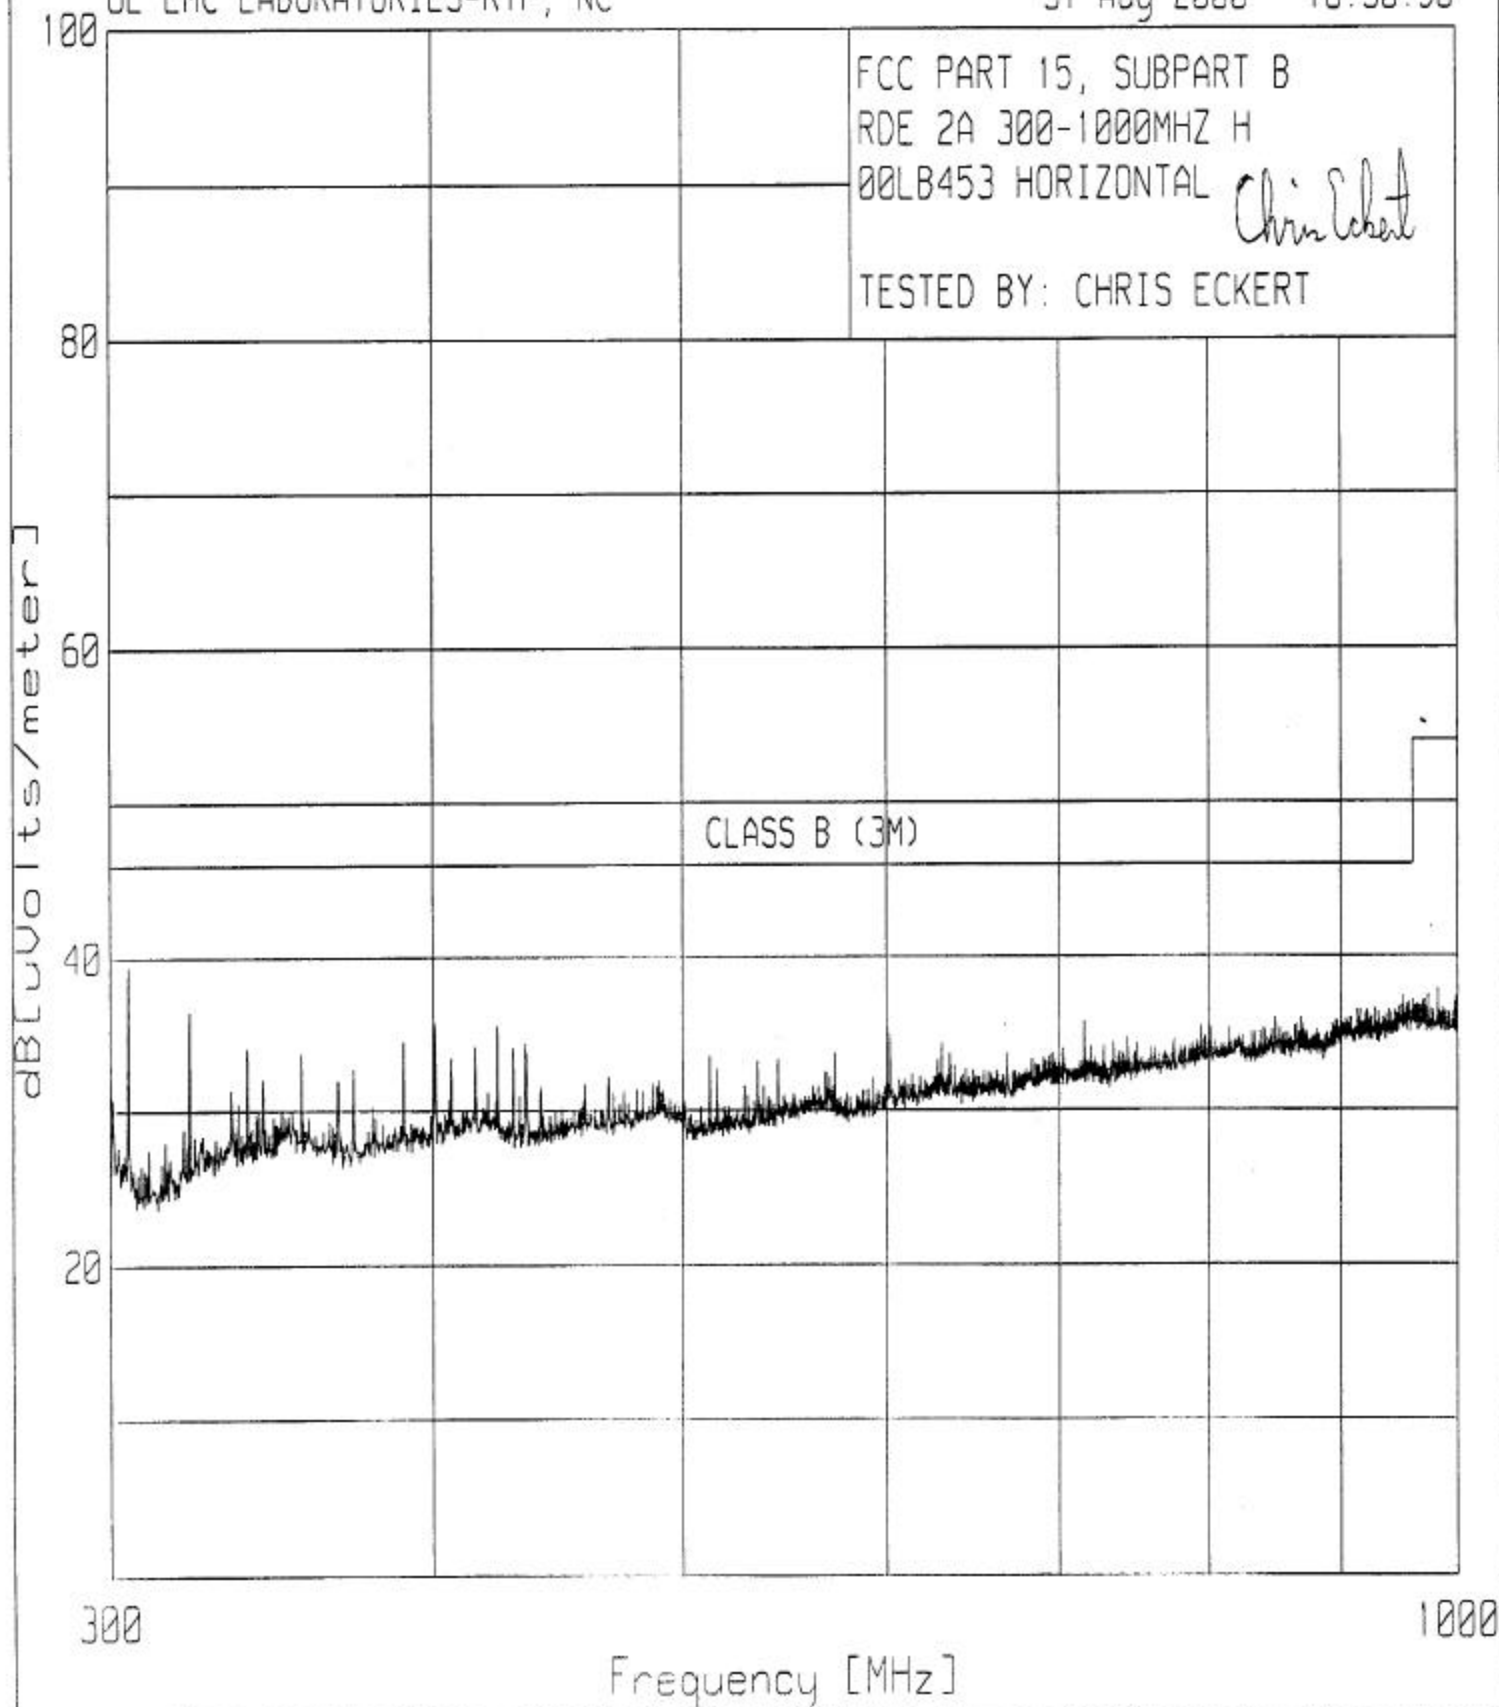

FCC PART 15, SUBPART B
RDE 3A 1-5GHZ H
00LB453 HORIZONTAL

TESTED BY: CHRIS ECKERT

Base Station S.m


CLASS B 3M

dB[μVolts/meter]

1000

5000

Frequency [MHz]

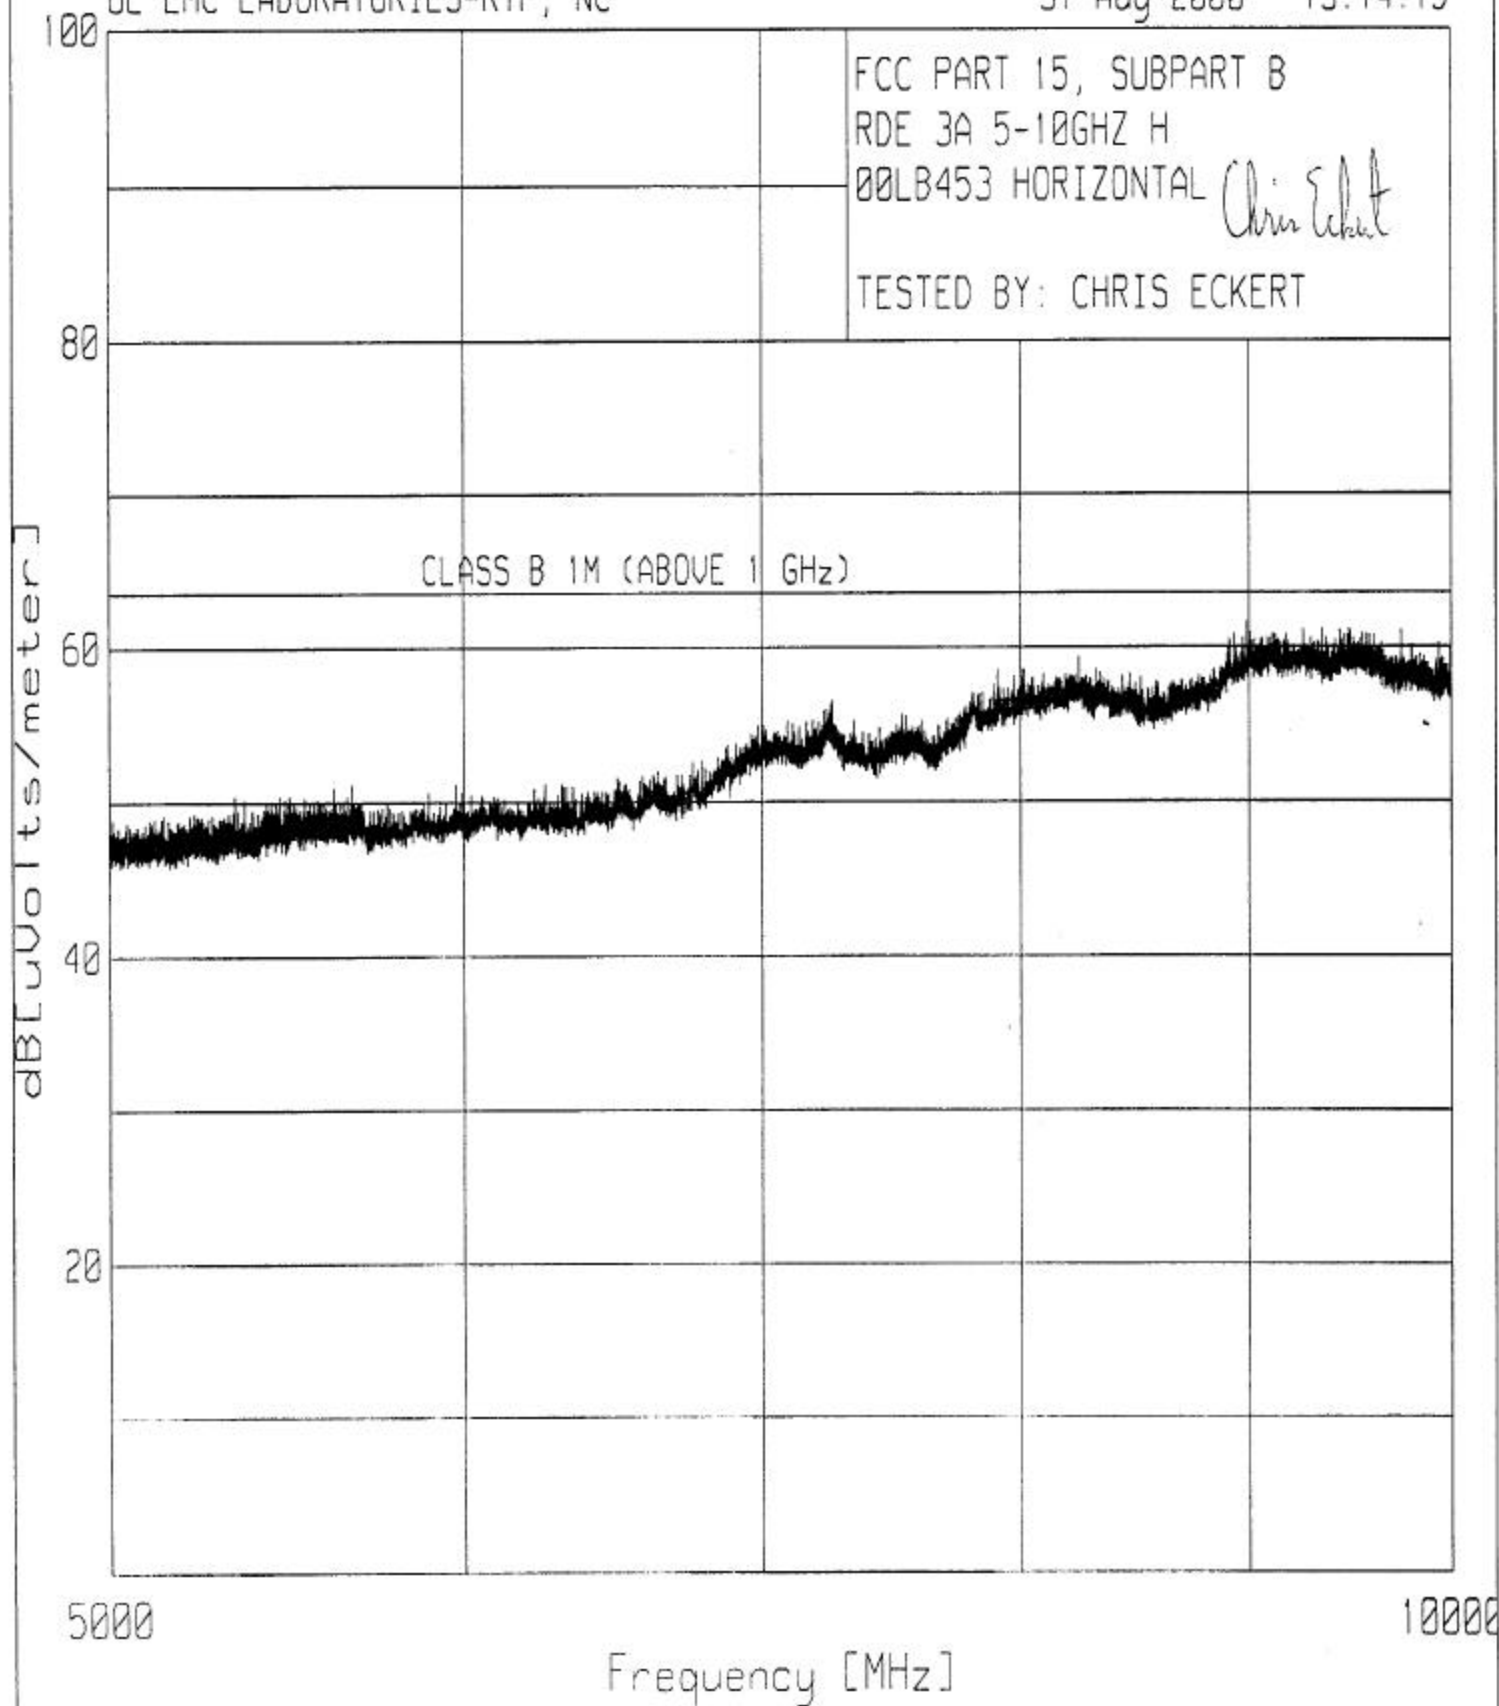

Chris Eckert


Date Tested: 31 Aug 20
15:32:43


2 CG-E
RDE SA 30-300MHZ V
00LB453 VERTICAL
TESTED BY: CHRIS ECKERT

Test	Meter	Gain/Loss	Transducer	Level	Limit:1	2	3	4
Frequency	Reading	Factor	Factor	dB[uVolts/meter]				
[MHz]	[dB(uV)]	[dB]	[dB]					
31.8924	13.64 qp	.9	16.9	31.44	40	N/A	N/A	N/A
Azimuth: 136 Height:102 Vert					Margin [dB]	-8.56	N/A	N/A
33.9198	21.6 qp	1	15.9	38.5	40	N/A	N/A	N/A
Azimuth: 4 Height:101 Vert					Margin [dB]	-1.5	N/A	N/A
35.9665	15.27 qp	1	15	31.27	40	N/A	N/A	N/A
Azimuth: 136 Height:100 Vert					Margin [dB]	-8.73	N/A	N/A

LIMIT 1: CLASS B (3M)
LIMIT 2: NONE
LIMIT 3: NONE
LIMIT 4: NONE

pk - Peak detector
qp - Quasi-Peak detector
av - Average detector

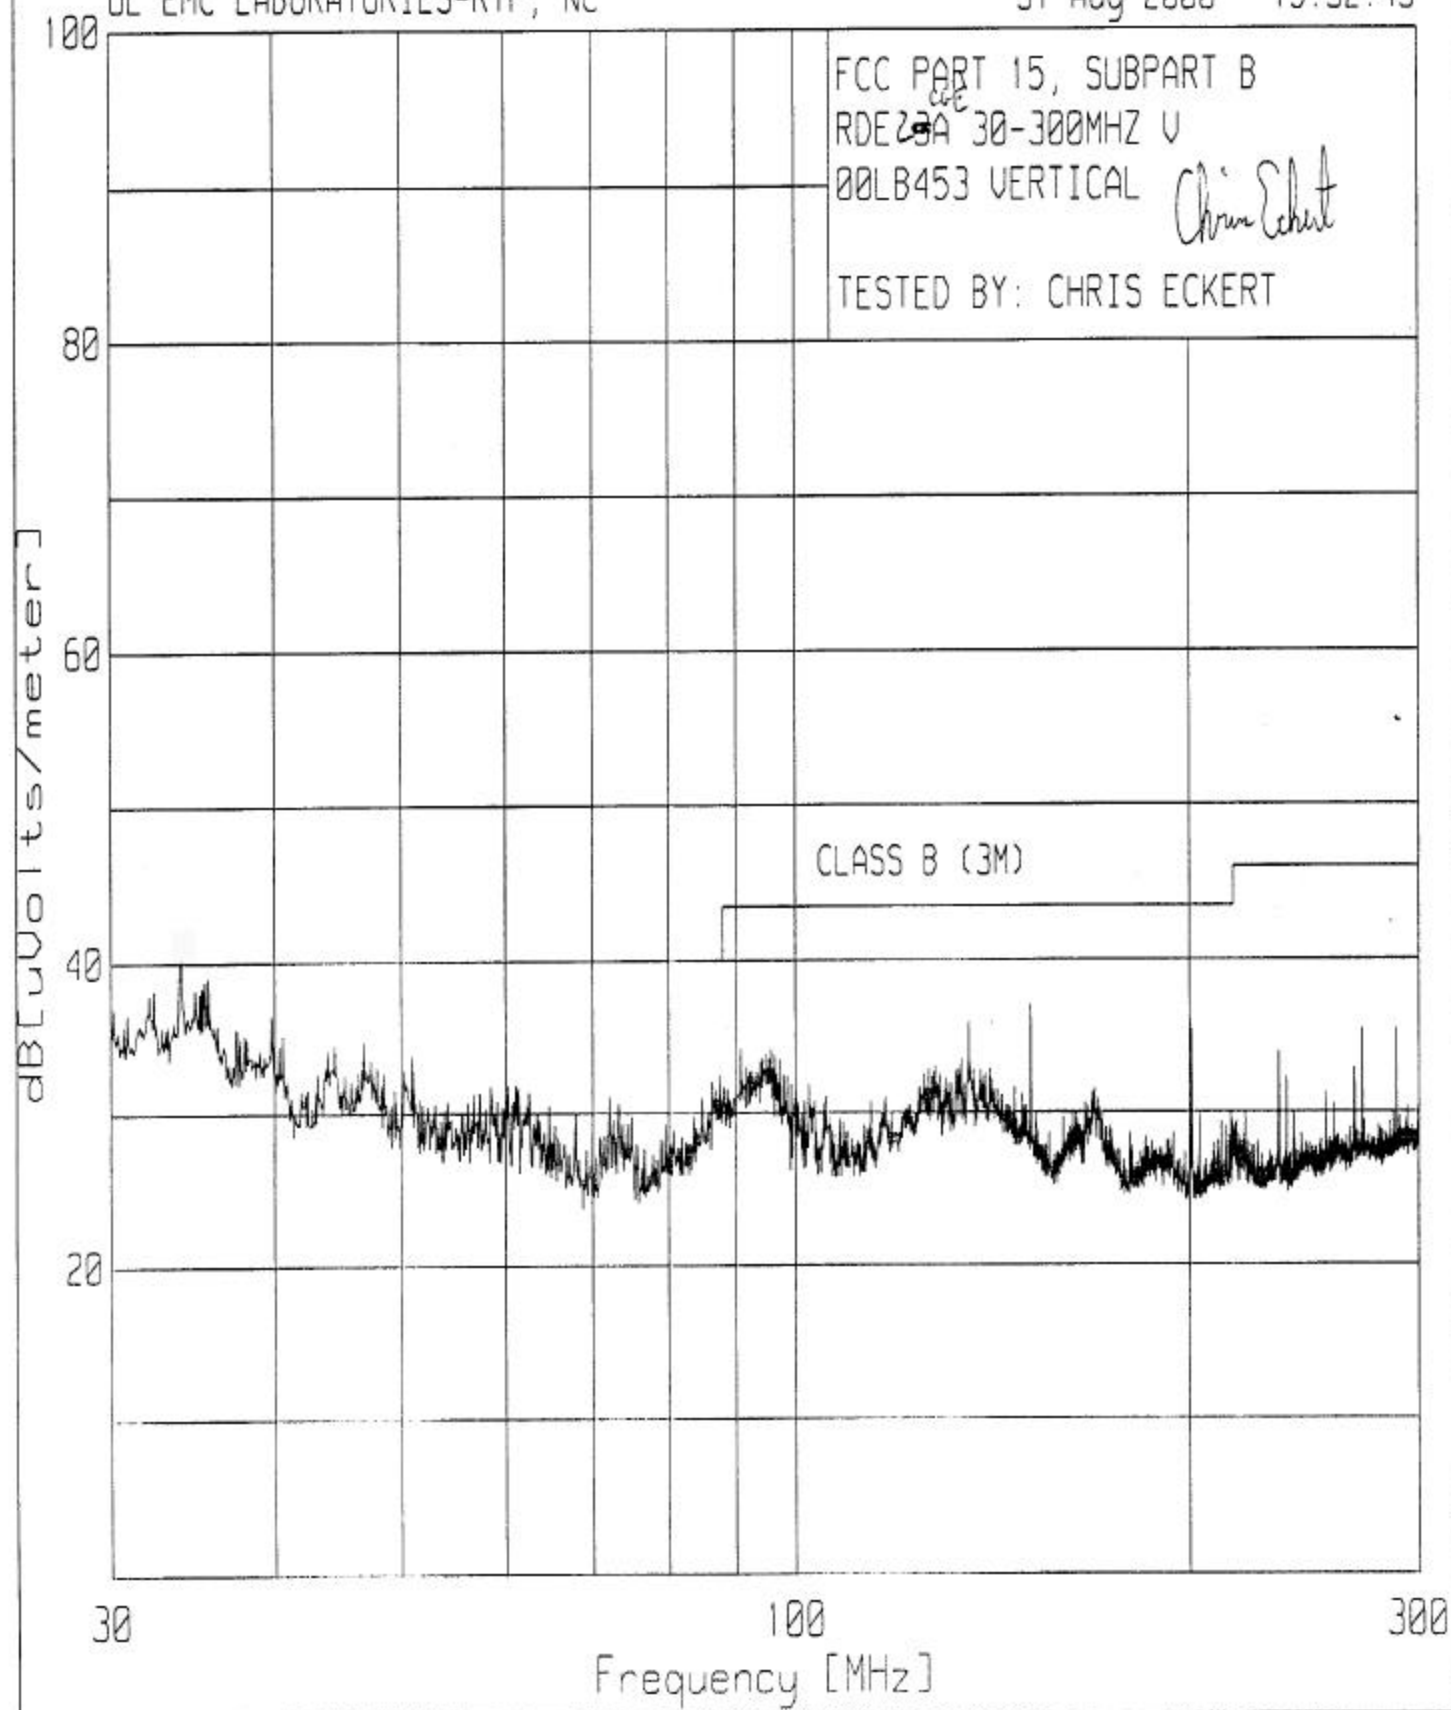

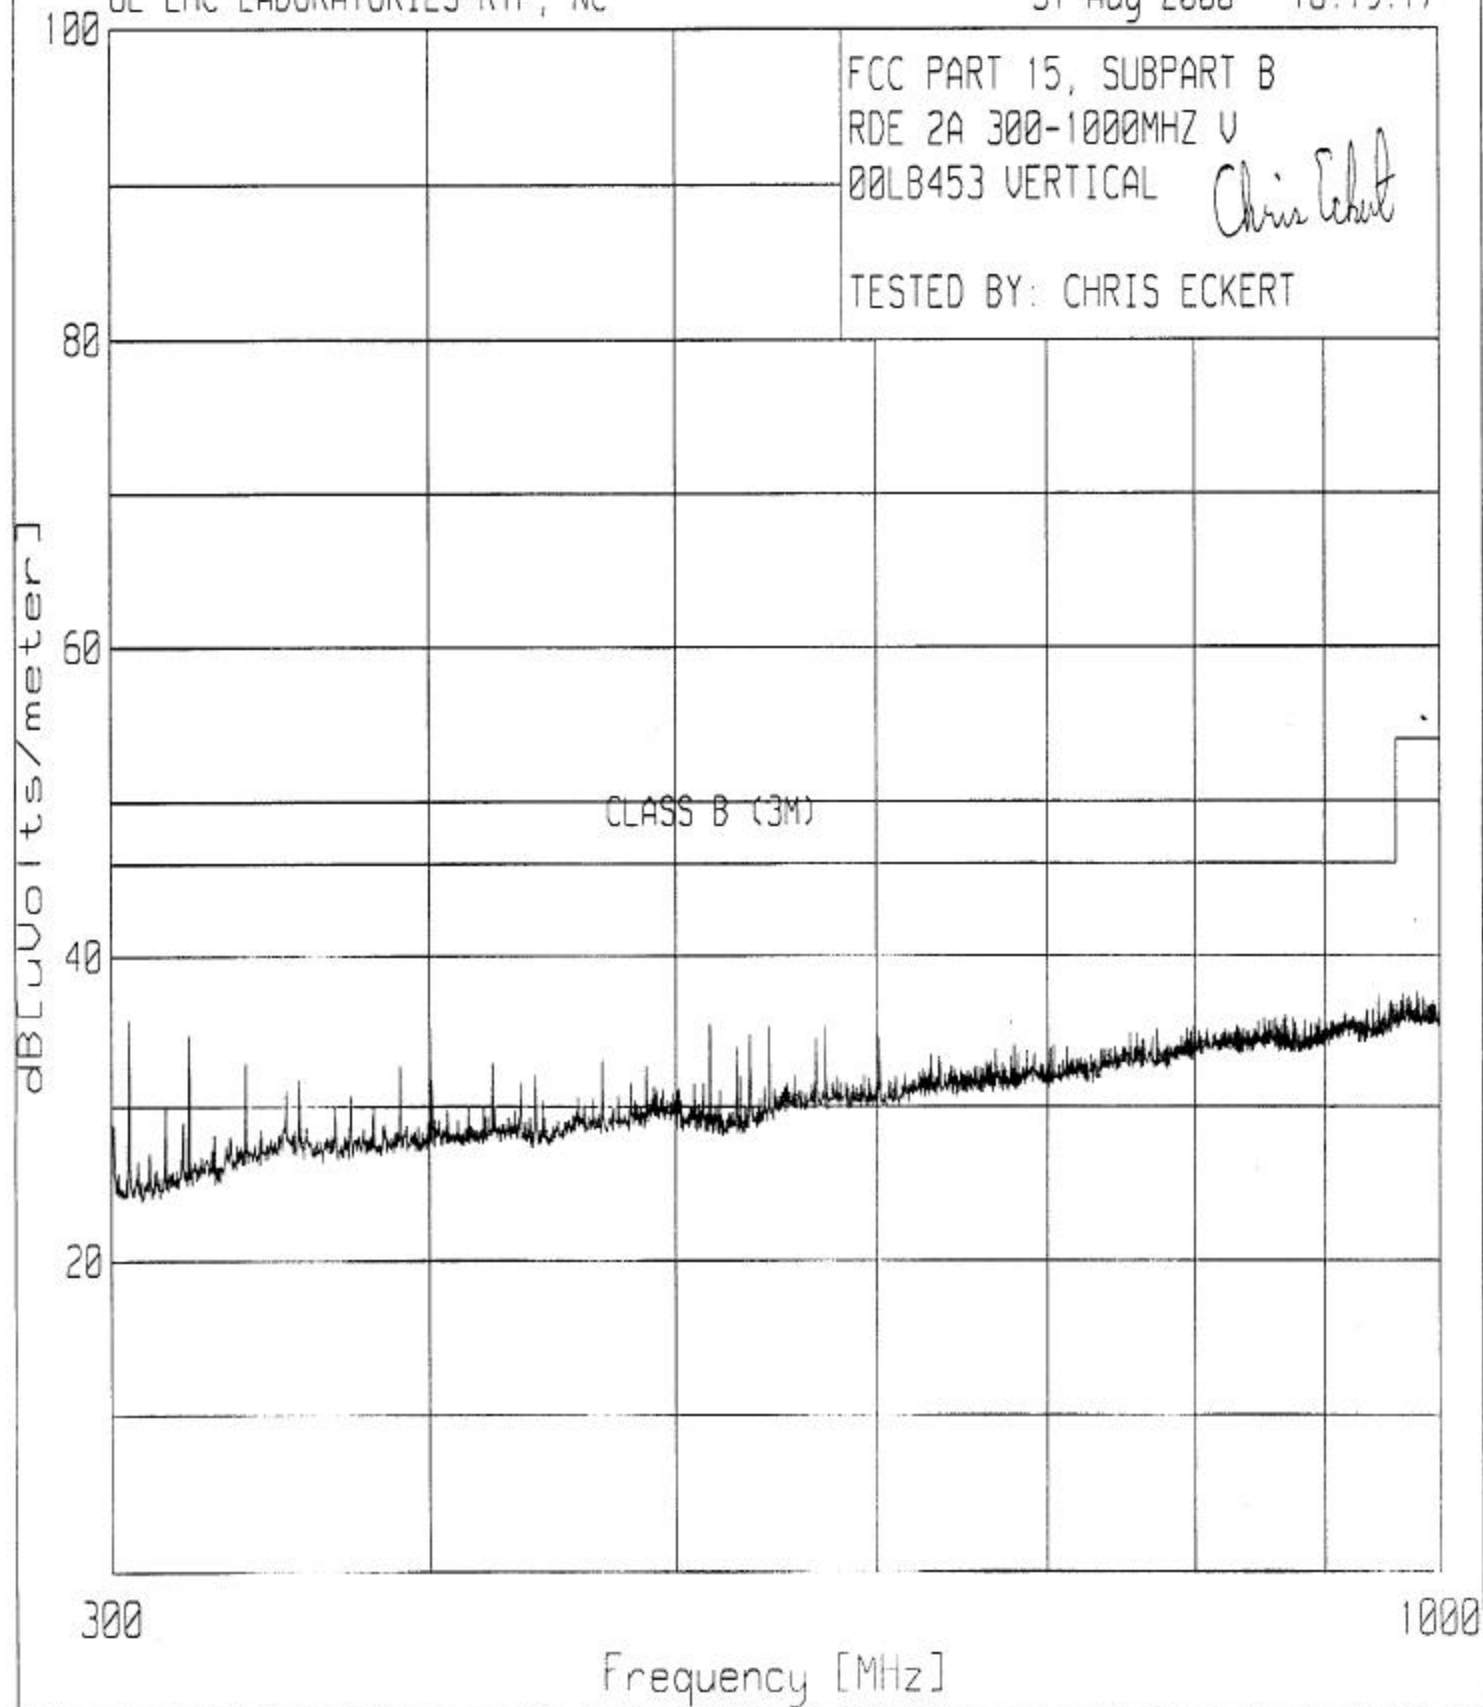

FCC PART 15, SUBPART B

RDE 3A 1-5GHZ U

00LB453 VERTICAL

Chris Eckert

TESTED BY: CHRIS ECKERT

dB[uVolts/meter]

CLASS B 3M

* Big Station Sum

1000

Frequency [MHz]

5000

FCC PART 15, SUBPART B

RDE 3A 5-10GHZ U

00LB453 VERTICAL

Chris Eckert

TESTED BY: CHRIS ECKERT

CLASS B 1M (ABOVE 1 GHz)

dBuV/meter

5000

Frequency [MHz]

10000