



element

Timecode Systems Limited

UltraSync BLUE

FCC 15.247:2018

Bluetooth Low Energy (DTS) Radio

Report # TMEC0002.1



NVLAP LAB CODE: 200630-0



This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. This Report shall not be reproduced, except in full without written approval of the laboratory.

EAR-Controlled Data - This document contains technical data whose export and reexport/retransfer is subject to control by the U.S. Department of Commerce under the Export Administration Act and the Export Administration Regulations. The Department of Commerce's prior written approval may be required for the export or re-export/retransfer of such technical data to any foreign person, foreign entity or foreign organization whether in the United States or abroad.

More: <https://www.bis.doc.gov/index.php/forms-documents/regulations-docs/14-commerce-country-chart/fileT>

CERTIFICATE OF TEST

Last Date of Test: September 6, 2018
 Timecode Systems Limited
 Model: UltraSync BLUE

Radio Equipment Testing

Standards

Specification	Method
FCC 15.247:2018	ANSI C63.10:2013, KDB 558074

Results

Method Clause	Test Description	Applied	Results	Comments
6.2	Powerline Conducted Emissions	No	N/A	Not required for a battery powered EUT.
11.12.1, 11.13.2, 6.5, 6.6	Spurious Radiated Emissions	Yes	Pass	
11.6	Duty Cycle	Yes	N/A	Characterization of radio operation.
11.8.2	Occupied Bandwidth	Yes	Pass	
11.9.1.1	Output Power	Yes	Pass	
11.10.2	Power Spectral Density	Yes	Pass	
11.11	Band Edge Compliance	Yes	Pass	
11.11	Spurious Conducted Emissions	Yes	Pass	

Deviations From Test Standards

None

Approved By:



Kyle Holgate, Operations Manager

Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information. As indicated in the Statement of Work sent with the quotation, Element's standard process is to always use the latest published version of the test methods even when earlier versions are cited in the test specification. Issuance of a purchase order was de facto acceptance of this approach. Otherwise, the client would have advised Element in writing of the specific version of the test methods they wanted applied to the subject testing.

REVISION HISTORY



Revision Number	Description	Date (yyyy-mm-dd)	Page Number
00	None		

ACCREDITATIONS AND AUTHORIZATIONS



United States

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

A2LA - Accredited by A2LA to ISO / IEC 17065 as a product certifier. This allows Element to certify transmitters to FCC and IC specifications.

NVLAP - Each laboratory is accredited by NVLAP to ISO 17025

Canada

ISED - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB). Certification chambers and Open Area Test Sites are filed with ISED.

European Union

European Commission – Within Element, we have a EU Notified Body validated for the EMCD and RED Directives.

Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

Korea

MSIT / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

Taiwan

BSMI – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

Singapore

IDA – Recognized by IDA as a CAB for the acceptance of test data.

Israel

MOC – Recognized by MOC as a CAB for the acceptance of test data.

Hong Kong

OFCA – Recognized by OFCA as a CAB for the acceptance of test data.

Vietnam

MIC – Recognized by MIC as a CAB for the acceptance of test data.

SCOPE


For details on the Scopes of our Accreditations, please visit:

<https://www.nwemc.com/emc-testing-accreditations>

FACILITIES



California Labs OC01-17 41 Tesla Irvine, CA 92618 (949) 861-8918	Minnesota Labs MN01-10 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612)-638-5136	New York Labs NY01-04 4939 Jordan Rd. Elbridge, NY 13060 (315) 554-8214	Oregon Labs EV01-12 6775 NE Evergreen Pkwy #400 Hillsboro, OR 97124 (503) 844-4066	Texas Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255	Washington Labs NC01-05 19201 120 th Ave NE Bothell, WA 98011 (425)984-6600
NVLAP					
NVLAP Lab Code: 200676-0	NVLAP Lab Code: 200881-0	NVLAP Lab Code: 200761-0	NVLAP Lab Code: 200630-0	NVLAP Lab Code:201049-0	NVLAP Lab Code: 200629-0
Innovation, Science and Economic Development Canada					
2834B-1, 2834B-3	2834E-1, 2834E-3	N/A	2834D-1, 2834D-2	2834G-1	2834F-1
BSMI					
SL2-IN-E-1154R	SL2-IN-E-1152R	N/A	SL2-IN-E-1017	SL2-IN-E-1158R	SL2-IN-E-1153R
VCCI					
A-0029	A-0109	N/A	A-0108	A-0201	A-0110
Recognized Phase I CAB for ACMA, BSMI, IDA, KCC/RRR, MIC, MOC, NCC, OFCA					
US0158	US0175	N/A	US0017	US0191	US0157

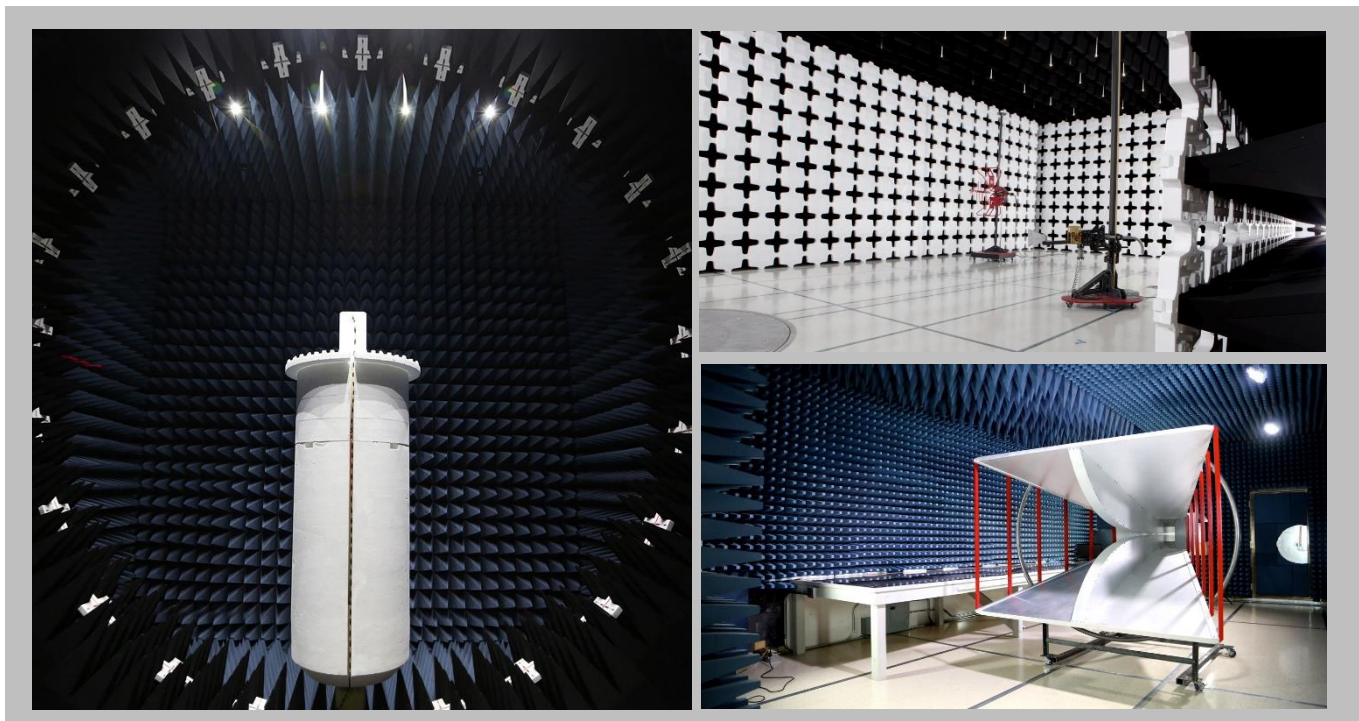

MEASUREMENT UNCERTAINTY

Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.

A measurement uncertainty estimation has been performed for each test per our internal quality document QM205.4.6. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (K=2) can be found included as part of the applicable test description page. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.

The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.

Test	+ MU	- MU
Frequency Accuracy (Hz)	0.0007%	-0.0007%
Amplitude Accuracy (dB)	1.2 dB	-1.2 dB
Conducted Power (dB)	0.3 dB	-0.3 dB
Radiated Power via Substitution (dB)	0.7 dB	-0.7 dB
Temperature (degrees C)	0.7°C	-0.7°C
Humidity (% RH)	2.5% RH	-2.5% RH
Voltage (AC)	1.0%	-1.0%
Voltage (DC)	0.7%	-0.7%
Field Strength (dB)	5.2 dB	-5.2 dB
AC Powerline Conducted Emissions (dB)	2.4 dB	-2.4 dB

Test Setup Block Diagrams


Antenna Port Conducted Measurements



Near Field Test Fixture Measurements



Spurious Radiated Emissions

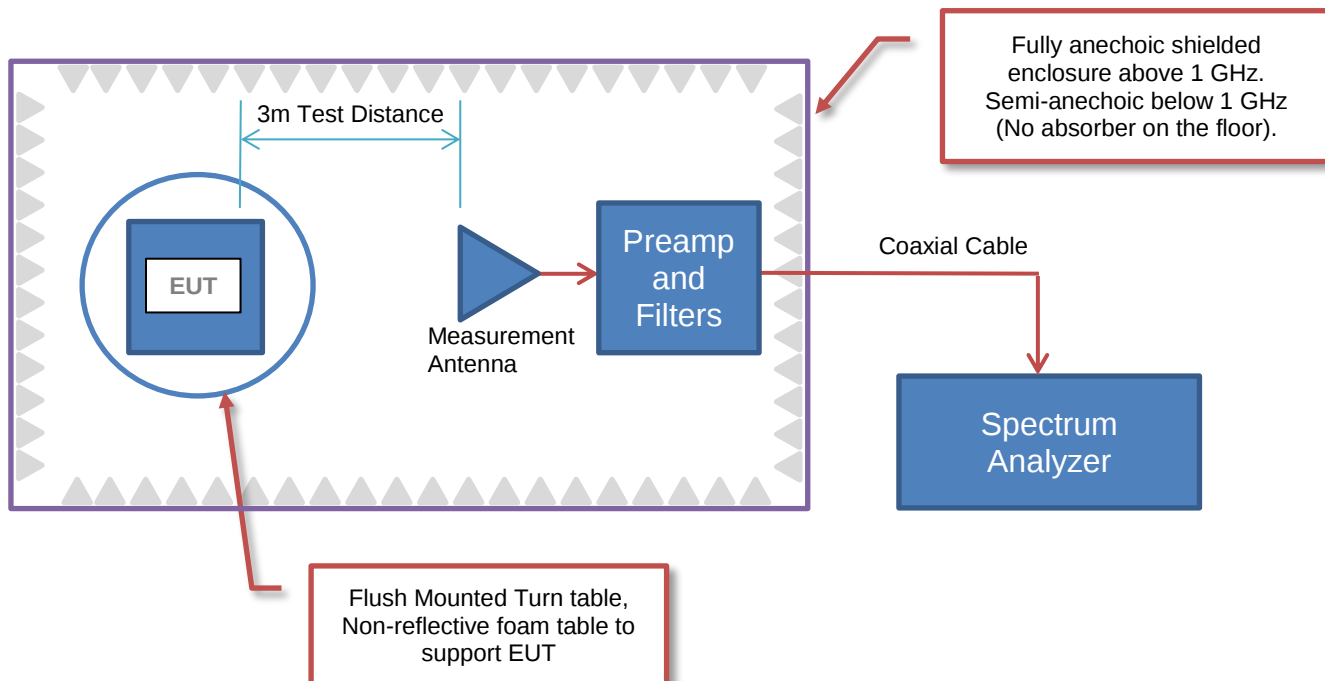

PRODUCT DESCRIPTION



Client and Equipment Under Test (EUT) Information

Company Name:	Timecode Systems Limited
Address:	Unit 6 Elgar Business Centre Moseley Road
City, State, Zip:	Hallow, WR2 6NJ
Test Requested By:	Paul Scurrall
Model:	UltraSync BLUE
First Date of Test:	September 4, 2018
Last Date of Test:	September 6, 2018
Receipt Date of Samples:	September 4, 2018
Equipment Design Stage:	Production
Equipment Condition:	No Damage
Purchase Authorization:	Verified

Information Provided by the Party Requesting the Test

Functional Description of the EUT:
Time code synchronization system
Testing Objective:
To demonstrate compliance of the Bluetooth low energy (DTS) radio to FCC 15.247 requirements.

CONFIGURATIONS

Configuration TMEC0002- 1

Software/Firmware Running during test	
Description	Version
USB3	2.9

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Time code synchronization system	Timecode Systems Limited	UltraSync BLUE	111836-000001

Configuration TMEC0002- 2

Software/Firmware Running during test	
Description	Version
USB3	2.9

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Time code synchronization system	Timecode Systems Limited	UltraSync BLUE	111836-000003

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
USB Cable	Yes	1.0 m	No	Time code synchronization system	Unterminated

MODIFICATIONS

Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	2018-09-04	Occupied Bandwidth	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
2	2018-09-04	Output Power	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
3	2018-09-04	Power Spectral Density	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
4	2018-09-04	Band Edge Compliance	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
5	2018-09-04	Spurious Conducted Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
6	2018-09-06	Spurious Radiated Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

SPURIOUS RADIATED EMISSIONS



PSA-ESCI 2018.05.04

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

BTLE continuous Tx, Low Ch. = 2402 MHz, Mid Ch. = 2442 MHz, High Ch. = 2480 MHz

POWER SETTINGS INVESTIGATED

Battery

CONFIGURATIONS INVESTIGATED

TMEC0002 - 2

FREQUENCY RANGE INVESTIGATED

Start Frequency	30 MHz	Stop Frequency	26.5 GHz
-----------------	--------	----------------	----------

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Filter - Low Pass	Micro-Tronics	LPM50004	HGR	28-Feb-2018	12 mo
Amplifier - Pre-Amplifier	Miteq	AM-1551	AOY	28-Feb-2018	12 mo
Cable	None	3m Test Distance Cable	EVM	28-Feb-2018	12 mo
Antenna - Biconilog	EMCO	3141	AXG	17-Jul-2017	24 mo
Analyzer - Spectrum Analyzer	Agilent	E4443A	AFB	31-May-2018	12 mo
Cable	ESM Cable Corp.	KMKM-72	EVY	24-Aug-2018	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-18002650-25-10P	AVU	24-Aug-2018	12 mo
Antenna - Standard Gain	ETS Lindgren	3160-09	AIV	NCR	0 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-12001800-30-10P	AVD	30-Nov-2017	12 mo
Antenna - Standard Gain	ETS Lindgren	3160-08	AHV	NCR	0 mo
Cable	None	Standard Gain Horns Cable	EVF	30-Nov-2017	12 mo
Amplifier - Pre-Amplifier	L-3 Narda-MITEQ	AMF-6F-08001200-30-10P	PAO	30-Nov-2017	12 mo
Antenna - Standard Gain	ETS Lindgren	3160-07	AHU	NCR	0 mo
Cable	N/A	Double Ridge Horn Cables	EVB	29-Nov-2017	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-3D-00100800-32-13P	PAG	29-Nov-2017	12 mo
Antenna - Double Ridge	ETS Lindgren	3115	AIZ	7-Feb-2018	24 mo
Filter - High Pass	Micro-Tronics	HPM50111	HFO	1-Feb-2018	12 mo
Attenuator	Coaxicom	3910-20	AXZ	28-Feb-2018	12 mo
Analyzer - Spectrum Analyzer	Agilent	E4446A	AAQ	18-Mar-2018	12 mo

TEST DESCRIPTION

The highest gain antenna of each type to be used with the EUT was tested. The EUT was configured for the required transmit frequencies and the modes as showed in the data sheets.

For each configuration, the spectrum was scanned throughout the specified range as part of the exploratory investigation of the emissions. These “pre-scans” are not included in the report. Final measurements on individual emissions were then made and included in this test report.

The individual emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis if required, and adjusting the measurement antenna height and polarization (per ANSI C63.10). A preamp and high pass filter (and notch filter) were used for this test in order to provide sufficient measurement sensitivity.

Measurements were made with the required detectors and annotated on the data for each individual point using the following annotation:

QP = Quasi-Peak Detector

PK = Peak Detector

AV = RMS Detector

Measurements were made to satisfy the specific requirements of the test specification for out of band emissions as well as the restricted band requirements.

If there are no detectable emissions above the noise floor, the data included may show noise floor measurements for reference only.

Measurements at the edges of the allowable band may be presented in an alternative method as provided for in the ANSI C63.10 Marker-Delta method. This method involves performing an in-band fundamental measurement followed by a screen capture of the fundamental and out-of-band emission using reduced measurement instrumentation bandwidths. The amplitude delta measured on this screen capture is applied to the fundamental emission value to show the out-of-band emission level as applied to the limit.

Where the radio test software does not provide for a duty cycle at continuous transmit conditions (> 98%) and the RMS (power average) measurements were made across the on and off times of the EUT transmissions, a duty cycle correction is added to the measurements using the formula of $10 \cdot \text{LOG}(\text{dc})$.


SPURIOUS RADIATED EMISSIONS



Work Order:	TMEC0002	Date:	6-Sep-2018	
Project:	None	Temperature:	22.2 °C	
Job Site:	EV01	Humidity:	41% RH	
Serial Number:	111836-000003	Barometric Pres.:	1020 mbar	
EUT:	UltraSync BLUE			
Configuration:	2			
Customer:	Timecode Systems Limited			
Attendees:	Paul Bannister			
EUT Power:	Battery			
Operating Mode:	BTLE continuous Tx, Low Ch. = 2402 MHz, Mid Ch. = 2442 MHz, High Ch. = 2480 MHz			
Deviations:	None			
Comments:	Software power setting = 50. See comments below for Channel and EUT orientation.			

Test Specifications	Test Method
FCC 15.247:2018	ANSI C63.10:2013

Run #	11	Test Distance (m)	3	Antenna Height(s)	1 to 4(m)	Results	Pass
-------	----	-------------------	---	-------------------	-----------	---------	------

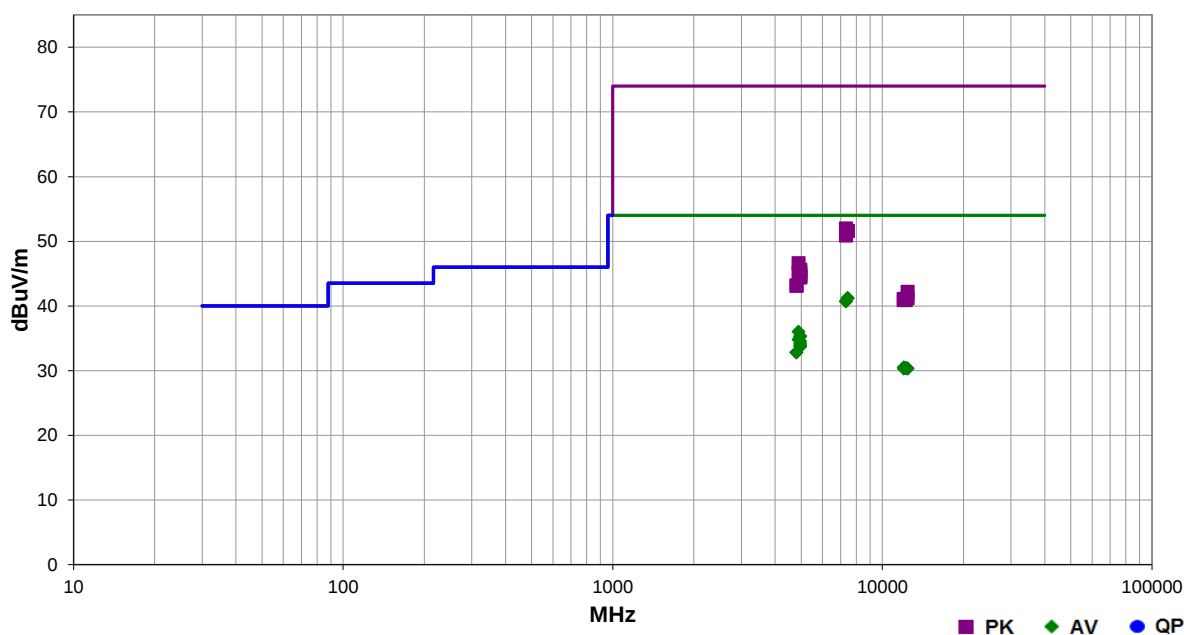

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
7440.417	28.2	13.0	1.0	160.0	3.0	0.0	Horz	AV	0.0	41.2	54.0	-12.8	High Ch, EUT on Side
7439.125	28.2	13.0	1.0	23.0	3.0	0.0	Vert	AV	0.0	41.2	54.0	-12.8	High Ch, EUT on Side
7327.442	28.4	12.3	1.0	352.0	3.0	0.0	Horz	AV	0.0	40.7	54.0	-13.3	Mid Ch, EUT on Side
7323.583	28.5	12.2	1.0	159.0	3.0	0.0	Vert	AV	0.0	40.7	54.0	-13.3	Mid Ch, EUT on Side
4884.133	30.9	5.1	1.0	313.0	3.0	0.0	Vert	AV	0.0	36.0	54.0	-18.0	Mid Ch, EUT on Side
4959.975	30.1	5.2	1.2	60.0	3.0	0.0	Vert	AV	0.0	35.3	54.0	-18.7	High Ch, EUT Horz
4960.175	30.1	5.2	1.0	198.0	3.0	0.0	Vert	AV	0.0	35.3	54.0	-18.7	High Ch, EUT on Side
4883.850	29.7	5.1	1.0	139.0	3.0	0.0	Horz	AV	0.0	34.8	54.0	-19.2	Mid Ch, EUT on Side
4960.108	29.3	5.2	1.0	214.0	3.0	0.0	Horz	AV	0.0	34.5	54.0	-19.5	High Ch, EUT on Side
4959.700	28.9	5.2	1.0	69.0	3.0	0.0	Horz	AV	0.0	34.1	54.0	-19.9	High Ch, EUT Vert
4961.742	28.6	5.2	1.0	129.0	3.0	0.0	Horz	AV	0.0	33.8	54.0	-20.2	High Ch, EUT Horz
4959.967	28.5	5.2	1.0	294.0	3.0	0.0	Vert	AV	0.0	33.7	54.0	-20.3	High Ch, EUT Vert
4802.783	29.0	3.8	1.0	272.0	3.0	0.0	Horz	AV	0.0	32.8	54.0	-21.2	Low Ch, EUT on Side
4802.092	29.0	3.8	1.0	205.0	3.0	0.0	Vert	AV	0.0	32.8	54.0	-21.2	Low Ch, EUT on Side
7325.575	39.7	12.3	1.0	352.0	3.0	0.0	Horz	PK	0.0	52.0	74.0	-22.0	Mid Ch, EUT on Side
7440.092	38.6	13.0	1.0	160.0	3.0	0.0	Horz	PK	0.0	51.6	74.0	-22.4	High Ch, EUT on Side
7438.083	38.6	13.0	1.0	23.0	3.0	0.0	Vert	PK	0.0	51.6	74.0	-22.4	High Ch, EUT on Side
7328.408	38.6	12.3	1.0	159.0	3.0	0.0	Vert	PK	0.0	50.9	74.0	-23.1	Mid Ch, EUT on Side

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
12008.270	29.5	1.0	1.0	285.0	3.0	0.0	Horz	AV	0.0	30.5	54.0	-23.5	Low Ch, EUT on Side
12208.740	29.4	1.0	1.0	283.0	3.0	0.0	Horz	AV	0.0	30.4	54.0	-23.6	Mid Ch, EUT on Side
12211.390	29.4	1.0	1.0	245.0	3.0	0.0	Vert	AV	0.0	30.4	54.0	-23.6	Mid Ch, EUT on Side
12398.050	29.1	1.2	2.1	80.0	3.0	0.0	Horz	AV	0.0	30.3	54.0	-23.7	High Ch, EUT on Side
12398.000	29.1	1.2	2.9	210.0	3.0	0.0	Vert	AV	0.0	30.3	54.0	-23.7	High Ch, EUT on Side
12007.910	29.3	1.0	2.1	118.0	3.0	0.0	Vert	AV	0.0	30.3	54.0	-23.7	Low Ch, EUT on Side
4884.667	41.5	5.1	1.0	313.0	3.0	0.0	Vert	PK	0.0	46.6	74.0	-27.4	Mid Ch, EUT on Side
4959.925	40.4	5.2	1.2	60.0	3.0	0.0	Vert	PK	0.0	45.6	74.0	-28.4	High Ch, EUT Horz
4957.858	40.1	5.2	1.0	129.0	3.0	0.0	Horz	PK	0.0	45.3	74.0	-28.7	High Ch, EUT Horz
4883.575	40.1	5.1	1.0	139.0	3.0	0.0	Horz	PK	0.0	45.2	74.0	-28.8	Mid Ch, EUT on Side
4959.525	39.7	5.2	1.0	198.0	3.0	0.0	Vert	PK	0.0	44.9	74.0	-29.1	High Ch, EUT on Side
4959.475	39.4	5.2	1.0	214.0	3.0	0.0	Horz	PK	0.0	44.6	74.0	-29.4	High Ch, EUT on Side
4960.925	39.3	5.2	1.0	69.0	3.0	0.0	Horz	PK	0.0	44.5	74.0	-29.5	High Ch, EUT Vert
4961.450	39.2	5.2	1.0	294.0	3.0	0.0	Vert	PK	0.0	44.4	74.0	-29.6	High Ch, EUT Vert
4804.700	39.3	3.9	1.0	205.0	3.0	0.0	Vert	PK	0.0	43.2	74.0	-30.8	Low Ch, EUT on Side
4802.283	39.3	3.8	1.0	272.0	3.0	0.0	Horz	PK	0.0	43.1	74.0	-30.9	Low Ch, EUT on Side
12399.340	41.0	1.2	2.1	80.0	3.0	0.0	Horz	PK	0.0	42.2	74.0	-31.8	High Ch, EUT on Side
12397.530	40.0	1.2	2.9	210.0	3.0	0.0	Vert	PK	0.0	41.2	74.0	-32.8	High Ch, EUT on Side
12009.980	40.1	1.0	2.1	118.0	3.0	0.0	Vert	PK	0.0	41.1	74.0	-32.9	Low Ch, EUT on Side
12210.210	40.0	1.0	1.0	283.0	3.0	0.0	Horz	PK	0.0	41.0	74.0	-33.0	Mid Ch, EUT on Side
12010.260	39.9	1.0	1.0	285.0	3.0	0.0	Horz	PK	0.0	40.9	74.0	-33.1	Low Ch, EUT on Side
12209.580	39.9	1.0	1.0	245.0	3.0	0.0	Vert	PK	0.0	40.9	74.0	-33.1	Mid Ch, EUT on Side


SPURIOUS RADIATED EMISSIONS



Work Order:	TMEC0002	Date:	6-Sep-2018	
Project:	None	Temperature:	22.2 °C	
Job Site:	EV01	Humidity:	41% RH	
Serial Number:	111836-000003	Barometric Pres.:	1020 mbar	
EUT:	UltraSync BLUE			
Configuration:	2			
Customer:	Timecode Systems Limited			
Attendees:	Paul Bannister			
EUT Power:	Battery			
Operating Mode:	BTLE continuous Tx, Low Ch. = 2402 MHz, Mid Ch. = 2442 MHz, High Ch. = 2480 MHz			
Deviations:	None			
Comments:	Software power setting = 50. See comments below for Channel and EUT orientation.			

Test Specifications	Test Method
FCC 15.247:2018	ANSI C63.10:2013

Run #	13	Test Distance (m)	3	Antenna Height(s)	1 to 4(m)	Results	Pass
-------	----	-------------------	---	-------------------	-----------	---------	------

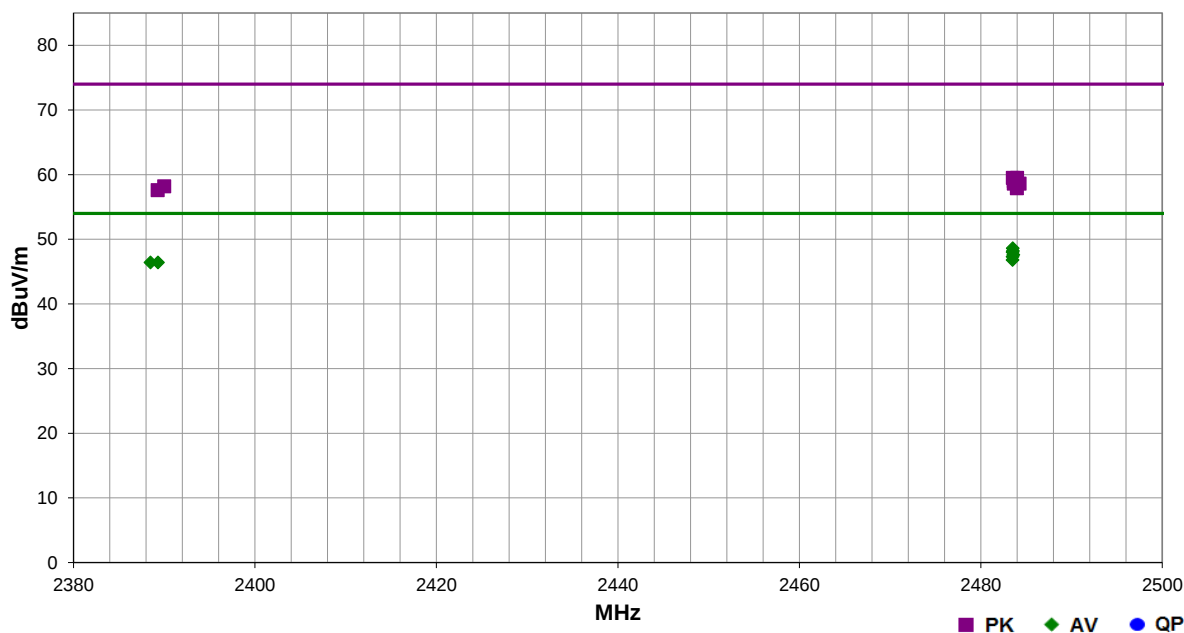

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
2483.520	33.1	-4.5	1.0	273.0	3.0	20.0	Vert	AV	0.0	48.6	54.0	-5.4	High Ch, EUT Vert
2483.550	32.7	-4.5	1.0	100.0	3.0	20.0	Vert	AV	0.0	48.2	54.0	-5.8	High Ch, EUT on Side
2483.500	32.5	-4.5	1.0	320.0	3.0	20.0	Horz	AV	0.0	48.0	54.0	-6.0	High Ch, EUT Horz
2483.603	32.1	-4.5	1.3	339.0	3.0	20.0	Horz	AV	0.0	47.6	54.0	-6.4	High Ch, EUT Vert
2483.517	31.8	-4.5	1.0	72.0	3.0	20.0	Horz	AV	0.0	47.3	54.0	-6.7	High Ch, EUT on Side
2483.517	31.3	-4.5	1.8	102.0	3.0	20.0	Vert	AV	0.0	46.8	54.0	-7.2	High Ch, EUT Horz
2388.490	31.3	-4.9	1.0	217.0	3.0	20.0	Horz	AV	0.0	46.4	54.0	-7.6	Low Ch, EUT Horz
2389.317	31.3	-4.9	1.1	234.0	3.0	20.0	Vert	AV	0.0	46.4	54.0	-7.6	Low Ch, EUT Vert
2484.000	44.0	-4.5	1.0	72.0	3.0	20.0	Horz	PK	0.0	59.5	74.0	-14.5	High Ch, EUT on Side
2483.537	44.0	-4.5	1.0	273.0	3.0	20.0	Vert	PK	0.0	59.5	74.0	-14.5	High Ch, EUT Vert
2483.643	43.5	-4.5	1.0	100.0	3.0	20.0	Vert	PK	0.0	59.0	74.0	-15.0	High Ch, EUT on Side
2484.277	43.0	-4.4	1.3	339.0	3.0	20.0	Horz	PK	0.0	58.6	74.0	-15.4	High Ch, EUT Vert
2483.633	43.1	-4.5	1.0	320.0	3.0	20.0	Horz	PK	0.0	58.6	74.0	-15.4	High Ch, EUT Horz
2389.987	43.1	-4.9	1.1	234.0	3.0	20.0	Vert	PK	0.0	58.2	74.0	-15.8	Low Ch, EUT Vert
2483.970	42.4	-4.5	1.8	102.0	3.0	20.0	Vert	PK	0.0	57.9	74.0	-16.1	High Ch, EUT Horz
2389.267	42.5	-4.9	1.0	217.0	3.0	20.0	Horz	PK	0.0	57.6	74.0	-16.4	Low Ch, EUT Horz

DUTY CYCLE



TEST DESCRIPTION

The Duty Cycle (x) were measured for each of the EUT operating modes. The measurements were made using a zero span on the spectrum analyzer to see the pulses in the time domain. The transmit power was set to its default maximum. A direct connection was made between the RF output of the EUT and a spectrum analyzer. Attenuation and a DC block were used

The duty cycle was calculated by dividing the transmission pulse duration (T) by the total period of a single on and total off time.

The EUT operates at 100% Duty Cycle.

OCCUPIED BANDWIDTH



XMI 2017.12.13

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Analyzer - Spectrum Analyzer	Agilent	N9010A	AFI	12-Jan-18	12-Jan-19
Generator - Signal	Keysight	N5182B	TFU	27-Oct-15	27-Oct-18
Cable	Micro-Coax	UFD150A-1-0720-200200	EVH	23-Apr-18	23-Apr-19
Attenuator	S.M. Electronics	SA26B-20	AUY	16-Apr-18	16-Apr-19
Block - DC	Fairview Microwave	SD3379	AMW	23-Apr-18	23-Apr-19

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The EUT was set to the channels and modes listed in the datasheet.

The 6dB occupied bandwidth was measured using 100 kHz resolution bandwidth and 300 kHz video bandwidth. The 99.0% occupied bandwidth was also measured at the same time which can be needed during Output Power depending on the applicable method.

OCCUPIED BANDWIDTH



TMETx 2017.12.14 XMtM 2017.12.13


EUT: UltraSync BLUE		Work Order: TMEC0002	
Serial Number: 1836000001		Date: 4-Sep-18	
Customer: Timecode Systems Limited		Temperature: 22 °C	
Attendees: Paul Bannister		Humidity: 40.7% RH	
Project: None		Barometric Pres.: 1022 mbar	
Tested by: Jeff Alcock	Power: Battery	Job Site: EV06	
TEST SPECIFICATIONS		Test Method	
FCC 15.247:2018		ANSI C63.10:2013	
COMMENTS			
Software power setting = 50.			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	1	Signature 	
		Value	Limit (±) Result
BLE/GFSK Low Channel, 2402 MHz		765.134 kHz	500 kHz Pass
BLE/GFSK Mid Channel, 2442 MHz		762.838 kHz	500 kHz Pass
BLE/GFSK High Channel, 2480 MHz		763.132 kHz	500 kHz Pass

OCCUPIED BANDWIDTH




TMTx 2017.12.14 XMt 2017.12.13

BLE/GFSK Low Channel, 2402 MHz						
				Value	Limit (≥)	Result
				765.134 kHz	500 kHz	Pass

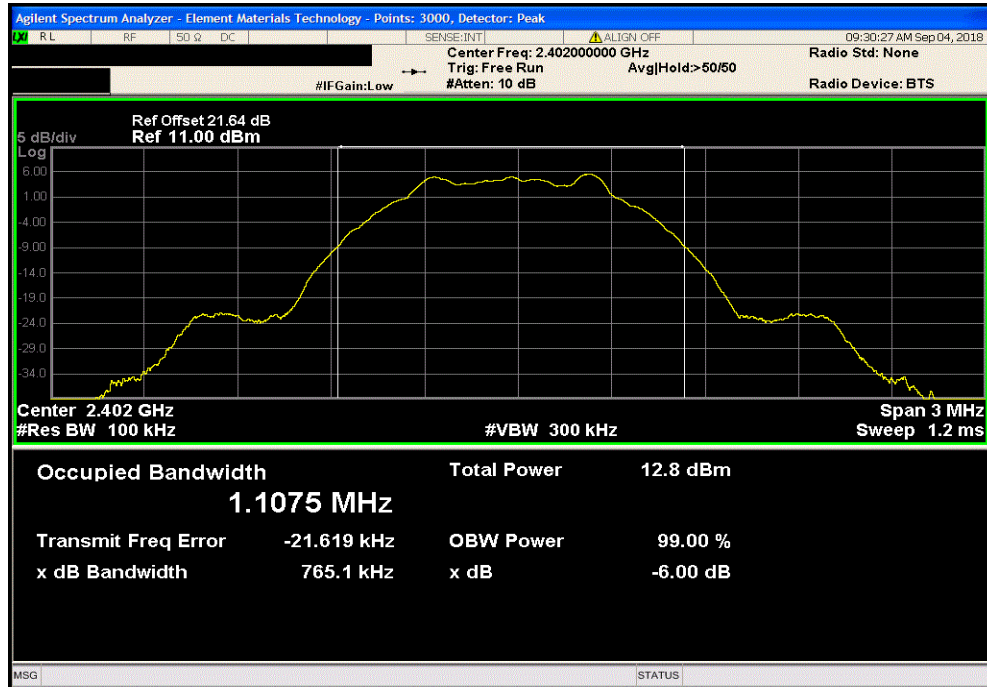

BLE/GFSK Mid Channel, 2442 MHz						
				Value	Limit (≥)	Result
				762.838 kHz	500 kHz	Pass

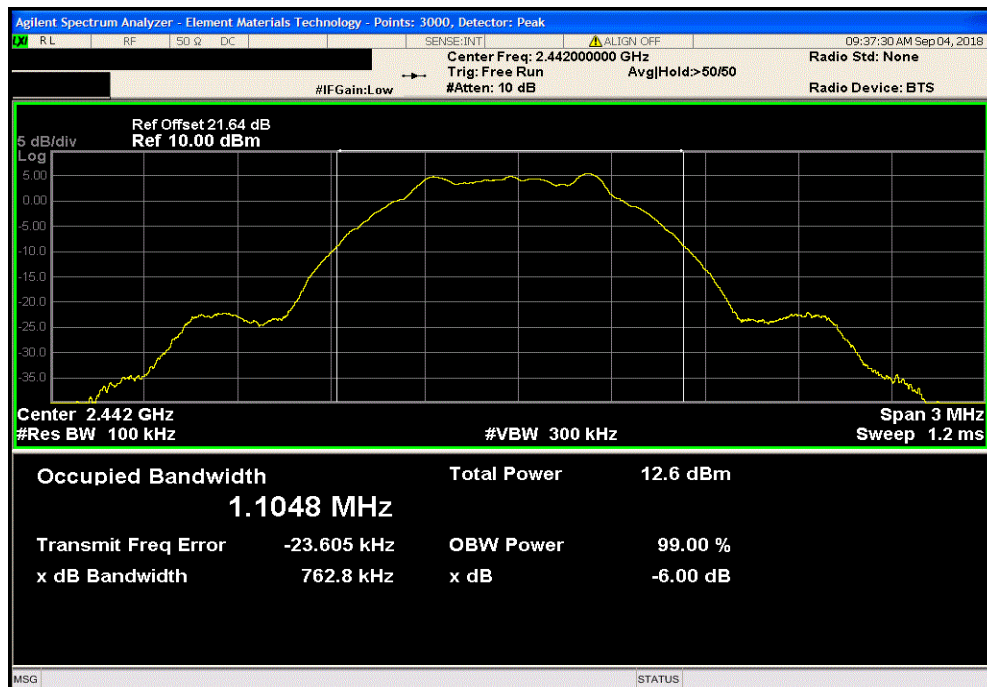


OCCUPIED BANDWIDTH



TMTx 2017.12.14 XMI 2017.12.13

BLE/GFSK High Channel, 2480 MHz						
Value				Limit	Result	
763.132 kHz				500 kHz	Pass	

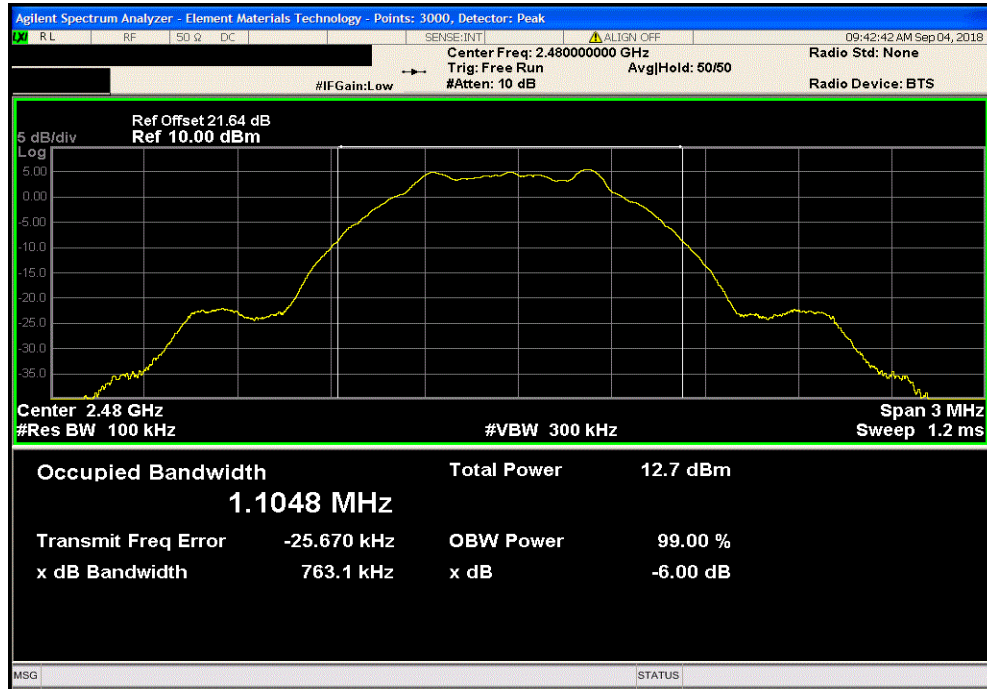

OUTPUT POWER



XMI 2017.12.13

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Keysight	N5182B	TFU	27-Oct-15	27-Oct-18
Analyzer - Spectrum Analyzer	Agilent	N9010A	AFI	12-Jan-18	12-Jan-19
Cable	Micro-Coax	UFD150A-1-0720-200200	EVH	23-Apr-18	23-Apr-19
Attenuator	S.M. Electronics	SA26B-20	AUY	16-Apr-18	16-Apr-19
Block - DC	Fairview Microwave	SD3379	AMW	23-Apr-18	23-Apr-19

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The transmit frequency was set to the required channels in each band. The transmit power was set to its default maximum.

Prior to measuring peak transmit power the DTS bandwidth (B) was measured.

The method found in ANSI C63.10:2013 Section 11.9.1.1 was used because the RBW on the analyzer was greater than the DTS Bandwidth of the radio.

De Facto EIRP Limit: The EUT meets the de facto EIRP limit of +36 dBm.

OUTPUT POWER




TMtTx 2017.12.14 XMtM 2017.12.13


EUT: UltraSync BLUE		Work Order: TMEC0002					
Serial Number: 1836000001		Date: 4-Sep-18					
Customer: Timecode Systems Limited		Temperature: 22 °C					
Attendees: Paul Bannister		Humidity: 40.7% RH					
Project: None		Barometric Pres.: 1022 mbar					
Tested by: Jeff Alcock	Power: Battery	Job Site: EV06					
TEST SPECIFICATIONS		Test Method					
FCC 15.247:2018		ANSI C63.10:2013					
COMMENTS							
Additional 0.3 dB offset added to measurements to account for clients direct connect SMA cable. Software power setting = 50.							
DEVIATIONS FROM TEST STANDARD							
None							
Configuration #	1	Signature 					
		Measured Value (mW)	Additional Offset (dB)				
		Additional Offset (mW)	Corrected Value (mW)				
		Limit < (W)	Result				
BLE/GFSK Low Channel, 2402 MHz		4.290	0.3	1.1	5.390	1	Pass
BLE/GFSK Mid Channel, 2442 MHz		4.159	0.3	1.1	5.259	1	Pass
BLE/GFSK High Channel, 2480 MHz		4.225	0.3	1.1	5.325	1	Pass

OUTPUT POWER

BLE/GFSK Low Channel, 2402 MHz						
Measured Value (mW)	Additional Offset (dB)	Additional Offset (mW)	Corrected Value (mW)	Limit < (W)	Result	
4.29	0.3	1.1	5.39	1	Pass	

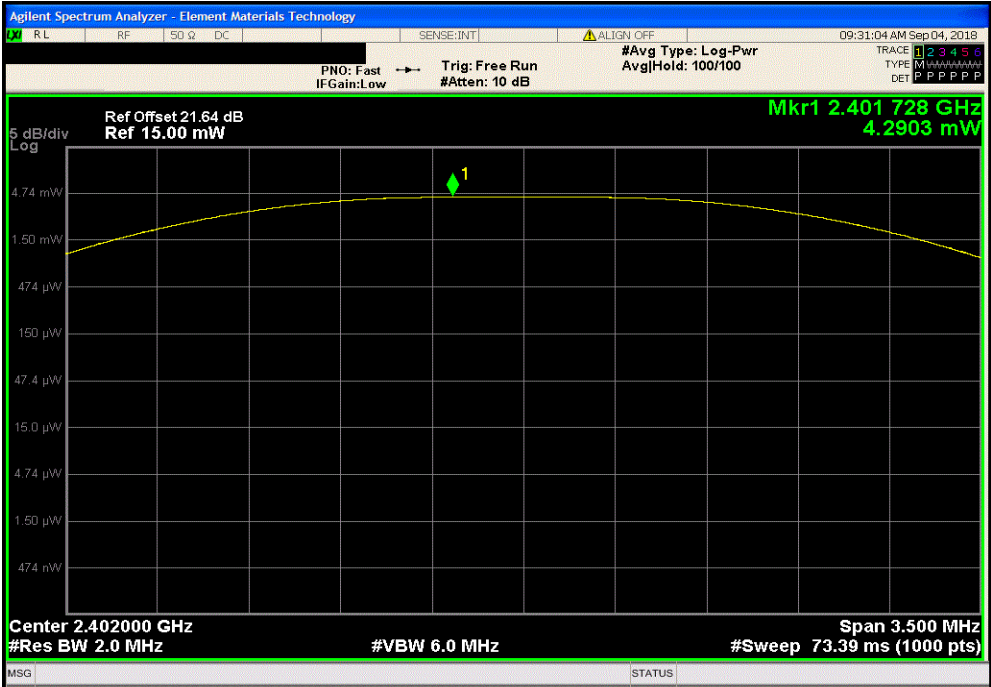


BLE/GFSK Mid Channel, 2442 MHz						
Measured Value (mW)	Additional Offset (dB)	Additional Offset (mW)	Corrected Value (mW)	Limit < (W)	Result	
4.159	0.3	1.1	5.259	1	Pass	

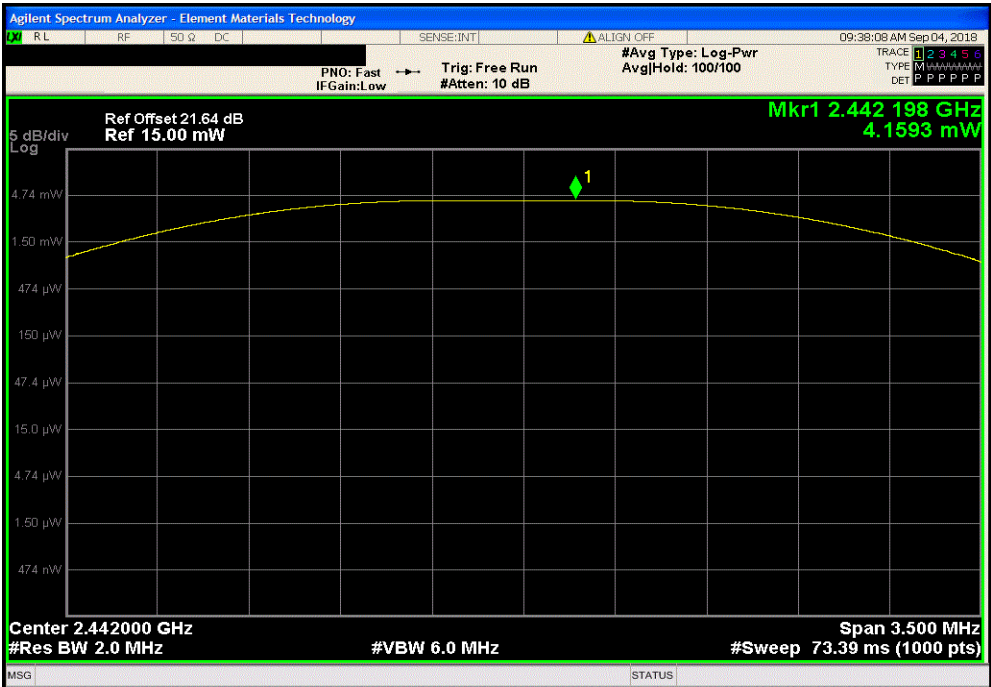

OUTPUT POWER

TMTx 2017.12.14 XM8 2017.12.13

BLE/GFSK High Channel, 2480 MHz						
Measured Value (mW)	Additional Offset (dB)	Additional Offset (mW)	Corrected Value (mW)	Limit < (W)	Result	
4.225	0.3	1.1	5.325	1	Pass	

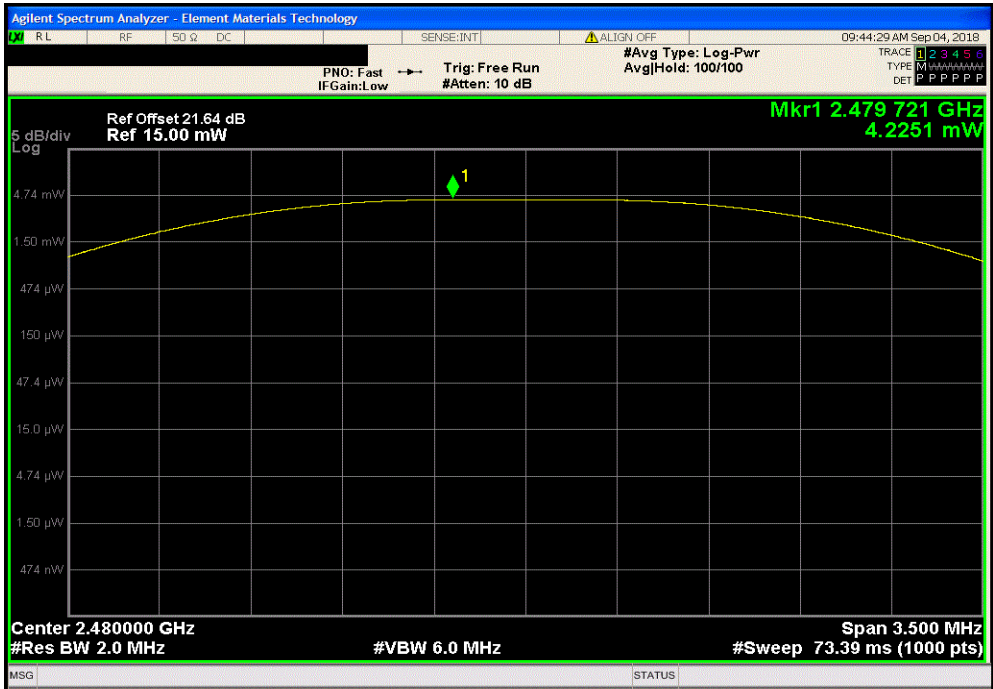

POWER SPECTRAL DENSITY



XMIT 2017.12.13

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Keysight	N5182B	TFU	27-Oct-15	27-Oct-18
Cable	Micro-Coax	UFD150A-1-0720-200200	EVH	23-Apr-18	23-Apr-19
Attenuator	S.M. Electronics	SA26B-20	AUY	16-Apr-18	16-Apr-19
Block - DC	Fairview Microwave	SD3379	AMW	23-Apr-18	23-Apr-19
Analyzer - Spectrum Analyzer	Agilent	N9010A	AFI	12-Jan-18	12-Jan-19

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The maximum power spectral density measurements was measured using the channels and modes as called out on the following data sheets.

Per the procedure outlined in ANSI C63.10 the peak power spectral density was measured in a 3 kHz RBW.

POWER SPECTRAL DENSITY



TMTx 2017.12.14 XMM 2017.12.13


EUT: UltraSync BLUE		Work Order: TMEC0002				
Serial Number: 1836000001		Date: 4-Sep-18				
Customer: Timecode Systems Limited		Temperature: 22.1 °C				
Attendees: Paul Bannister		Humidity: 40.6% RH				
Project: None		Barometric Pres.: 1021 mbar				
Tested by: Jeff Alcock	Power: Battery	Job Site: EV06				
TEST SPECIFICATIONS		Test Method				
FCC 15.247:2018		ANSI C63.10:2013				
COMMENTS						
Additional 0.3 dB offset added to measurements to account for clients direct connect SMA cable. Software power setting = 50.						
DEVIATIONS FROM TEST STANDARD						
None						
Configuration #	1	Signature 				
		Value dBm/3kHz	Additional Offset (dB)			
		Corrected Value dBm/3kHz	Limit < dBm/3kHz			
			Results			
BLE/GFSK Low Channel, 2402 MHz		-10.997	0.3	-10.697	8	Pass
BLE/GFSK Mid Channel, 2442 MHz		-11.132	0.3	-10.832	8	Pass
BLE/GFSK High Channel, 2480 MHz		-11.054	0.3	-10.754	8	Pass

POWER SPECTRAL DENSITY




TxtTx 2017.12.14 XMit 2017.12.13

BLE/GFSK Low Channel, 2402 MHz						
	Value	Additional Offset	Corrected Value	Limit	Results	
	dBm/3kHz	(dB)	dBm/3kHz	< dBm/3kHz		
	-10.997	0.3	-10.697	8	Pass	

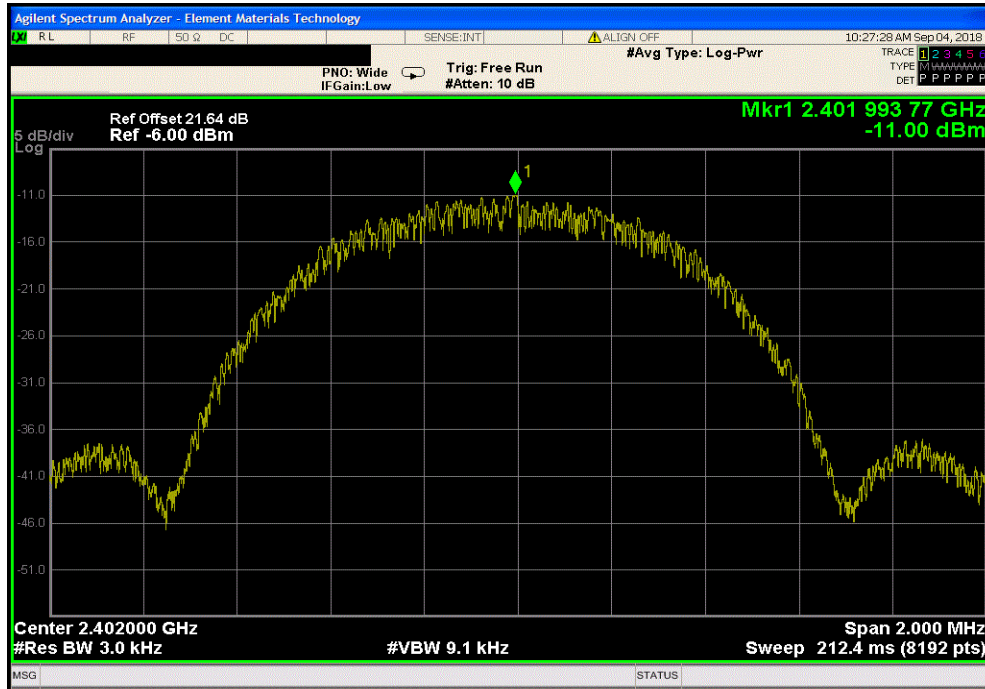

BLE/GFSK Mid Channel, 2442 MHz						
	Value	Additional Offset	Corrected Value	Limit	Results	
	dBm/3kHz	(dB)	dBm/3kHz	< dBm/3kHz		
	-11.132	0.3	-10.832	8	Pass	

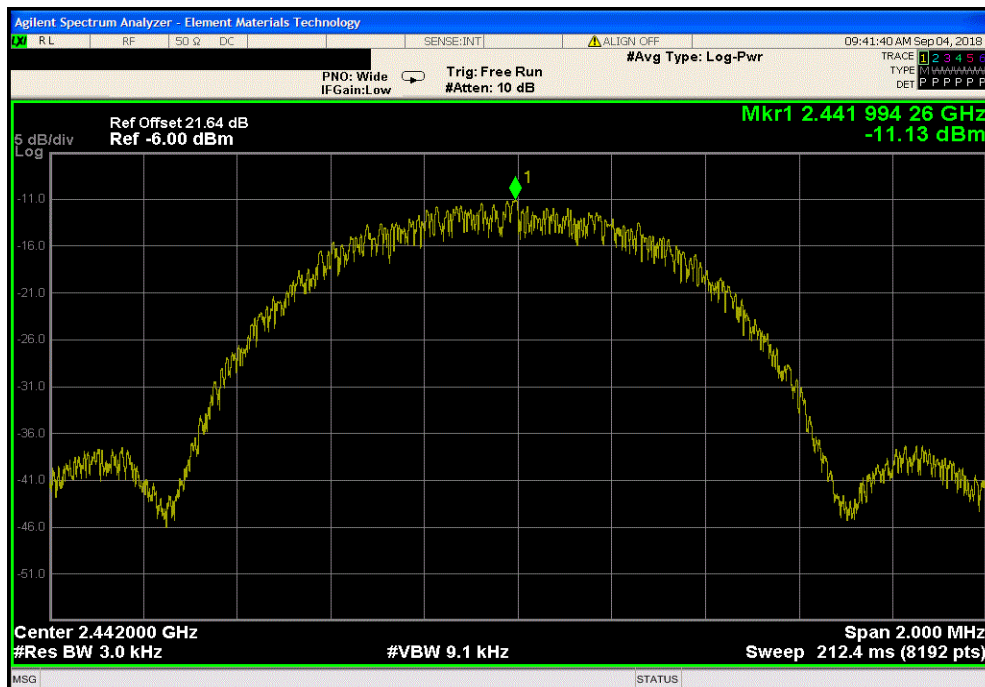


POWER SPECTRAL DENSITY



TMTX 2017.12.14 XMI 2017.12.13

BLE/GFSK High Channel, 2480 MHz					
	Value	Additional Offset	Corrected Value	Limit	Results
	dBm/3kHz	(dB)	dBm/3kHz	< dBm/3kHz	
	-11.054	0.3	-10.754	8	Pass

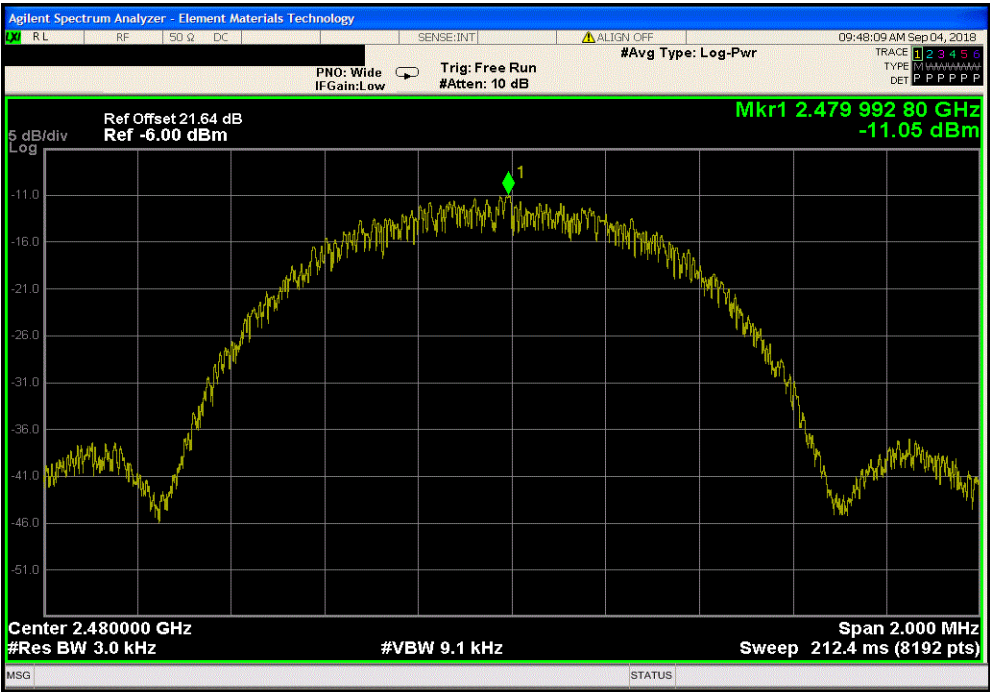

BAND EDGE COMPLIANCE



XMIT 2017.12.13

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Analyzer - Spectrum Analyzer	Agilent	N9010A	AFI	12-Jan-18	12-Jan-19
Generator - Signal	Keysight	N5182B	TFU	27-Oct-15	27-Oct-18
Cable	Micro-Coax	UFD150A-1-0720-200200	EVH	23-Apr-18	23-Apr-19
Attenuator	S.M. Electronics	SA26B-20	AUY	16-Apr-18	16-Apr-19
Block - DC	Fairview Microwave	SD3379	AMW	23-Apr-18	23-Apr-19

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The spurious RF conducted emissions at the edges of the authorized bands were measured with the EUT set to low and high transmit frequencies in each available band. The channels closest to the band edges were selected. The EUT was transmitting at the data rate(s) listed in the datasheet.

The spectrum was scanned below the lower band edge and above the higher band edge.

BAND EDGE COMPLIANCE



TMETx 2017.12.14 XMM 2017.12.13


EUT: UltraSync BLUE		Work Order: TMEC0002				
Serial Number: 1836000001		Date: 4-Sep-18				
Customer: Timecode Systems Limited		Temperature: 21.9 °C				
Attendees: Paul Bannister		Humidity: 40.7% RH				
Project: None		Barometric Pres.: 1022 mbar				
Tested by: Jeff Alcock	Power: Battery	Job Site: EV06				
TEST SPECIFICATIONS		Test Method				
FCC 15.247:2018		ANSI C63.10:2013				
COMMENTS						
Additional 0.3 dB offset added to measurements to account for clients direct connect SMA cable. Software power setting = 50.						
DEVIATIONS FROM TEST STANDARD						
None						
Configuration #	1	Signature 				
		Measured Value (dBc)	Additional offset (dB)			
		Corrected Value (dBc)	Limit ≤ (dBc)			
			Result			
BLE/GFSK Low Channel, 2402 MHz		-49.62	0.3	-49.32	-20	Pass
BLE/GFSK High Channel, 2480 MHz		-53.99	0.3	-53.69	-20	Pass

BAND EDGE COMPLIANCE




TMTx 2017.12.14 XMM 2017.12.13

BLE/GFSK Low Channel, 2402 MHz						
Measured Value	Additional offset	Corrected Value	Limit	Result		
(dBc)	(dB)	(dBc)	≤ (dBc)			
-49.62	0.3	-49.32	-20	Pass		

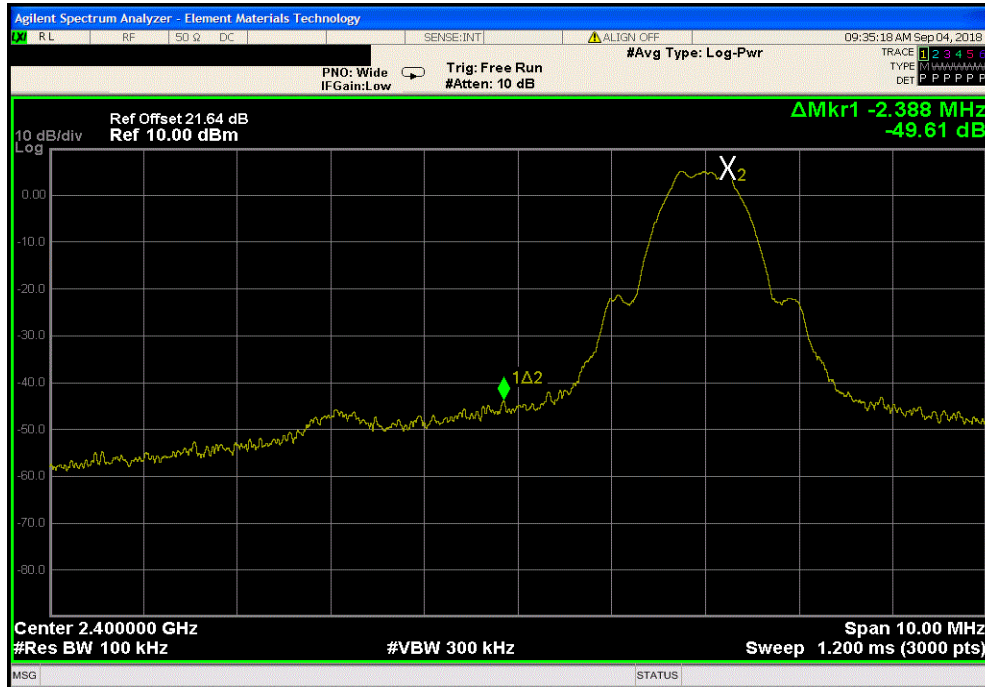

BLE/GFSK High Channel, 2480 MHz						
Measured Value	Additional offset	Corrected Value	Limit	Result		
(dBc)	(dB)	(dBc)	≤ (dBc)			
-53.99	0.3	-53.69	-20	Pass		

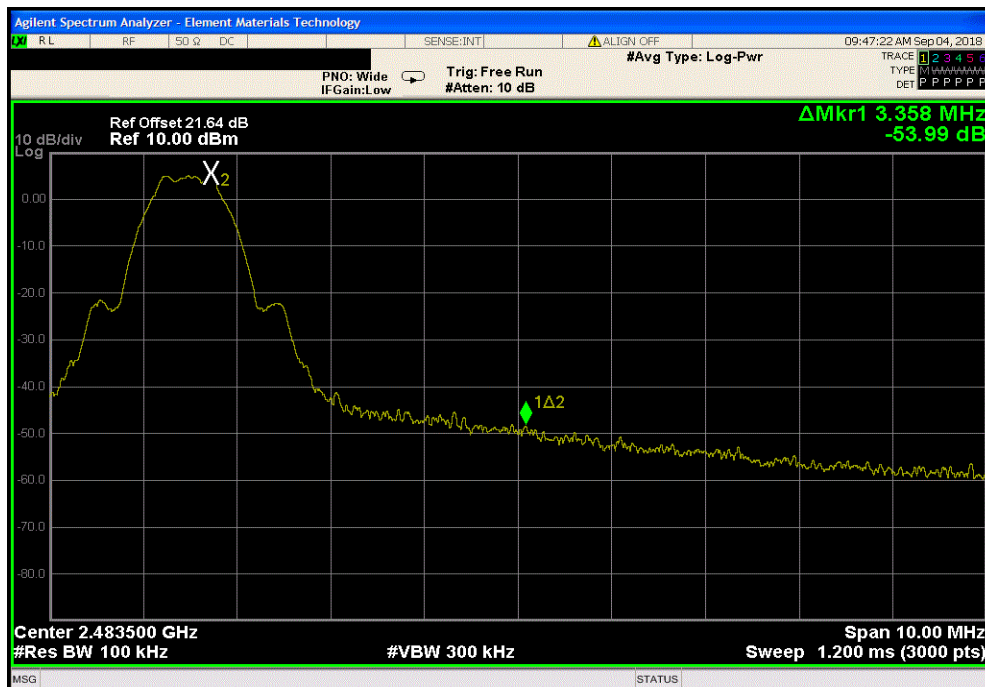

SPURIOUS CONDUCTED EMISSIONS



XMIT 2017.12.13

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Keysight	N5182B	TFU	27-Oct-15	27-Oct-18
Cable	Micro-Coax	UFD150A-1-0720-200200	EVH	23-Apr-18	23-Apr-19
Block - DC	Fairview Microwave	SD3379	AMW	23-Apr-18	23-Apr-19
Attenuator	S.M. Electronics	SA26B-20	AUY	16-Apr-18	16-Apr-19
Analyzer - Spectrum Analyzer	Agilent	N9010A	AFI	12-Jan-18	12-Jan-19

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The spurious RF conducted emissions were measured with the EUT set to low, medium and high transmit frequencies. The EUT was transmitting at the data rate(s) listed in the datasheet. For each transmit frequency, the spectrum was scanned throughout the specified frequency range.

SPURIOUS CONDUCTED EMISSIONS



TMETx 2017.12.14 XMtM 2017.12.13


EUT: UltraSync BLUE		Work Order: TMEC0002	
Serial Number: 1836000001		Date: 4-Sep-18	
Customer: Timecode Systems Limited		Temperature: 22.1 °C	
Attendees: Paul Bannister		Humidity: 40.6% RH	
Project: None		Barometric Pres.: 1021 mbar	
Tested by: Jeff Alcock	Power: Battery	Job Site: EV06	
TEST SPECIFICATIONS		Test Method	
FCC 15.247:2018		ANSI C63.10:2013	
COMMENTS			
Additional 0.3 dB offset added to measurements to account for clients direct connect SMA cable. Software power setting = 50.			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	1	Signature	
		Frequency Range	Max Value (dBc)
			Additioanl Offset (dB)
			Corrected Value (dBc)
			Limit ≤ (dBc)
			Result
BLE/GFSK Low Channel, 2402 MHz		Fundamental	N/A
BLE/GFSK Low Channel, 2402 MHz		30 MHz - 12.5 GHz	-51.90
BLE/GFSK Low Channel, 2402 MHz		12.5 GHz - 25 GHz	-56.32
BLE/GFSK Mid Channel, 2442 MHz		Fundamental	N/A
BLE/GFSK Mid Channel, 2442 MHz		30 MHz - 12.5 GHz	-58.15
BLE/GFSK Mid Channel, 2442 MHz		12.5 GHz - 25 GHz	-56.66
BLE/GFSK High Channel, 2480 MHz		Fundamental	N/A
BLE/GFSK High Channel, 2480 MHz		30 MHz - 12.5 GHz	-57.52
BLE/GFSK High Channel, 2480 MHz		12.5 GHz - 25 GHz	-56.42

SPURIOUS CONDUCTED EMISSIONS




TbTx 2017.12.14 XMI 2017.12.13

BLE/GFSK Low Channel, 2402 MHz						
Frequency Range	Max Value (dBc)	Additioanl Offset (dB)	Corrected Value (dBc)	Limit $\leq$ (dBc)	Result	
Fundamental	N/A	N/A	N/A	N/A	N/A	

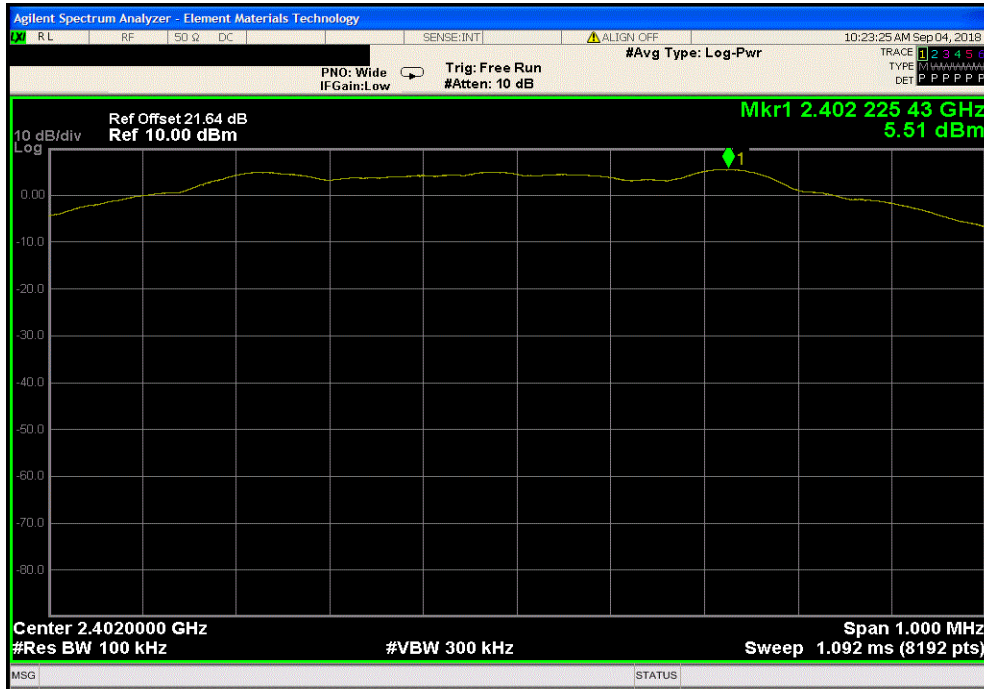

BLE/GFSK Low Channel, 2402 MHz						
Frequency Range	Max Value (dBc)	Additioanl Offset (dB)	Corrected Value (dBc)	Limit $\leq$ (dBc)	Result	
30 MHz - 12.5 GHz	-51.90	0.3	-51.60	-20	Pass	

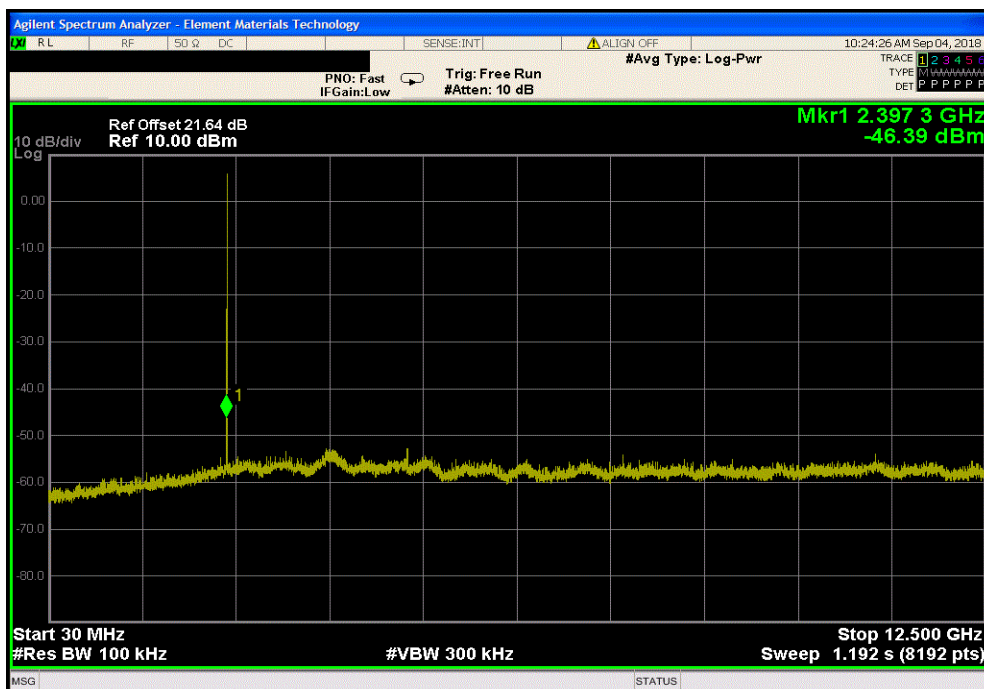


SPURIOUS CONDUCTED EMISSIONS




TMTx 2017.12.14 XMt 2017.12.13

BLE/GFSK Low Channel, 2402 MHz						
Frequency Range	Max Value (dBc)	Additional Offset (dB)	Corrected Value (dBc)	Limit $\leq$ (dBc)	Result	
12.5 GHz - 25 GHz	-56.32	0.3	-56.02	-20	Pass	

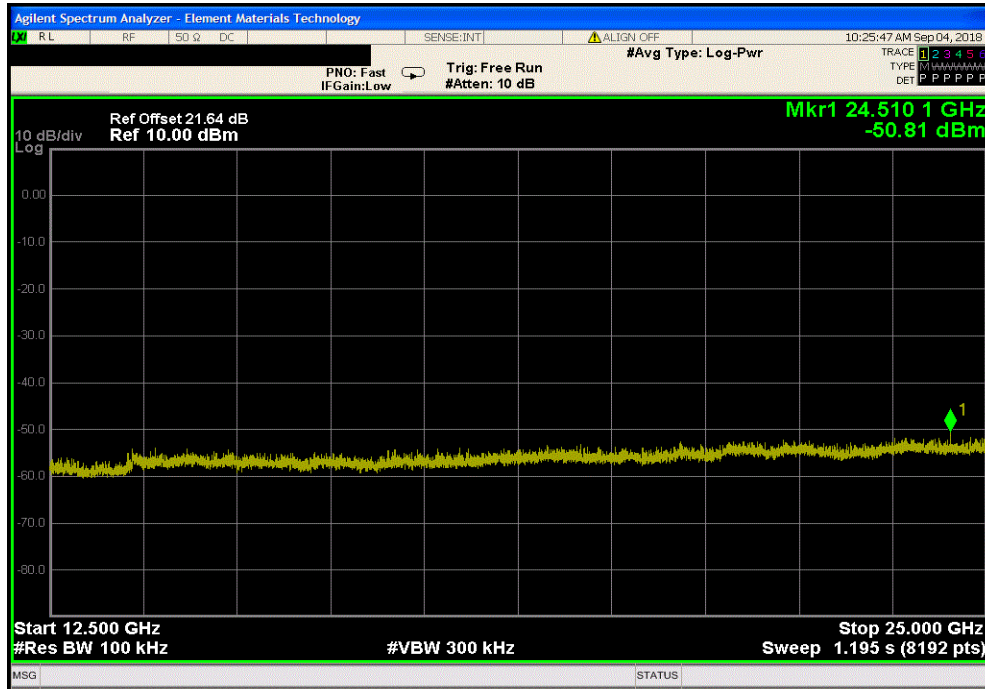

BLE/GFSK Mid Channel, 2442 MHz						
Frequency Range	Max Value (dBc)	Additional Offset (dB)	Corrected Value (dBc)	Limit $\leq$ (dBc)	Result	
Fundamental	N/A	N/A	N/A	N/A	N/A	

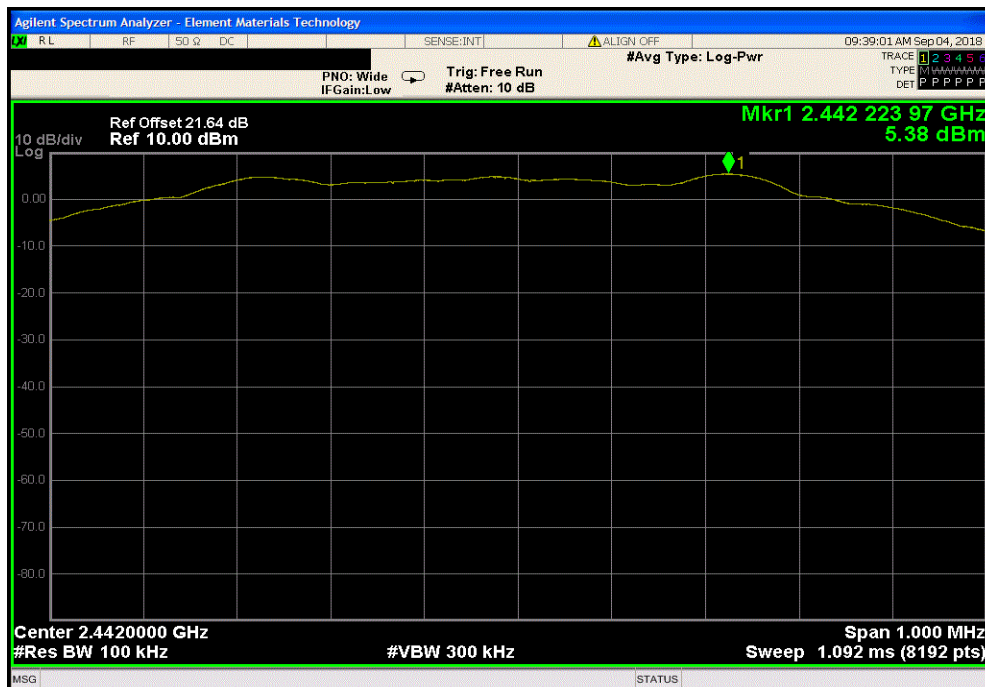


SPURIOUS CONDUCTED EMISSIONS




TbTx 2017.12.14 XMit 2017.12.13

BLE/GFSK Mid Channel, 2442 MHz						
Frequency Range	Max Value (dBc)	Additioanl Offset (dB)	Corrected Value (dBc)	Limit $\leq$ (dBc)	Result	
30 MHz - 12.5 GHz	-58.15	0.3	-57.85	-20	Pass	

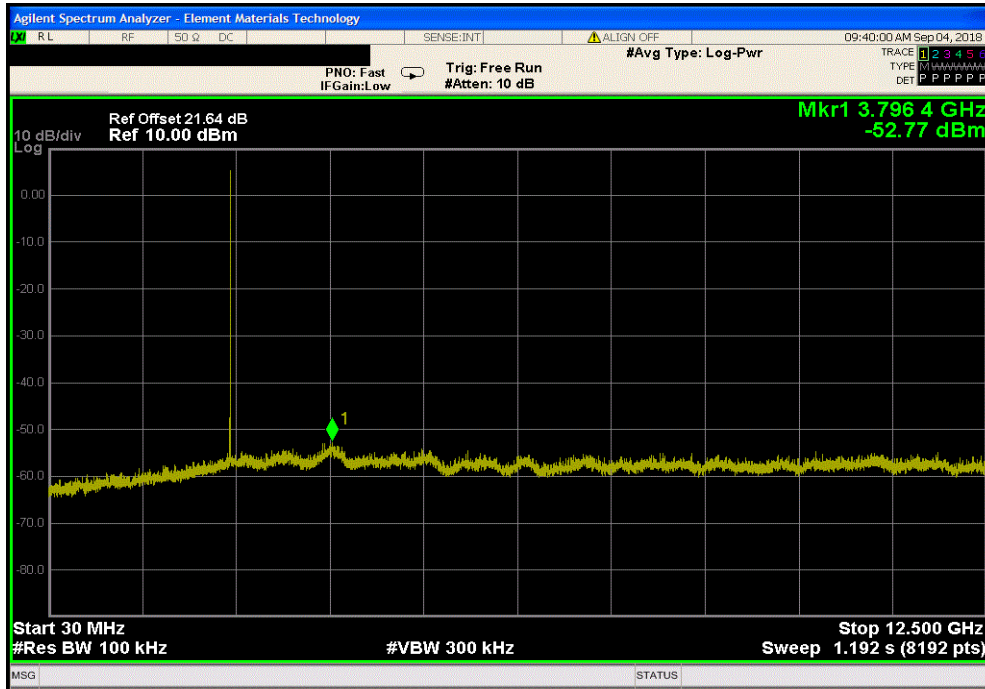

BLE/GFSK Mid Channel, 2442 MHz						
Frequency Range	Max Value (dBc)	Additioanl Offset (dB)	Corrected Value (dBc)	Limit $\leq$ (dBc)	Result	
12.5 GHz - 25 GHz	-56.66	0.3	-56.36	-20	Pass	

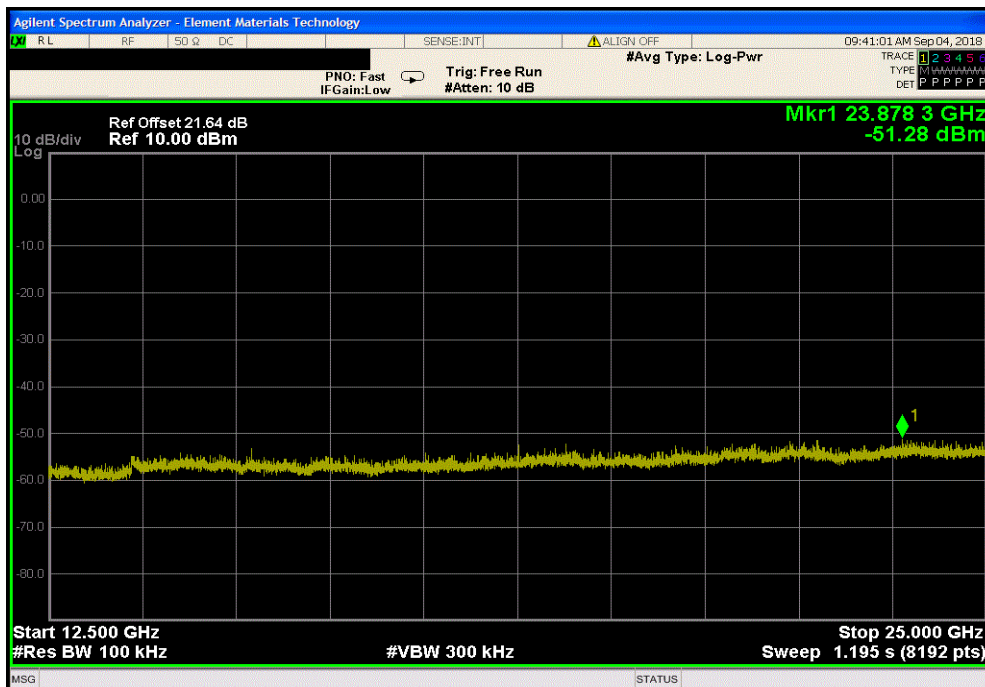


SPURIOUS CONDUCTED EMISSIONS



TrtTx 2017.12.14 XMit 2017.12.13

BLE/GFSK High Channel, 2480 MHz						
Frequency Range	Max Value (dBc)	Additioanl Offset (dB)	Corrected Value (dBc)	Limit $\leq$ (dBc)	Result	
Fundamental	N/A	N/A	N/A	N/A	N/A	

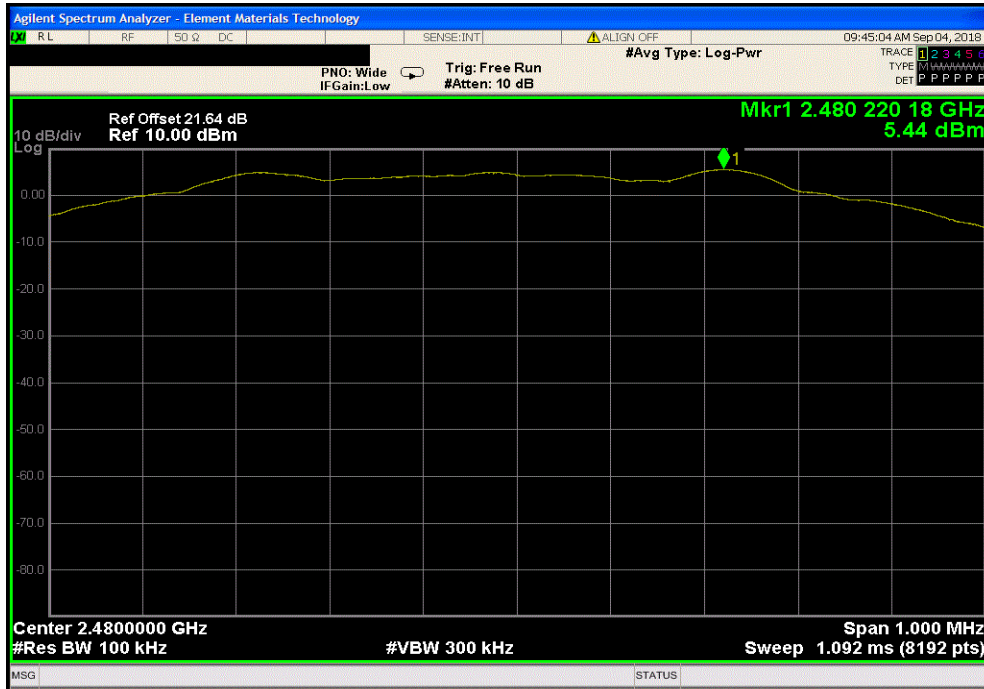

BLE/GFSK High Channel, 2480 MHz						
Frequency Range	Max Value (dBc)	Additioanl Offset (dB)	Corrected Value (dBc)	Limit $\leq$ (dBc)	Result	
30 MHz - 12.5 GHz	-57.52	0.3	-57.22	-20	Pass	

