

	 CERTIFICATE 2518.08																												
MOTOROLA PENANG ADV. COMM. LABORATORY Motorola Solutions Malaysia Sdn Bhd Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas Penang, MALAYSIA	FCC / ISED TEST REPORT Report Revision : Rev.A																												
<table><tr><td>Date/s Tested</td><td>: 23-OCT-2024</td></tr><tr><td>Manufacturer</td><td>: MOTOROLA SOLUTIONS MALAYSIA SDN BHD</td></tr><tr><td>Manufacturer Address</td><td>: PLOT 2A, MEDAN BAYAN LEPAS, MUKIM 12 SWD, 11900 BAYAN LEPAS, PENANG, MALAYSIA</td></tr><tr><td>Requestor</td><td>: Chew Looi Wong</td></tr><tr><td>Product Type</td><td>: PORTABLE</td></tr><tr><td>Model Number</td><td>: RMU2080BDLAA</td></tr><tr><td>Frequency Band</td><td>: 162.4-162.55 MHz (Weather Channel)</td></tr><tr><td>Firmware Version</td><td>: R02.02</td></tr><tr><td>Applicant Name</td><td>: Motorola Solutions Inc</td></tr><tr><td>Applicant Address</td><td>: PLOT 2A, MEDAN BAYAN LEPAS, MUKIM 12 SWD, 11900 BAYAN LEPAS, PENANG, MALAYSIA</td></tr><tr><td>ISED Registrations</td><td>: MY0001</td></tr><tr><td>FCC Registrations</td><td>: 461337</td></tr><tr><td>Remark</td><td>: NA</td></tr></table> The equipment was tested accordance to the requirement listed below: <table><tr><td>FCC 47 CFR Part 15B / RSS GEN / ICES-003</td><td>PASS</td></tr></table>		Date/s Tested	: 23-OCT-2024	Manufacturer	: MOTOROLA SOLUTIONS MALAYSIA SDN BHD	Manufacturer Address	: PLOT 2A, MEDAN BAYAN LEPAS, MUKIM 12 SWD, 11900 BAYAN LEPAS, PENANG, MALAYSIA	Requestor	: Chew Looi Wong	Product Type	: PORTABLE	Model Number	: RMU2080BDLAA	Frequency Band	: 162.4-162.55 MHz (Weather Channel)	Firmware Version	: R02.02	Applicant Name	: Motorola Solutions Inc	Applicant Address	: PLOT 2A, MEDAN BAYAN LEPAS, MUKIM 12 SWD, 11900 BAYAN LEPAS, PENANG, MALAYSIA	ISED Registrations	: MY0001	FCC Registrations	: 461337	Remark	: NA	FCC 47 CFR Part 15B / RSS GEN / ICES-003	PASS
Date/s Tested	: 23-OCT-2024																												
Manufacturer	: MOTOROLA SOLUTIONS MALAYSIA SDN BHD																												
Manufacturer Address	: PLOT 2A, MEDAN BAYAN LEPAS, MUKIM 12 SWD, 11900 BAYAN LEPAS, PENANG, MALAYSIA																												
Requestor	: Chew Looi Wong																												
Product Type	: PORTABLE																												
Model Number	: RMU2080BDLAA																												
Frequency Band	: 162.4-162.55 MHz (Weather Channel)																												
Firmware Version	: R02.02																												
Applicant Name	: Motorola Solutions Inc																												
Applicant Address	: PLOT 2A, MEDAN BAYAN LEPAS, MUKIM 12 SWD, 11900 BAYAN LEPAS, PENANG, MALAYSIA																												
ISED Registrations	: MY0001																												
FCC Registrations	: 461337																												
Remark	: NA																												
FCC 47 CFR Part 15B / RSS GEN / ICES-003	PASS																												
This report shall not be reproduced without written approval from an officially designated representative of the Motorola Penang Adv. Comm. Laboratory. The results and statements contained in this report pertain only to the device(s) evaluated.																													
Prepared By:  MOHD ALIF IZMER Report Generator	Approve Signatory:  LEOW TING JUN Responsible Engineer																												

Table of Contents

Report Revision History	2
1.0. General Information.....	3
2.0. Summary of Test Results.....	3
3.0. Measurement Uncertainty	3
4.0. Equipment List.....	4
5.0. Test Condition.....	5
5.1 Receiver Test Conditions.....	5
6.0. Receiver Test Parameters.....	6
6.1. Conducted Spurious Output Power.....	6
6.1.1. Test Setup	6
6.1.2. Test Result	6
6.1.3. Test Limit.....	6
6.2. Radiated Spurious Output Power.....	7
6.2.1. Test Setup	7
6.2.2. Test Result	8
6.2.3. Test Limit.....	10
6.3. AC Power Line Conducted Spur Emissions	11
6.3.1. Test Setup	11
6.3.2. Test Results.....	11
6.3.3. Test Limits	11
7.0. Appendix: Test Setup Photo	12
7.1. Conducted Spur Emission ATE Station Setup	12
7.2. Radiated Spur Emission Station Setup	12
7.3. AC Power Line Conducted Emission Station Setup.....	12
7.4. Photographs – EUT.....	13

Report Revision History

Revision History	Description	Date	Originator
Rev. A	Initial Report	08-NOV-2024	MOHD ALIF IZMER

1.0. General Information

EUT Description:

Technologies	LMR (Weather Channel)
Modulation Type	FM

The EUT was tested with following device/accessory:

Item	Brand	Model or P/N
RM/RVA/XT HC BATT LIION-3000	MOTOROLA	PMNN4453A

General Description of Applied Standards

According to the specifications of the manufacturer, the EUT is to comply with the requirements of the following standards:

ANSI C63.4.2014

2.0. Summary of Test Results

FCC General Rules Part (47CFR)	IC General Rules Part	Test Item	Result
15.109, 15.111	RSS-Gen	Conducted Spurious Output Power	NA
15.109, 15.111	RSS-Gen	Radiated Spurious Output Power	Pass
15.107	ICES-003 6.1, RSS-Gen	AC Power Conducted Spurious Emissions	NA

NA → Not Applicable

3.0. Measurement Uncertainty

Measurement	Frequency	Expended Uncertainty (k=1.96) (±)
AC Power Line Conducted Spurious Emission	150KHz ~ 30MHz	3.48
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	5.88
	200MHz ~ 1000MHz	5.88
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.84
	18GHz ~ 25GHz	6.02
Conducted Spurious Emissions	9kHz ~ 12.75GHz	2.82

4.0. Equipment List

Conducted Spur Emission Ate # 1

NA

Radiated Emission Station

DESCRIPTION	MODEL	SERIAL NUMBER	CALIBRATION DATE	CALIBRATION DUE DATE
DRG HORN FREQ.	SAS-571	1143	08-Mar-23	08-Mar-25
DRG HORN FREQ.	SAS-571	720	18-Apr-23	18-Apr-25
DC Power Supply	6623A	3302A02585	30-Jul-24	30-Jul-25
SIGNAL GENERATOR	SMB 100A	182511	04-Sep-21	04-Dec-24
EMI TEST RECEIVER	ESW44	101750	08-Aug-24	07-Aug-25
5m SEMI-ANECHOIC CHAMBER	S800-HX	J2308	No Cal. Req'd	No Cal. Req'd
BILOG ANTENNA	CBL6112B	2950	14-Dec-23	14-Dec-24
BILOG ANTENNA	CBL6112D	55546	05-Jun-24	05-Jun-25
DATA LOGGER THERMOHYGROMETER	SDL500	A.016800	26-Jun-24	26-Jun-25
SYSTEM CONTROLLER	SC104V	050806-1	No Cal. Req'd	No Cal. Req'd
TURNTABLE FLUSH MOUNT 2M	FM2011	FM2011-001	No Cal. Req'd	No Cal. Req'd
ANTENNA POSITIONING TOWER	TLT2	NA	No Cal. Req'd	No Cal. Req'd
BROAD-BAND HORN ANTENNA	BBHA9170	BBHA9170255	13-Mar-2024	13-Mar-2025
PREAMPLIFIER 18-40GHz	Miteq Hi Gain Sucoflex	002	No Cal. Req'd	No Cal. Req'd
PREAMPLIFIER	PAM-0118P	574	19-Mar-24	19-Mar-25
LOOP ANTENNA	6502	00203479	06-Mac-24	06-Mac-25
TEST SOFTWARE	EMC_FCC_IC_BLUETOOTH_RE_TEST			
VERSION	EMC_FCC_RE_v1.6.5			

AC Power Line Conducted Spurious Emission

NA

5.0. Test Condition

5.1 Receiver Test Conditions


Test Item, (Channel Spacing)	Temperature (°C)	Voltage Supply (V)	Power (W)	Modulation	Test Frequency (MHz)	Test Mode Description
Conducted Spurious Output Power (NA)	NA	NA	NA	NA	NA	NA
Radiated Spurious Output Power (25kHz)	23.1	3.7	2	FM	162.4000	Radio turned ON with LMR (weather channel) in standby mode
AC Power Line Conducted Spurious Emissions (NA)	NA	NA	NA	NA	NA	NA

NA → Not Applicable

6.0. Receiver Test Parameters

6.1. Conducted Spurious Output Power

6.1.1. Test Setup

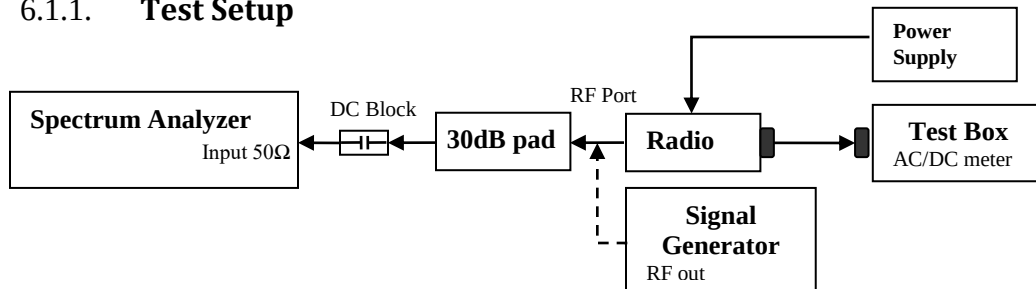

- 1) Identify the radio is high side ($LO = F_c + IF$) or low side injection ($LO = F_c - IF$).
- 2) To get the reference point, set sigen to 1st LO frequency with amplitude level 0dBm.
- 3) Set the LO frequency into PSA. Adjust the PSA RBW = 100 kHz and record the Reference level offset.
- 4) Replace the Sigen with the UUT.
- 5) At PSA, set the frequency step size to LO frequency to test from 2LO to 10LO.
- 6) Record or screen captures the data in dBm value.

6.1.2. Test Result


NA

6.1.3. Test Limit

NA

6.2. Radiated Spurious Output Power

6.2.1. Test Setup

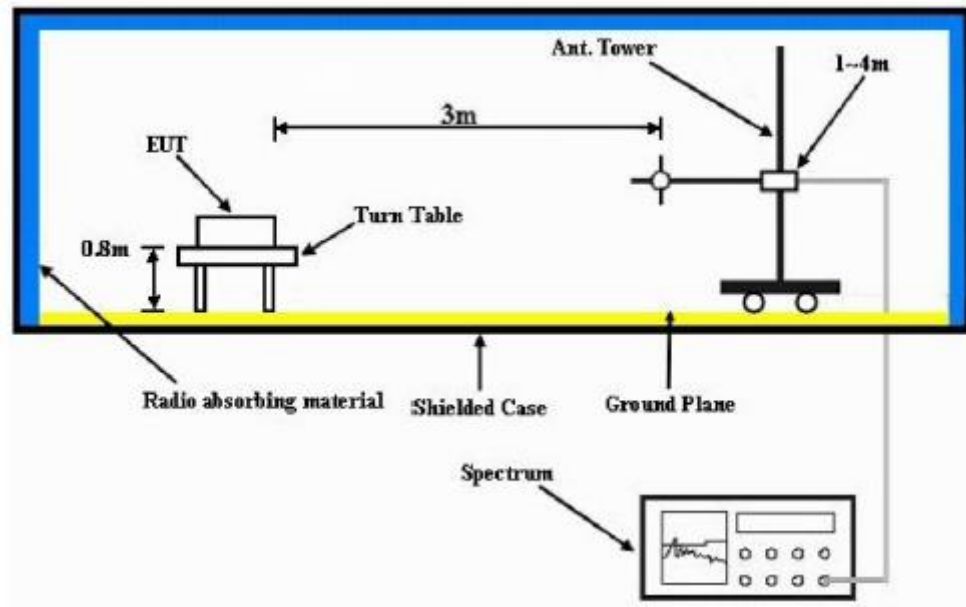

- 1) The spectrum setting for scanning Radiated Emission below 1 GHz is RBW = 100 kHz, VBW = 300 kHz and above 1 GHz is RBW = 1MHz, VBW = 3MHz. Detector mode is positive peak.
- 2) In the semi-anechoic chamber, setup as illustrated above the EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- 3) The substitution antenna is substituted for EUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.
- 4) Final Radiated Spurious Emission = "Read Value" + Measured substitution value.

Test: SAC Receiver Radiated Emission

EMC SR ID#: 1073P00-EMC-00008

Accessory: NA

25 kHz 2.000 Watt(s) /Max Power

Test Standard: ANSI C63.4-2014

Vertical Radiated Emission Result

Horizontal Radiated Emission Result

Remarks:
Pass Result

Marginal Result

Fail Result


Humidity (%): 68.6

Test Date: Wed, 23 Oct, 2024


System MU: 5.88 dB (30-1000MHz), 5.84 dB (1000-18000MHz)

***Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.**

VERTICAL, QPK

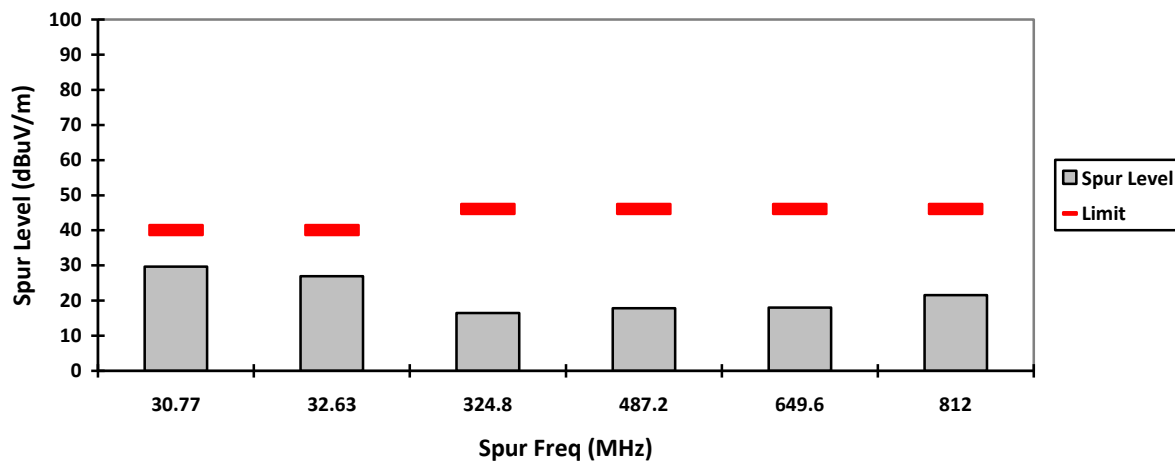

HORIZONTAL, QPK

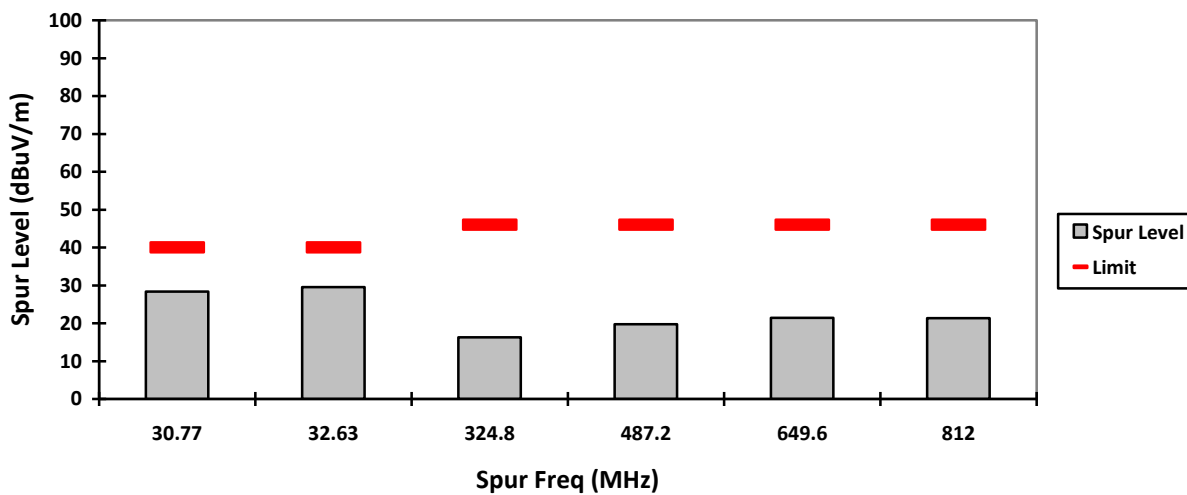

6.2.3. Test Limit

(a) Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:


Frequency of emission (MHz)	Field strength (microvolts/meter)
30-88	100
88-216	150
216-960	200
Above 960	500

(b) The field strength of radiated emissions from a Class A digital device, as determined at a distance of 10 meters, shall not exceed the following:

Frequency of emission (MHz)	Field strength (microvolts/meter)
30-88	90
88-216	150
216-960	210
Above 960	300

6.3. AC Power Line Conducted Spur Emissions

6.3.1. Test Setup

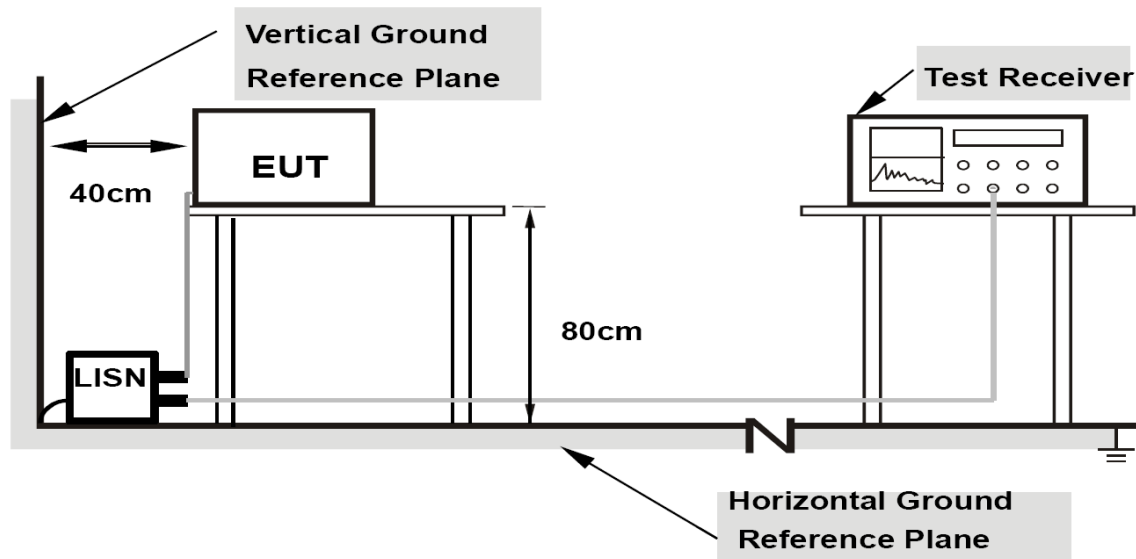

- 1) Tests were conducted for both Receive and Transmit Mode of the EUT.
- 2) The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50uH of coupling impedance for the measuring instrument.
- 3) Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- 4) The frequency range from 150 kHz to 30MHz was measured.

6.3.2. Test Results

NA

6.3.3. Test Limits



NA

7.0. Appendix: Test Setup Photo

7.1. Conducted Spur Emission ATE Station Setup

NA

7.2. Radiated Spur Emission Station Setup

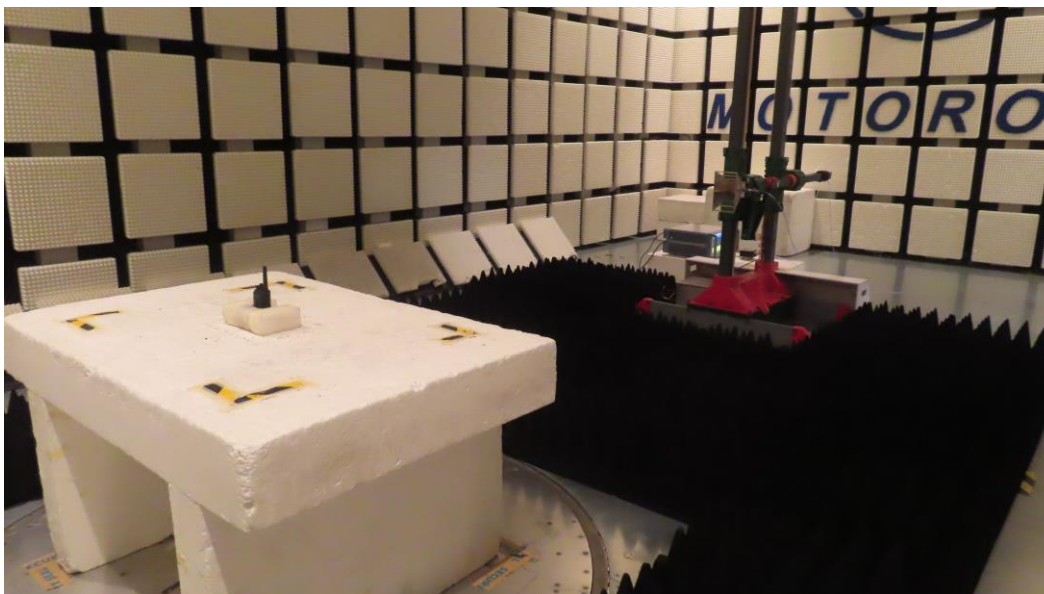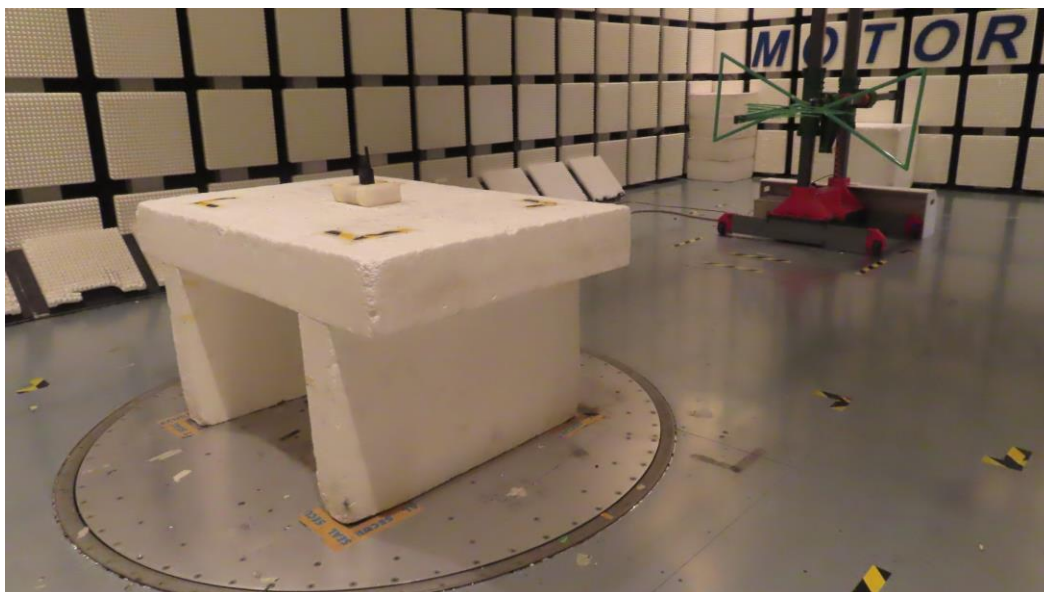

7.3. AC Power Line Conducted Emission Station Setup

NA

7.4. **Photographs - EUT**



Radio + Antenna + Battery

~ End of Test Report ~