

FCC DoC Test Report

Report No.: FD150630C01B

FCC ID: AZ489FT7078

Test Model: LEX L10i

Received Date: Mar. 02, 2016

Test Date: Mar. 17 ~ Mar. 23, 2016

Issued Date: Mar. 23, 2016

Applicant: Motorola Solutions Inc

Address: 1301 East Algonquin Road, Schaumburg, Illinois 60196

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, TAIWAN (R.O.C.)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results.....	5
2.1 Measurement Uncertainty	5
2.2 Modification Record	5
3 General Information	6
3.1 Features of EUT	6
3.2 General Description of EUT	6
3.3 Operating Modes of EUT and Determination of Worst Case Operating Mode	8
3.4 Test Program Used and Operation Descriptions.....	9
3.5 Primary Clock Frequencies of Internal Source	9
3.6 Miscellaneous.....	10
4 Configuration and Connections with EUT	11
4.1 Connection Diagram of EUT and Peripheral Devices	11
4.2 Configuration of Peripheral Devices and Cable Connections	13
5 Conducted Emissions at Mains Ports.....	14
5.1 Limits	14
5.2 Test Instruments	14
5.3 Test Arrangement	15
5.4 Test Results.....	16
6 Radiated Emissions up to 1 GHz	22
6.1 Limits	22
6.2 Test Instruments	23
6.3 Test Arrangement	24
6.4 Test Results.....	25
7 Radiated Emissions above 1 GHz.....	27
7.1 Limits	27
7.2 Test Instruments	28
7.3 Test Arrangement	29
7.4 Test Results.....	30
8 Pictures of Test Arrangements	34
8.1 Conducted Emissions at Mains Ports	34
8.2 Radiated Emissions up to 1 GHz	37
8.3 Radiated Emissions above 1 GHz	38
Appendix – Information on the Testing Laboratories	39



A D T

Release Control Record

Issue No.	Description	Date Issued
FD150630C01B	Original release.	Mar. 23, 2016

1 Certificate of Conformity

Product: Mobile Phone

Brand: Motorola Solutions Inc

Test Model: LEX L10i

Sample Status: PROTOTYPE

Applicant: Motorola Solutions Inc

Test Date: Mar. 17 ~ Mar. 23, 2016

Standards: 47 CFR FCC Part 15, Subpart B, Class B
ICES-003:2016 Issue 6, Class B
ANSI C63.4:2014

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :


Ivy Lin / Specialist

Date: Mar. 23, 2016

Approved by :


Ken Liu / Senior Manager

Date: Mar. 23, 2016

2 Summary of Test Results

47 CFR FCC Part 15, Subpart B / ICES-003:2016 Issue 6, Class B

ANSI C63.4:2014

FCC Clause	ICES-003 Clause	Test Item	Result/Remarks	Verdict
15.107	6.1	AC Power Line Conducted Emissions	Minimum passing Class B margin is -7.08 dB at 0.32188 MHz	Pass
15.109	6.2.1	Radiated Emissions up to 1 GHz	Minimum passing Class B margin is -6.32 dB at 800.02 MHz	Pass
	6.2.2	Radiated Emissions above 1 GHz	Minimum passing Class B margin is -20.82 dB at 20335.47 MHz	Pass

Note: There is no deviation to the applied test methods and requirements covered by the scope of this report.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT:

3 General Information

3.1 Features of EUT

The tests reported herein were performed according to the method specified by Motorola Solutions Inc, for detailed feature description, please refer to the manufacturer's specifications or user's manual.

3.2 General Description of EUT

Product	Mobile Phone	
Brand	Motorola Solutions Inc	
Test Model	LEX L10i	
Sample Status	PROTOTYPE	
Operating Software	Andriod 4.4.4	
Power Supply Rating	3.7Vdc (Battery) 5Vdc (Adapter) 5Vdc (Car charger)	
Mode of Operation	WLAN, Bluetooth EDR, Bluetooth LE, GSM	
Operating Frequency	WLAN	2.4GHz: 2412 ~ 2472MHz 5.0GHz: 5180 ~ 5240MHz, 5260 ~ 5320MHz, 5500 ~ 5700MHz & 5745 ~ 5825MHz
	Bluetooth EDR	2402MHz~2480MHz
	Bluetooth LE	2402MHz~2480MHz
	GSM	824MHz ~ 849MHz 1850MHz ~ 1910MHz
	WCDMA	824MHz ~ 849MHz 1850MHz ~ 1910MHz 171 MHz ~ 1755MHz
	LTE Band	814 MHz ~ 849 MHz 824MHz ~ 849MHz 1710MHz ~ 1755MHz 2500MHz ~ 2570MHz
	GPS	1575.42 MHz
Accessory Device	Refer to Note for more details	
Data Cable Supplied	Refer to Note for more details	
SW Version	LEXL10-INT-R01	
HW Version	Rev. A	

Note:

1. The EUT contains following accessory devices and data cable.

Item	Brand	Model or P/N	Specification
Rechargeable Lithium ion battery	MOTOROLA	PMNN4472B	3.7Vdc, 2340mAh, 8.7Wh
Rechargeable Lithium ion battery	MOTOROLA	PMNN4475B	3.7Vdc, 4560mAh, 16.9Wh
ITE power supply	MOTOROLA	IU08-2050120-WP (P/N: HKTN4009A)	I/P: AC 100-240Vac, 50-60Hz, 0.2A O/P: 5Vdc, 1.2A
USB cable 1 (CABLE: ES400 USB SYNC AND CHARGE)	N/A	P/N: CKN6969A	1.4m shielded cable without core (For ITE power supply)
USB cable 2	N/A	P/N: CB000262A01	1.5m shielded cable without core
Car charger	MOTOROLA	CCA08W05-50V (P/N: CKN6968A)	I/P:12-24Vdc, 1.3A O/P: 5.0Vdc, 1.2A 0.8m cable without core
Vehicle cradle	MOTOROLA	P/N:HKLN4621A	-
Desktop cradle	MOTOROLA	P/N:HKTN4007A	-
Holster	N/A	P/N:HKLN4618A	-

3.3 Operating Modes of EUT and Determination of Worst Case Operating Mode

The EUT consumes power from adapter or host equipment or car charger, which is designed with AC power supply of 100-240Vac, 50-60Hz or 5Vdc from host, 12Vdc/24Vdc from car charger, 3.7Vdc from battery.

For radiated emission test, the EUT has been pre-tested under following test modes, and test mode 16 was the worst case for final test.

Mode	Test Condition
1	EUT + WLAN 2.4GHz link + BT link + MP4 play from SD card + Earphone + Thick battery + USB cable 1 + Adapter
2	EUT + WLAN 5GHz link + BT link + MP4 play from SD card + Thick battery+ USB cable 1 + Adapter
3	EUT + WLAN 2.4GHz link + BT link + GSM850 link + Earphone + Thick battery + USB cable 1 + Adapter
4	EUT + WLAN 5GHz link + BT link + GSM1900 link + Earphone + Thick battery + USB cable 1 + Adapter
5	EUT + WLAN 2.4GHz link + BT link + WCDMA B2 link + Earphone + Thick battery + USB cable 1 + Adapter
6	EUT + WLAN 5GHz link + BT link + WCDMA B4 link + Earphone + Thick battery + USB cable 1 + Adapter
7	EUT + WLAN 2.4GHz link + BT link + WCDMA B5 link + Earphone + Thick battery + USB cable 1 + Adapter
8	EUT + WLAN 5GHz link + BT link + LTE B4 link + Earphone + Thick battery + USB cable 1 + Adapter
9	EUT + WLAN 2.4GHz link + BT link + LTE B5 link + Earphone + Thick battery + USB cable 1 + Adapter
10	EUT + WLAN 5GHz link + BT link + LTE B7 link + Earphone + Thick battery + USB cable 1 + Adapter
11	EUT + WLAN 2.4GHz link + BT link + LTE B26 link + Earphone + Thick battery + USB cable 1 + Adapter
12	EUT + 125kHz link + BT link + GPS + Earphone + Thick battery + USB cable 1 + Adapter
13	EUT + WLAN 2.4GHz link + BT link + GSM850 link + Earphone + Thin battery + USB cable 1 + Adapter
14	EUT + WLAN 2.4GHz link + BT link + GSM850 link + Earphone + Thin battery + USB cable 2 + Adapter
15	EUT + WLAN 2.4GHz link + BT link + GSM850 link + Earphone + Thin battery + USB cable 1 + Desktop cradle + Adapter
16	EUT + Charging + Thin battery + USB 2.0 R/W + USB cable 1 + Notebook
17	EUT + WLAN 2.4GHz link + BT link + GSM850 link + Earphone + Thin battery + Car charger DC 12V
18	EUT + WLAN 2.4GHz link + BT link + GSM850 link + Earphone + Thin battery + Car charger DC 24V
19	EUT + WLAN 2.4GHz link + BT link + GSM850 link + Earphone + Thin battery + Vehicle cradle + Car charger DC 12V

Test modes are presented in the report as below.

Mode	Test Condition
Conducted emission test	
A	EUT + WLAN 2.4GHz link + BT link + GSM850 link + Earphone + Thin battery + USB cable 1 + Adapter
B	EUT + WLAN 2.4GHz link + BT link + GSM850 link + Earphone + Thin battery + USB cable 1 + Desktop cradle + Adapter
C	EUT + Charging + Thin battery + USB 2.0 R/W + USB cable 1 + Notebook
Radiated emission test	
C	EUT + Charging + Thin battery + USB 2.0 R/W + USB cable 1 + Notebook

3.4 Test Program Used and Operation Descriptions

Test Mode A

- The EUT was powered by adapter in charging mode.
- The EUT sent audio signal to earphone and Bluetooth earphone.
- The EUT linked with the Bluetooth earphone, Wireless Router and Radio Communication Tester, which acted as a communication partner, via Bluetooth, WLAN and GSM.

Test Mode B

- The EUT was powered by Desktop cradle in charging mode.
- The EUT sent audio signal to earphone and Bluetooth earphone.
- The EUT linked with the Bluetooth earphone, Wireless Router and Radio Communication Tester, which acted as a communication partner, via Bluetooth, WLAN and GSM.

Test Mode C

- The EUT was powered by Notebook in charging mode.
- The EUT sent audio signal to earphone.
- The notebook sent "H" patterns to the Printer and printed them.
- The Notebook performed R/W function with EUT.

3.5 Primary Clock Frequencies of Internal Source

The highest frequency generated or used within the EUT or on which the EUT operates or tunes is 5 GHz, provided by Motorola Solutions Inc, for detailed internal source, please refer to the manufacturer's specifications.

3.6 Miscellaneous

Labelling Requirements for Part 15 Devices:

➤ Verification

The specific labelling requirements for a device subject to the Verification procedure are contained in Section 15.19(a). These labelling requirements are:

If the device is subject only to Verification, include a label bearing a unique identifier (Section 2.954) and one of three compliance statements specified in Section 15.19(a). If the labeling area for the device is so small, and/or it is not practical to place the compliance statement on the device, then the statement can be placed in the user manual or product packaging (Section 15.19(a)(5)). However, the device must still be labelled with the unique identifier (Verification). Generally, devices smaller than the palm of the hand are considered too small for the compliance statement.

➤ Certification

If the device is subject to Certification: (1) Section 2.925 contains information on identification of the equipment; (2) include a label bearing an FCC Identifier (FCC ID) (Section 2.926) and (3) include the appropriate compliance statement in Section 15.19(a). If the device is considered too small and therefore it is impractical (smaller than the palm of the hand) to display the compliance statement, then the statement may be placed in the user manual or product packaging. However, the device must still be labelled with the FCC ID. If the device is unquestionably too small for the FCC ID to be readable (smaller than 4-6 points), the FCC ID may be placed in the user manual. However, it must be determined that the device itself is too small – the label area allocated to the FCC ID may not be reduced because of over crowded identification of other product and regulatory information.

An electronic display of the FCC ID (see 9. Electronic Labelling below) may be used for Certification of Section 15.212 modular transmitters and software defined radios (Section 2.944).

➤ Declaration of Conformity (DoC):

The labelling requirements for a device subject to the DoC procedure are specified in Section 15.19(b). The label should include the FCC logo along with the Trade Name and Model Number, which satisfies the unique identifier requirement of Section 2.1074 if it represents the identical equipment tested for DoC compliance. For personal computers assembled from authorized components, the following additional text must also be included: “Assembled from tested components,” “Complete system not tested.” When the device is so small and/or when it is not practical to place the required additional text on the device, the text may be placed in the user manual or pamphlet supplied to the user. However, the FCC logo, Trade Name, and Model Number must still be displayed on the device (Section 15.19(b)(3)).



Part 15 Declaration of Conformity (DoC) Label Examples

Equipment certified as software defined radio may use a means that readily displays the FCC ID on an electronic display screen, instead of labelling the device (Section 2.925 (e)).

Further information may refer to FCC KDB:784748 D01 Labelling Part 15 &18 Guidelines

Labelling Requirements for ICES-003 Devices:

➤ Industry Canada ICES-003 Compliance Label:


CAN ICES-3 (*)/NMB-3(*)

* Insert either “A” or “B” but not both to identify the applicable Class of ITE.


4 Configuration and Connections with EUT

4.1 Connection Diagram of EUT and Peripheral Devices


Test Mode A

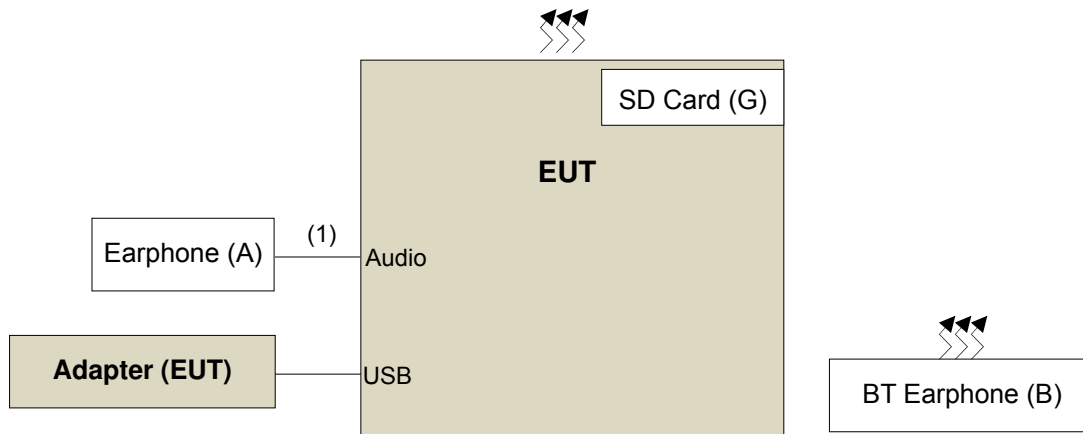


Remote site

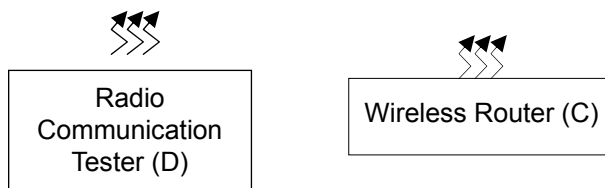


Test Mode B

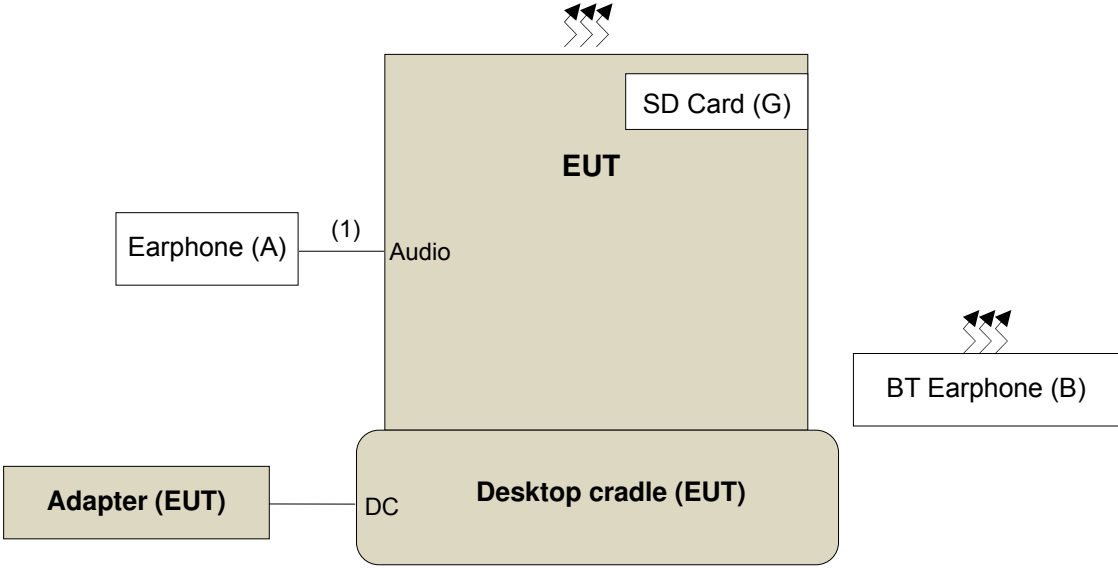

Remote site

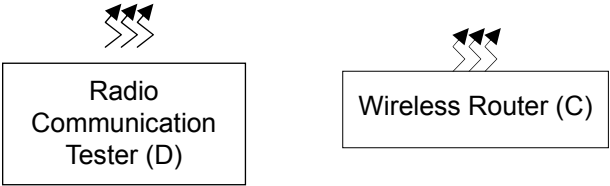

Test Mode C

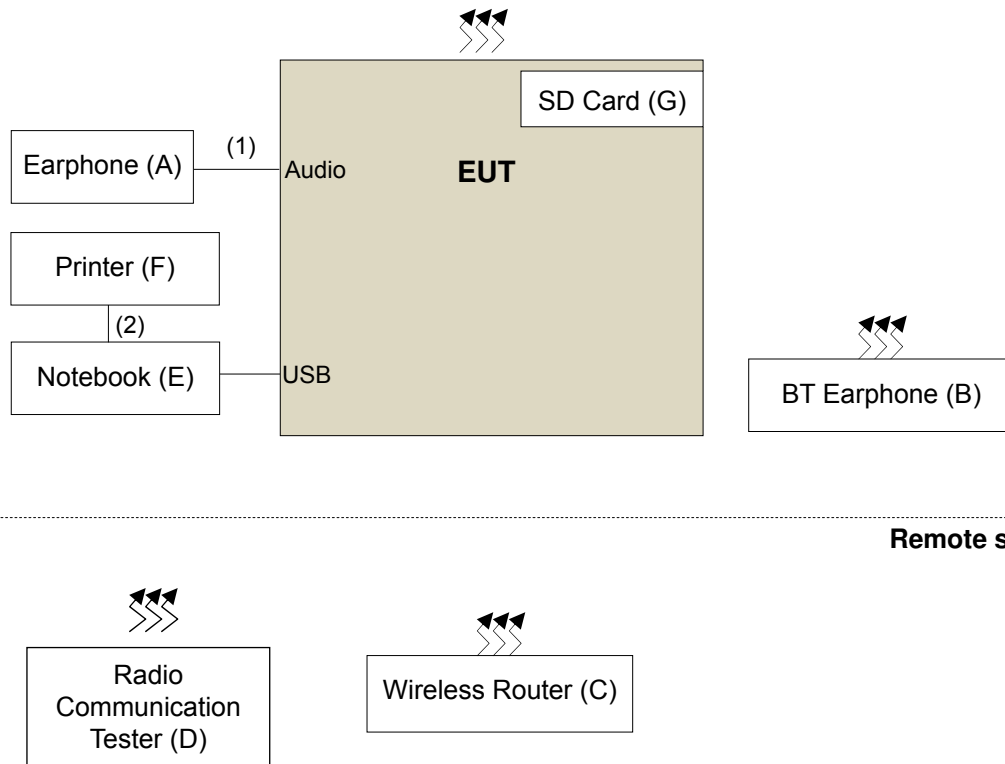

4.2 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Earphone	ASUS	N/A	N/A	N/A	-
B.	Bluetooth Earphone	ELECOM	LBT-MPHS400	N/A	N/A	-
C.	Wireless N Dual band Router	D-LINK	DIR-815	PVK21B5000399	KA21R815A1	-
D.	Radio Communication Tester	R&S	CMW500	151084	N/A	-
E.	Notebook	DELL	E6440	FMLNM32	FCC DoC Approved	-
F.	Printer	EPSON	T22	MEEZ070388	FCC DoC Approved	-
G.	Micro SD Card	Transcend	8GB	N/A	N/A	-

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Items B~D acted as communication partners to transfer data.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	Earphone cable	1	1.2	Y	0	-
2.	USB cable	1	1.8	Y	0	-

5 Conducted Emissions at Mains Ports

5.1 Limits

Frequency (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

Notes: 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases linearly with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.2 Test Instruments


Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCS 30	100288	Apr. 27, 2015	Apr. 26, 2016
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond2-01	Dec. 26, 2015	Dec. 25, 2016
LISN ROHDE & SCHWARZ (EUT)	ESH2-Z5	100100	Jan. 11, 2016	Jan. 10, 2017
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100312	Jul. 21, 2015	Jul. 20, 2016
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 2.
3. The VCCI Site Registration No. is C-2047.

5.3 Test Arrangement

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The test results of conducted emissions at mains ports are recorded of six worst margins for quasi-peak (mandatory) [and average (if necessary)] values against the limits at frequencies of interest unless the margin is 20 dB or greater.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

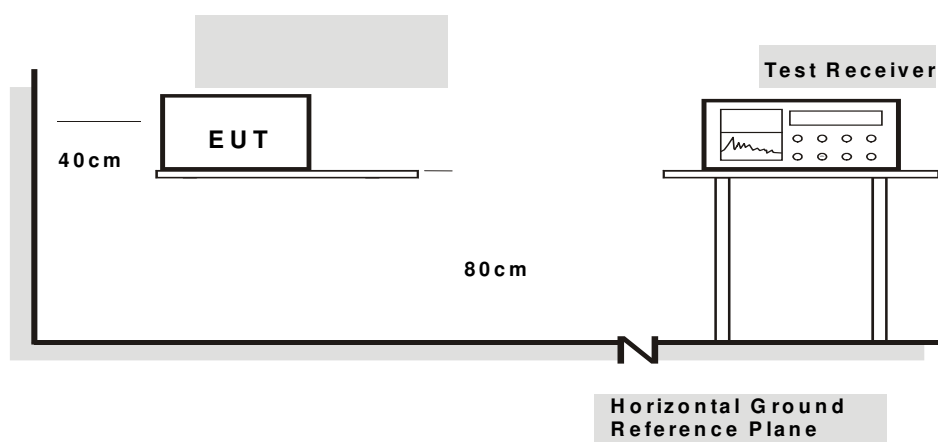

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

5.4 Test Results

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	22



Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	22



Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Bandwidth	
		Environmental Conditions	22



Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	22



Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz (System)	Environmental Conditions	22



Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz (System)	Environmental Conditions	22

6 Radiated Emissions up to 1 GHz

6.1 Limits

Emissions radiated outside of the specified bands, shall be according to the general radiated limits as following:

Radiated Emissions Limits at 10 meters (dBμV/m)				
Frequencies (MHz)	FCC 15B / ICES-003, Class A	FCC 15B / ICES-003, Class B	CISPR 22, Class A	CISPR 22, Class B
30-88	39	29.5	40	30
88-216	43.5	33.1		
216-230	46.4	35.6		
230-960			47	37
960-1000	49.5	43.5		

Radiated Emissions Limits at 3 meters (dBμV/m)				
Frequencies (MHz)	FCC 15B / ICES-003, Class A	FCC 15B / ICES-003, Class B	CISPR 22, Class A	CISPR 22, Class B
30-88	49.5	40	50.5	40.5
88-216	54	43.5		
216-230	56.9	46		
230-960			57.5	47.5
960-1000	60	54		

- Notes:
1. The lower limit shall apply at the transition frequencies.
 2. Emission level (dB μ V/m) = 20 log Emission level (uV/m).
 3. QP detector shall be applied if not specified.

6.2 Test Instruments


Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ (V)	ESR	101240	Oct. 06, 2015	Oct. 05, 2016
Test Receiver ROHDE & SCHWARZ (H)	ESR	101264	Dec. 11, 2015	Dec. 10, 2016
BILOG Antenna SCHWARZBECK (V)	VULB9168	9168-149	Jan. 05, 2016	Jan. 04, 2017
BILOG Antenna SCHWARZBECK (H)	VULB9168	9168-154	Jan. 05, 2016	Jan. 04, 2017
Preamplifier Agilent (V)	310N	352924	Jul. 20, 2015	Jul. 19, 2016
Preamplifier Agilent (H)	310N	352923	Jul. 20, 2015	Jul. 19, 2016
RF signal cable (with 5dB PAD) Woken (V)	8D-FB	Cable-CH(V)-01	Oct. 25, 2015	Oct. 24, 2016
RF signal cable (with 5dB PAD) Woken (H)	8D-FB	Cable-CH(H)-01	Oct. 25, 2015	Oct. 24, 2016
Software BV ADT	BV ADT_Radiated_ V 8.7.07	NA	NA	NA
Antenna Tower (V)	MFA-440	9707	NA	NA
Antenna Tower (H)	MFA-440	970705	NA	NA
Turn Table	DS430	50303	NA	NA
Controller (V)	MF7802	074	NA	NA
Controller (H)	MF7802	08093	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 1.
3. The FCC Site Registration No. is 477732.
4. The IC Site Registration No. is IC 7450F-1.
5. The VCCI Site Registration No. is R-1893.

6.3 Test Arrangement

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at an accredited test facility. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

Note: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for quasi-peak detection (QP) at frequency below 1GHz.

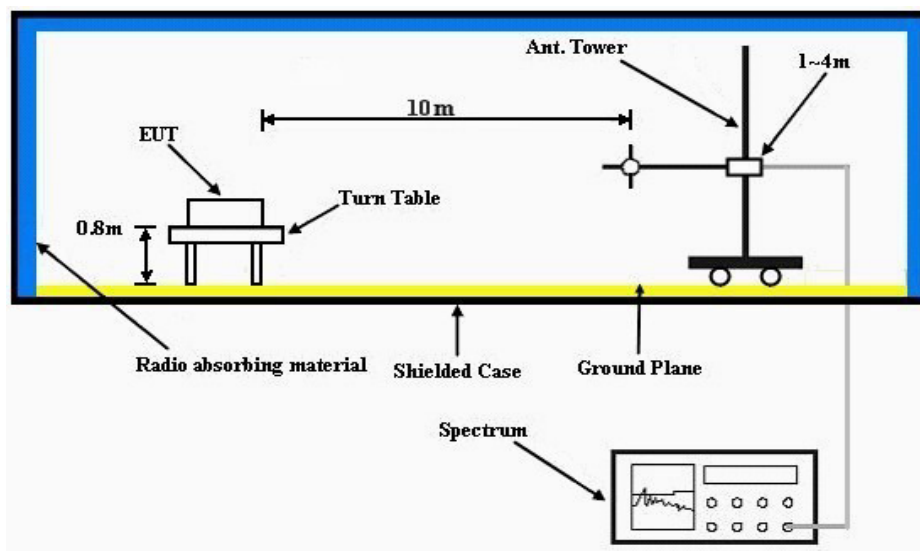

6.4 Test Results

Frequency Range	30MHz ~ 1GHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP), 120kHz
Input Power	120Vac, 60Hz (System)	Environmental Conditions	17



Frequency Range	30MHz ~ 1GHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP), 120kHz
Input Power	120Vac, 60Hz (System)	Environmental Conditions	17

7 Radiated Emissions above 1 GHz

7.1 Limits

Emissions radiated outside of the specified bands, shall be according to the general radiated limits as following:

Radiated Emissions Limits at 10 meters (dB μ V/m)				
Frequencies (MHz)	FCC 15B / ICES-003, Class A	FCC 15B / ICES-003, Class B	CISPR 22, Class A	CISPR 22, Class B
1000-3000	Avg: 49.5	Avg: 43.5	Not defined	Not defined
Above 3000	Peak: 69.5	Peak: 63.5	Not defined	Not defined

Radiated Emissions Limits at 3 meters (dB μ V/m)				
Frequencies (MHz)	FCC 15B / ICES-003, Class A	FCC 15B / ICES-003, Class B	CISPR 22, Class A	CISPR 22, Class B
1000-3000	Avg: 60	Avg: 54	Avg: 56 Peak: 76	Avg: 50 Peak: 70
Above 3000	Peak: 80	Peak: 74	Avg: 60 Peak: 80	Avg: 54 Peak: 74

- Notes:
1. The lower limit shall apply at the transition frequencies.
 2. Emission level (dB μ V/m) = 20 log Emission level (uV/m).
 3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Radiated Emissions Limits at 1.5 meters (dB μ V/m)		
Frequencies (MHz)	FCC 15B / ICES-003, Class A	FCC 15B / ICES-003, Class B
18000-40000	Avg: 66 Peak: 86	Avg: 60 Peak: 80

Note: Limit@1.5m = Limit@3m + 20log(3/1.5)

Frequency Range (For unintentional radiators)

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705-108	1000
108-500	2000
500-1000	5000
Above 1000	5th harmonic of the highest frequency or 40GHz, whichever is lower


7.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESR7	101471	Feb. 19, 2016	Feb. 18, 2017
Spectrum Analyzer Agilent	E4446A	MY51100039	Aug. 25, 2015	Aug. 24, 2016
BILOG Antenna SCHWARZBECK	VULB9168	9168-151	Jan. 07, 2016	Jan. 06, 2017
RF signal cable (with 5dB PAD) Woken	8D-FB	Cable-CH2-01	Mar. 22, 2015 Mar. 22, 2016	Mar. 21, 2016 Mar. 21, 2017
HORN Antenna (with 4dB PAD) SCHWARZBECK	BBHA 9120 D	9120D-405	Jan. 19, 2016	Jan. 18, 2017
Preamplifier Agilent (Above 1GHz)	8449B	3008A01961	Oct. 18, 2015	Oct. 17, 2016
RF signal cable ALLTEST	JUNFLON	Cable-CH2-02 (MWX322+MWX2211 3028S0295)	Nov. 06, 2015	Nov. 05, 2016
Software BV ADT	BV ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower BV ADT	AT100	AT93021702	NA	NA
Turn Table BV ADT	TT100	TT93021702	NA	NA
Controller BV ADT	SC100	SC93021702	NA	NA
HORN Antenna (with 3dB PAD) SCHWARZBECK	BBHA 9170	148	Jan. 19, 2016	Jan. 18, 2017
RF signal cable HUBER+SUHNER	SUCOFLEX 102	Cable-CH1-03-38218	Oct. 25, 2015	Oct. 24, 2016
RF signal cable HUBER+SUHNER	SUCOFLEX 102	Cable-CH1-04-37433	Oct. 25, 2015	Oct. 24, 2016
Fix tool for Boresight antenna tower	BAF-01	2	NA	NA
Pre-amplifier (18GHz-40GHz) EMC	EMC184045B	980175	Nov. 07, 2015	Nov. 06, 2016

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 2.
3. The horn antenna and preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 686814.
5. The IC Site Registration No. is IC 7450F-2.
6. The VCCI Site Registration No. is G-18.

7.3 Test Arrangement

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at an accredited chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- For frequency range 1 ~ 18GHz, the EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- For frequency range 18 ~ 40GHz, the EUT was set 1.5 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna can be varied from one meter to four meters, the height of adjustment depends on the EUT height and the antenna 3dB beamwidth both, to detect the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The spectrum analyzer system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.

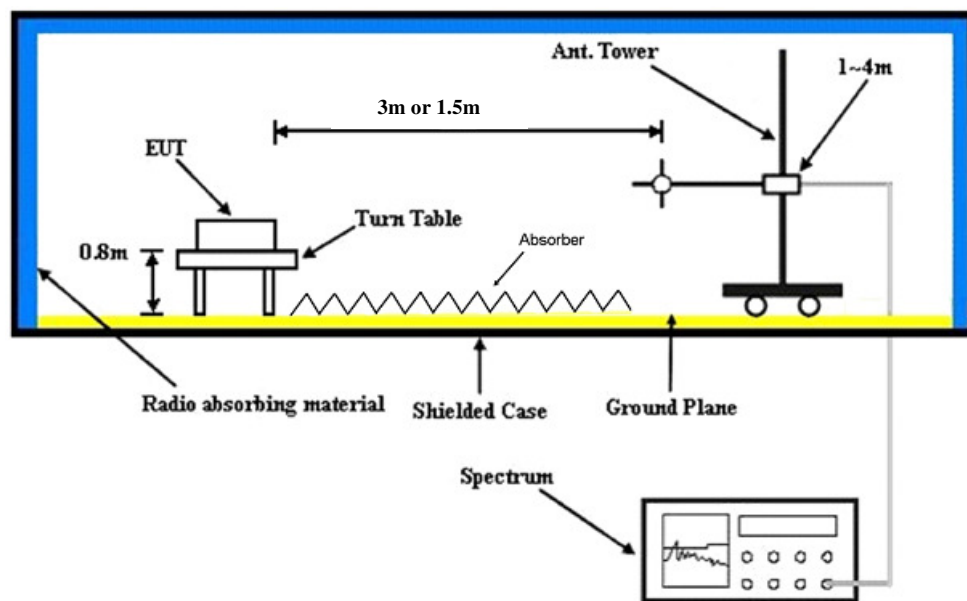

7.4 Test Results

Frequency Range	1GHz ~ 18GHz	Detector Function & Resolution Bandwidth	Peak (PK) / Average (AV), 1MHz
Input Power	120Vac, 60Hz (System)	Environmental Conditions	22



Frequency Range	1GHz ~ 18GHz	Detector Function & Resolution Bandwidth	Peak (PK) / Average (AV), 1MHz
Input Power	120Vac, 60Hz (System)	Environmental Conditions	22



Frequency Range	18GHz ~ 40GHz	Detector Function & Resolution Bandwidth	Peak (PK) / Average (AV), 1MHz
Input Power	120Vac, 60Hz (System)	Environmental Conditions	22



Frequency Range	18GHz ~ 40GHz	Detector Function & Resolution Bandwidth	Peak (PK) / Average (AV), 1MHz
Input Power	120Vac, 60Hz (System)	Environmental Conditions	22

8 Pictures of Test Arrangements

8.1 Conducted Emissions at Mains Ports

Test Mode A




Test Mode B





Test Mode C



8.2 Radiated Emissions up to 1 GHz

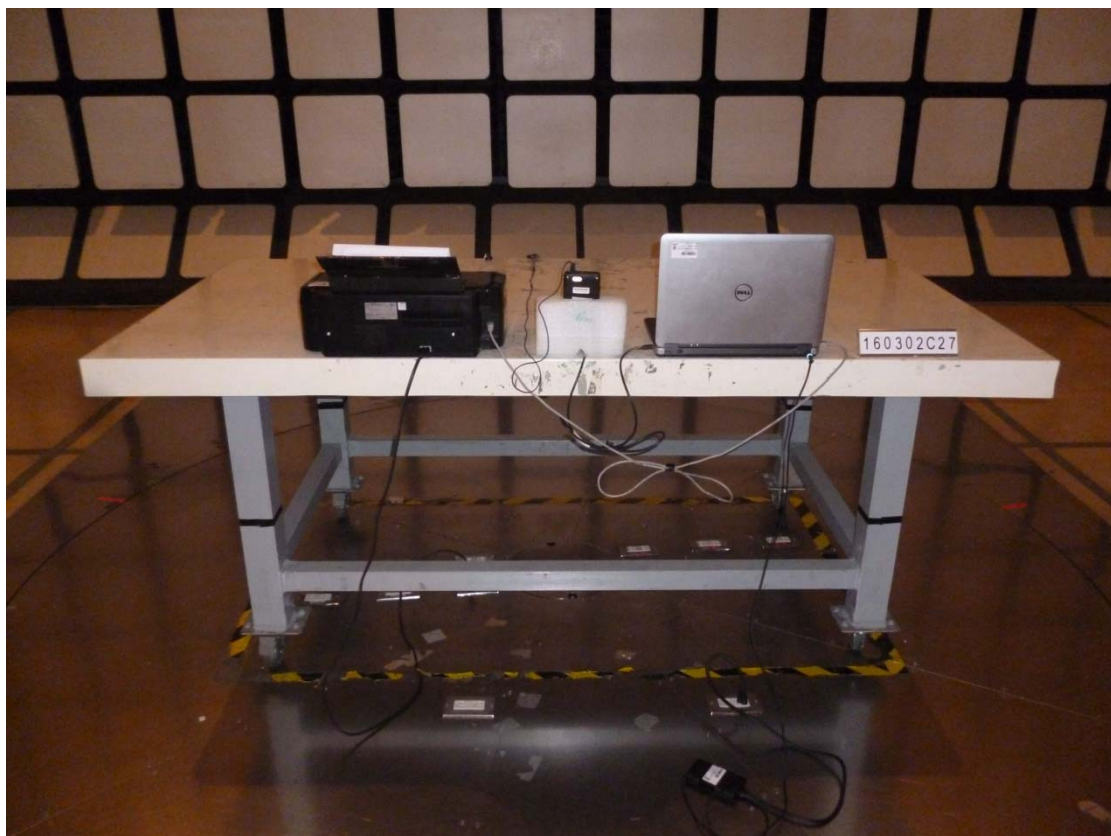

8.3 Radiated Emissions above 1 GHz

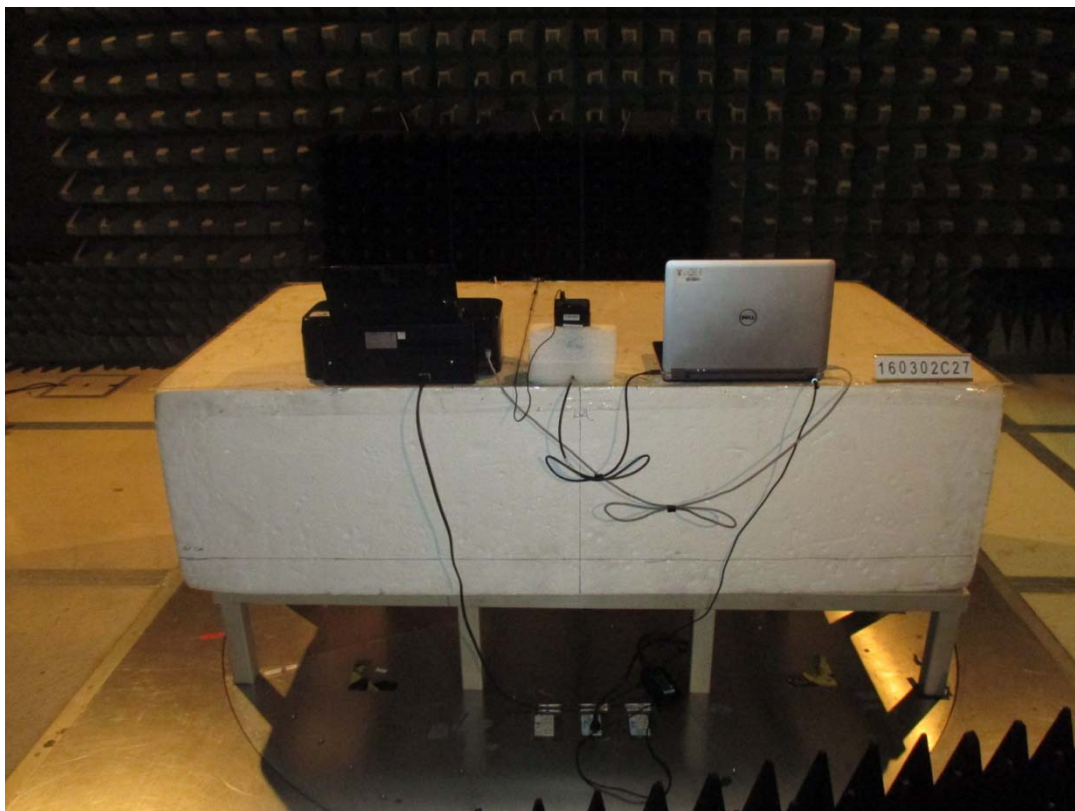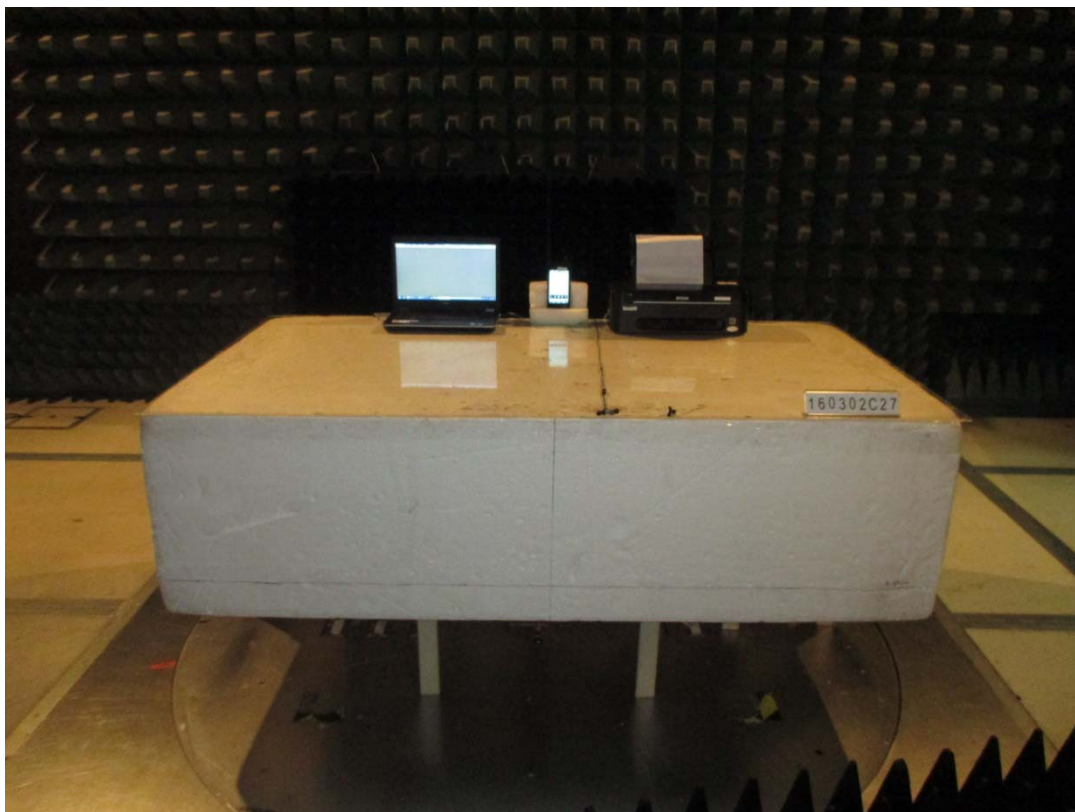

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---