


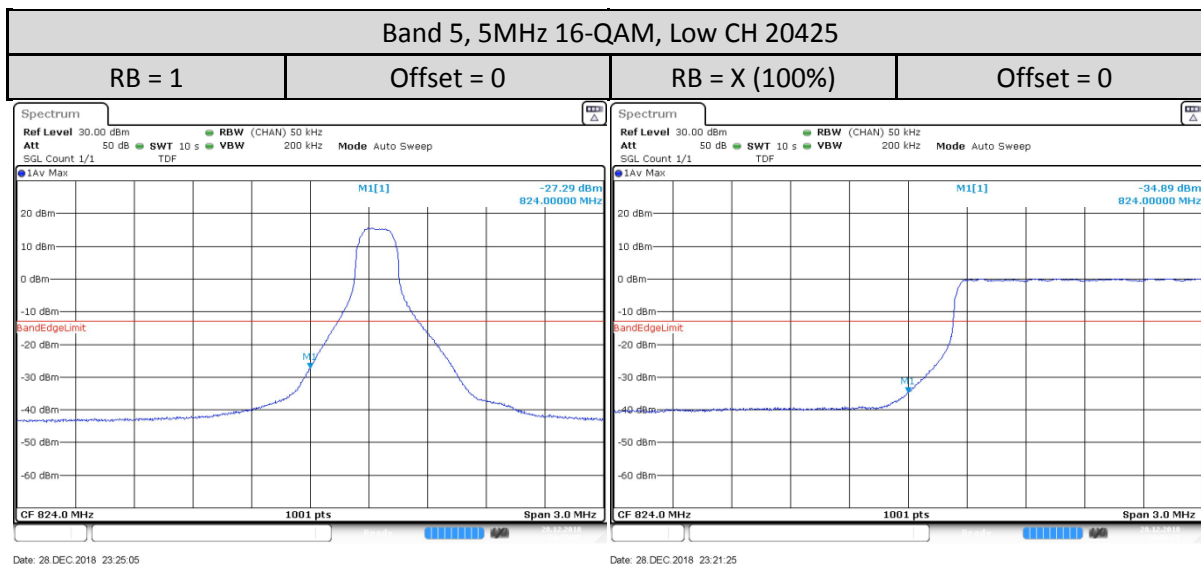
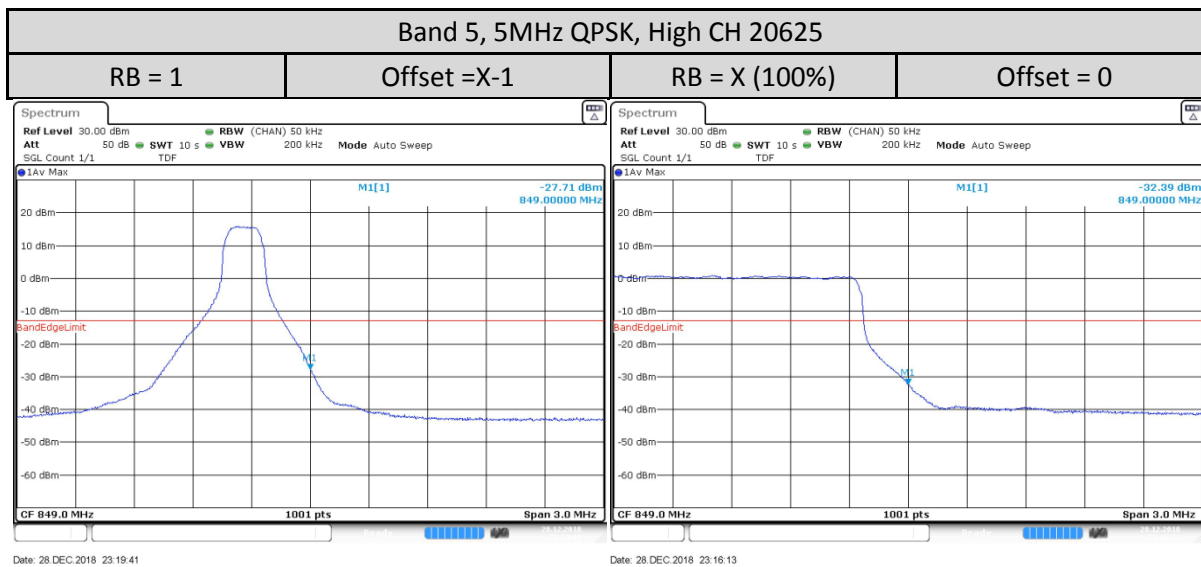
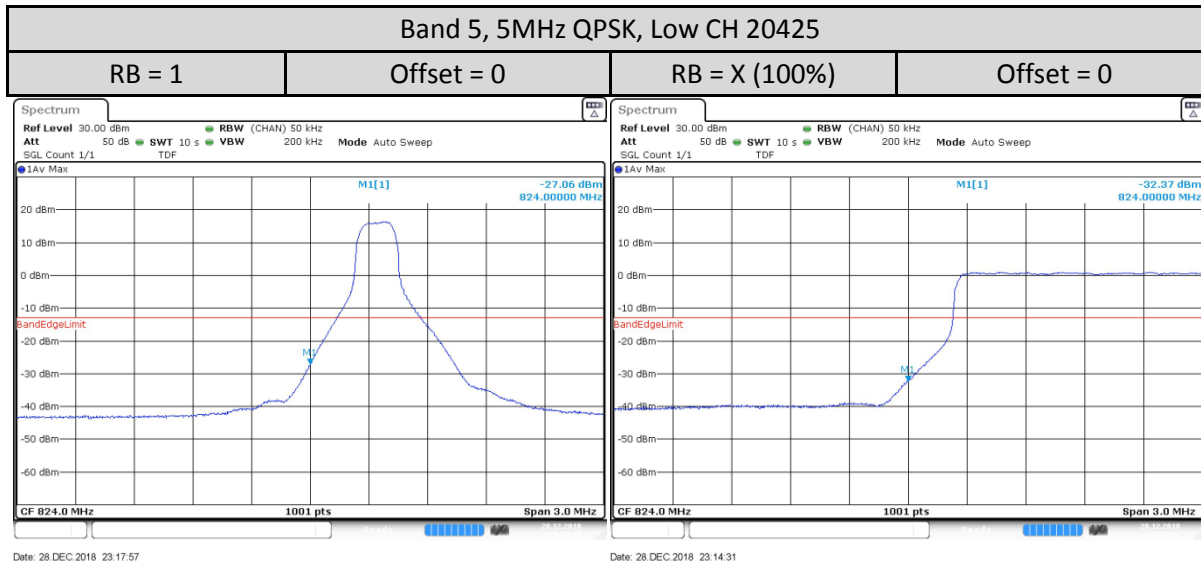
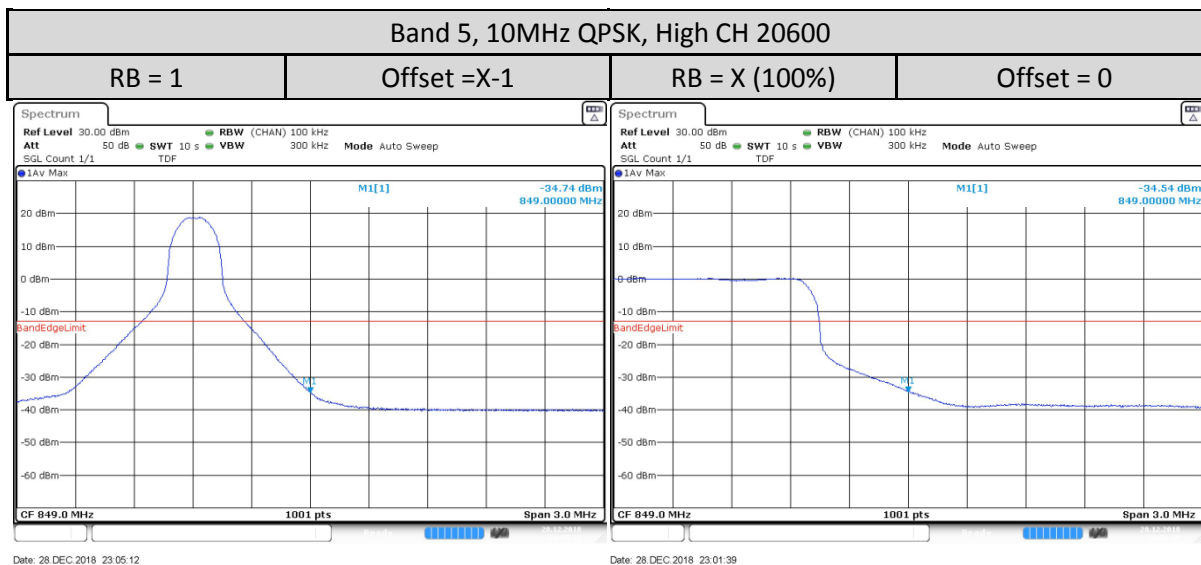
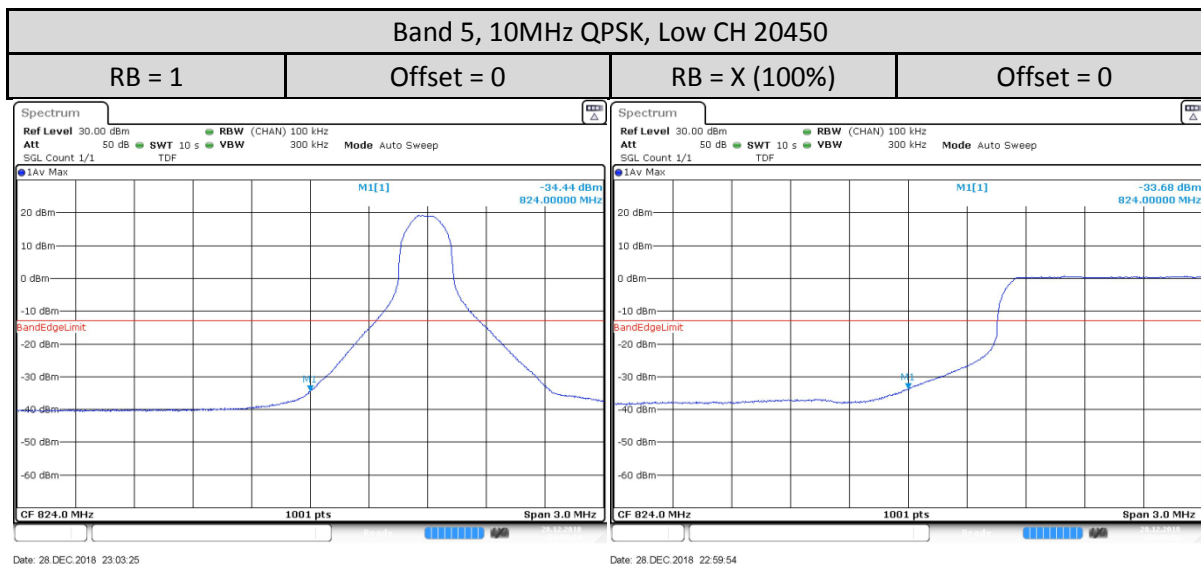


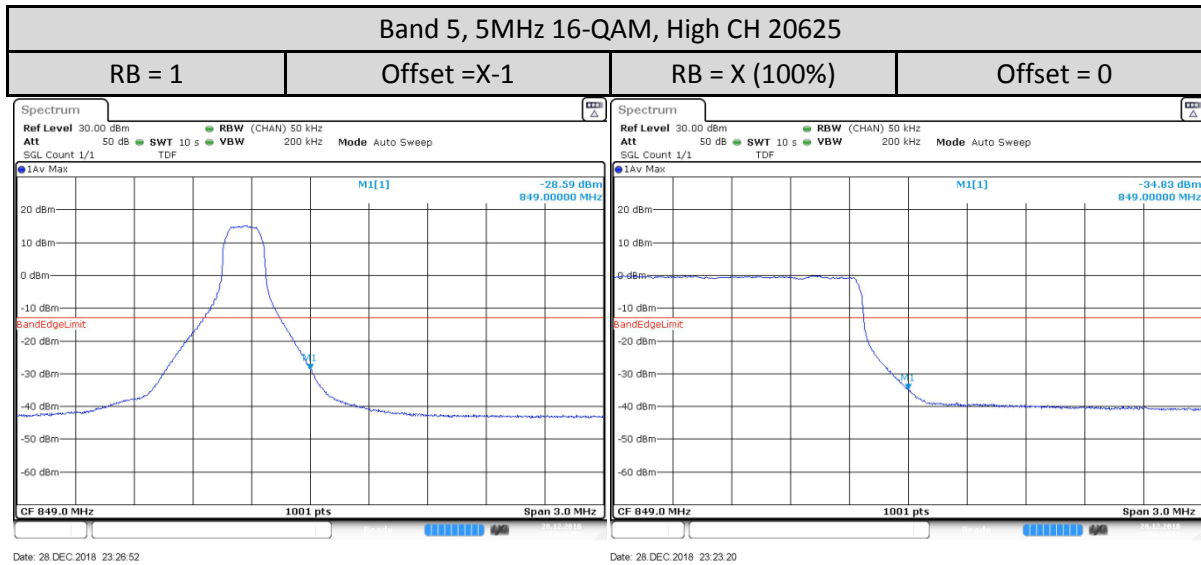


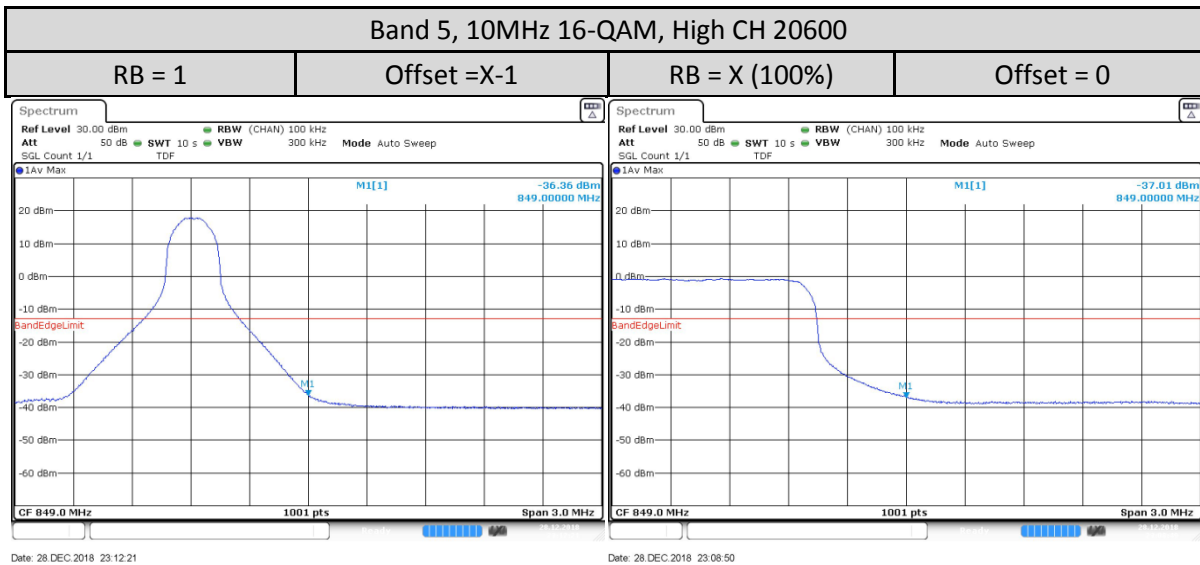

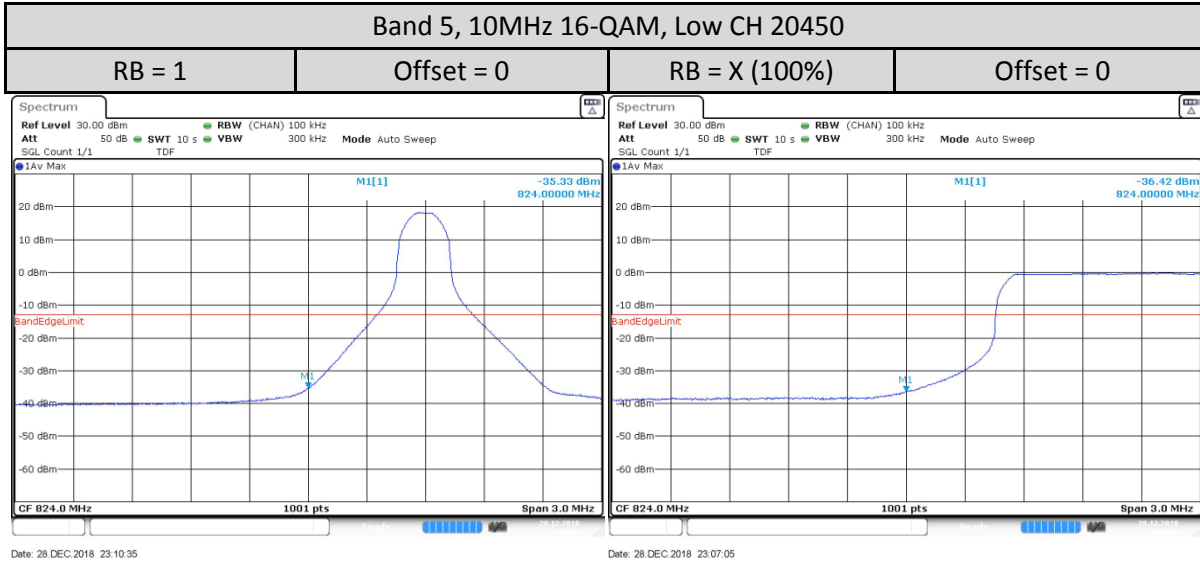

1.11. Conducted Spurious Emission

1.11.1. Test Setup

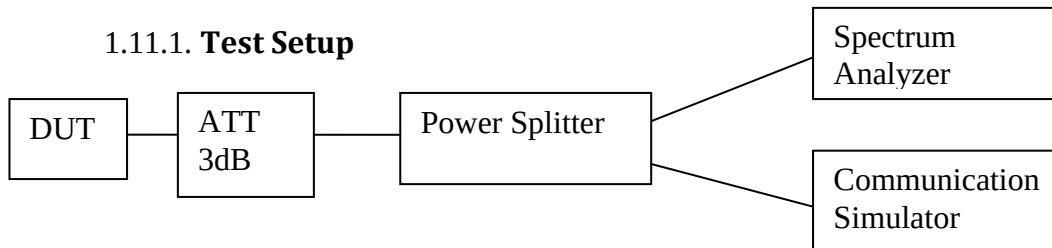


- 1) The DUT transmitter output port was connected to communication simulator with above setup.
- 2) Path loss for the measurement included.
- 3) Set DUT to transmit maximum power through communication simulator.
- 4) Spectrum Analyzer setting, RBW = 100 kHz or greater, VBW = 3*RBW.
- 5) The spurious emission of lowest, middle and highest channels with the highest RF powers were measured.
- 6) Record the maximum trace plot into the test report.



1.11.2. Test Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.



1.11.3. Conducted Spurious Emission - LTE Band 5 (824-849MHz)


1.4MHz

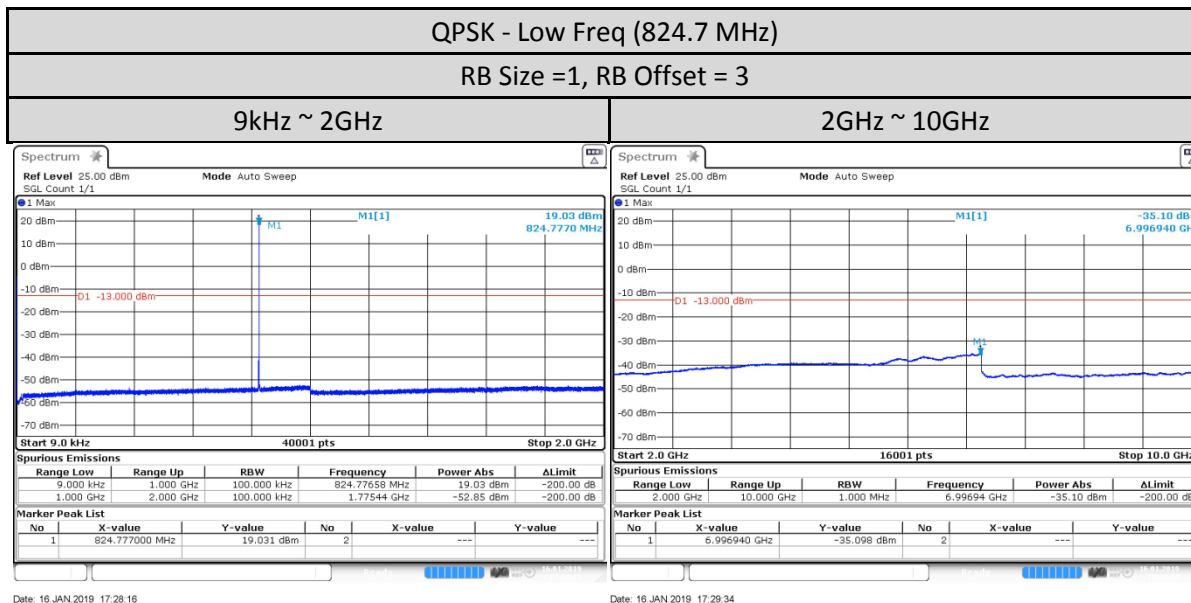

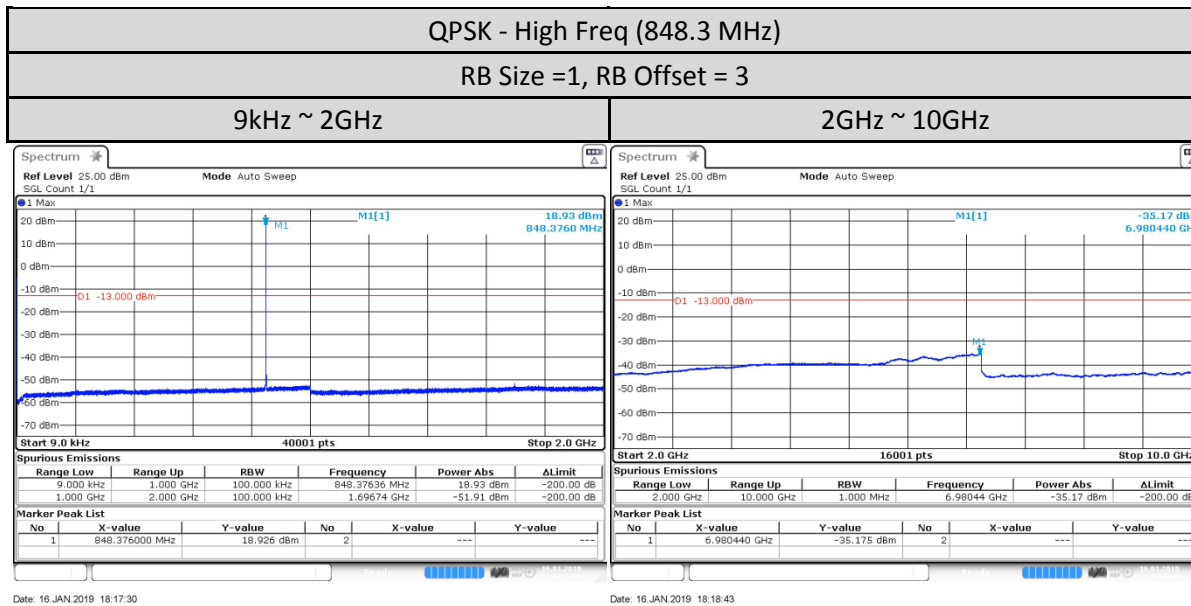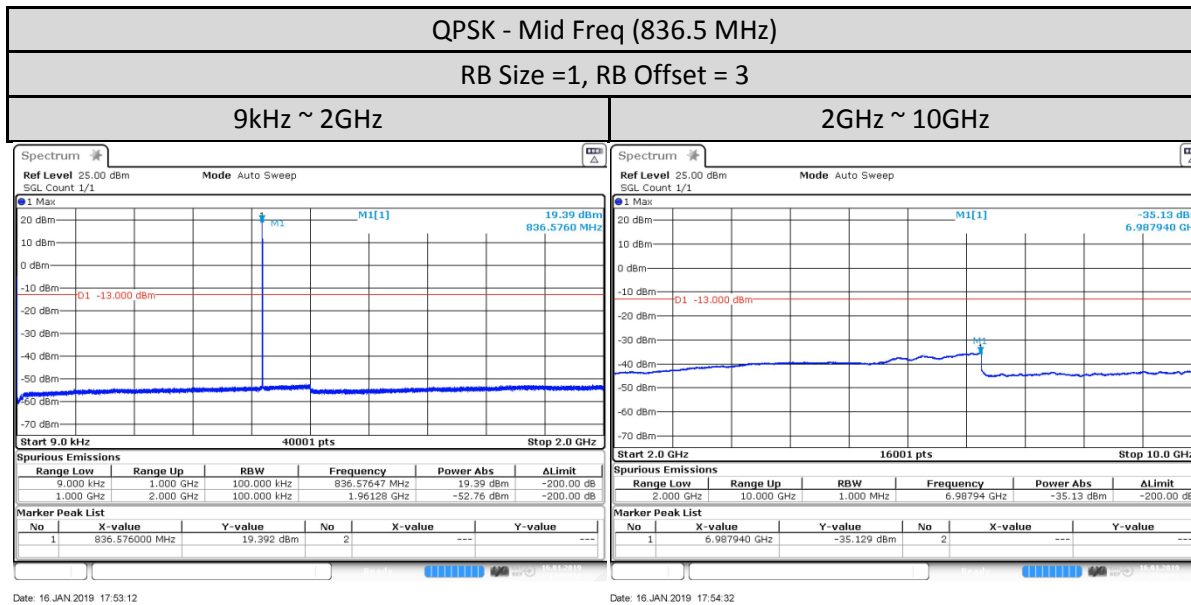




3MHz

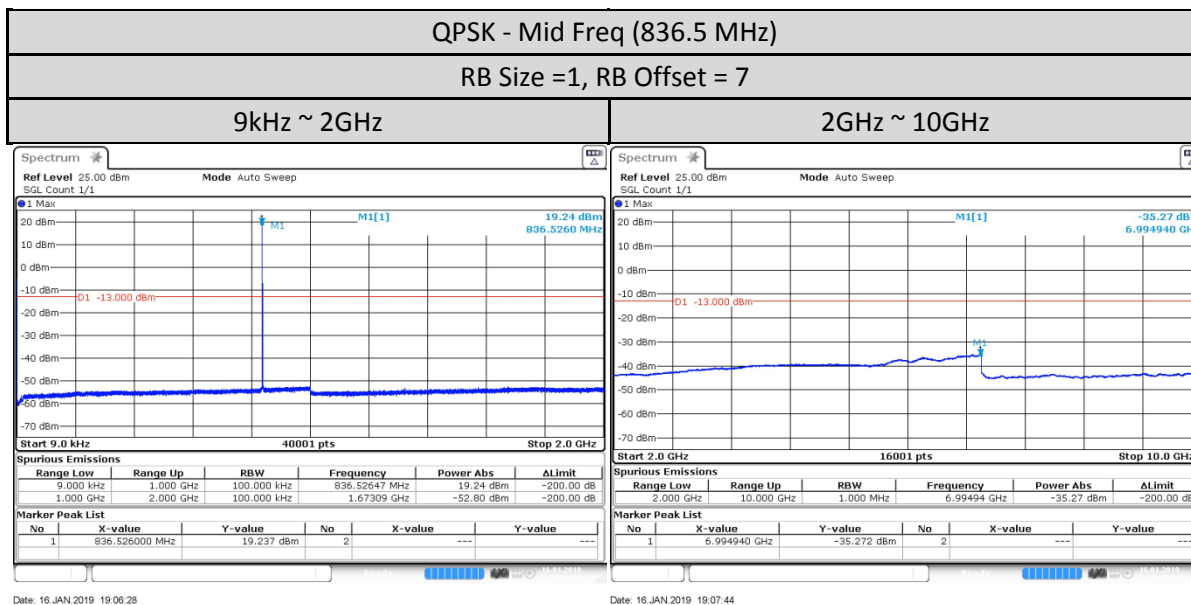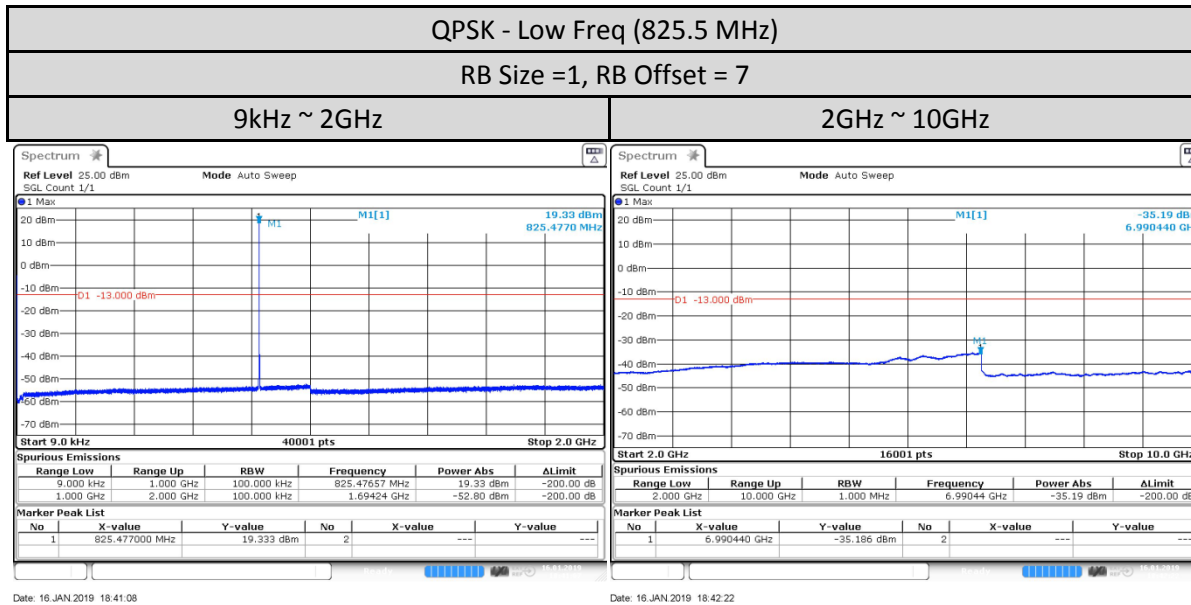


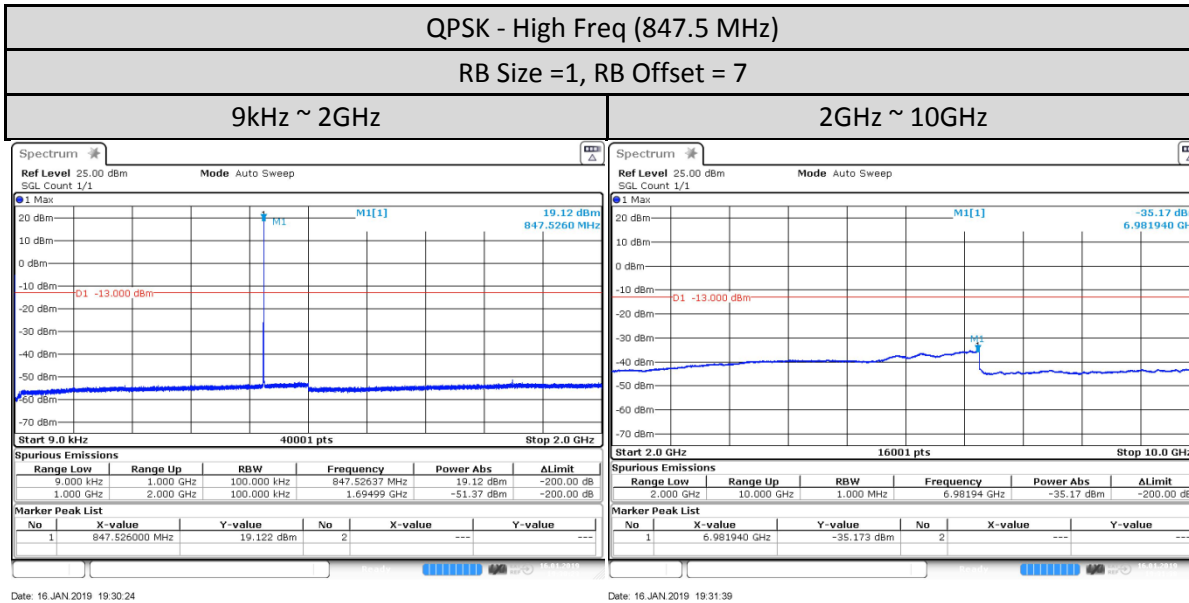



5MHz

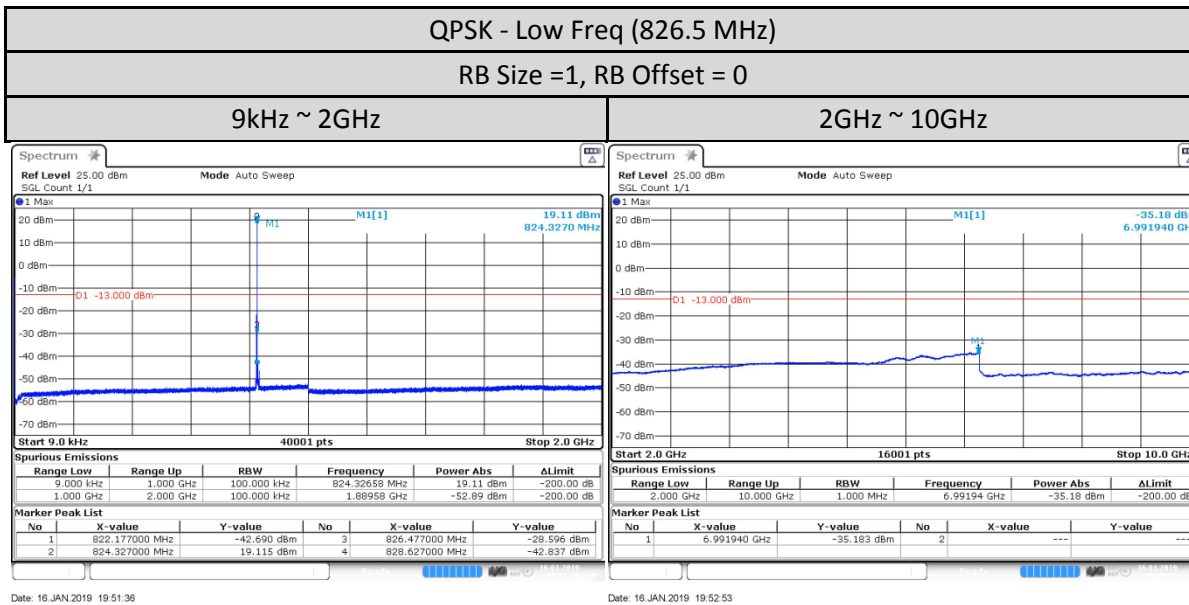

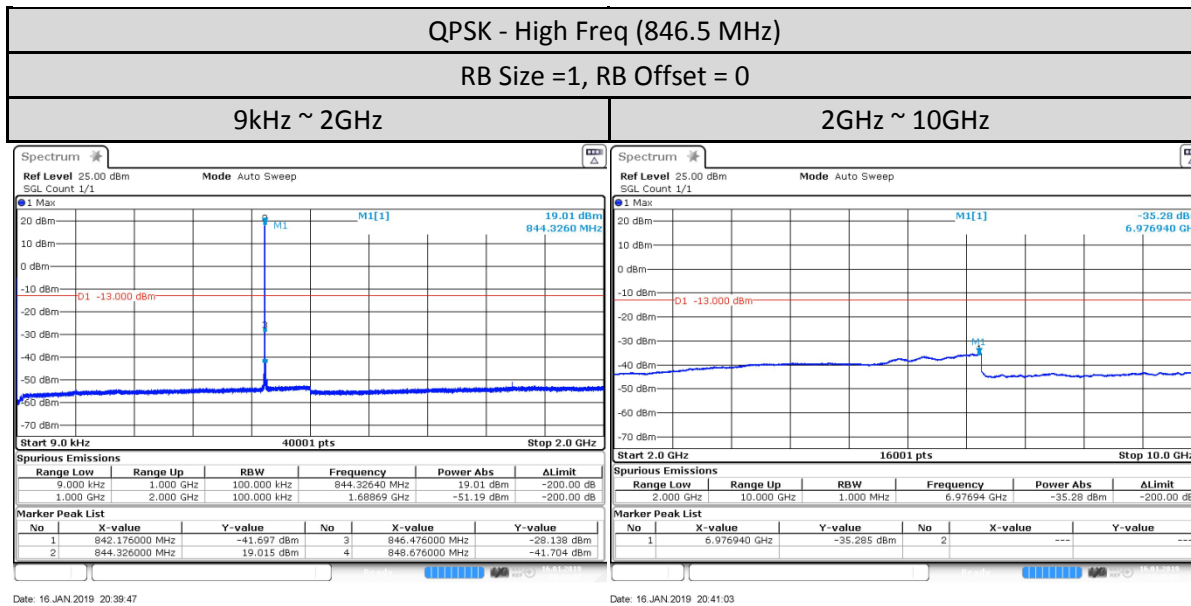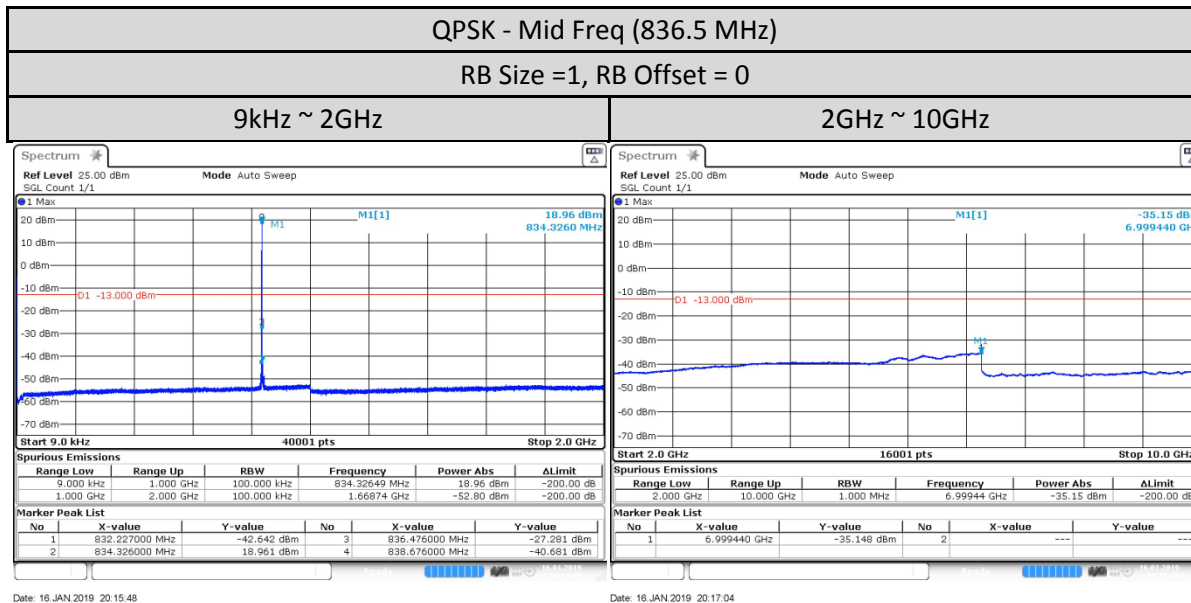


10MHz

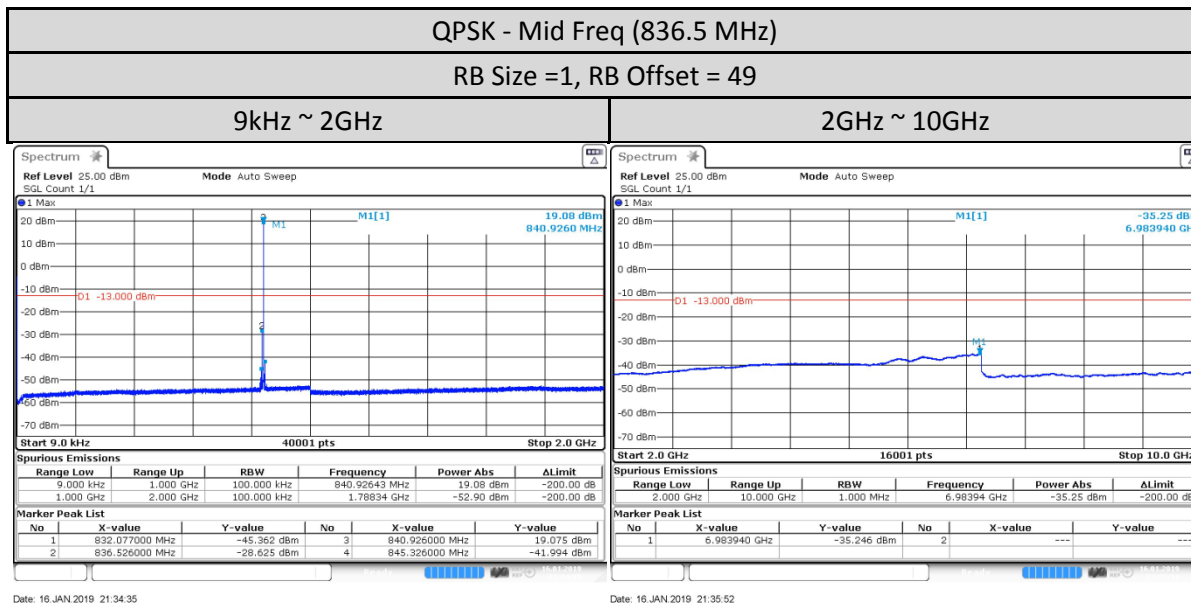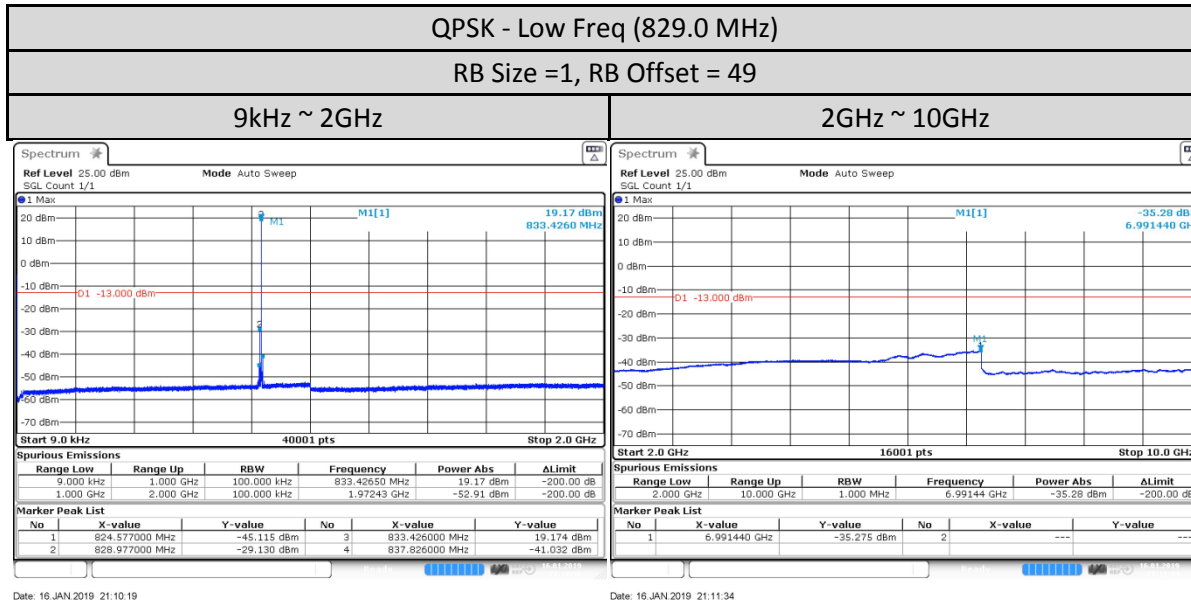

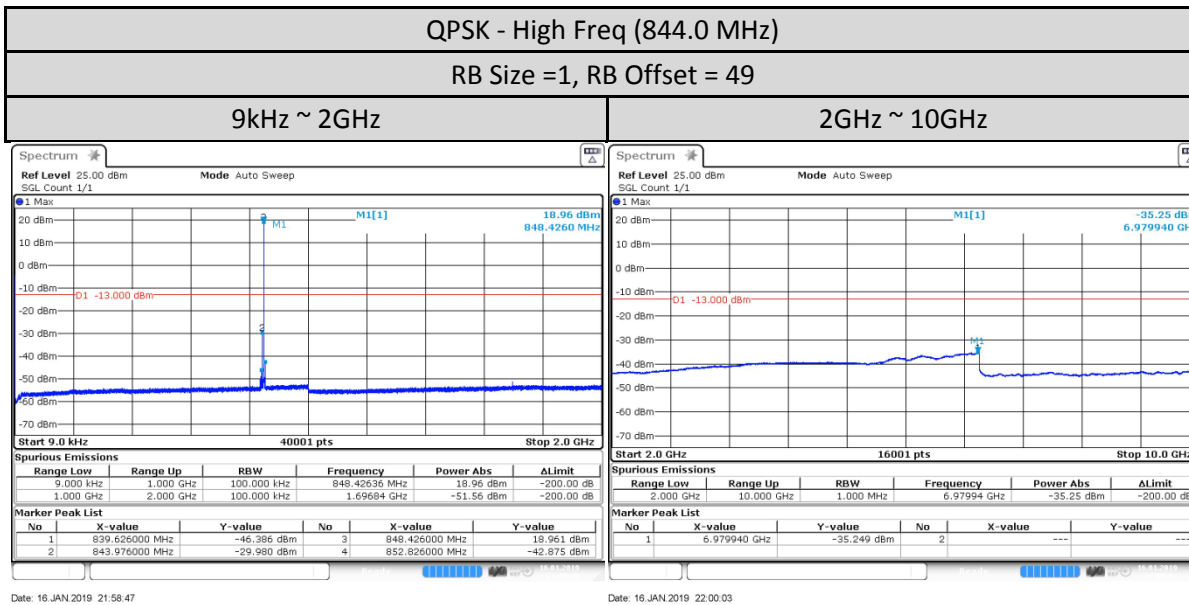

1.12. Radiated Spurious Emission

1.12.1. Test Setup

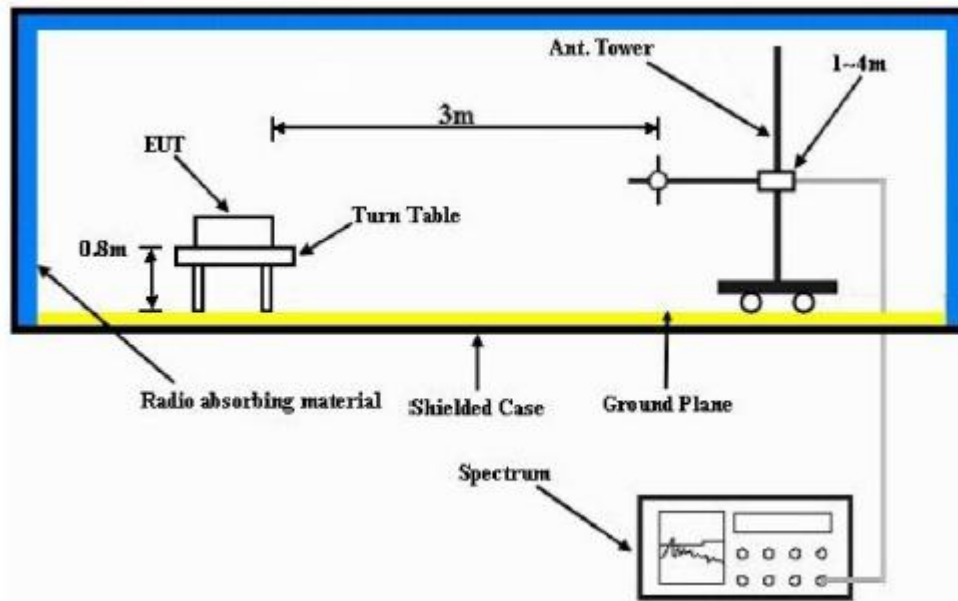

- 1) The spectrum setting for scanning Radiated Emission below 1 GHz is RBW = 100 kHz, VBW = 300 kHz and above 1 GHz is RBW = 1MHz, VBW = 3MHz. Detector mode is positive peak.
- 2) In the semi-anechoic chamber, setup as illustrated above the EUT placed on the Turn Table at 0.8m height for below 1Ghz measurement and at 1.5m height for above 1GHz measurement, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- 3) The substitution antenna is substituted for EUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.
- 4) Final Radiated Spurious Emission = “Read Value” + Measured substitution value.

1.12.2. Test Limit


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

1.12.3. Radiated Spurious Emission – LTE Band 5 (824-849MHz)

Not Performed.

1.13. Effective Radiated Power (ERP)

1.13.1. Test Setup

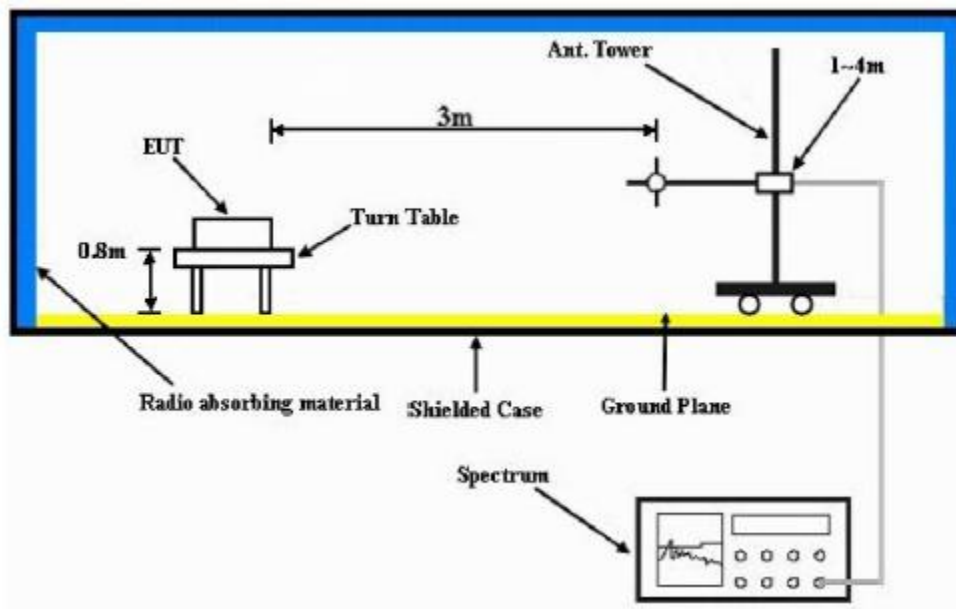

- 1) All measurements were done at low, middle and high operational frequency range. RBW is 1% to 5% of OBW, VBW is 3*RBW. Detector mode is RMS.
- 2) In the semi-anechoic chamber, setup as illustrated above the EUT placed on the Turn Table at 0.8m height for below 1Ghz measurement and at 1.5m height for above 1GHz measurement, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- 3) The substitution antenna is substituted for EUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the Measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.
- 4) $ERP = \text{“Read Value”} + \text{Measured substitution value.}$

1.13.2. Test Limit

The maximum output power of the transmitter for mobile stations is 100 watts (20 dBw). Power is given in terms of effective radiated power (ERP).

1.13.3. Effective Radiated Power (ERP) - LTE Band 5 (824-849MHz)

Not Performed.

-- End of Test Report--