

IDENTIFICATION LABELS

LOCATION



_____	See the Attached Photograph or Sketch
<u> X </u>	Bottom of Radio (FCC)
<u> X </u>	On Microphone Cord (RF Exposure)
_____	Back of Radio under Belt Clip

TYPE

<u> X </u>	The labels are a paper polyester film laminate with a pressure sensitive adhesive backing. The adhesive is a permanent type acrylic with a minimum peel strength of 32 oz/inch.
--------------	---

MARKINGS (TEXT)

<u> X </u>	See the Attached Photographs and Exhibit 3 for the actual location of the labels on the device.
_____	Label Attached Below.
_____	See Attached Drawing.

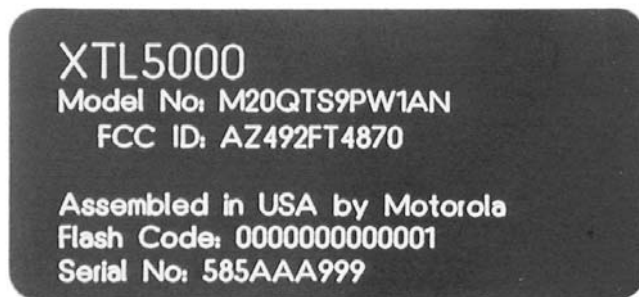

GENERAL INFORMATION

- I. Production Plans -- Pursuant 2.1033 (c)
Quantity production is planned.
- II. Application References -- Pursuant 2.1061
Reference is made to the following Motorola "Application References"
 1. Mobile Products and their application.
 2. Mobile Products Transmitter Modulations Methods.
 3. Motorola Plantation EMC Lab (FCC Registration: 91932, Industry Canada: IC3679)
- III. Data Submittal Procedure:
Data is supplied in accordance with Part 2, Sub-part J of the Commissions' rules.

Necessary Bandwidth Computation for 8K10F1E Emission Designator

FCC Title 47 of the Code of Federal Regulations, Part 2, §2.202(b) defines *Necessary Bandwidth* as the minimum value of the occupied bandwidth sufficient to ensure that transmission of information at the rate and with the quality required for the system employed. §2.202(c) lists four methods of determining the necessary bandwidth, including the use of formulas in §2.202(g), and measurement in cases where the other methods of §2.202(c) do not apply. It is felt that while these formulas apply well to voice and many older digital modulation systems, the formulas do not apply to the high performance digital modulation employed in the system submitted for Certification because of difficulties determining representative values for the factors K and M. We have, therefore, used the measurement criteria of §2.202(c)(4).

The value cited, 8K10, is the bandwidth that contains 99% of the total transmitted power. The 99% value was chosen because §2.202(b) defines *Necessary Bandwidth* as the minimum value of the occupied bandwidth. In turn, §2.202(b) defines *Occupied Bandwidth* as the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5% of the total mean power radiated by a given emission, i.e., contains 99% of the total transmitted power.

- IV. Applicable References:
 - Reference Certification FCC ID: AZ492FT4870
 - EIA/TIA-603 Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
 - Digital C4FM/CQPSK Transceiver Measurement Methods & Standards (EIA/TIA-102.CAAA & EIA/TIA-102.CAAB)
 - FCC Title 47 of the Code of Federal Regulations, Parts 2.1033 – 2.1061
 - FCC Title 47 of the Code of Federal Regulations, Part 90.210