

EXHIBIT 6**INDEX OF SUBMITTED MEASURED DATA**

This exhibit contains the measured data for this equipment as follows:

EXHIBIT 6A - RF Power Output**EXHIBIT 6B - Transmit Audio Response**

- 6B-1 – 467.775 MHz, 12.5 kHz Channel Spacing
- 6B-2 – 467.775 MHz, 25 kHz Channel Spacing

EXHIBIT 6C - Transmit Audio Low pass Filter Response

- 6C-1 – 467.775 MHz, 12.5 kHz Transmit Audio LPF Response
- 6C-2 – 467.775 MHz, 25 kHz Transmit Audio LPF Response

EXHIBIT 6D - Modulation Limiting Characteristics

- 6D-1 – 467.775 MHz, 12.5 kHz Carrier Squelch Mode
- 6D-2 – 467.775 MHz, 25 kHz Carrier Squelch Mode

EXHIBIT 6E – Modulation Techniques and Occupied Bandwidth

- 6E-1: 406.2 MHz, 12.5 kHz Channel Spacing, 2500Hz Audio Modulation only, 11K0F3E Mask D
- 6E-2: 406.2 MHz, O.153 Test Pattern 4FSK Voice and Data Modulation, 7K60F1W Mask D
- 6E-3: 406.2 MHz, O.153 Test Pattern 4FSK Data Modulation only, 7K60F1D Mask D
- 6E-4: 406.2 MHz, O.153 Test Pattern 4FSK Voice Modulation only, 7K60F1E Mask D
- 6E-5: 450.65 MHz, 12.5 kHz Channel Spacing, 2500Hz Audio Modulation only, 11K0F3E Mask D
- 6E-6: 450.65 MHz, O.153 Test Pattern 4FSK Voice and Data Modulation, 7K60F1W Mask D
- 6E-7: 450.65 MHz, O.153 Test Pattern 4FSK Data Modulation only, 7K60F1D Mask D
- 6E-8: 450.65 MHz, O.153 Test Pattern 4FSK Voice Modulation only, 7K60F1E Mask D
- 6E-9: 459.125 MHz, 12.5 kHz Channel Spacing, 2500Hz Audio Modulation only, 11K0F3E Mask D
- 6E-10: 467.775 MHz, 12.5 kHz Channel Spacing, 2500Hz Audio Modulation only, 11K0F3E Mask D
- 6E-11: 469.9875 MHz, 12.5 kHz Channel Spacing, 2500Hz Audio Modulation only, 11K0F3E Mask D
- 6E-12: 469.9875 MHz, O.153 Test Pattern 4FSK Voice and Data Modulation, 7K60F1W Mask D
- 6E-13: 469.9875 MHz, O.153 Test Pattern 4FSK Data Modulation only, 7K60F1D Mask D
- 6E-14: 469.9875 MHz, O.153 Test Pattern 4FSK Voice Modulation only, 7K60F1E Mask D
- 6E-15: 406.2 MHz, 25 kHz Channel Spacing, 2500Hz Audio Modulation only, 16K0F3E Mask B (Not for FCC Review)
- 6E-16: 450.65 MHz, 25 kHz Channel Spacing, 2500Hz Audio Modulation only, 16K0F3E Mask B, Mask 74.462(c)
- 6E-17: 459.125 MHz, 25 kHz Channel Spacing, 2500Hz Audio Modulation only, 16K0F3E Mask B, FCC Part 22 Limit
- 6E-18: 467.775 MHz, 25 kHz Channel Spacing, 2500Hz Audio Modulation only, 16K0F3E Mask B, Mask 80.211(f)
- 6E-19: 469.9875 MHz, 25 kHz Channel Spacing, 2500Hz Audio Modulation only, 16K0F3E Mask B (Not for FCC Review)
- 6E-20: 467.775 MHz, 25 kHz Channel Spacing, 2500Hz Audio Modulation only, 16K0F3E Mask 80.211(c)

EXHIBIT 6F - Conducted Spurious Emissions

- 6F-1 – 30 Watts, 406.2 MHz, 25 kHz Channel Spacing (Not for FCC Review)
- 6F-2 – 30 Watts, 450.025 MHz, 25 kHz Channel Spacing
- 6F-3 – 30 Watts, 459.125 MHz, 25 kHz Channel Spacing
- 6F-4 – 30 Watts, 467.775 MHz, 25 kHz Channel Spacing
- 6F-5 – 1 Watts, 450.025 MHz, 25 kHz Channel Spacing
- 6F-6 – 1 Watts, 467.775 MHz, 25 kHz Channel Spacing
- 6F-7 – 30 Watts, 406.2 MHz, Digital 12.5 kHz Channel Spacing
- 6F-8 – 30 Watts, 450.025 MHz, Digital 12.5 kHz Channel Spacing
- 6F-9 – 30 Watts, 459.125 MHz, Digital 12.5 kHz Channel Spacing
- 6F-10 – 30 Watts, 467.775 MHz, Digital 12.5 kHz Channel Spacing
- 6F-11 – 1 Watts, 450.025 MHz, Digital 12.5 kHz Channel Spacing
- 6F-12 – 1 Watts, 467.775 MHz, Digital 12.5 kHz Channel Spacing

EXHIBIT 6G – Radiated Spurious Emissions

- 6G-1 – 30 Watts, 406.2 MHz, 12.5 kHz Channel Spacing
- 6G-2 – 30 Watts, 450.65 MHz, 12.5 kHz Channel Spacing
- 6G-3 – 30 Watts, 459.125 MHz, 12.5 kHz Channel Spacing
- 6G-4 – 30 Watts, 467.775 MHz, 12.5 kHz Channel Spacing
- 6G-5 – 1 Watts, 450.65 MHz, 12.5 kHz Channel Spacing
- 6G-6 – 1 Watts, 467.775 MHz, 12.5 kHz Channel Spacing
- 6G-7 – 30 Watts, 406.2 MHz, 25 kHz Channel Spacing (Not for FCC Review)
- 6G-8 – 30 Watts, 450.65 MHz, 25 kHz Channel Spacing
- 6G-9 – 30 Watts, 459.125 MHz, 25 kHz Channel Spacing
- 6G-10 – 30 Watts, 467.775 MHz, 25 kHz Channel Spacing
- 6G-11 – 1 Watts, 450.65 MHz, 25 kHz Channel Spacing
- 6G-12 – 1 Watts, 467.775 MHz, 25 kHz Channel Spacing

EXHIBIT 6H – Frequency Stability

- 6H-1 – 467.775 MHz Frequency Stability vs. Temperature
- 6H-2 – 467.775 MHz Frequency Stability vs. Voltage

EXHIBIT 6I – Transient Frequency Behavior

- 6I-1 – 467.775 MHz, 12.5 kHz Channel Spacing Key-Up Attack Time
- 6I-2 – 467.775 MHz, 12.5 kHz Channel Spacing De-Key Decay Time
- 6I-3 – 467.775MHz, 25 kHz Channel Spacing Key-Up Attack Time
- 6I-4 – 467.775MHz, 25 kHz Channel Spacing De-Key Decay Time

**** Please note that the above data were taken following the procedures and limits outlined in TIA 603-D and RSS 119 during the month of October 2015. See Table 2 in Ex07_test_procedures**

Radio model tested: AAM28QNN9RA1AN

Important Note: The data in this test report meets or exceeds the technical requirements of FCC Rule Parts 22, 74, 80 and 90.

EXHIBIT 6A – RF POWER OUTPUT**HIGH POWER SETTING, FREQUENCY 406.2 MHz**

Measured RF Output Power:	29.5 Watts
Measured DC Voltage:	13.2 Volts
Measured DC Input Current:	5.03 Amperes

LOW POWER SETTING, FREQUENCY 406.2 MHz

Measured RF Output Power:	0.96 Watts
Measured DC Voltage:	13.2 Volts
Measured DC Input Current:	1.53 Amperes

HIGH POWER SETTING, FREQUENCY 450.65 MHz

Measured RF Output Power:	29.9 Watts
Measured DC Voltage:	13.2 Volts
Measured DC Input Current:	5.0 Amperes

LOW POWER SETTING, FREQUENCY 450.65 MHz

Measured RF Output Power:	0.97 Watts
Measured DC Voltage:	13.2 Volts
Measured DC Input Current:	1.61 Amperes

HIGH POWER SETTING, FREQUENCY 459.125 MHz

Measured RF Output Power:	29.8 Watts
Measured DC Voltage:	13.2 Volts
Measured DC Input Current:	5.57 Amperes

LOW POWER SETTING, FREQUENCY 459.65 MHz

Measured RF Output Power:	0.97 Watts
Measured DC Voltage:	13.2 Volts
Measured DC Input Current:	1.63 Amperes

HIGH POWER SETTING, FREQUENCY 467.775 MHz

Measured RF Output Power:	29.9 Watts
Measured DC Voltage:	13.2 Volts
Measured DC Input Current:	5.4 Amperes

LOW POWER SETTING, FREQUENCY 467.775 MHz

Measured RF Output Power:	0.97 Watts
Measured DC Voltage:	13.2 Volts
Measured DC Input Current:	1.62 Amperes

HIGH POWER SETTING, FREQUENCY 469.9875 MHz

Measured RF Output Power:	29.6 Watts
Measured DC Voltage:	13.2 Volts
Measured DC Input Current:	5.32 Amperes

LOW POWER SETTING, FREQUENCY 469.9875 MHz

Measured RF Output Power:	0.98 Watts
Measured DC Voltage:	13.2 Volts
Measured DC Input Current:	1.61 Amperes

EXHIBIT 6B – Transmit Audio Response

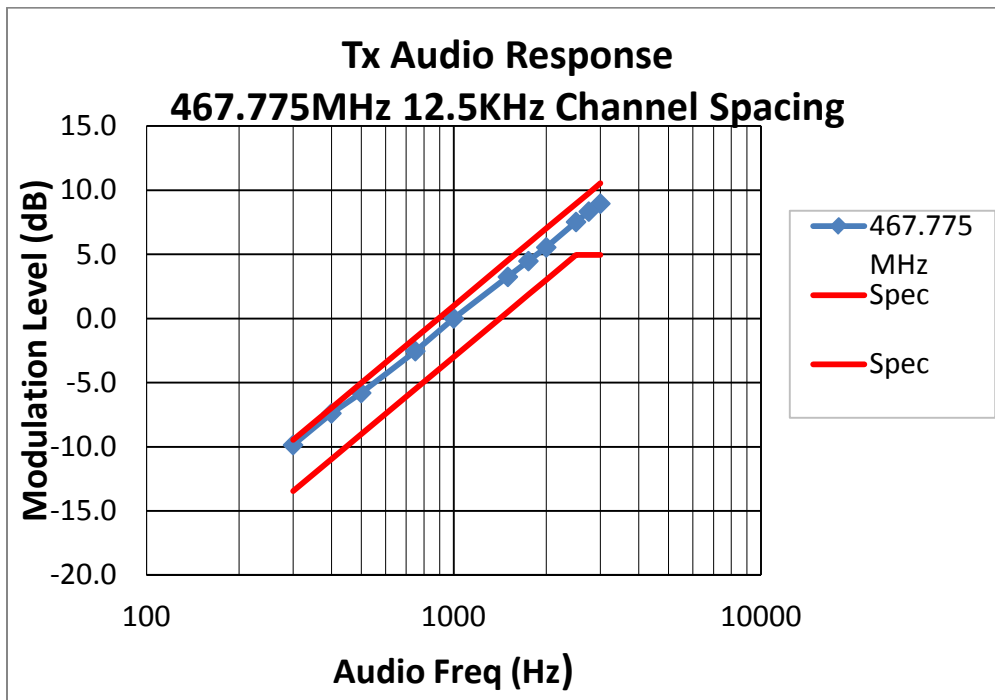


Figure 6B-1: 467.775 MHz, 12.5 kHz Channel Spacing, Transmit Audio Frequency Response

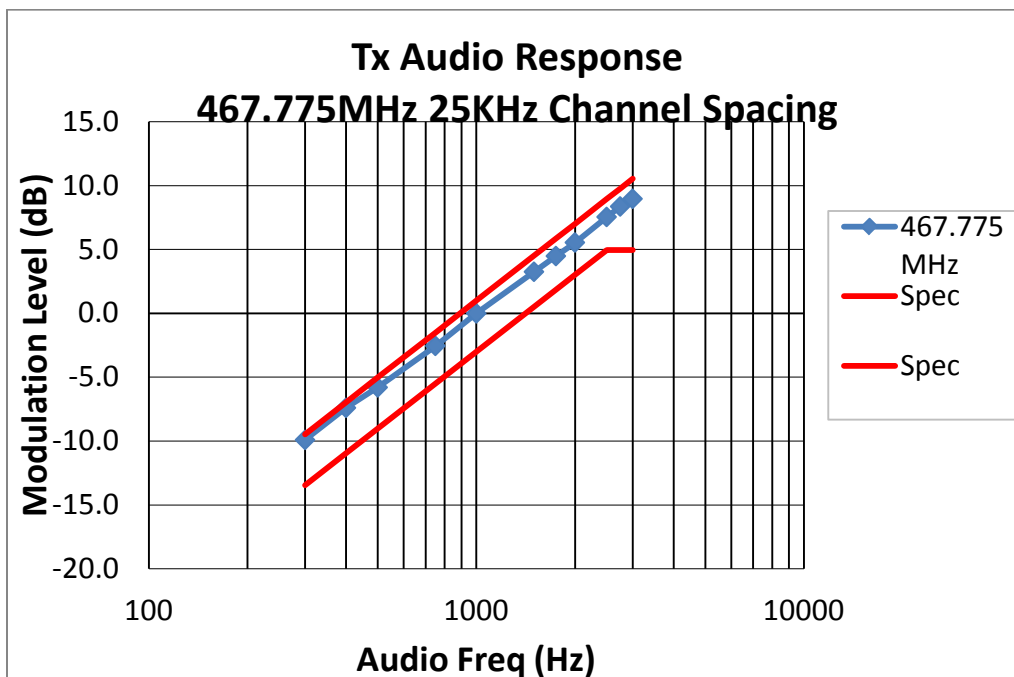


Figure 6B-2: 467.775 MHz, 25 kHz Channel Spacing, Transmit Audio Frequency Response

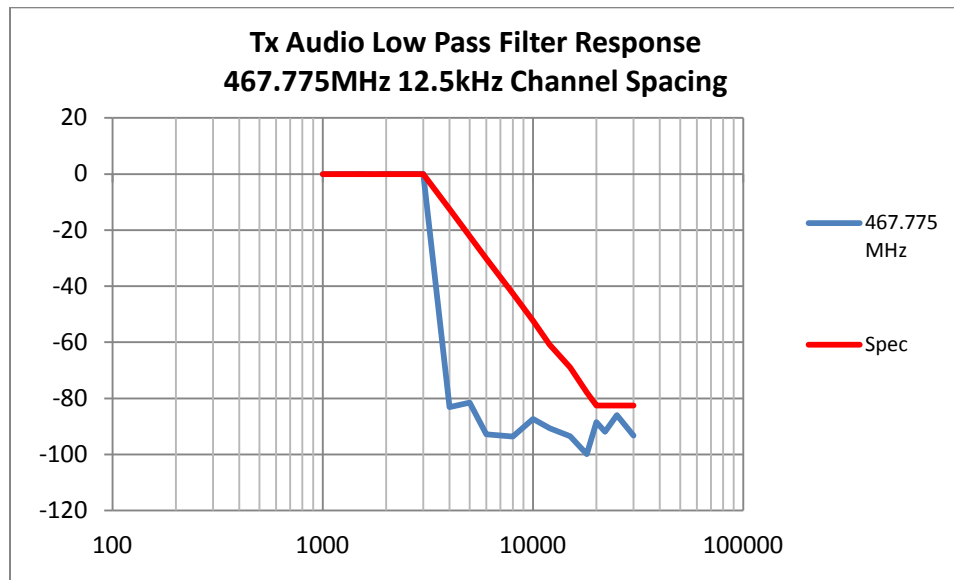
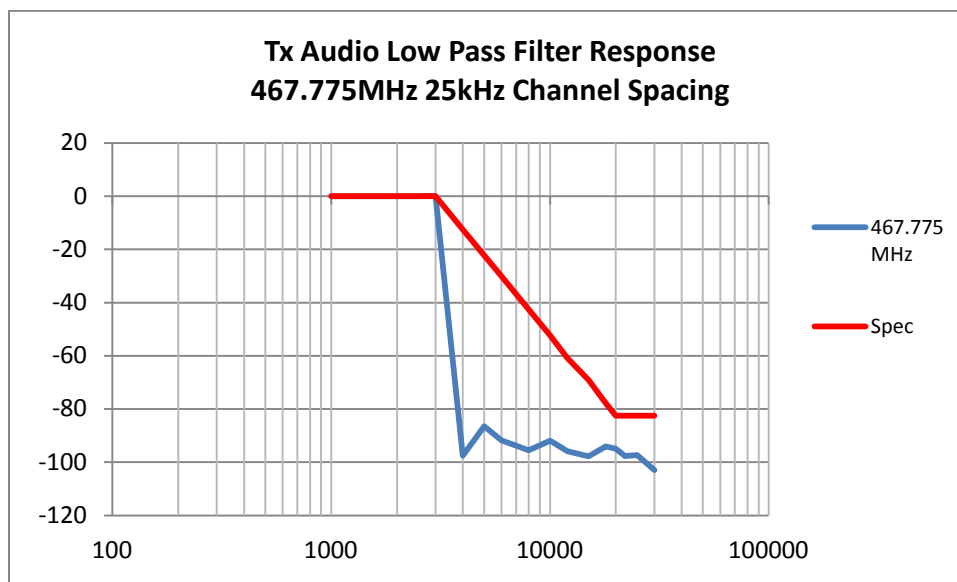
EXHIBIT 6C – Transmit Audio Post Limiter Low Pass Filter Response**Figure 6C-1:** 467.775 MHz, 12.5 kHz Channel Spacing, Transmit Audio Low Pass Filter Response**Figure 6C-2:** 467.775 MHz, 25 kHz Channel Spacing, Transmit Audio Low Pass Filter Response

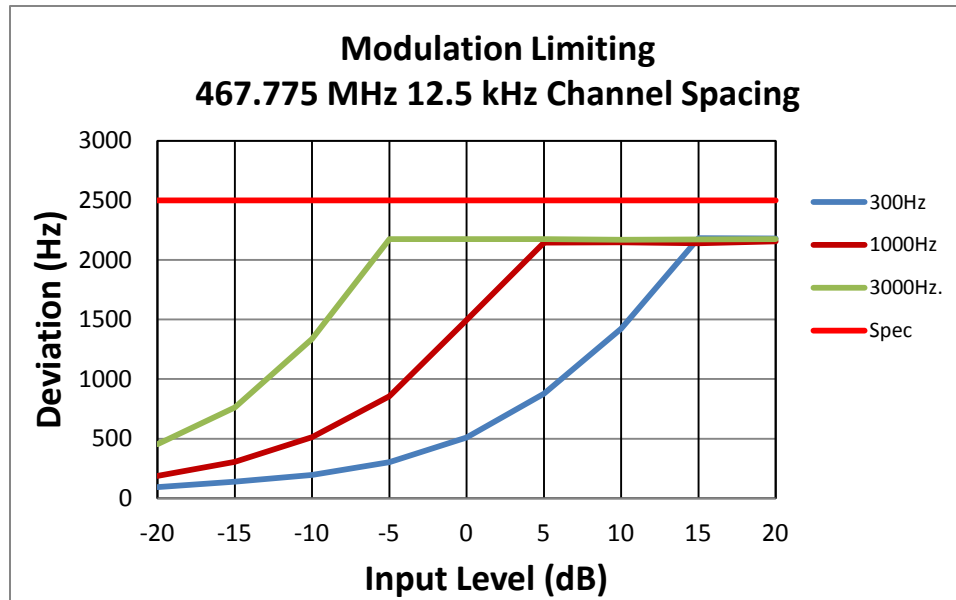
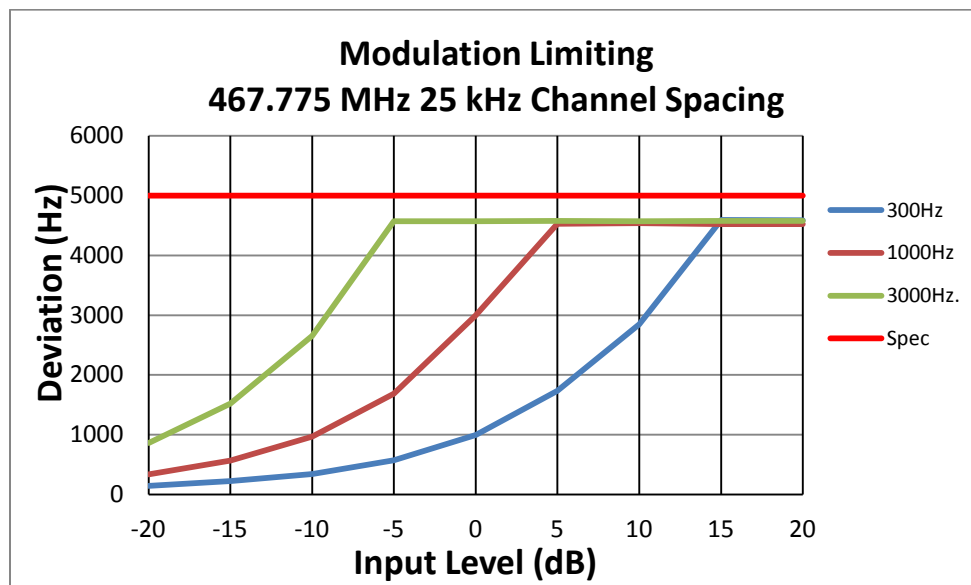
EXHIBIT 6D – Modulation Limiting Characteristic**Figure 6D-1:** 467.775 MHz, 12.5 KHz Channel Spacing, Modulation Limiting**Figure 6D-2:** 467.775 MHz, 25 KHz Channel Spacing, Modulation Limiting

EXHIBIT 6E – Modulation Techniques

The transmitter is capable of the following types of modulation:

- i) Modulation of PL (Private Line) – Direct FM tone modulation of 67 Hz to 250.3 Hz at 15% of full system deviation. Also referred to as TPL (Tone Private Line).
- ii) Modulation of DPL (Digital Private Line) – Direct FM modulation at 134 bps at 15% of full system deviation.
- iii) Modulation of 2000/3000 Hz FSK Data – FM modulation at nominally 60% of full system deviation.
- iv) Modulation of DTMF (Dual Tone Multi Frequency) – FM modulation at nominally 60% of full system deviation
- v) Modulation of 9600 bps 4 level FSK Data

Standard Audio Modulation (25 kHz Channelization, Analog Voice) (Not for FCC Review)

Per CFR Title 47, Part 2, Section 2.201, the Carson's Rule calculation for necessary bandwidth, $BW = 2M + 2DK$, where M = maximum modulating frequency in Hz, D = peak deviation in Hz, and K=1, is as follows:

In this case the maximum modulating frequency is 3.0 kHz with a 5.0 kHz deviation.

$$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 5.0 \text{ kHz}) = 16 \text{ kHz (16K0 designator)}$$

Per CFR Title 47, Part 2, Section 2.201:

Frequency Modulation	F
A single channel containing analogue information	3
Telephony (including sound broadcasting)	E

The complete emissions designator for this transmitter is **16K0F3E**.

Standard Audio Modulation (12.5 kHz Channelization, Analog Voice)

Per CFR Title 47, Part 2, Section 2.201, the Carson's Rule calculation for necessary bandwidth, $BW = 2M + 2DK$, where M = maximum modulating frequency in Hz, D = peak deviation in Hz, and K=1, is as follows:

In this case the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.

$$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 2.5 \text{ kHz}) = 11 \text{ kHz (11K0 designator)}$$

Per CFR Title 47, Part 2, Section 2.201:

Frequency Modulation	F
A single channel containing analogue information	3
Telephony (including sound broadcasting)	E

The complete emissions designator for this transmitter is **11K0F3E**.

4 Level FSK Digital Modulation Techniques

The modulation sends 4800 symbols/sec with each symbol conveying 2 bits of information for a data rate of 9600 bps in a 12.5 kHz channel, which is equivalent to 4800 bps per 6.25kHz. The maximum deviation D , of the symbol is defined as:

$$D = 3h / 2T$$

where:

h is the deviation index defined for the modulation
 T is the symbol time (1/4800) in seconds

The deviation index, h , is 0.27. This yields a symbol deviation of 1.944 kHz at the symbol center. The mapping between symbols and bits is shown below:


Information Bits		Symbol	4FSK Deviation
Bit 1	Bit 0		
0	1	+3	+1.944 kHz
0	0	+1	+0.648 kHz
1	0	-1	-0.648 kHz
1	1	-3	-1.944 kHz

A Square Root Raised Cosine Filter is implemented for the modulation low pass filter. The input to the modulation low pass filter consists of a series of impulses separated in time by 208.33 microseconds (1/4800 sec). The group delay of the filter is flat over the passband for $|f| < 2880$ Hz. The magnitude response of the filter is given by the following formula.

$|F(f)|$ = magnitude response of the Square Root Raised Cosine Filter

$|F(f)| = 1$ for $|f| \leq 1920$ Hz
 $|F(f)| = |\cos(\pi f / 1920)|$ for $1920 \text{ Hz} < |f| < 2880 \text{ Hz}$
 $|F(f)| = 0$ for $|f| > 2880 \text{ Hz}$
where f = frequency in hertz.

The 4FSK modulator consists of a Square Root Raised Cosine Filter, cascaded with a frequency modulator.



4 Level FSK Digital Modulation (12.5 kHz Channelization, Digital Data)

Measurement's per Rule Part 2.202(c)(4) where employed because Part 2.202(g) Table III A formulation produces an excessive result using the value of K recommended in the Table. Therefore, the 99% energy rule (Title 47 CFR 2.989) was used for digital mode and is more accurate than Carson's rule. It states that 99% of the modulation energy falls within X kHz, which in this case is 7.6 kHz (**7K60** designator).

Per CFR Title 47, Part 2, Section 2.201:

Frequency Modulation	F
A single channel containing quantized or digital information without the use of a modulating sub-carrier, excluding time-division multiplex	1
Data Transmission, telemetry, telecommand	D

Note: This product utilizes a Time Division Multiple Access (TDMA) protocol.

The complete emissions designator for this transmitter is **7K60F1D**.

4 Level FSK Digital Modulation (12.5 kHz Channelization, Digital Voice)

Measurement's per Rule Part 2.202(c)(4) where employed because Part 2.202(g) Table III A formulation produces an excessive result using the value of K recommended in the Table. Therefore the 99% energy rule

(title 47CFR2.989) was used for digital mode and is more accurate than Carson's rule. It states that 99% of the modulation energy falls within X kHz, which in this case is 7.6 kHz (**7K60** designator).

Per CFR Title 47, Part 2, Section 2.201:

Frequency Modulation	F
A single channel containing quantized or digital information without the use of a modulating sub-carrier, excluding time-division multiplex	1
Telephony (including sound broadcasting)	E

Note: This product utilizes a Time Division Multiple Access (TDMA) protocol.

The complete emissions designator for this transmitter is **7K60F1E**.

Digital (12.5 kHz Channelization, Digital TDMA)

Measurement's per Rule Part 2.202(c)(4) where employed because Part 2.202(g) Table III A formulation produces an excessive result using the value of K recommended in the Table. Therefore the 99% energy rule (title 47CFR2.989) was used for digital mode and is more accurate than Carson's rule. It states that 99% of the modulation energy falls within X kHz, which in this case is 7.6 kHz (**7K60** designator).

Per CFR Title 47, Part 2, Section 2.201:

Frequency Modulation	F
A single channel containing quantized or digital information without the use of a modulating sub-carrier, excluding time-division multiplex	1
Combination of Data Transmission, telemetry, telecommand (D), and Telephony (E)...	W

Note: This product utilizes a Time Division Multiple Access (TDMA) protocol.

The complete emissions designator for this transmitter is **7K60F1W**.

Digital Modulation (12.5 kHz Channelization, Digital Data)

Measurement's per Rule Part 2.202(c)(4) where employed because Part 2.202(g) Table III A formulation produces an excessive result using the value of K recommended in the Table. Therefore, the 99% energy rule (Title 47 CFR 2.989) was used for digital mode and is more accurate than Carson's rule. It states that 99% of the modulation energy falls within X kHz, which in this case is 7.6 kHz (**7K60** designator).

Per CFR Title 47, Part 2, Section 2.201:

Frequency Modulation	F
Case not otherwise covered	X
Data Transmission, telemetry, telecommand	D

Note: This product utilizes a Time Division Multiple Access (TDMA) protocol.

The complete emissions designator for this transmitter is **7K60FXD**.

Digital Modulation (12.5 kHz Channelization, Digital Voice)

Measurement's per Rule Part 2.202(c)(4) where employed because Part 2.202(g) Table III A formulation produces an excessive result using the value of K recommended in the Table. Therefore the 99% energy rule (title 47CFR2.989) was used for digital mode and is more accurate than Carson's rule. It states that 99% of the modulation energy falls within X kHz, which in this case is 7.6 kHz (**7K60** designator).

Per CFR Title 47, Part 2, Section 2.201:

Frequency Modulation	F
Case not otherwise covered	X
Telephony (including sound broadcasting)	E

Note: This product utilizes a Time Division Multiple Access (TDMA) protocol.

The complete emissions designator for this transmitter is **7K60FXE**.

OCCUPIED BANDWIDTH MEASUREMENT

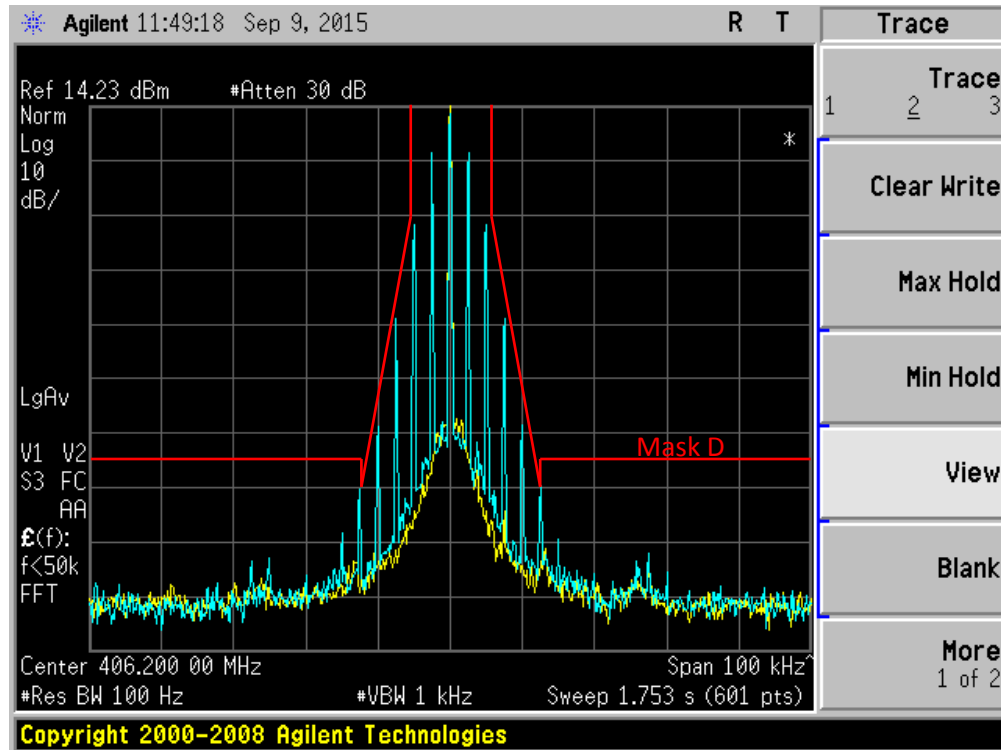


Figure 6E-1: 406.2 MHz, 12.5 kHz Channel Spacing, 2500Hz Audio Modulation only, 11K0F3E Mask D

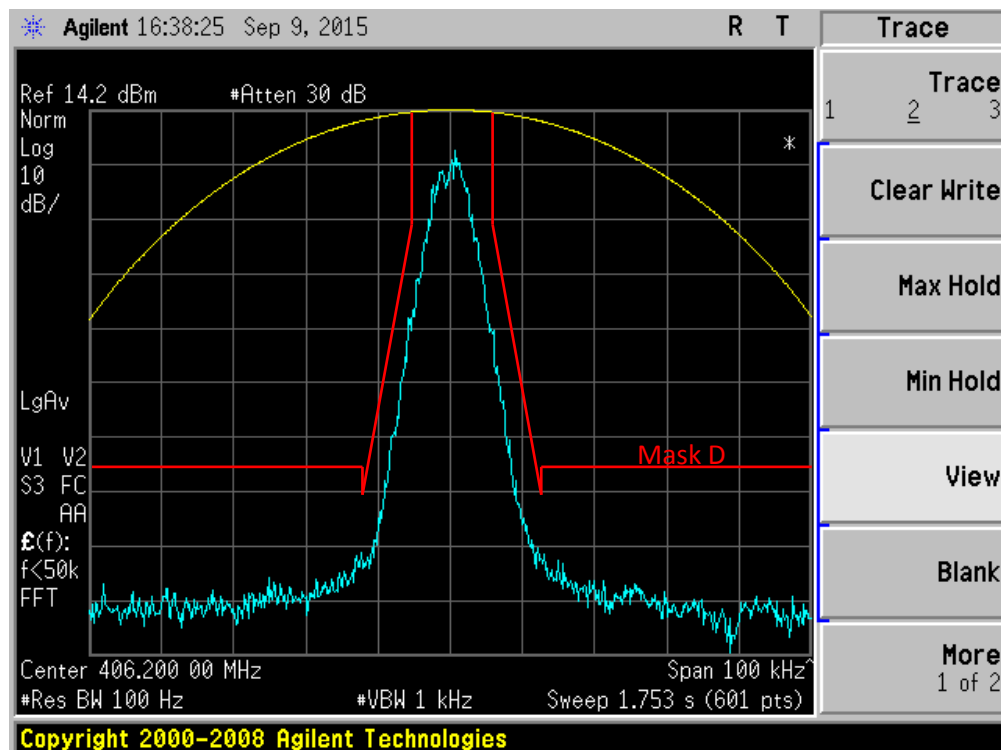


Figure 6E-2: 406.2 MHz, O.153 Test Pattern 4FSK Voice and Data Modulation, 7K60F1W Mask D

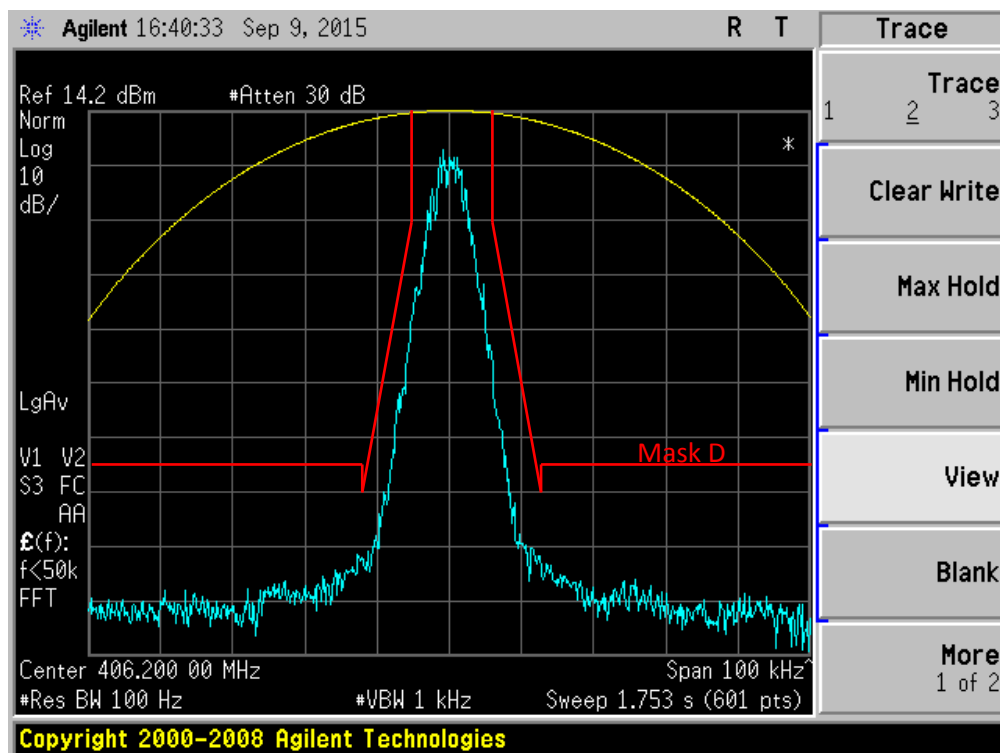


Figure 6E-3: 406.2 MHz, O.153 Test Pattern 4FSK Data Modulation only, 7K60F1D Mask D

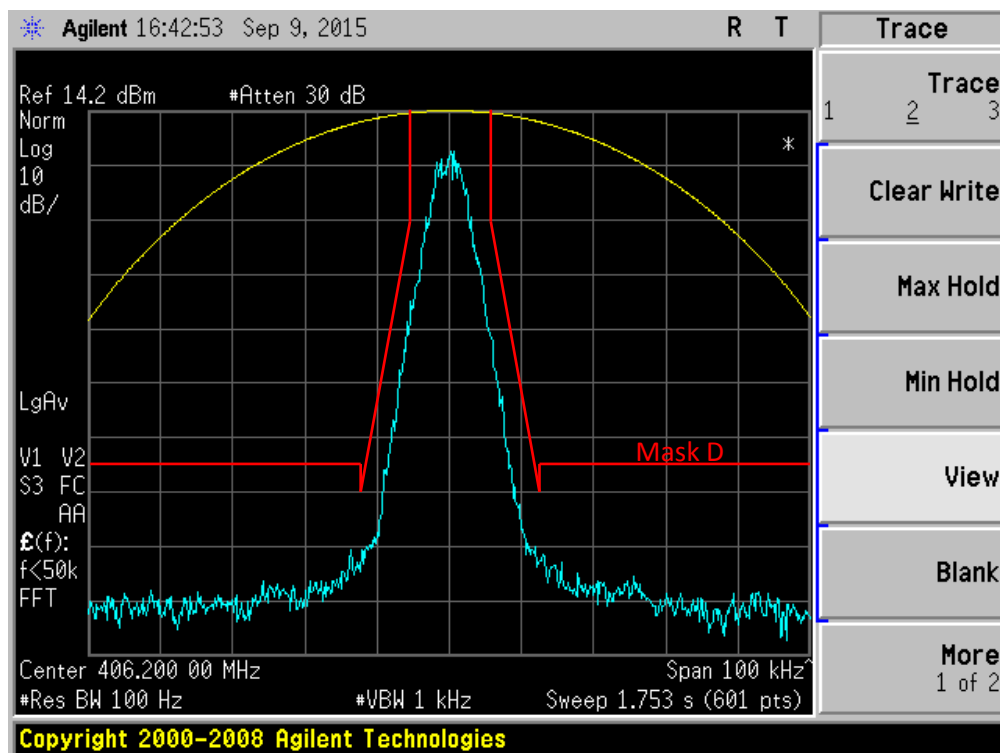


Figure 6E-4: 406.2 MHz, O.153 Test Pattern 4FSK Voice Modulation only, 7K60F1E Mask D

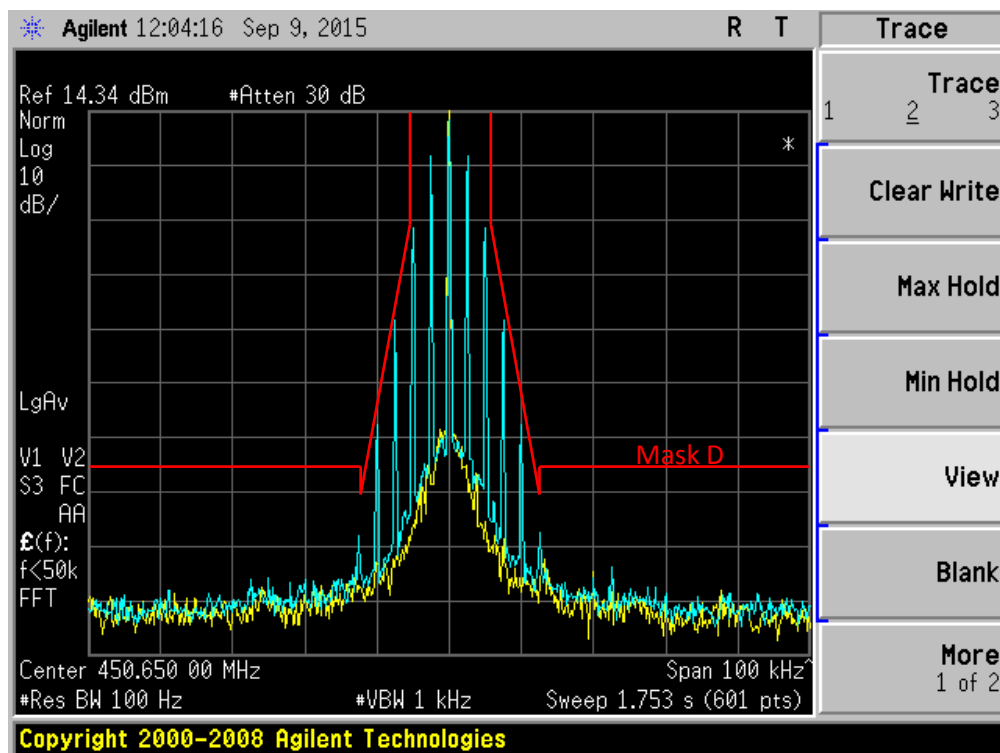


Figure 6E-5: 450.65 MHz, 12.5 kHz Channel Spacing, 2500Hz Audio Modulation only, 11K0F3E Mask D

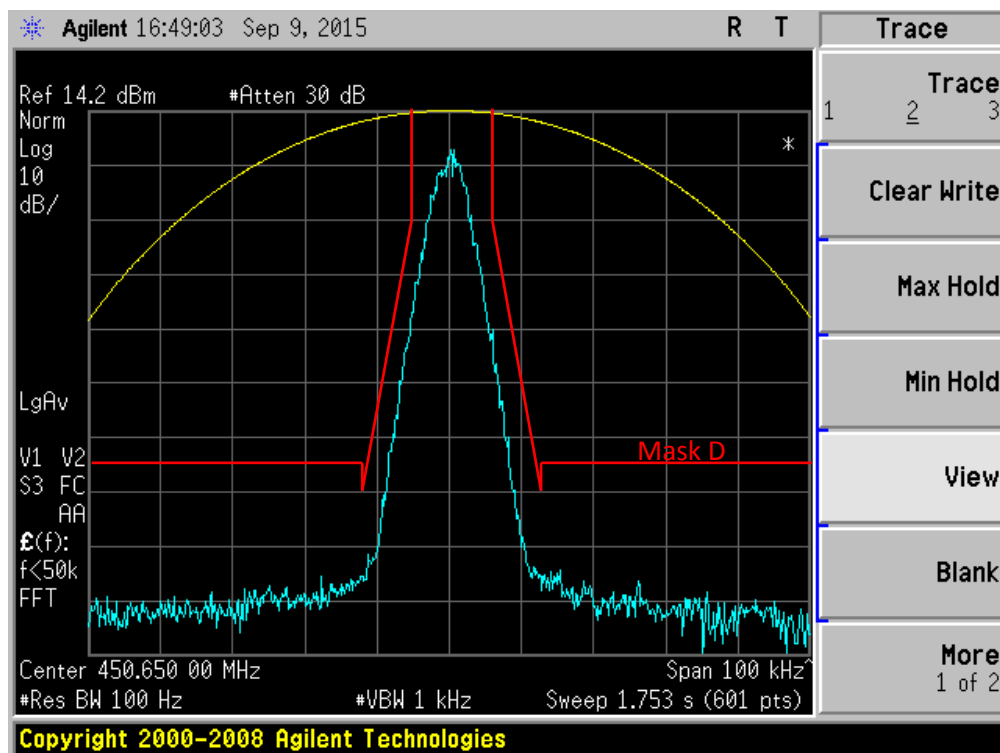


Figure 6E-6: 450.65 MHz, O.153 Test Pattern 4FSK Voice and Data Modulation, 7K60F1W Mask D

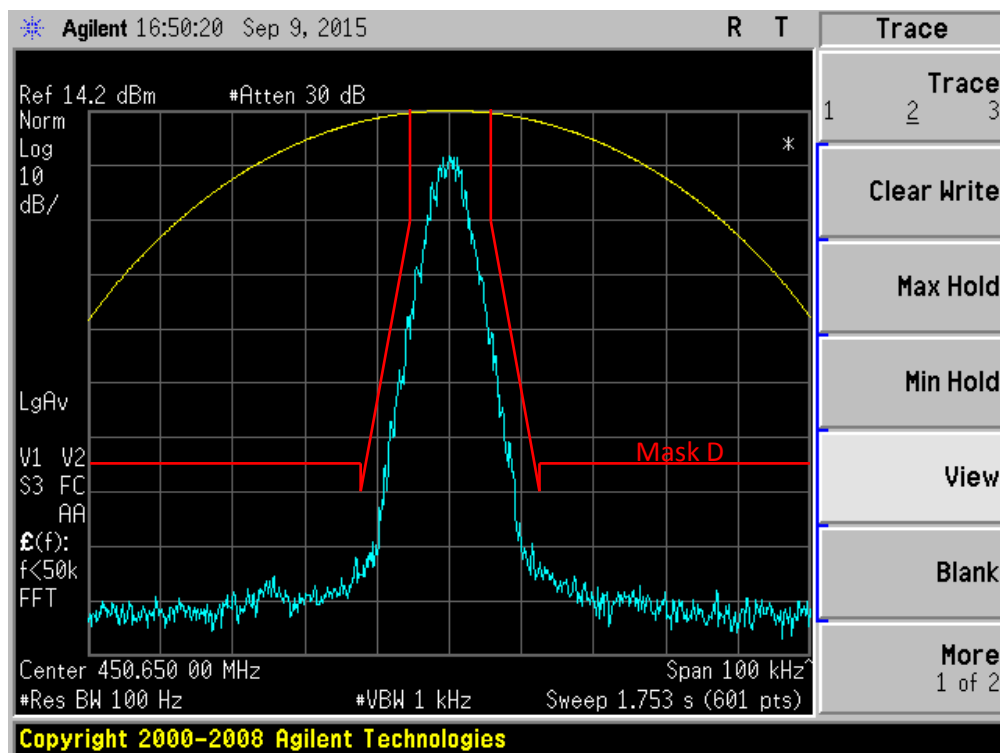


Figure 6E-7: 450.65 MHz, O.153 Test Pattern 4FSK Data Modulation only, 7K60F1D Mask D

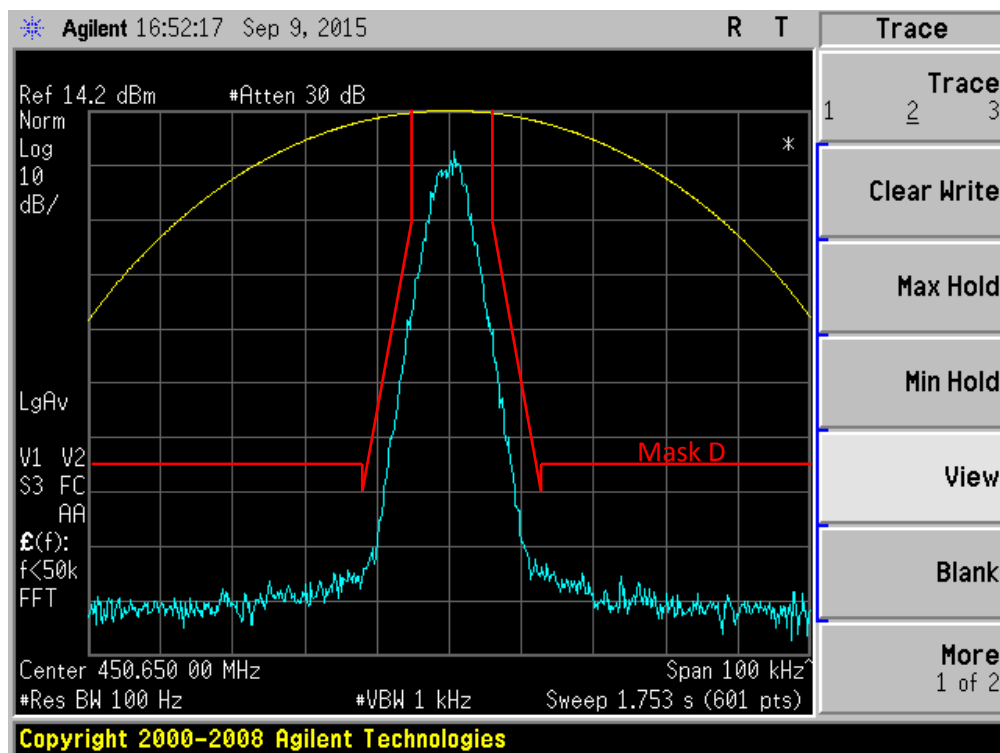


Figure 6E-8: 450.65 MHz, O.153 Test Pattern 4FSK Voice Modulation only, 7K60F1E Mask D

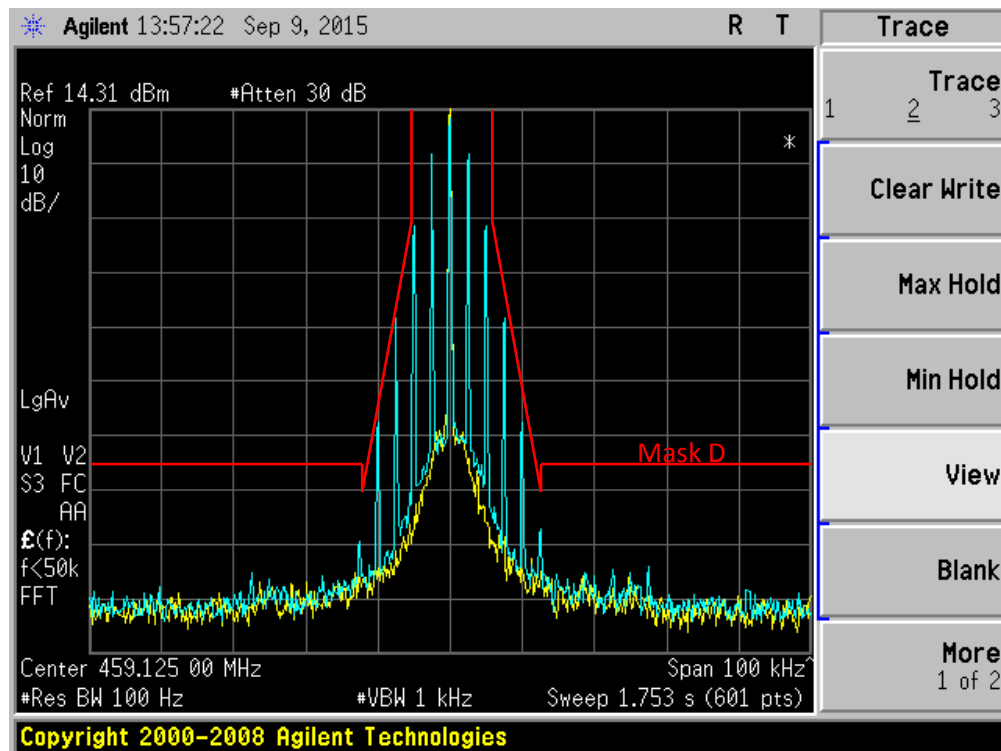


Figure 6E-9: 459.125 MHz, 12.5 kHz Channel Spacing, 2500Hz Audio Modulation only, 11K0F3E Mask D

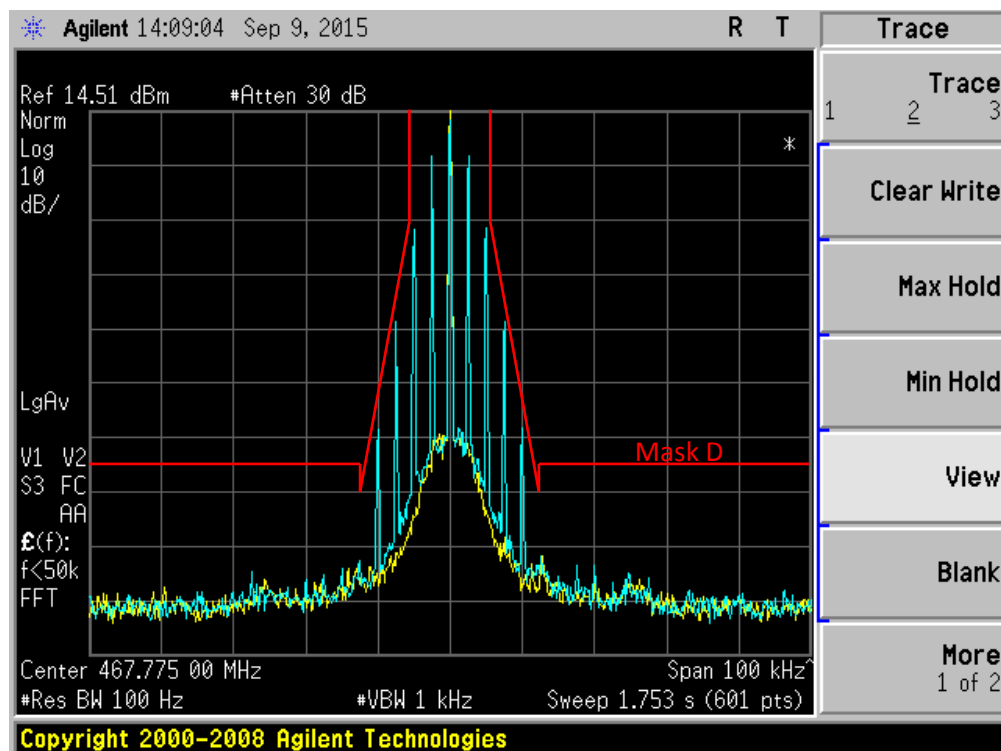


Figure 6E-10: 467.775 MHz, 12.5 kHz Channel Spacing, 2500Hz Audio Modulation only, 11K0F3E Mask D

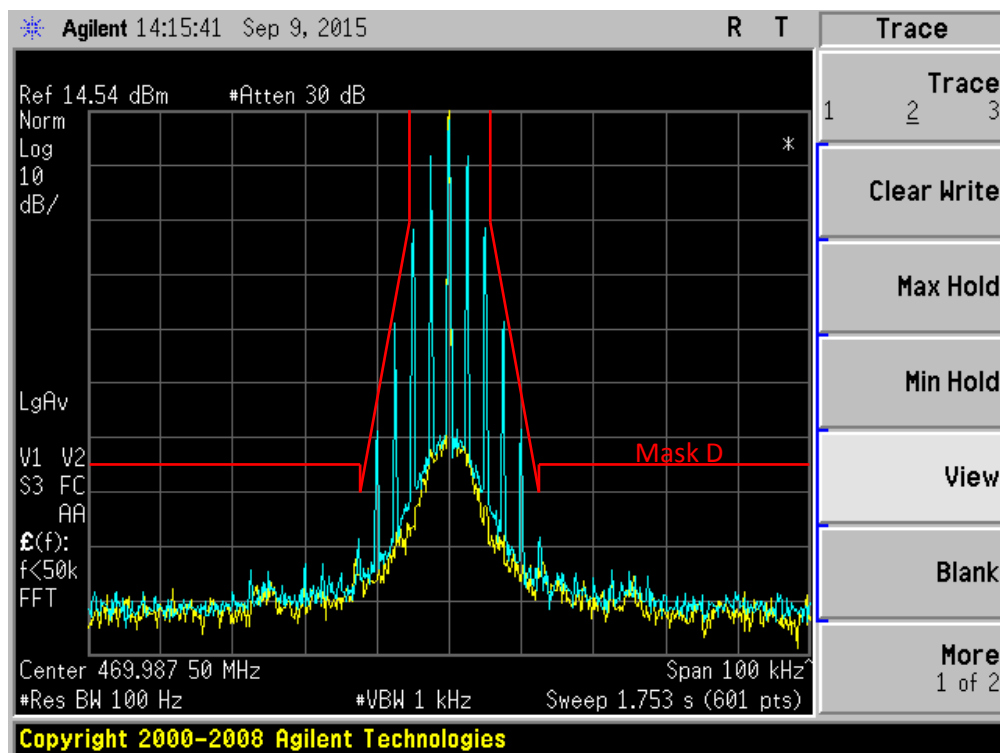


Figure 6E-11: 469.9875 MHz, 12.5 kHz Channel Spacing, 2500Hz Audio Modulation only, 11K0F3E Mask D

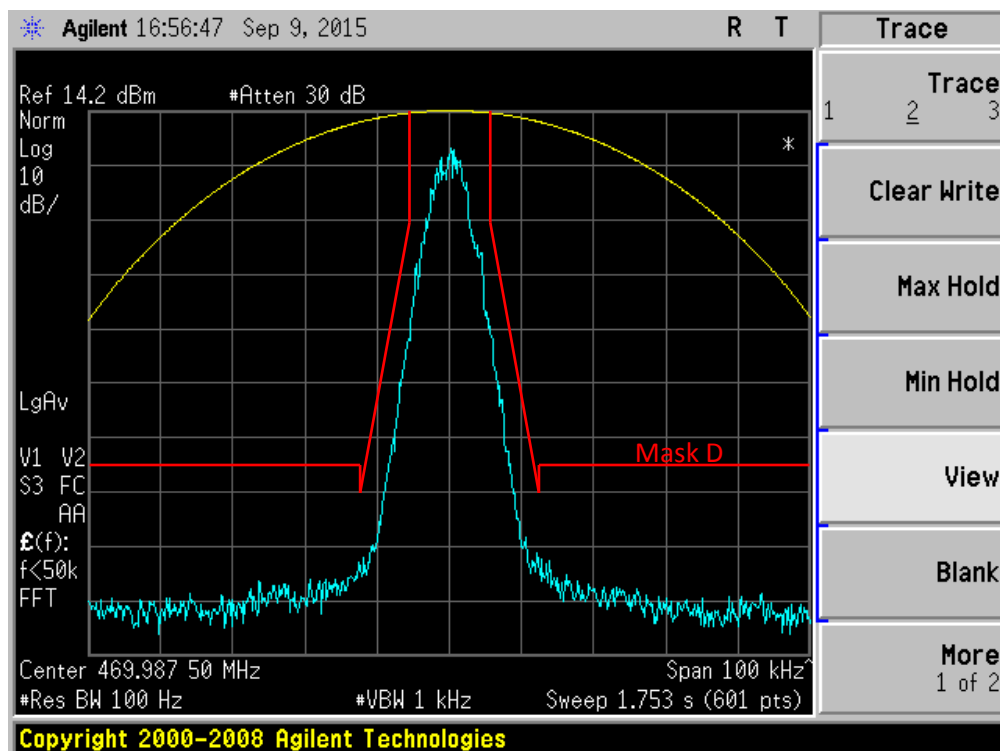


Figure 6E-12: 469.9875 MHz, O.153 Test Pattern 4FSK Voice and Data Modulation, 7K60F1W Mask D

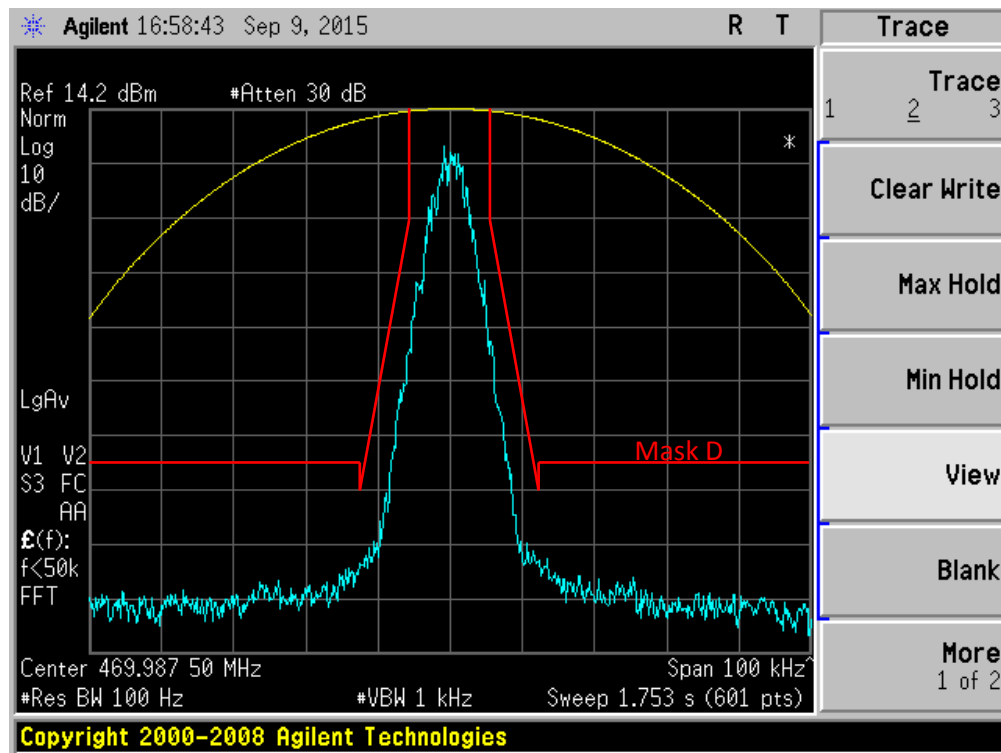


Figure 6E-13: 469.9875 MHz, O.153 Test Pattern 4FSK Data Modulation only, 7K60F1D Mask D

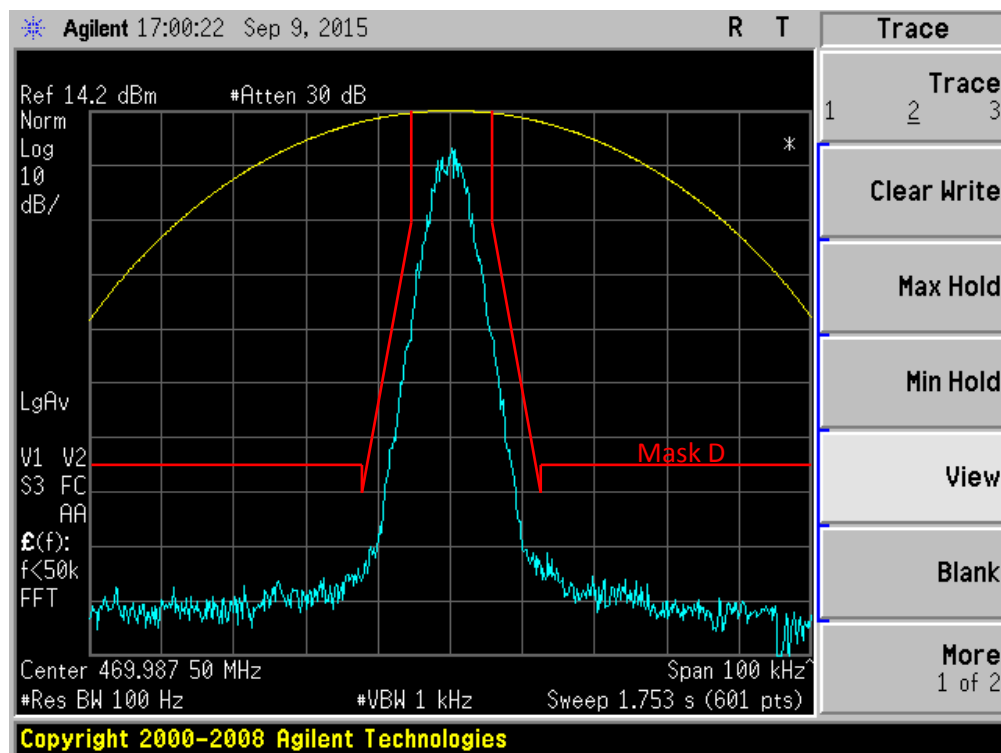


Figure 6E-14: 469.9875 MHz, O.153 Test Pattern 4FSK Voice Modulation only, 7K60F1E Mask D

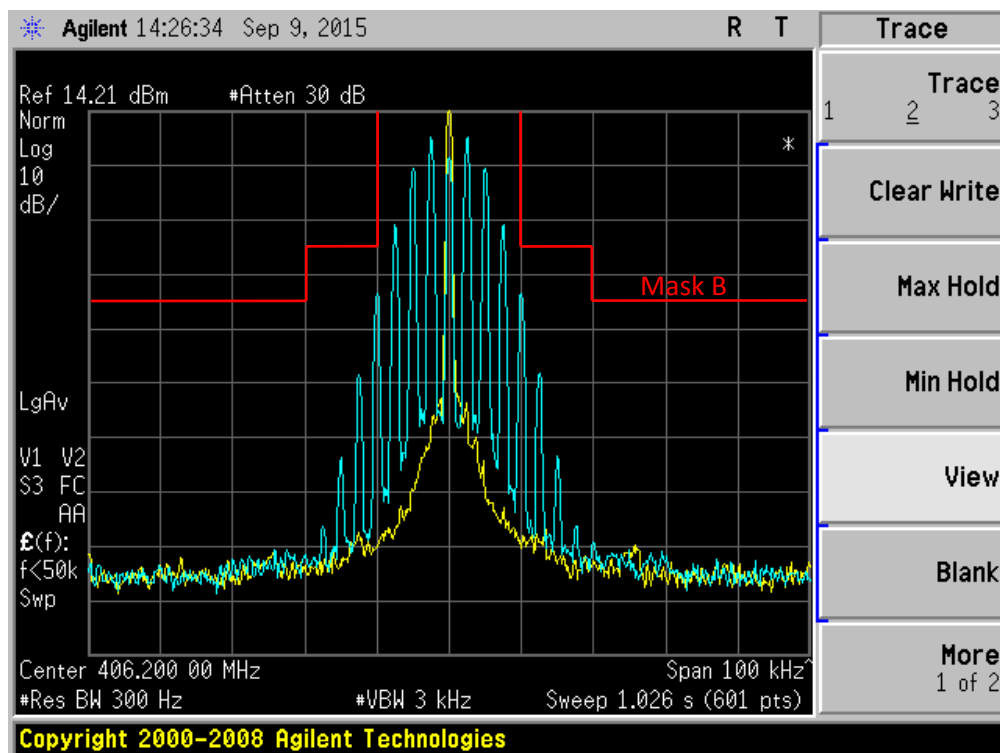


Figure 6E-15: 406.2 MHz, 25 kHz Channel Spacing, 2500Hz Audio Modulation only, 16K0F3E Mask B (Not for FCC Review)

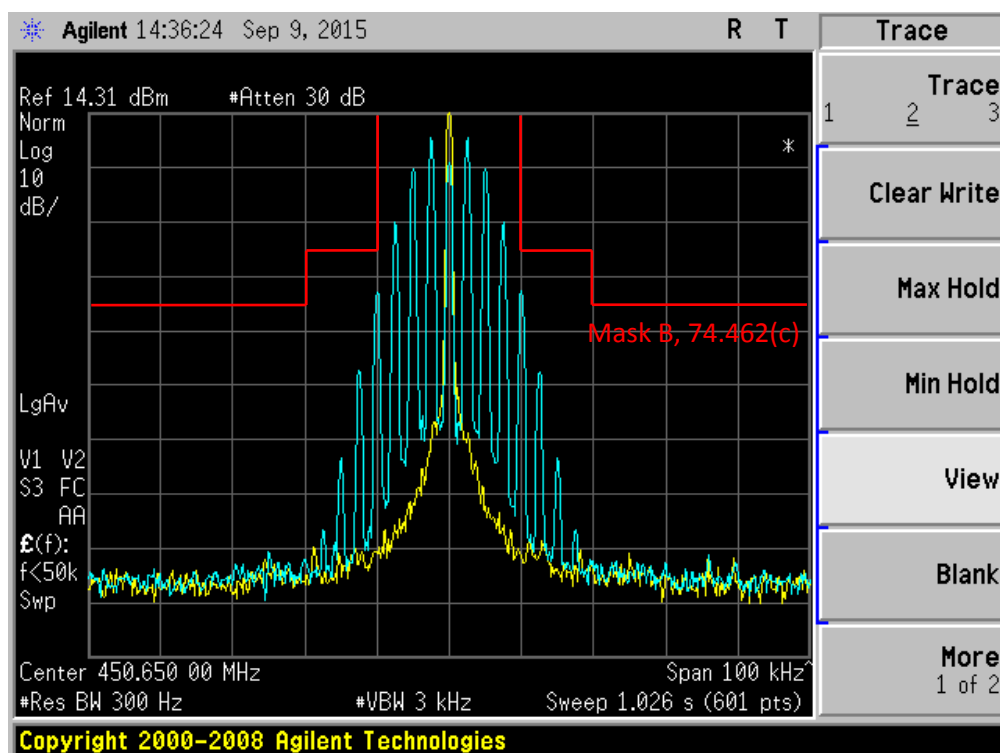


Figure 6E-16: 450.65 MHz, 25 kHz Channel Spacing, 2500Hz Audio Modulation only, 16K0F3E Mask B, Mask 74.462(c)

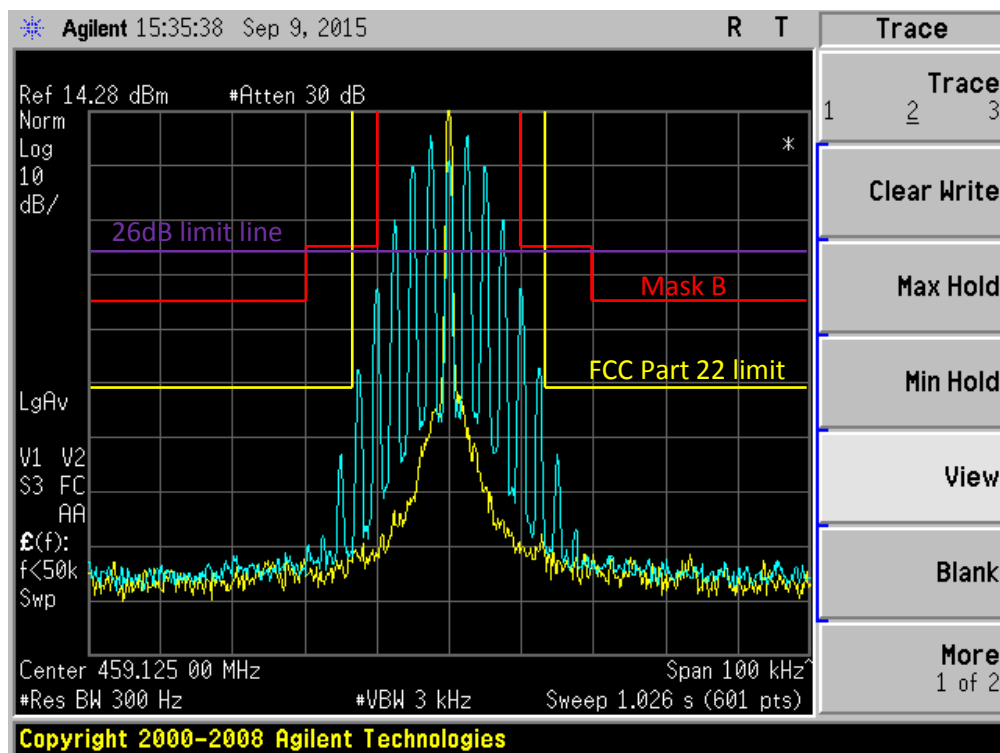


Figure 6E-17: 459.125 MHz, 25 kHz Channel Spacing, 2500Hz Audio Modulation only, 16K0F3E Mask B, FCC Part 22 Limit

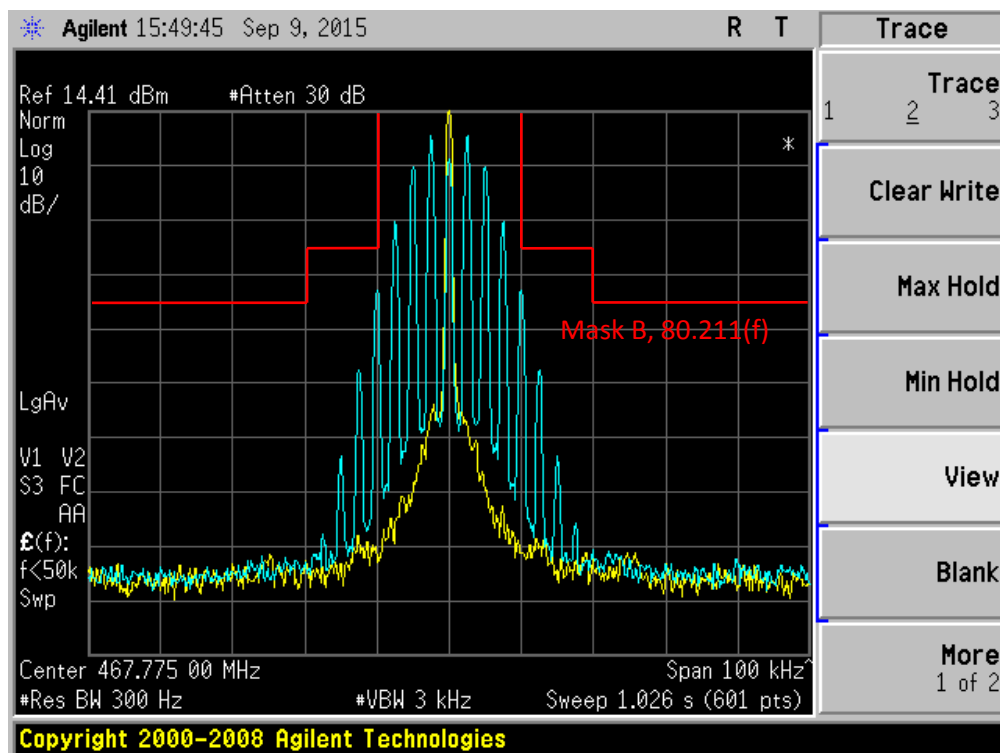


Figure 6E-18: 467.775 MHz, 25 kHz Channel Spacing, 2500Hz Audio Modulation only, 16K0F3E Mask B, Mask 80.211(f)

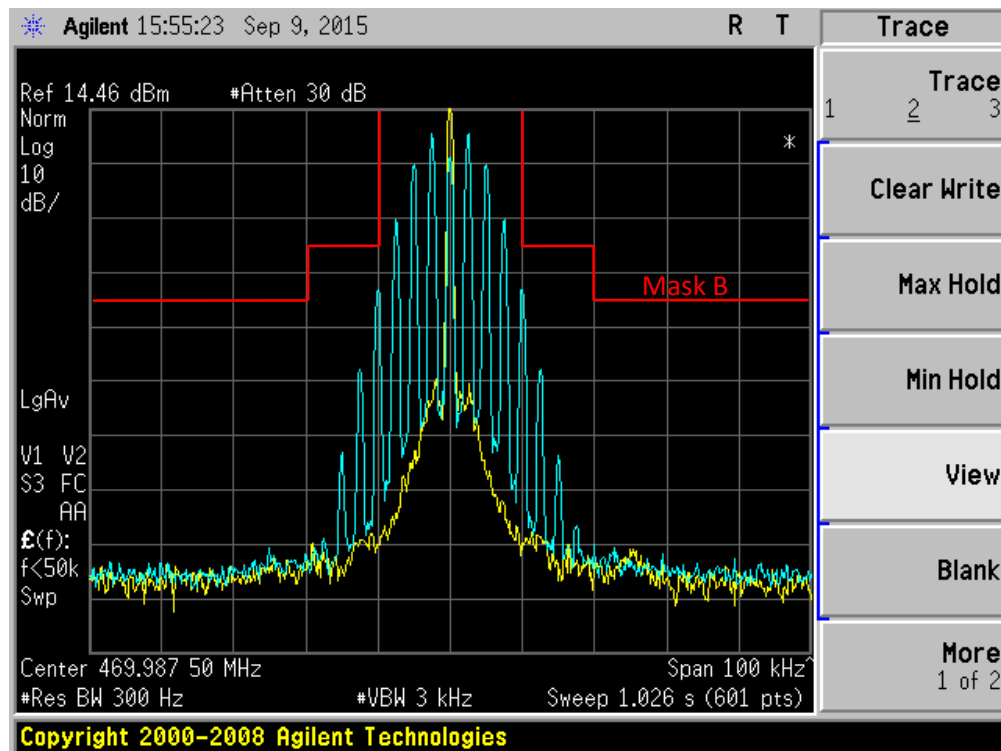


Figure 6E-19: 469.9875 MHz, 25 kHz Channel Spacing, 2500Hz Audio Modulation only, 16K0F3E Mask B (Not for FCC Review)

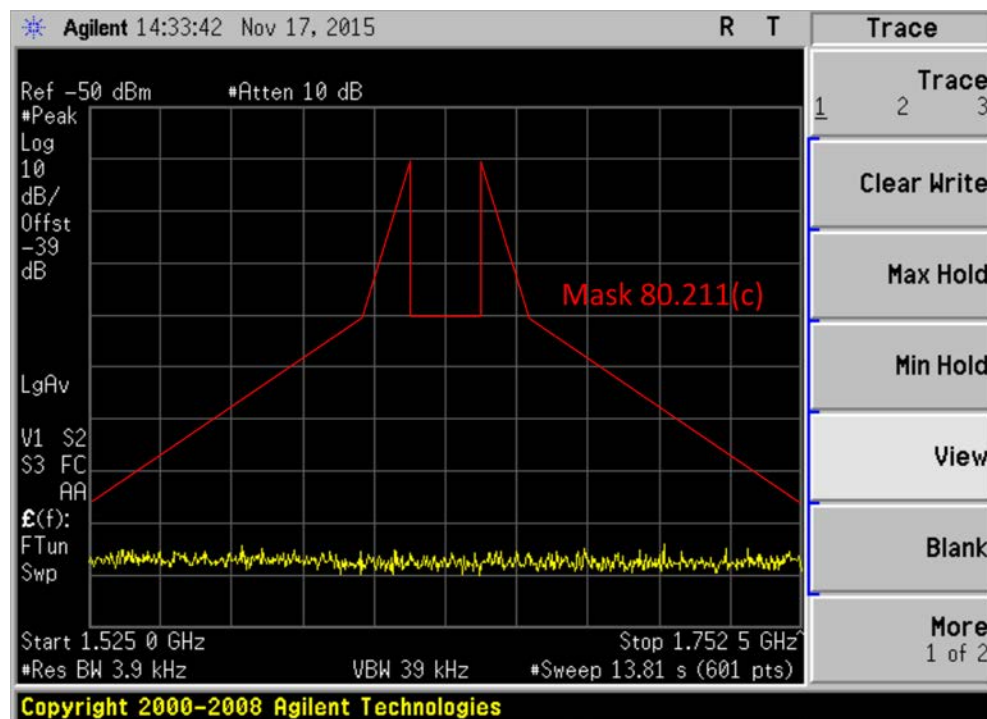


Figure 6E-20: 467.775 MHz, 25 kHz Channel Spacing, 2500Hz Audio Modulation only, 16K0F3E Mask 80.211(c)

****NOTE:-**

- For 4FSK Digital Modulation, 12.5 kHz Data 7K60F1D & 7K60FXD would be the same. Therefore only measurements with 7K60F1D shown above.
- For 4FSK Digital Modulation, 12.5 kHz Voice 7K60F1E & 7K60FXE would be the same. Therefore only measurements with 7K60F1E shown above.
- All measurements of Occupied Bandwidth which are shown on the above plots are measured using a Spectrum Analyzer
- Measurement using a Spectrum Analyzer must use a 30dB attenuation in order to avoid damage to it
- Therefore the reference power level (Ref) shown on each plot refers to its true power level

EXHIBIT 6F – Transmitter Conducted Spurious Emissions

Note: Display lines on graphs correspond to the FCC limit of – 13dBm (25 kHz) & -20dBm (12.5 kHz).

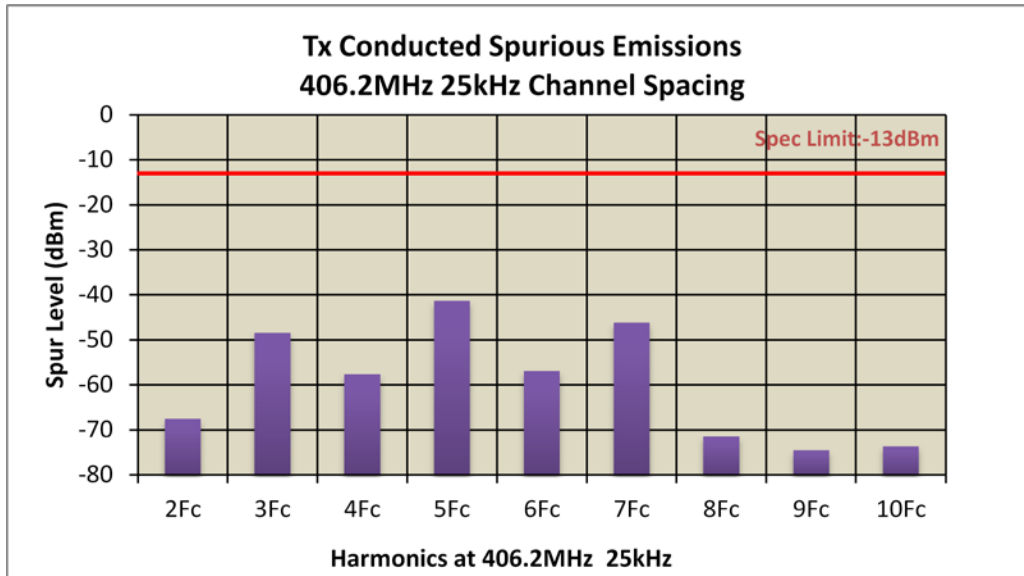


Figure 6F-1: 30 W Harmonic of Carrier 406.2 MHz, 25 kHz Channel Spacing
(Not for FCC Review)

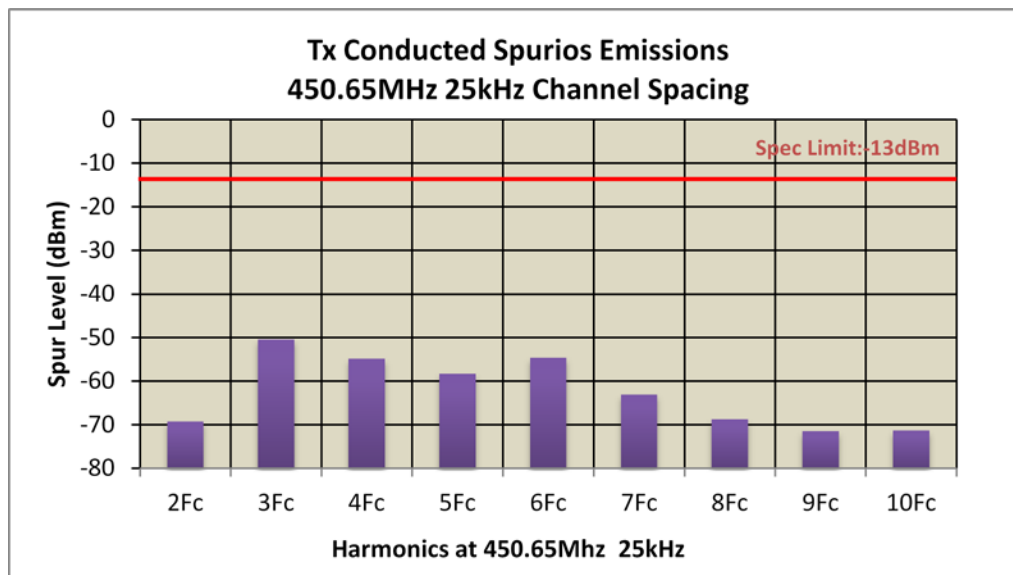


Figure 6F-2: 30 W Harmonic of Carrier 450.65 MHz, 25 kHz Channel Spacing

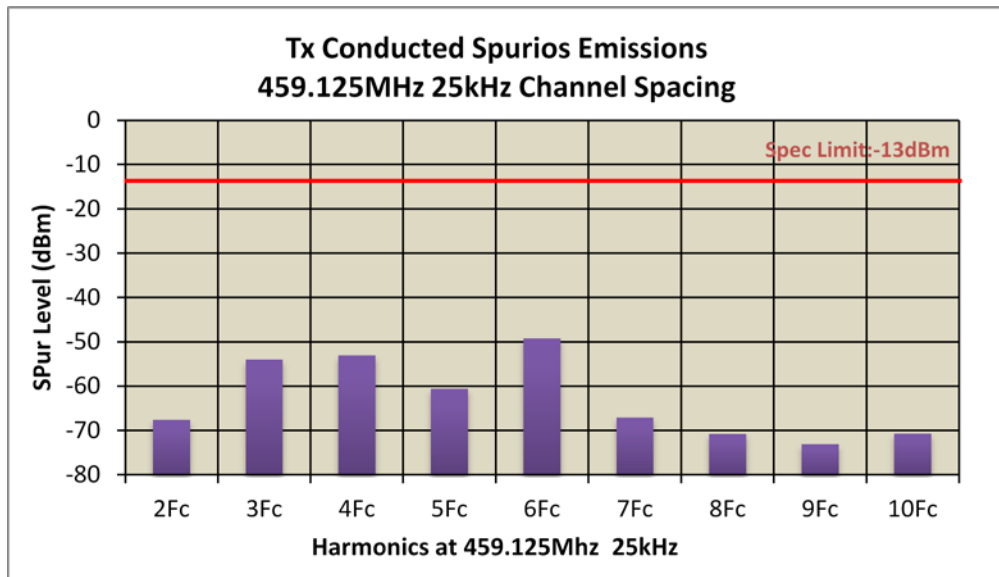


Figure 6F-3: 30 W Harmonic of Carrier 459.125 MHz, 25 kHz Channel Spacing

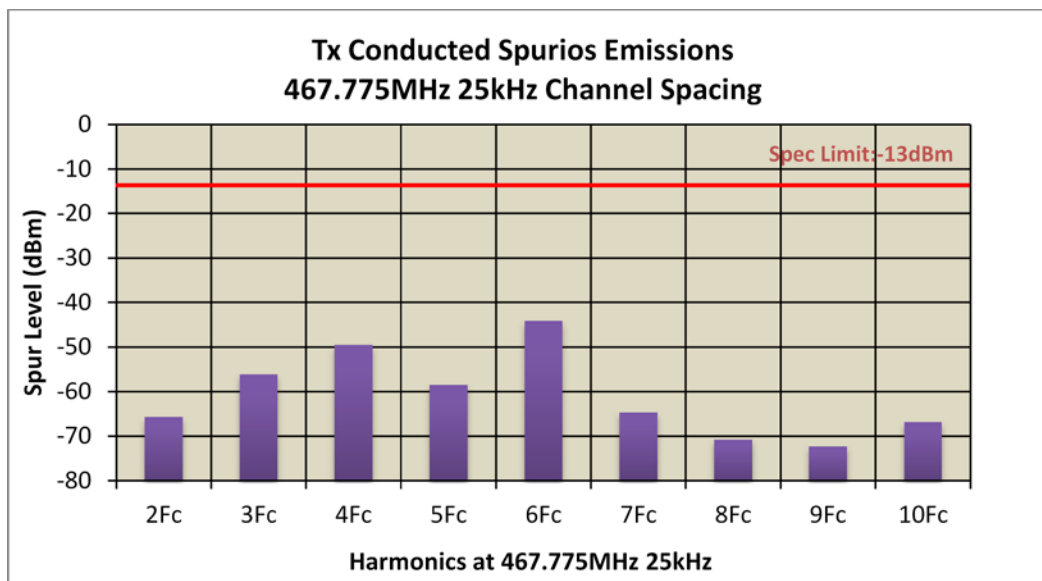


Figure 6F-4: 30 W Harmonic of Carrier 467.775 MHz, 25 kHz Channel Spacing

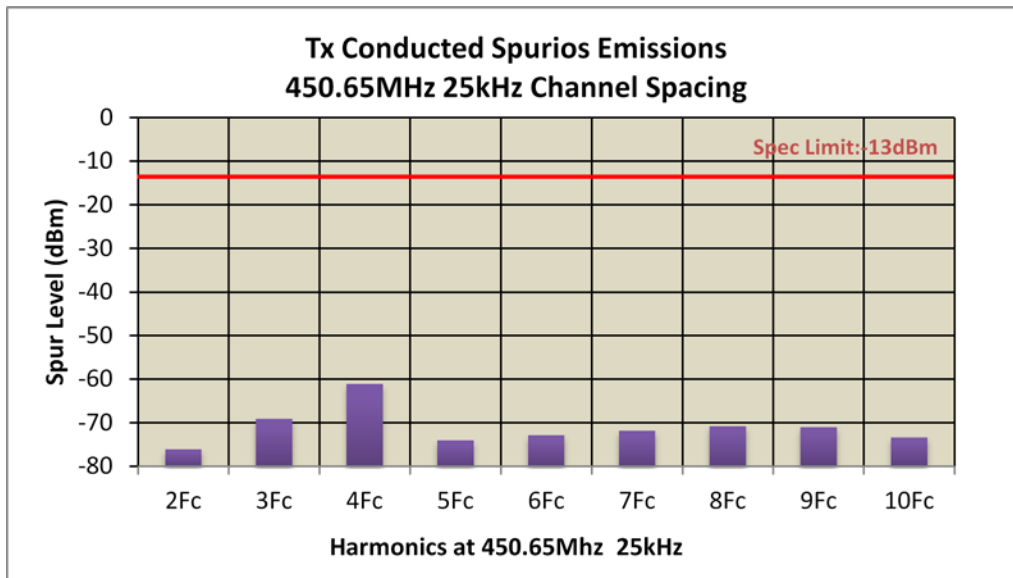


Figure 6F-5: 1W Harmonic of Carrier 450.65 MHz, 25 kHz Channel Spacing

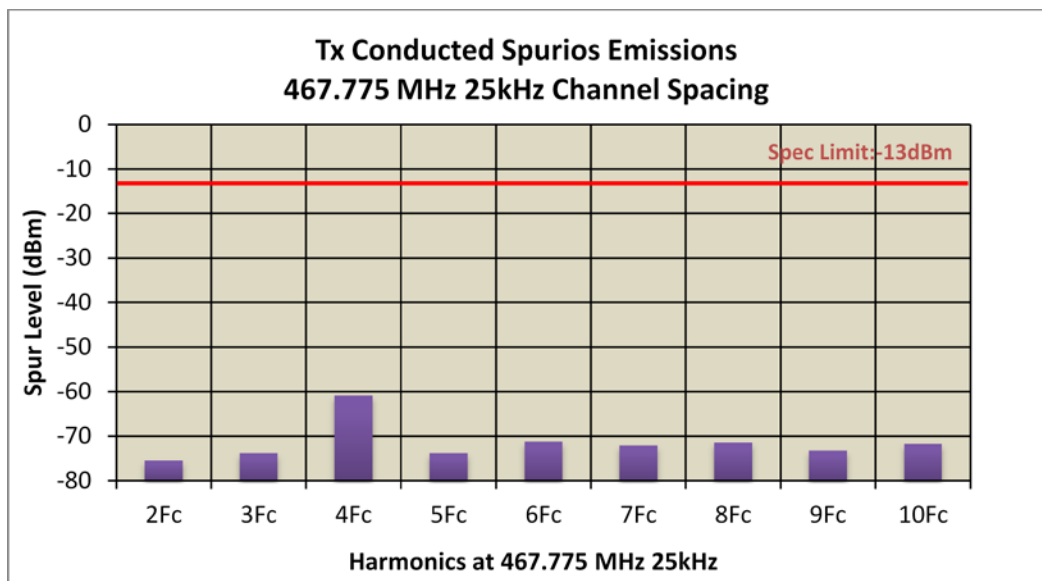


Figure 6F-6: 1W Harmonic of Carrier 467.775 MHz, 25 kHz Channel Spacing

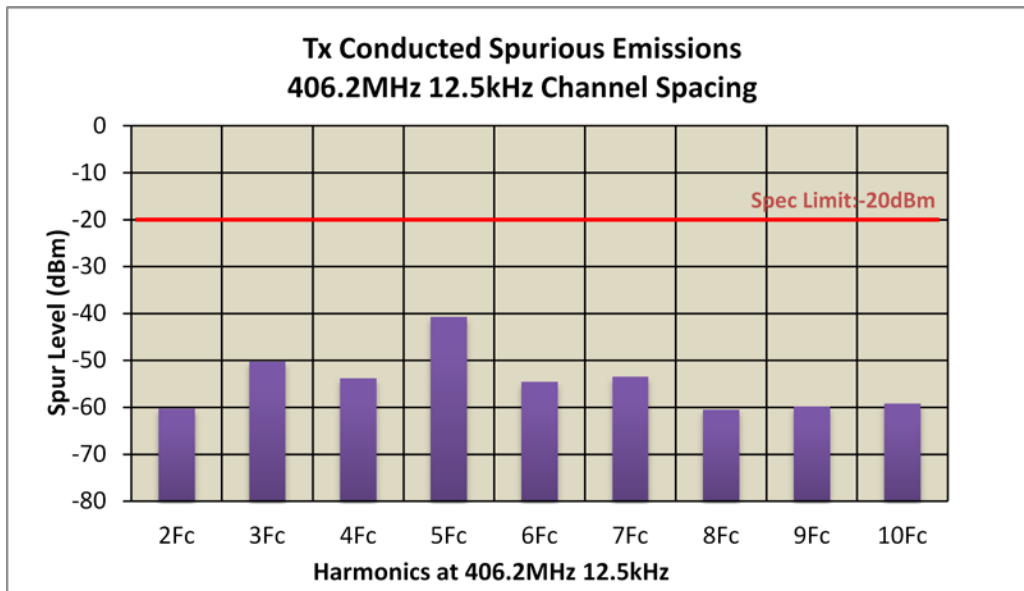


Figure 6F-7: 30 W Harmonic of Carrier 406.2 MHz, Digital 12.5 kHz Channel Spacing

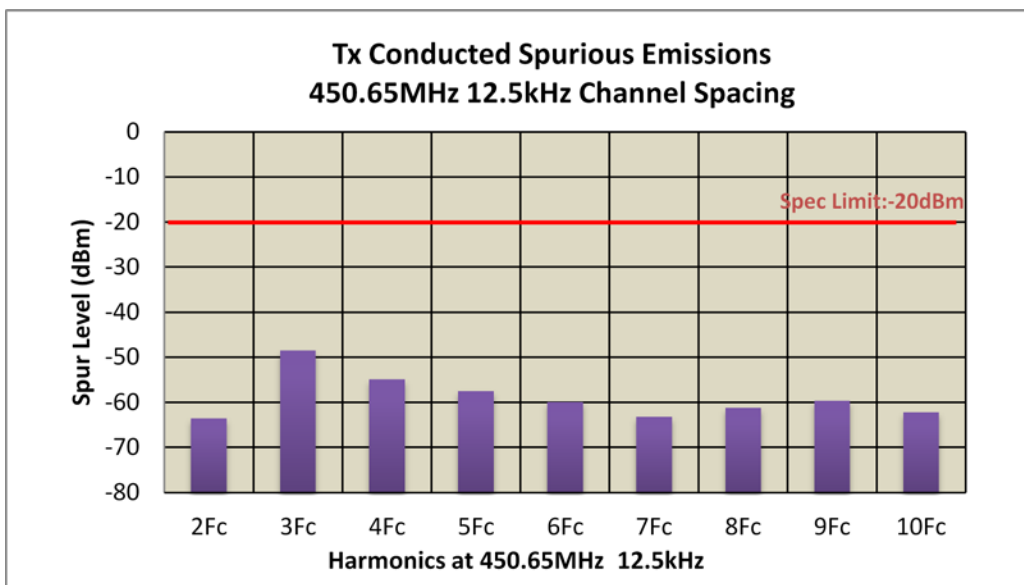


Figure 6F-8: 30 W Harmonic of Carrier 450.65 MHz, Digital 12.5 kHz Channel Spacing

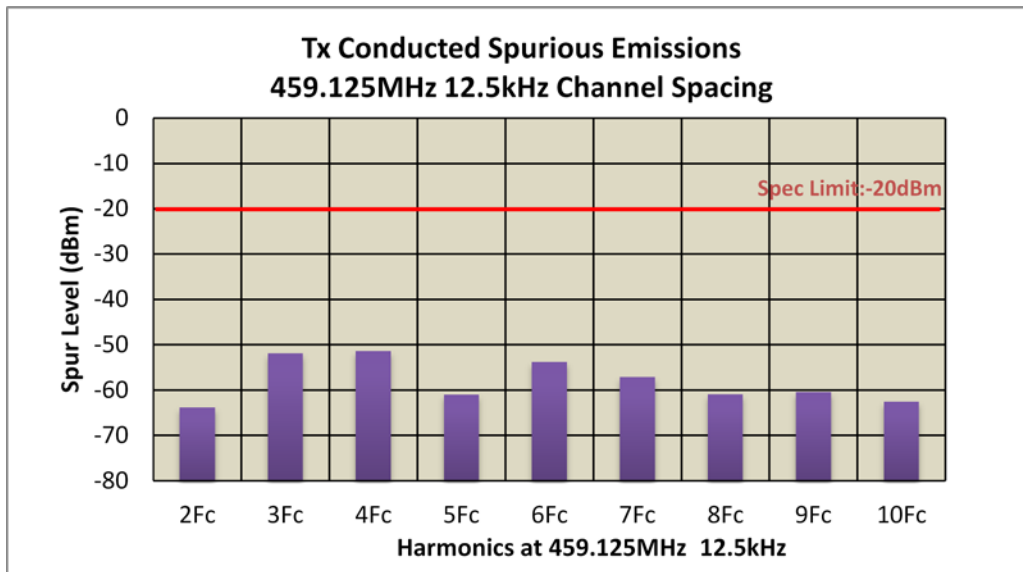


Figure 6F-9: 30 W Harmonic of Carrier 459.125 MHz, Digital 12.5 kHz Channel Spacing

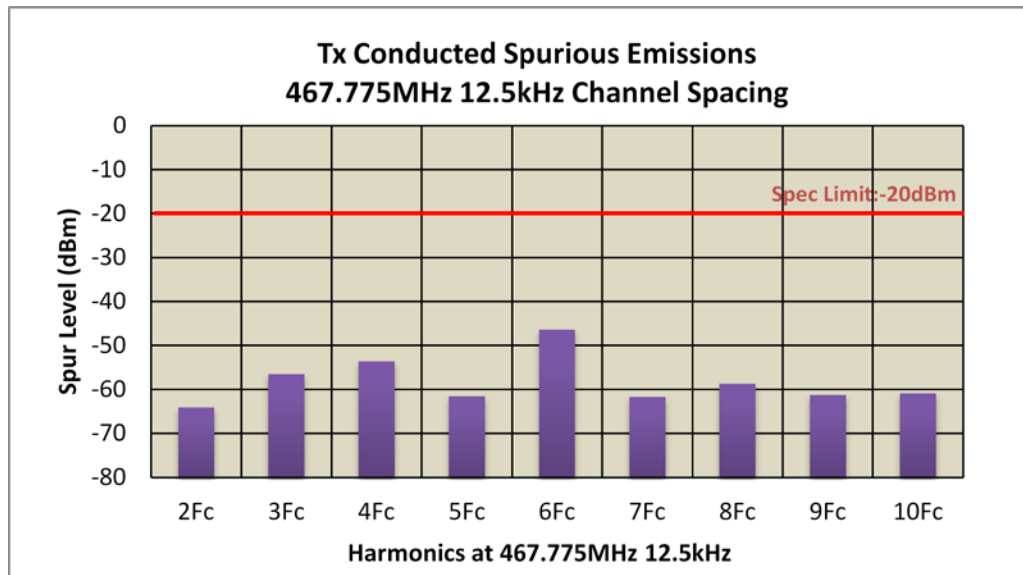


Figure 6F-10: 30 W Harmonic of Carrier 467.775 MHz, Digital 12.5 kHz Channel Spacing

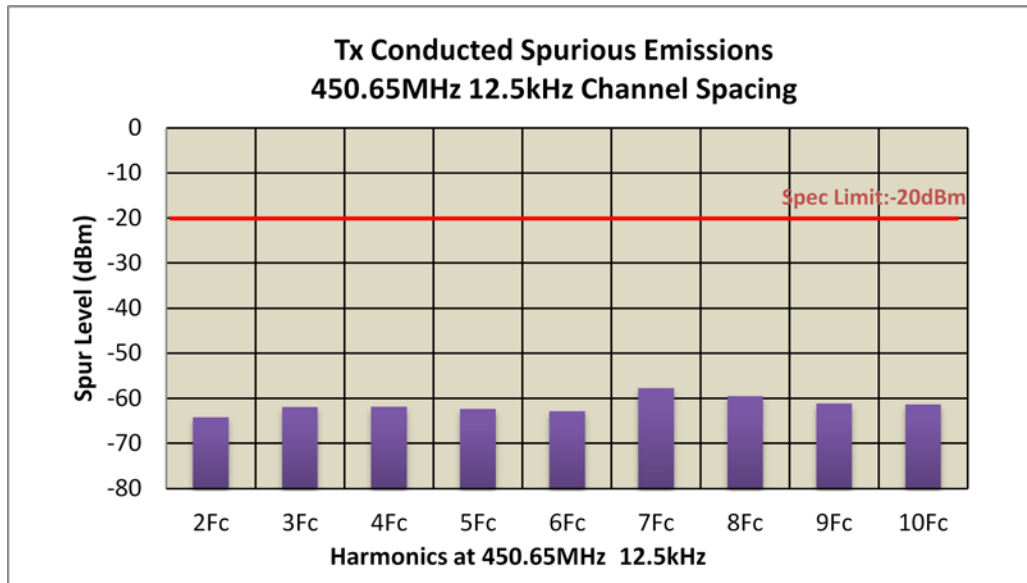


Figure 6F-11: 1W Harmonic of Carrier 450.65 MHz, Digital 12.5 kHz Channel Spacing

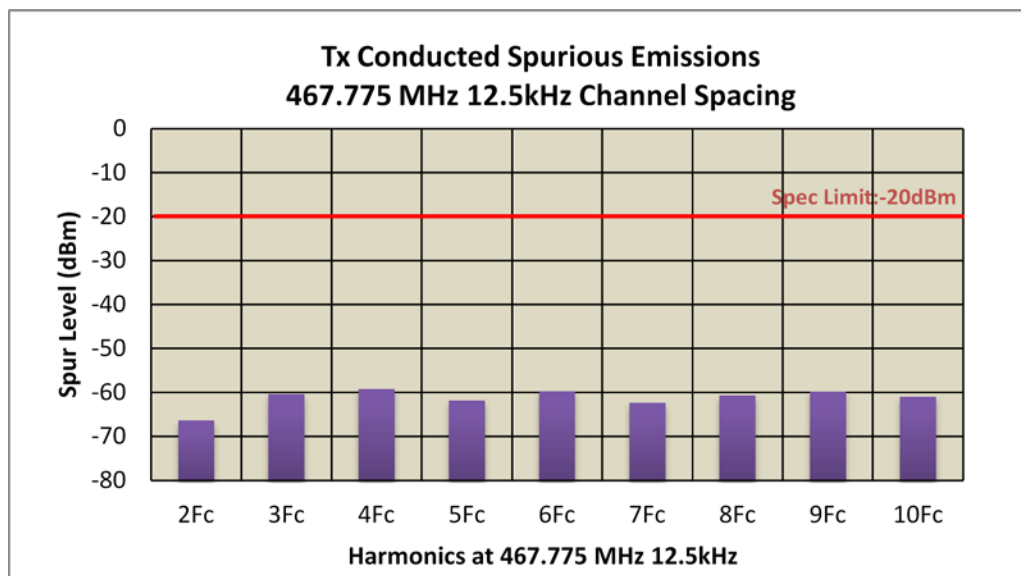


Figure 6F-12: 1W Harmonic of Carrier 467.775 MHz, Digital 12.5 kHz Channel Spacing

IC ID: 109U-92FT7080

Audio Accy (PPT) - RMN5127C

S/N: 511TRMB909

RADIATED SPURIOUS EMISSIONS

Y-axis: Emission Level (dBm)

X-axis: Frequency (MHz)

Legend:

- Horizontal Measured Emission Equip. Pair into Ideal Dipole (dBm)
- Vertical Measured Emission Equip. Pair into Ideal Dipole (dBm)
- FCC Failing Limit

Frequency (MHz)	Horizontal Measured Emission (dBm)	Vertical Measured Emission (dBm)
901.3,000	-20	-40
1351.9,500	-20	-40
1802.6,000	-20	-40
2253.2,500	-20	-40
2703.9,000	-20	-40
3154.5,500	-20	-40
3605.2,000	-20	-40
4055.8,500	-20	-40
4506.5,000	-20	-40

Remarks:

Failed Results

EXHIBIT 6
SHEET 30 OF 43

IC ID: 109U-92FT7080

Audio Accy (PPT) - RMN5127C

S/N: 511TRMB909

RADIATED SPURIOUS EMISSIONS

Y-axis: Emission Level (dBm)

X-axis: Frequency (MHz)

Legend:

- Horizontal Measured Emission Equip Par Into Ideal Dipole (dBm)
- Vertical Measured Emission Equip Par Into Ideal Dipole (dBm)
- FCC Falling Limit

Frequency (MHz)	Horizontal Measured Emission (dBm)	Vertical Measured Emission (dBm)	FCC Falling Limit (dBm)
935.5500	-20	-40	-40
1403.3250	-20	-40	-40
1871.1000	-20	-40	-40
2338.8750	-20	-40	-40
2806.6500	-20	-40	-40
3274.4250	-20	-40	-40
3742.2000	-20	-40	-40
4209.9750	-20	-40	-40
4677.7500	-20	-40	-40

August 28, 2015

Industry Canada: 109AK

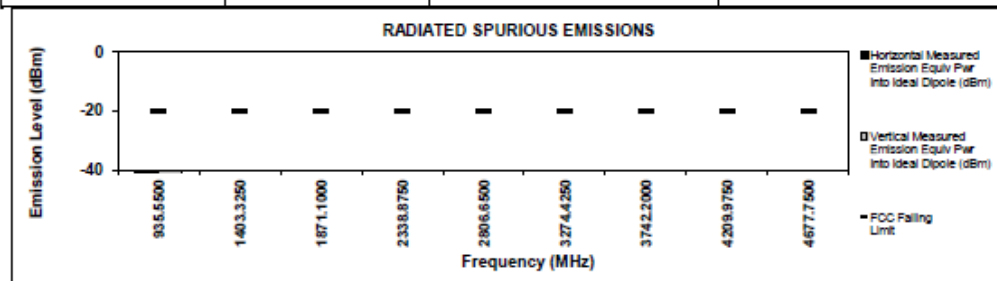
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.4 Hum(%RH): 71.2

Failed Results

EXHIBIT 6
SHEET 32 OF 43

TRANSMITTER RADIATED SPURIOUS EMISSIONS: BALI REFRESH MOBILE 403-470MHZ 1-25W
MODEL #: XPR 5550e TX DIGITAL Audio Accy (PPT) - RMN5127C
02806-EMC-00002

[illegible]

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.
Motorola Penang EMC Lab - Test Performed by: Qawiman/Nazrin August 28, 2015
FCC Registration: 772092 Industry Canada: 109AK
Remarks:** Indicates the spurious emission could not be detected due to noise limitations or ambients.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.4 Hum(%RH): 71.2

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

Figure 6G-6 – 1 Watts, 467.775 MHz, 12.5 kHz Channel Spacing

FCC ID: AZ492FT7080
IC ID: 109U-92FT7080

Audio Accy (PPT) - RMN5127C

406.2 MHz

25 kHz

30 Watt(s)/Max Power

S/N: 511TRMB909

RADIATED SPURIOUS EMISSIONS

Y-axis: Emission Level (dBm)
X-axis: Frequency (MHz)

Legend:

- Horizontal Measured Emission Equiv Per Int. Ideal Dipole (dBm)
- Vertical Measured Emission Equiv Per Int. Ideal Dipole (dBm)
- FCC Failing Limit

Frequency (MHz)	Horizontal Measured Emission (dBm)	Vertical Measured Emission (dBm)	FCC Failing Limit (dBm)
812.4000	-15	-15	-15
1218.6000	-15	-15	-15
1524.8000	-15	-15	-15
2031.0000	-15	-15	-15
2437.2000	-15	-15	-15
2943.4000	-15	-15	-15
3249.6000	-15	-15	-15
3655.8000	-15	-15	-15
4062.0000	-15	-15	-15

Industry Canada: 109AK

Temp(Deg): 23.4 Hum(%RH): 71.2

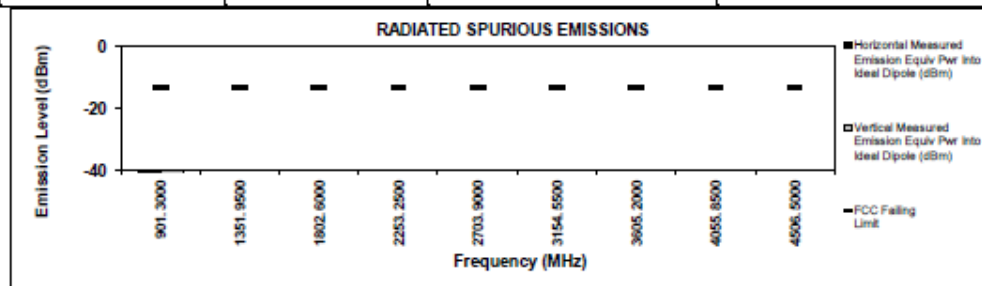
Passed Results

Marginal Results

Failed Results

EXHIBIT 6
SHEET 35 OF 43

TRANSMITTER RADIATED SPURIOUS EMISSIONS: BALI REFRESH MOBILE 403-470MHZ 1-25W
MODEL #: XPR 5550e TX ANALOG
02806-EMC-00002 Audio Accy (PPT) - RMN5127C

[illegible]

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.
Motorola Penang EMC Lab - Test Performed by: Qawiman/Nazrin
FCC Registration: 772092 Industry Canada: 109AK
Remarks:** Indicates the spurious emission could not be detected due to noise limitations or ambients.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.4 Hum(%RH): 71.2

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

Figure 6G-8 – 30 Watts, 450.65 MHz, 25 kHz Channel Spacing

TRANSMITTER RADIATED SPURIOUS EMISSIONS: BALI REFRESH MOBILE 403-470MHZ 1-25W
MODEL #: XPR 5550e TX ANALOG Audio Accy (PPT) - RMN5127C
02806-EMC-00002
450.65 MHz 25 kHz 1 Watt(s)/Low Power S/N: 511TRMB90

RADIATED SPURIOUS EMISSIONS

Y-axis: Emission Level (dBm)

X-axis: Frequency (MHz)

Legend:

- Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
- Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
- FCC Failing Limit

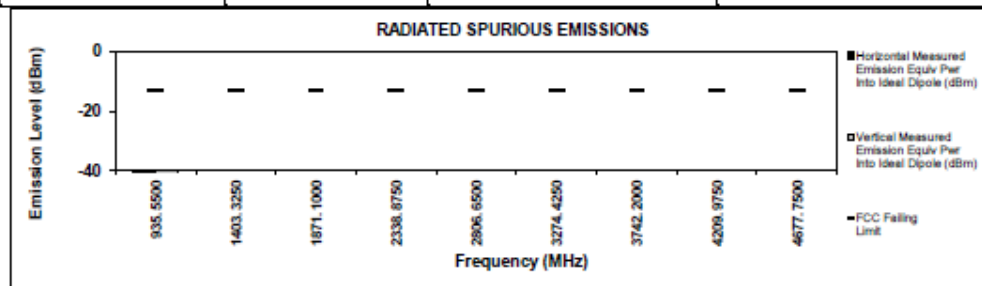
Frequency (MHz)	Horizontal Measured Emission Level (dBm)	Vertical Measured Emission Level (dBm)
901.3000	-13	-13
1351.9500	-13	-13
1802.6000	-13	-13
2253.2500	-13	-13
2703.9000	-13	-13
3154.5500	-13	-13
3605.2000	-13	-13
4055.8500	-13	-13
4506.5000	-13	-13

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.
 Motorola Penang EMC Lab - Test Performed by: Qawiman/Nazrin
 FCC Registration: 772092 Industry Canada: 109AK
 Remarks:** Indicates the spurious emission could not be detected due to noise limitations or ambients.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.4 Hum(%RH): 71.2

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

EXHIBIT 6
SHEET 39 OF 43

TRANSMITTER RADIATED SPURIOUS EMISSIONS: BALI REFRESH MOBILE 403-470MHZ 1-25W			
MODEL #: XPR 5550e	TX ANALOG		
02806-EMC-00002	Audio Accy (PPT) - RMN5127C		
467.775 MHz	25 kHz	1 Watt(s)/Low Power	S/N: 511TRMB90



Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

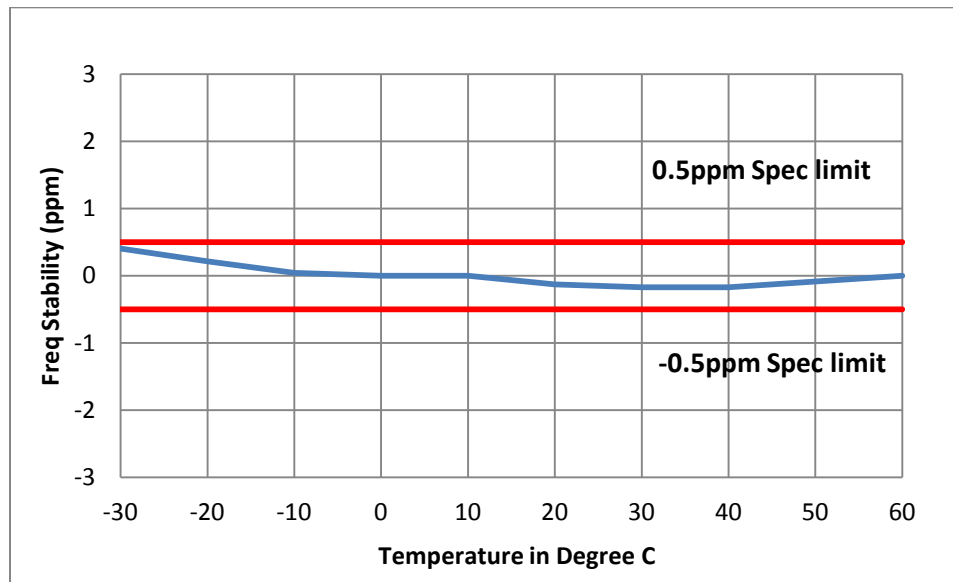
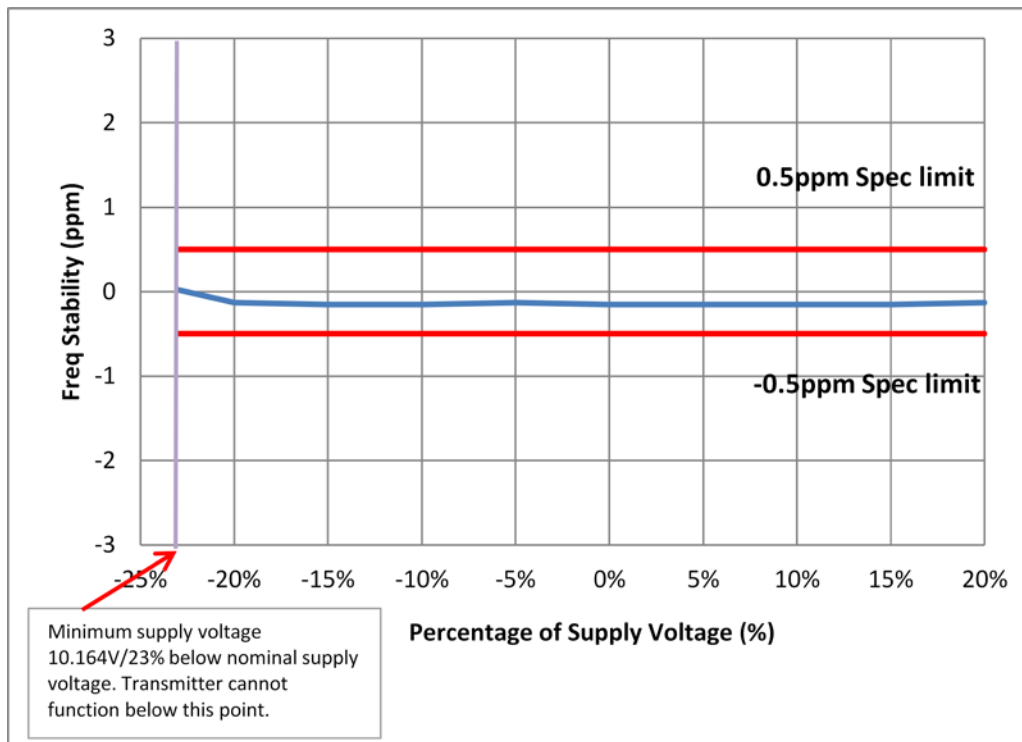
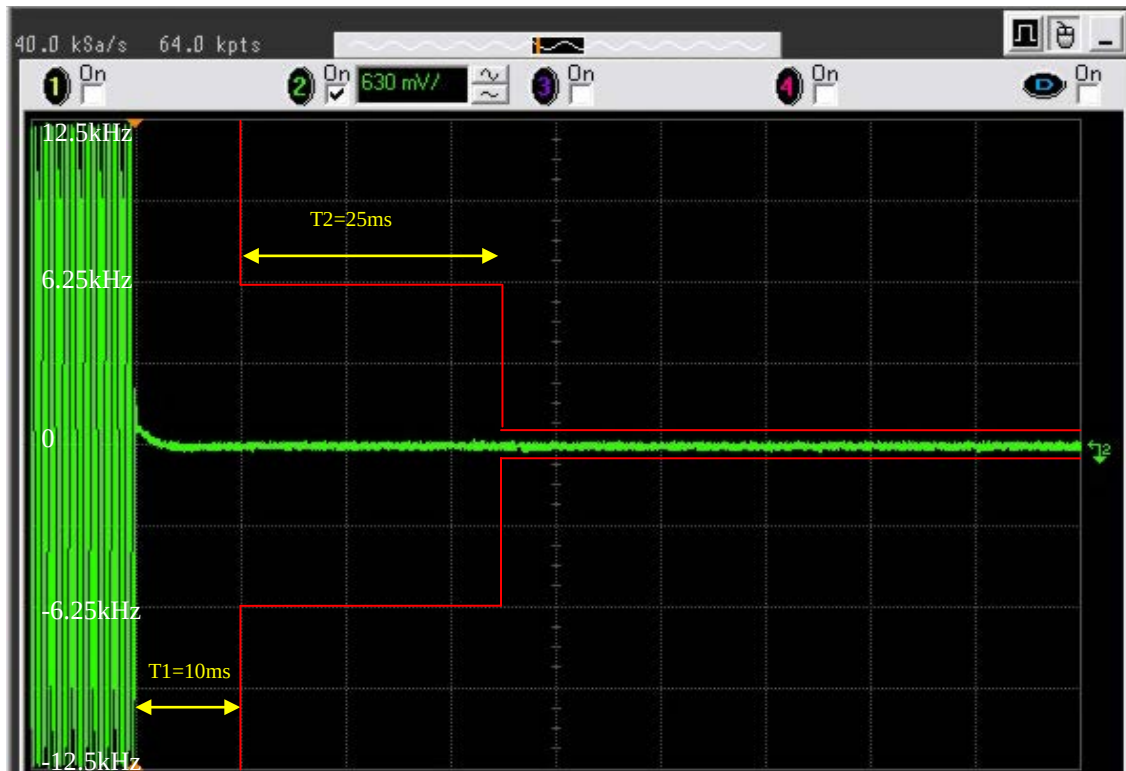
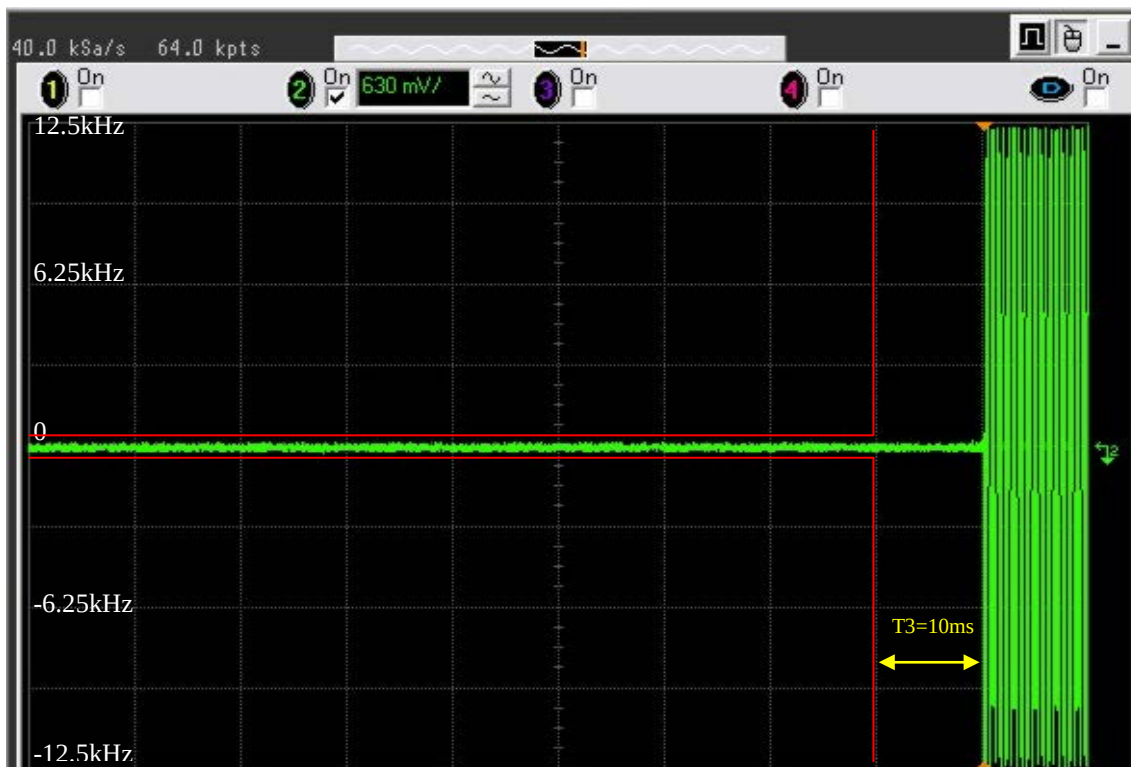
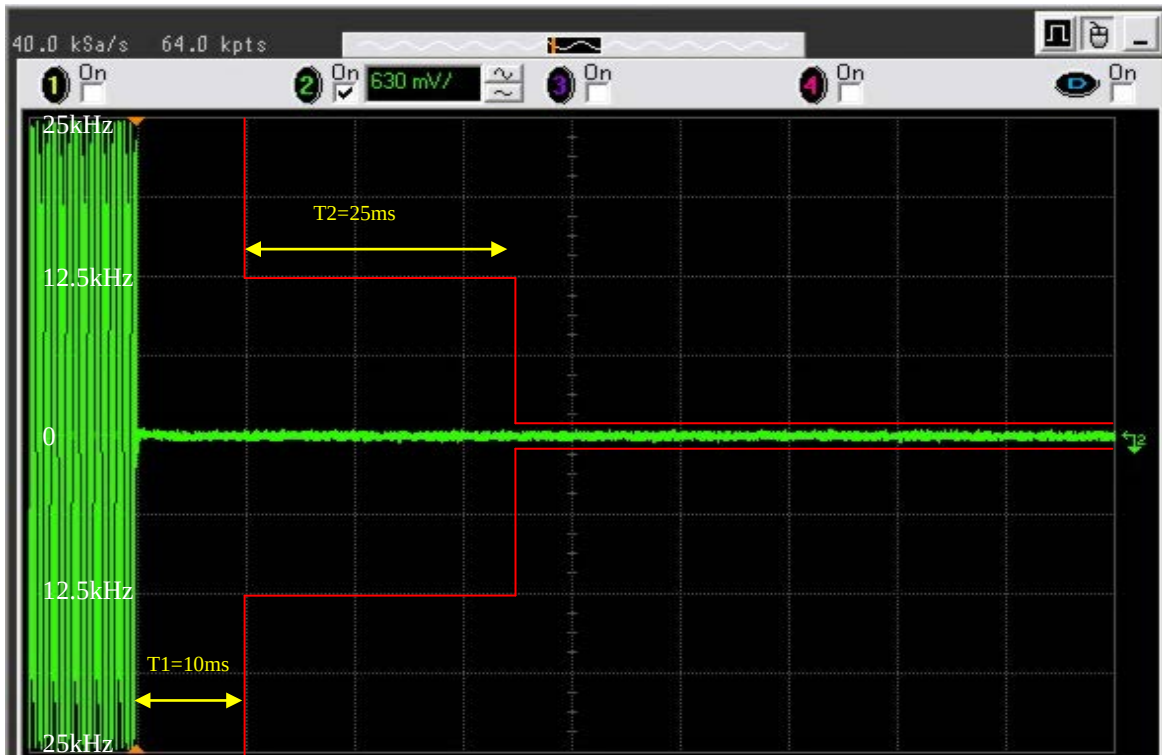
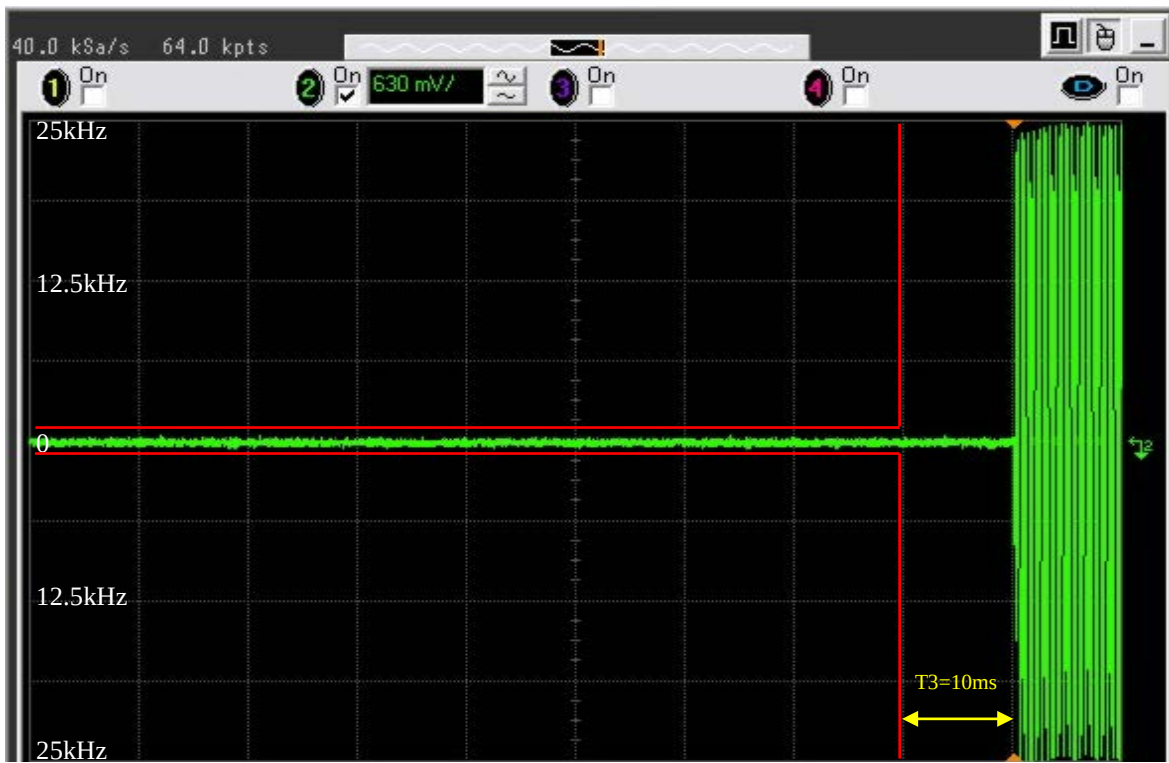
EXHIBIT 6H – Frequency Stability**6H-1 – 467.775 MHz Frequency Stability vs. Temperature****6H-2 – 467.775 MHz Frequency Stability vs. Supply Voltage**

EXHIBIT 6I – Transient Frequency Behavior**6I-1 – 467.775 MHz, 12.5 kHz Channel Spacing Key-Up Attack Time****6I-2 – 467.775 MHz, 12.5 kHz Channel Spacing De-Key Decay Time**

**6I-3** – 467.775 MHz, 25 kHz Channel Spacing Key-Up Attack Time**6I-4** – 467.775 MHz, 25 kHz Channel Spacing De-Key Decay Time