

FCC Radio Test Report

FCC ID : AZ499FT6031
Equipment : Operation Critical Wireless Earpiece PTT
Brand Name : Motorola
Model Name : PMLN8792A,PMLN8740A
Applicant : Motorola Solutions, Inc.
Plot 2A, Medan Bayan Lepas Mukim 12 SWD,
Bayan Lepas,11900 Malaysia
Manufacturer : Motorola Solutions Malaysia Sdn. Bhd.
Plot 2A, Medan Bayan Lepas Mukim 12, S.W.D
11900 Bayan Lepas, Penang,Malaysia
Standard : 47 CFR FCC Part 15.247

The product was received on Jan. 15, 2026, and testing was started from Jan. 30, 2026 and completed on Feb. 25, 2026. We, SPORTON INTERNATIONAL INC. Hsinhua Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Hsinhua Laboratory, the test report shall not be reproduced except in full.


Approved by: Jackson Tsai

SPORTON INTERNATIONAL INC. Hsinhua Laboratory

No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.)



Table of Contents

HISTORY OF THIS TEST REPORT	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Information.....	5
1.2 Testing Applied Standards	7
1.3 Testing Location Information	7
1.4 Measurement Uncertainty	7
2 TEST CONFIGURATION OF EUT.....	8
2.1 Test Channel Mode	8
2.2 The Worst Case Measurement Configuration	9
2.3 Accessories	10
2.4 Support Equipment.....	10
2.5 Test Setup Diagram	11
3 TRANSMITTER TEST RESULT	13
3.1 AC Power-line Conducted Emissions	13
3.2 20dB Bandwidth and Carrier Frequency Separation.....	15
3.3 Maximum Conducted Output Power	16
3.4 Number of Hopping Frequencies and Hopping Bandedge	17
3.5 Time of Occupancy (Dwell Time)	18
3.6 Emissions in Non-restricted Frequency Bands	19
3.7 Emissions in Restricted Frequency Bands.....	20
4 TEST EQUIPMENT AND CALIBRATION DATA.....	23
APPENDIX A. TEST RESULTS OF AC POWER-LINE CONDUCTED EMISSIONS	
APPENDIX B. TEST RESULTS OF 20DB BANDWIDTH AND CARRIER FREQUENCY SEPARATION	
APPENDIX C. TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER	
APPENDIX D. TEST RESULTS OF NUMBER OF HOPPING FREQUENCIES AND HOPPING BANDEDGE	
APPENDIX E. TEST RESULTS OF TIME OF OCCUPANCY (DWELL TIME)	
APPENDIX F. TEST RESULTS OF EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS	
APPENDIX G. TEST RESULTS OF EMISSIONS IN RESTRICTED FREQUENCY BANDS	
APPENDIX H. TEST PHOTOS	
PHOTOGRAPHS OF EUT V01	

[illegible]

Summary of Test Result

Report Clause	Ref. Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.247(a)	20dB Bandwidth	PASS	-
3.2	15.247(a)	Carrier Frequency Separation	PASS	-
3.3	15.247(b)	Maximum Conducted Output Power	PASS	-
3.4	15.247(a)	Number of Hopping Frequencies and Hopping Bandedge	PASS	-
3.5	15.247(a)	Time of Occupancy (Dwell Time)	PASS	-
3.6	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	-
3.7	15.247(d)	Emissions in Restricted Frequency Bands	PASS	-

Note : From Sporton Project No.: FR5D0922AD.

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
Comments and explanations:
None

Reviewed by: Ben Tseng

Report Producer: Debby Hung

1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	Bluetooth Version	Ch. Frequency (MHz)	Channel Number
2400-2483.5	BR / EDR	2402-2480	0-78 [79]

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	BT-BR(1Mbps)	1	1TX
2.4-2.4835GHz	BT-EDR(2Mbps)	1	1TX
2.4-2.4835GHz	BT-EDR(3Mbps)	1	1TX

Note:

- ♦ Bluetooth BR uses a GFSK (1Mbps).
- ♦ Bluetooth EDR uses a combination of $\pi/4$ -DQPSK (2Mbps) and 8DPSK (3Mbps).
- ♦ Bluetooth BR/EDR uses as a system using FHSS modulation.
- ♦ BWch is the nominal channel bandwidth.

1.1.2 Antenna Information

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	Hengli Yongtong	HL-2012-ANT-00021	CHIP Antenna	N/A	2.48

Note 1: The EUT has one antenna.

For BT function:

For IEEE 802.15.1 Bluetooth mode (1TX/1RX)

Ant. 1 (port 1) could transmit/receive.

1.1.3 EUT Information

Operational Condition	
EUT Power Type	From Battery
EUT Function	☒ Point-to-multipoint ☐ Point-to-point
Type of EUT	
☒	Stand-alone
☐	Combined (EUT where the radio part is fully integrated within another device)
	Combined Equipment - Brand Name / Model No.: ...
☐	Plug-in radio (EUT intended for a variety of host systems)
	Host System - Brand Name / Model No.: ...
☐	Other:

1.1.4 Mode Test Duty Cycle

PMLN8792A

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
BT-BR(1Mbps)	0.781	1.07	2.892m	500
BT-EDR(2Mbps)	0.784	1.06	2.888m	500
BT-EDR(3Mbps)	0.787	1.04	2.899m	500

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

PMLN8740A

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
BT-BR(1Mbps)	0.785	1.05	2.892m	500
BT-EDR(2Mbps)	0.784	1.06	2.888m	500
BT-EDR(3Mbps)	0.787	1.04	2.899m	500

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

1.1.5 Table for Multiple Listing

The model names in the following table are all refer to the identical product.

Model Name	Description
PMLN8792A,PMLN8740A	All the models are identical, the different model served as marketing strategy.

1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024

The following reference test guidance is not within the scope of accreditation of TAF:

- ♦ KDB 558074 D01 v05r02
- ♦ KDB 414788 D01 v01r01

1.3 Testing Location Information

Test Lab. : Sporton International Inc. Hsinhua Laboratory				
☒ Hsinhua (TAF: 3785)	ADD: No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.) TEL: 886-3-327-3456 FAX: 886-3-327-0973			
Test site Designation No. TW3785 with FCC.				
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
AC Conduction	CO04-HY	Lego Lin	17.3~18.5°C / 58~62%	06/Feb/2026
RF Conducted	TH07-HY	Alan Chien	23.4~25°C / 52~56%	05/Feb/2026~25/Feb/2026
Radiated	03CH03-HY	Simon Cheng	22.2~23.4°C / 50~52%	30/Jan/2026~04/Feb/2026
☐ Wen 33rd.St. (TAF: 3785)	ADD: No.14-1, Ln. 19, Wen 33rd St., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: 886-3-318-0787 FAX: 886-3-318-0287			

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
AC Power-line Conducted Emissions	3.44 dB	Confidence levels of 95%
Conducted Output Power	1.48 dB	Confidence levels of 95%
Bandwidth	0.05 MHz	Confidence levels of 95%
Conducted Emission	1.48 dB	Confidence levels of 95%
Radiated Emission (9 kHz ~ 30 MHz)	2.9 dB	Confidence levels of 95%
Radiated Emission (30 MHz ~ 1 GHz)	5.64 dB	Confidence levels of 95%
Radiated Emission (1 GHz ~ 18 GHz)	5.02 dB	Confidence levels of 95%
Radiated Emission (18 GHz ~ 40 GHz)	5.28 dB	Confidence levels of 95%

2 Test Configuration of EUT

2.1 Test Channel Mode

Test Software Version	InstallBlueSuiteCda_3_3_17_1792
------------------------------	---------------------------------

PMLN8792A

Mode	Power Setting
BT-BR(1Mbps)	-
2402MHz	Default
2440MHz	Default
2480MHz	Default
BT-EDR(2Mbps)	-
2402MHz	Default
2440MHz	Default
2480MHz	Default
BT-EDR(3Mbps)	-
2402MHz	Default
2440MHz	Default
2480MHz	Default

PMLN8740A

Mode	Power Setting
BT-BR(1Mbps)	-
2402MHz	Default
2440MHz	Default
2480MHz	Default
BT-EDR(2Mbps)	-
2402MHz	Default
2440MHz	Default
2480MHz	Default
BT-EDR(3Mbps)	-
2402MHz	Default
2440MHz	Default
2480MHz	Default

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	CTX
1	DC Power supply mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	20dB Bandwidth Carrier Frequency Separation Maximum Conducted Output Power Number of Hopping Frequencies Hopping Bandedge Time of Occupancy (Dwell Time) Emissions in Non-restricted Frequency Bands
Test Condition	Conducted measurement at transmit chains ☒ Non-adaptive frequency hopping systems (Non-AFH) ☒ adaptive frequency hopping systems (AFH)
Non-AFH Mode configuration was found to be the worst case and measured during the test.	

The Worst Case Mode for Following Conformance Tests			
Tests Item	Emissions in Restricted Frequency Bands		
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
Operating Mode < 1GHz	CTX		
1	DC Power supply mode		
Operating Mode > 1GHz	CTX		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			
Worst Planes of EUT			V

2.3 Accessories

Accessories				
Battery	Brand Name	VARTA	Model Name	CP1654 A4X
	Manufacturer	-	SN	-
	Power Rating	3.7 Vdc, 140 mAh	Type	Li-ion, Yes

Reminder: Regarding to more detail and other information, please refer to user manual.


2.4 Support Equipment


Support Equipment – AC Conduction					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	AC Power Cable	PowerSync	PW-GPC180-3	-	-
2	DC Power Cable	MiSUMi	WTN1229-BLACK	-	-
3	DC Power Cable	MiSUMi	WTN1229-RED	-	-
4	DC Power Supply	GW	GPS-3030DD	-	-
5	USB cable	LUXSHARE	JPA-WJ332-101	-	-
6	NB	HP	HSTNN-142C	-	-
7	Adapter (for NB)	HP	HSTNN-LA40	-	-

Support Equipment – Conducted					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	Notebook	DELL	E5410	-	-
2	Adapter for NB	DELL	HA65NM130	-	-
3	USB Type-C cable	Wanstonic	TPU4766	-	-
4	Adapter	MOTOROLA	MU08-L050150-A1	-	-

Support Equipment – Radiated					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	AC Power Cable	PowerSync	PW-GPC180-3	-	-
2	DC Power Cable	MiSUMi	WTN1229-BLACK	-	-
3	DC Power Cable	MiSUMi	WTN1229-RED	-	-
4	DC Power Supply	GW	GPS-3030DD	-	-
5	USB cable	LUXSHARE	JPA-WJ332-101	-	-
6	NB	HP	HSTNN-142C	-	-
7	Adapter (for NB)	HP	HSTNN-LA40	-	-

2.5 Test Setup Diagram

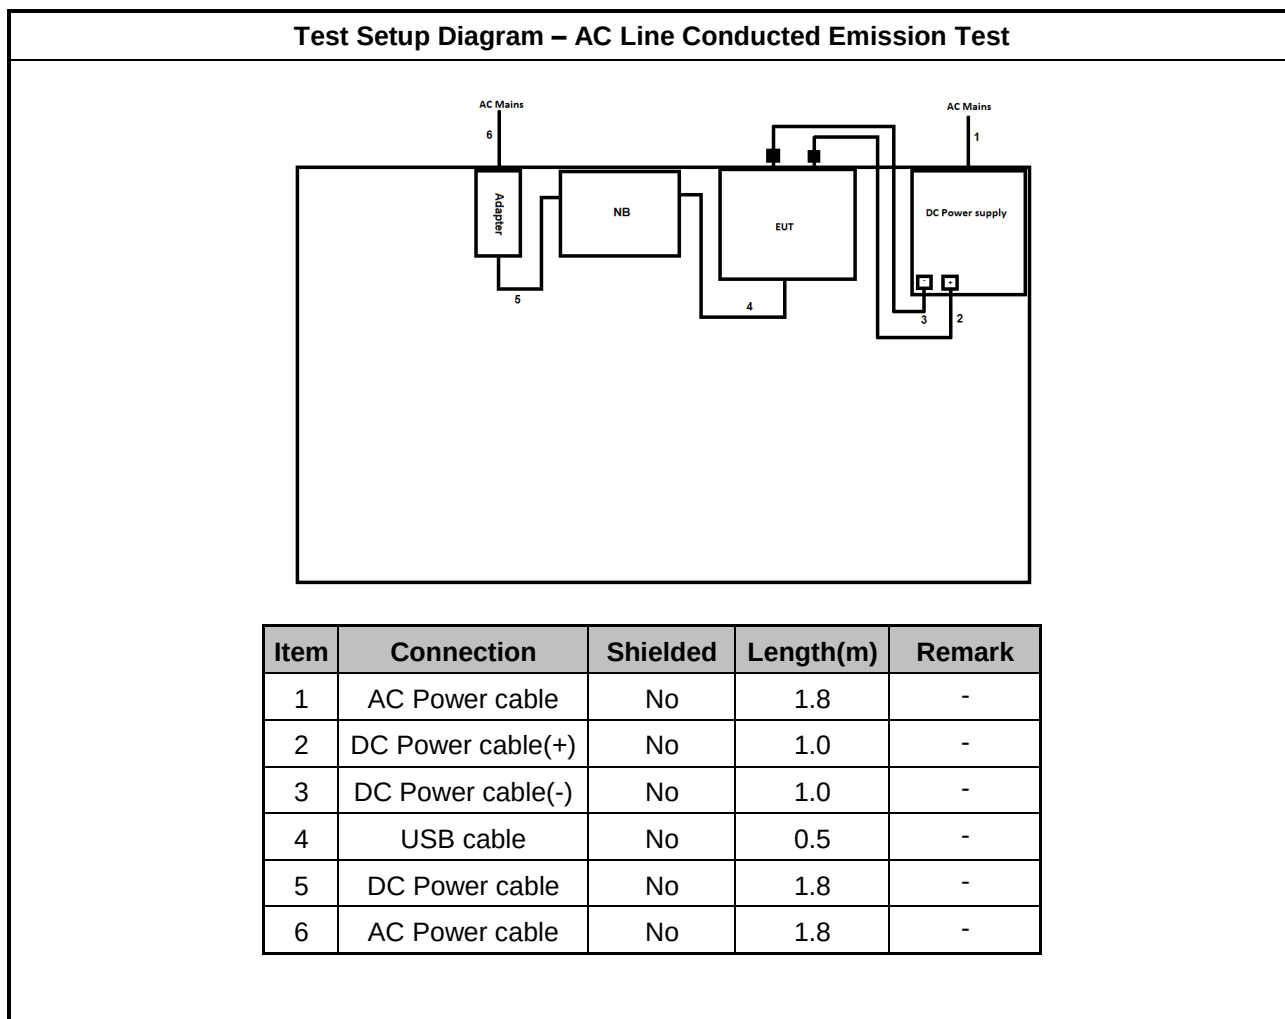

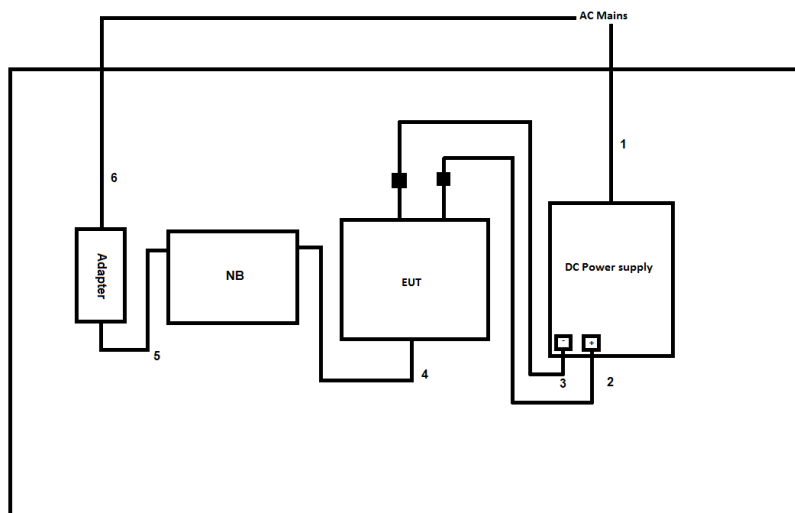Test Setup Diagram - Radiated Test_DC Power supply mode


Item	Connection	Shielded	Length(m)	Remark
1	AC Power cable	No	1.8	-
2	DC Power cable(+)	No	1.0	-
3	DC Power cable(-)	No	1.0	-
4	USB cable	No	0.5	-
5	DC Power cable	No	1.8	-
6	AC Power cable	No	1.8	-

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50
Note 1: * Decreases with the logarithm of the frequency.		

3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures


Test Method
▪ Refer as ANSI C63.10, clause 6.2 for AC power-line conducted emissions.

3.1.4 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Raw(Read Level) + LISN(LISN Factor) + CL(Cable Loss) + AT(Attenuator).

3.1.5 Test Setup

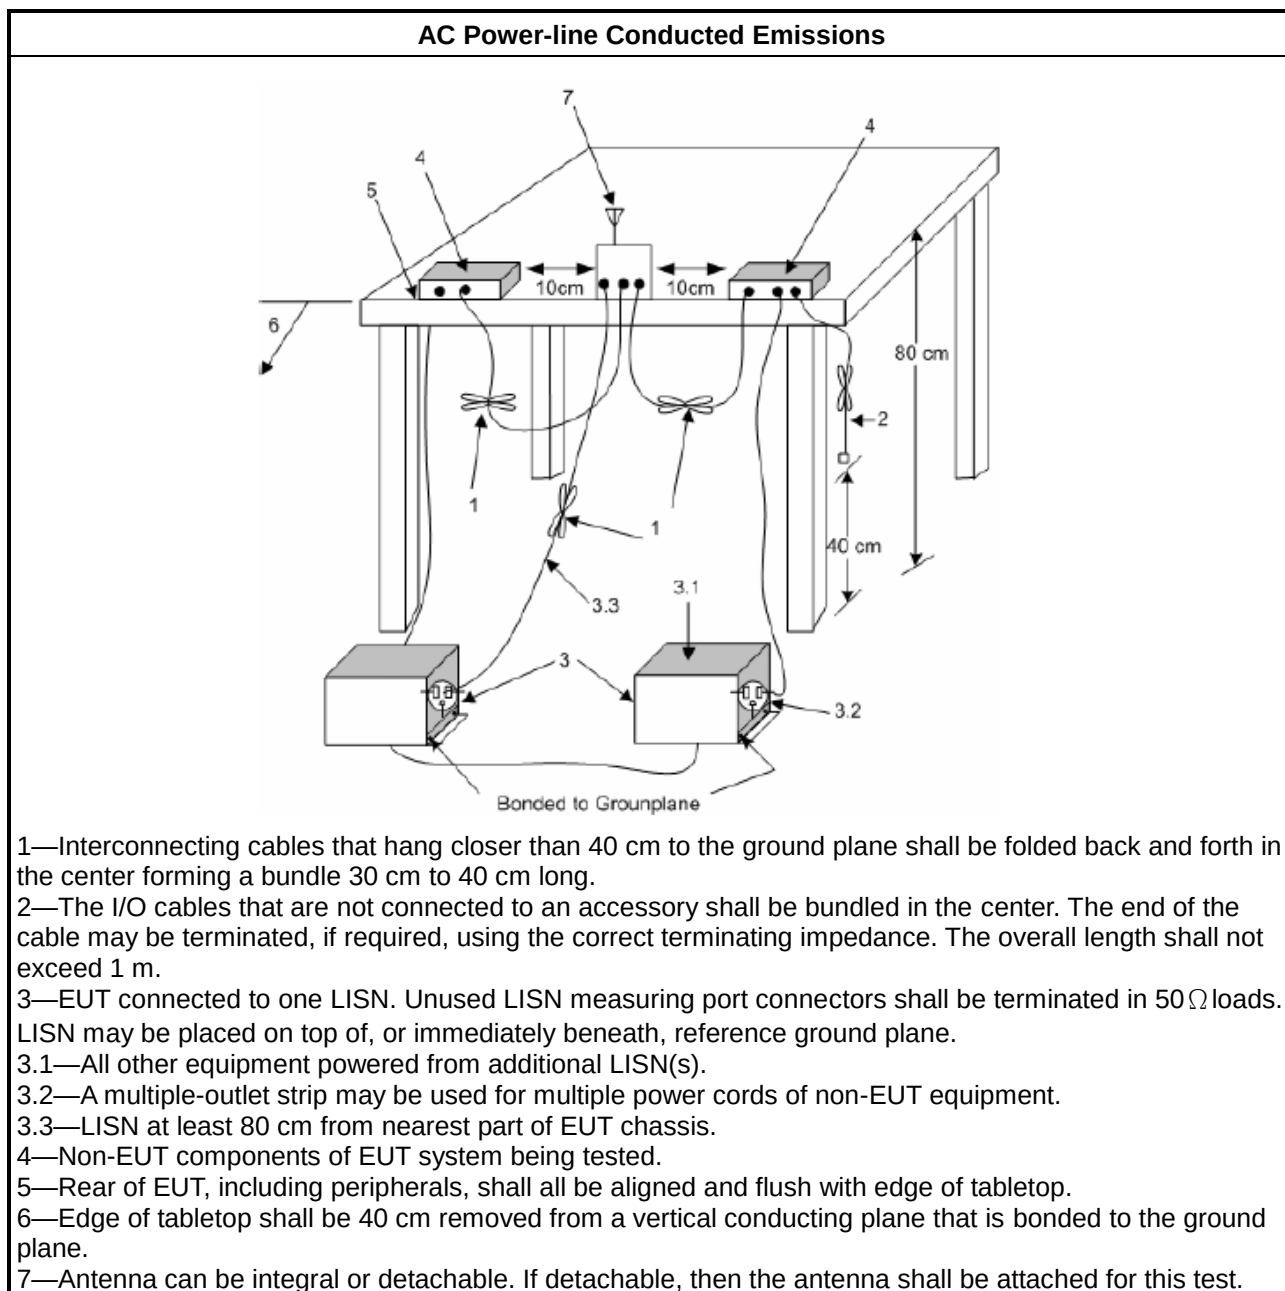

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 20dB Bandwidth and Carrier Frequency Separation

3.2.1 20dB Bandwidth and Carrier Frequency Separation Limit

20dB Bandwidth and Carrier Frequency Separation Limit for Frequency Hopping Systems	
2400-2483.5 MHz Band:	
	$N \geq 75$ and $ChS \geq MAX$ (20 dB bandwidth, 25 kHz).
	$75 > N \geq 15$ and $ChS \geq MAX$ (20 dB bandwidth 2/3, 25 kHz).
N: Number of Hopping Frequencies; ChS: Hopping Channel Separation	


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method
Refer as ANSI C63.10, clause 6.9.2 for 20 dB bandwidth measurement.
Refer as ANSI C63.10, clause 7.8.2 for carrier frequency separation measurement.

3.2.4 Test Setup

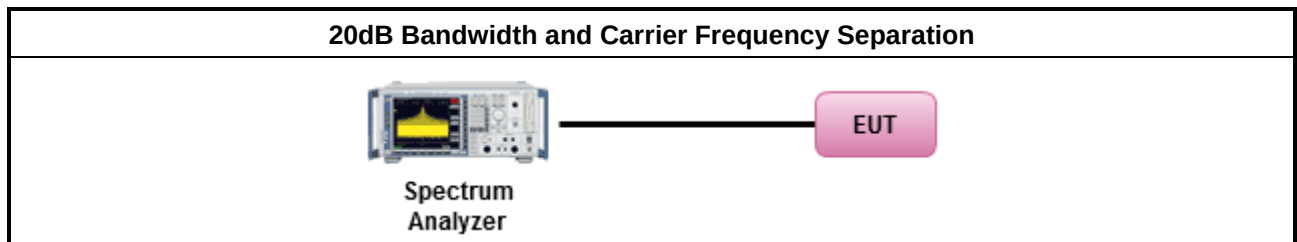

3.2.5 Test Result of 20dB Bandwidth

Refer as Appendix B

3.2.6 Test Result of Carrier Frequency Separation

Refer as Appendix B

3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
▪ 2400-2483.5 MHz Band:	
	▪ $N \geq 75$; Power 30dBm; EIRP 36dBm
	▪ $75 > N \geq 15$; Power 21dBm; EIRP 27dBm
N: Number of Hopping Frequencies	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method
▪ Refer as ANSI C63.10, clause 7.8.5 for output power measurement.

3.3.4 Test Setup

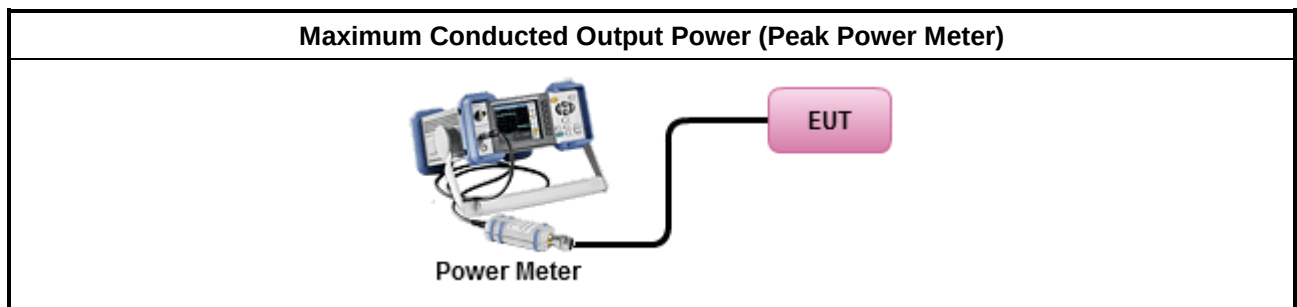

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C

3.4 Number of Hopping Frequencies and Hopping Bandedge

3.4.1 Number of Hopping Frequencies Limit

Number of Hopping Frequencies Limit	
2400-2483.5 MHz Band:	
	$N \geq 75$ and $ChS \geq MAX$ (20 dB bandwidth, 25 kHz).
	$75 > N \geq 15$ and $ChS \geq MAX$ (20 dB bandwidth 2/3, 25 kHz).
N: Number of Hopping Frequencies; ChS : Hopping Channel Separation	

3.4.2 Hopping Bandedge Limit

Refer clause 3.6.1 and clause 3.7.1


3.4.3 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.4 Test Procedures

Test Method
Refer as ANSI C63.10, clause 7.8.3 for number of hopping frequencies measurement.
Refer as ANSI C63.10, clause 7.8.7.2 for hopping frequencies Bandedge measurement.

3.4.5 Test Setup

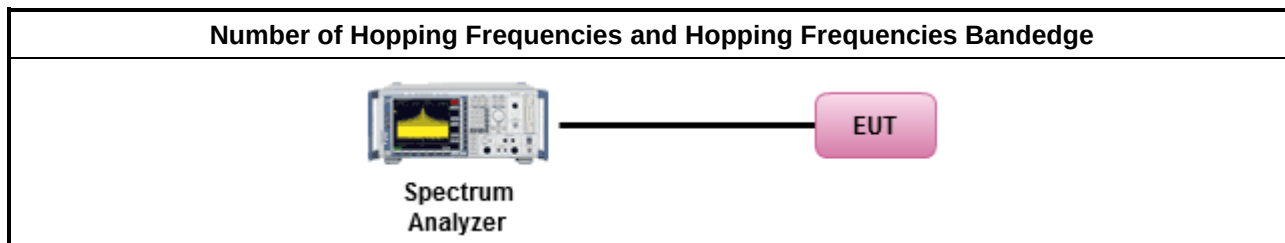

3.4.6 Test Result of Number of Hopping Frequencies

Refer as Appendix D

3.4.7 Test Result of Number of Hopping Frequencies Bandedge

Refer as Appendix D

3.5 Time of Occupancy (Dwell Time)

3.5.1 Time of Occupancy (Dwell Time) Limit

Time of Occupancy (Dwell Time) Limit for Frequency Hopping Systems	
▪ 2400-2483.5 MHz Band:	
	▪ $N \geq 75$; 0.4s in $N \times 0.4$ period
	▪ $75 > N \geq 15$; 0.4s in $N \times 0.4$ period
N: Number of Hopping Frequencies	


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
▪ Refer as ANSI C63.10, clause 7.8.4 for dwell time measurement.	
▪ Bluetooth ACL packets can be 1, 3, or 5 time slots. Following as dwell time. Operate DH5 at maximum dwell time and maximum duty cycle.	
	▪ The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle. A maximum length packet has duration of 5 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is $5/1600$ seconds, or 3.125ms. DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel.

3.5.4 Test Setup

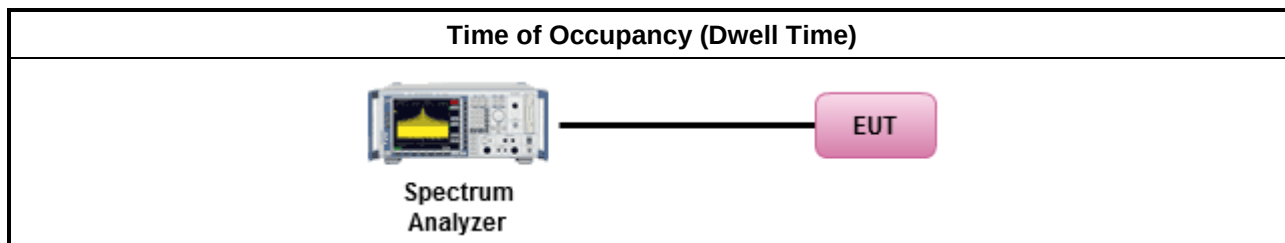

3.5.5 Test Result of Time of Occupancy (Dwell Time)

Refer as Appendix E

3.6 Emissions in Non-restricted Frequency Bands

3.6.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.	


3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method
Refer as ANSI C63.10, clause 7.8.7 for unwanted emissions into non-restricted bands.

3.6.4 Test Setup

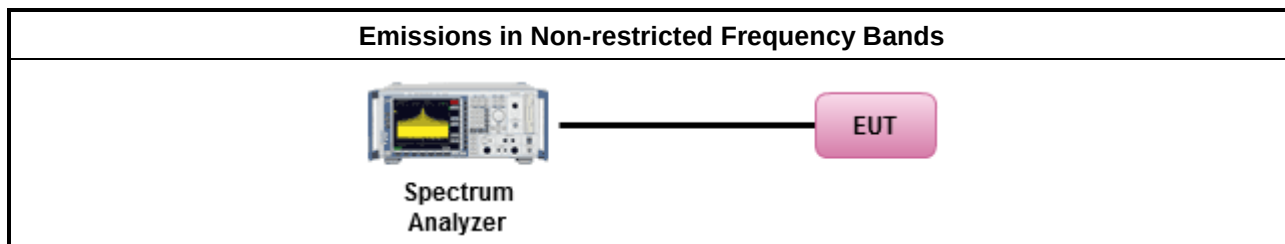

3.6.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix F

3.7 Emissions in Restricted Frequency Bands

3.7.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB / decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

3.7.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.7.3 Test Procedures


Test Method	
- The average emission levels shall be measured in [hopping duty factor]. - Refer as ANSI C63.10; clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band. - For the transmitter unwanted emissions shall be measured using following options below: - Refer as ANSI C63.10, clause 4.1.5.2.1 QP value. - Refer as ANSI C63.10, clause 4.1.5.2.2 measurement procedure peak. - Refer as ANSI C63.10, clause 4.1.5.2.5 average value of hopping pulsed emissions. - KDB 414788 Open-Field Test Sites and Chamber Correlation Justification. - Based on FCC 15.31(f)(2): measurements may be performed at a distance closer than that specified in regulations; however, an attempt should be made to avoid making measurements in the near field. - Open-field site and chamber correlation testing had been performed and chamber measured test result is the worst case test result.	


3.7.4 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Raw(Read Level) + AF(Antenna Factor) + CL(Cable Loss) - PA(Preamp Factor)

3.7.5 Test Setup

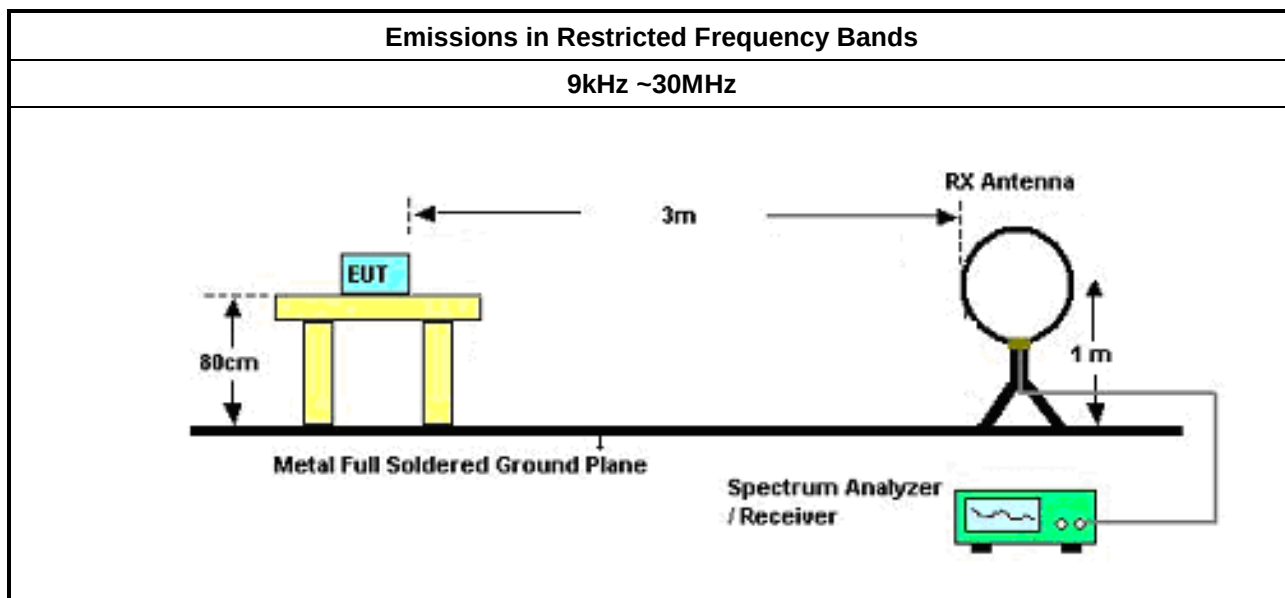

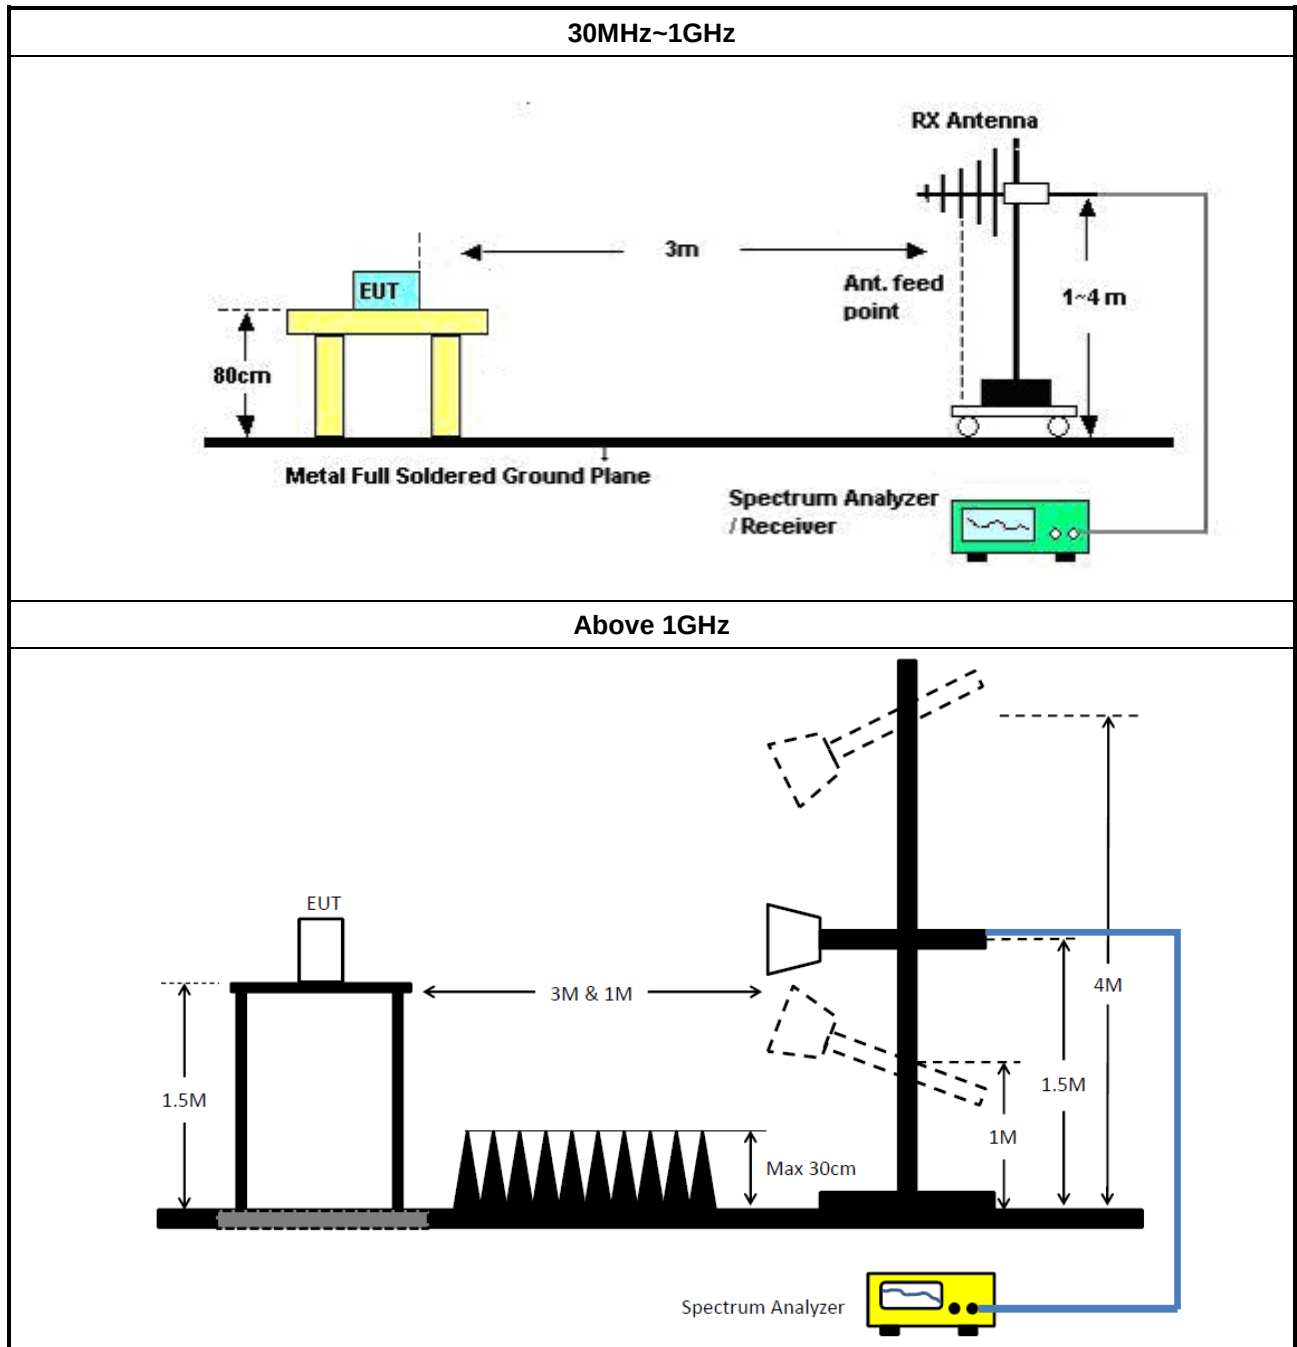

3.7.6 Test Result of Emissions in Restricted Frequency Bands (Below 30MHz)

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

3.7.7 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix G

4 Test Equipment and Calibration Data

Instrument for AC Conduction

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
EMI Test Receiver	ROHDE & SCHWARZ	ESR3	102051	9kHz ~ 3.6GHz	21/May/2025	20/May/2026
Two-Line V-Network	ROHDE & SCHWARZ	ENV 216	101578	9kHz ~ 30MHz	24/Aug/2025	23/Aug/2026
LISN (Support Unit)	SCHWARZBECK MESS-ELEKTRO NIK	NSLK 8127	8127477	9kHz ~ 30MHz	15/May/2025	14/May/2026
RF Cable 5m	TITAN	TITAN	CO04-cable-01	9 kHz~200MHz	26/Feb/2025	25/Feb/2026
Pulse Limiter	ROHDE & SCHWARZ	VTSD 9561F-N	1056	9kHz ~ 30MHz	25/Jun/2025	24/Jun/2026
Software	Sporton	SENSE-EMI	V5.11.6	-	NCR	NCR

NCR: No Calibration Required

Instrument for Conducted Test

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Signal Analyzer	R&S	FSV 40	101515	10Hz~40GHz	05/Jan/2026	04/Jan/2027
SMB100A Signal Generator	R&S	SMB100A	181147	100kHz~40GHz	29/Oct/2025	28/Oct/2026
Power Meter	Anritsu	ML2495A	1517010	300MHz~40GHz	17/Dec/2025	16/Dec/2026
Pulse Sensor	Anritsu	MA2411B	1339407	300MHz~40GHz	17/Dec/2025	16/Dec/2026
SENSE-15247_FS	Sporton	V5.11.27	N/A	N/A	N/A	N/A

Instrument for Radiated Test

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	1GHz~18GHz 3m	13/Jul/2025	12/Jul/2026
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz~1GHz 3m	13/Jul/2025	12/Jul/2026
EMI Test Receiver	R&S	ESR	102052	9kHz~3.6GHz	14/May/2025	13/May/2026
Signal Analyzer	ROHDE&SCHWARZ	FSV3044	101748	10Hz~44GHz	10/Apr/2025	09/Apr/2026
Loop Antenna	TESEQ	HLA 6120	31244	9kHz~30MHz	20/Mar/2025	19/Mar/2026
Bilog Antenna & 6dB Attenuator	SCHAFFNER / EMC	CBL6112B / N-6-05	22237 / AT-N-0603	30MHz~1GHz	11/Oct/2025	10/Oct/2026
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02267	1GHz~18GHz	28/Oct/2025	27/Oct/2026
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA 9170154	18GHz ~ 40GHz	02/Jul/2025	01/Jul/2026
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz~30MHz	10/Jun/2025	09/Jun/2026
RF Cable-R03m	Jye Bao	RG142	03CH03-cable -02	30MHz~1GHz	10/Jun/2025	09/Jun/2026
RF CABLE 5+8m	HUBER+SUHNER	SUOFLEX_104	03CH03-cable -03	1GHz~40GHz	19/May/2025	18/May/2026
Amplifier	Agilent	8447D	2944A08033	100kHz~1.3GHz	12/Sep/2025	11/Sep/2026
Microwave Premplifier	Agilent	8449B	3008A02326	1GHz~26.5GHz	23/Jul/2025	22/Jul/2026
Microwave Premplifier	EMC INSTRUMENTS	EM18G40G	060604	18GHz ~ 40GHz	26/Apr/2025	25/Apr/2026
SENSE-15247_FS	Sporton	V5.11.23	NA	NA	NA	NA




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	AV	11.23M	28.04	50.00	-21.96	Neutral


Result

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	QP	150k	21.59	66.00	-44.41	Line
Mode 1	Pass	AV	150k	19.50	56.00	-36.50	Line
Mode 1	Pass	QP	253.05k	15.79	61.66	-45.87	Line
Mode 1	Pass	AV	253.05k	14.11	51.66	-37.55	Line
Mode 1	Pass	QP	460.54k	13.54	56.69	-43.15	Line
Mode 1	Pass	AV	460.54k	12.28	46.69	-34.41	Line
Mode 1	Pass	QP	2.68M	16.57	56.00	-39.43	Line
Mode 1	Pass	AV	2.68M	14.43	46.00	-31.57	Line
Mode 1	Pass	QP	2.98M	19.03	56.00	-36.97	Line
Mode 1	Pass	AV	2.98M	15.68	46.00	-30.32	Line
Mode 1	Pass	QP	8.84M	32.87	60.00	-27.13	Line
Mode 1	Pass	AV	8.84M	25.73	50.00	-24.27	Line
Mode 1	Pass	QP	151.2k	20.96	65.92	-44.96	Neutral
Mode 1	Pass	AV	151.2k	19.04	55.92	-36.88	Neutral
Mode 1	Pass	QP	267.6k	15.49	61.20	-45.71	Neutral
Mode 1	Pass	AV	267.6k	13.83	51.20	-37.37	Neutral
Mode 1	Pass	QP	408.56k	13.95	57.68	-43.73	Neutral
Mode 1	Pass	AV	408.56k	12.40	47.68	-35.28	Neutral
Mode 1	Pass	QP	2.69M	16.02	56.00	-39.98	Neutral
Mode 1	Pass	AV	2.69M	14.32	46.00	-31.68	Neutral
Mode 1	Pass	QP	2.98M	18.52	56.00	-37.48	Neutral
Mode 1	Pass	AV	2.98M	15.21	46.00	-30.79	Neutral
Mode 1	Pass	QP	11.23M	34.47	60.00	-25.53	Neutral
Mode 1	Pass	AV	11.23M	28.04	50.00	-21.96	Neutral

Conducted Emissions at Powerline_Mode 1

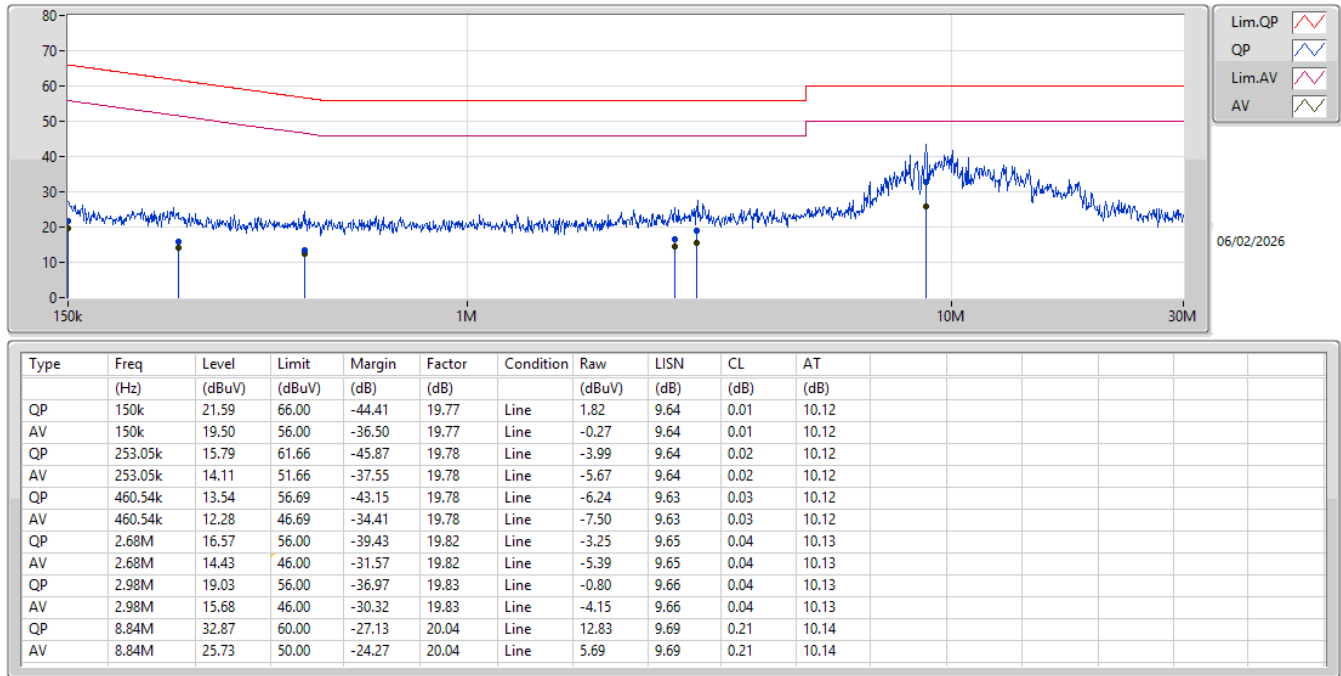

Conducted Emissions at Powerline_Mode 1

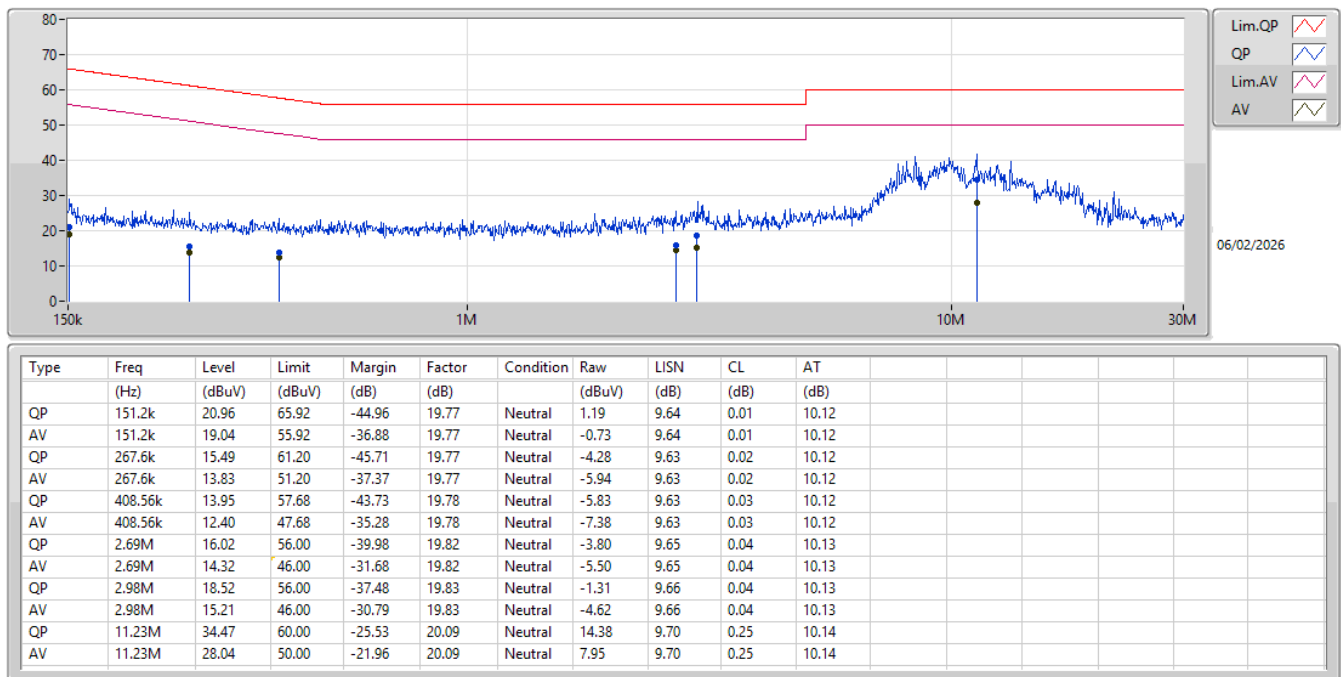




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	AV	10.45M	25.94	50.00	-24.06	Neutral


Result

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	QP	150k	21.38	66.00	-44.62	Line
Mode 1	Pass	AV	150k	19.59	56.00	-36.41	Line
Mode 1	Pass	QP	253.05k	15.52	61.66	-46.14	Line
Mode 1	Pass	AV	253.05k	14.16	51.66	-37.50	Line
Mode 1	Pass	QP	394.14k	13.70	57.97	-44.27	Line
Mode 1	Pass	AV	394.14k	12.45	47.97	-35.52	Line
Mode 1	Pass	QP	2.69M	16.05	56.00	-39.95	Line
Mode 1	Pass	AV	2.69M	14.17	46.00	-31.83	Line
Mode 1	Pass	QP	4.95M	17.44	56.00	-38.56	Line
Mode 1	Pass	AV	4.95M	15.48	46.00	-30.52	Line
Mode 1	Pass	QP	10.83M	32.51	60.00	-27.49	Line
Mode 1	Pass	AV	10.83M	25.30	50.00	-24.70	Line
Mode 1	Pass	QP	150k	21.75	66.00	-44.25	Neutral
Mode 1	Pass	AV	150k	19.62	56.00	-36.38	Neutral
Mode 1	Pass	QP	288.68k	15.09	60.57	-45.48	Neutral
Mode 1	Pass	AV	288.68k	13.61	50.57	-36.96	Neutral
Mode 1	Pass	QP	383.28k	13.70	58.20	-44.50	Neutral
Mode 1	Pass	AV	383.28k	12.54	48.20	-35.66	Neutral
Mode 1	Pass	QP	2.67M	15.69	56.00	-40.31	Neutral
Mode 1	Pass	AV	2.67M	13.91	46.00	-32.09	Neutral
Mode 1	Pass	QP	4.89M	17.30	56.00	-38.70	Neutral
Mode 1	Pass	AV	4.89M	15.46	46.00	-30.54	Neutral
Mode 1	Pass	QP	10.45M	32.83	60.00	-27.17	Neutral
Mode 1	Pass	AV	10.45M	25.94	50.00	-24.06	Neutral

Conducted Emissions at Powerline_Mode 1

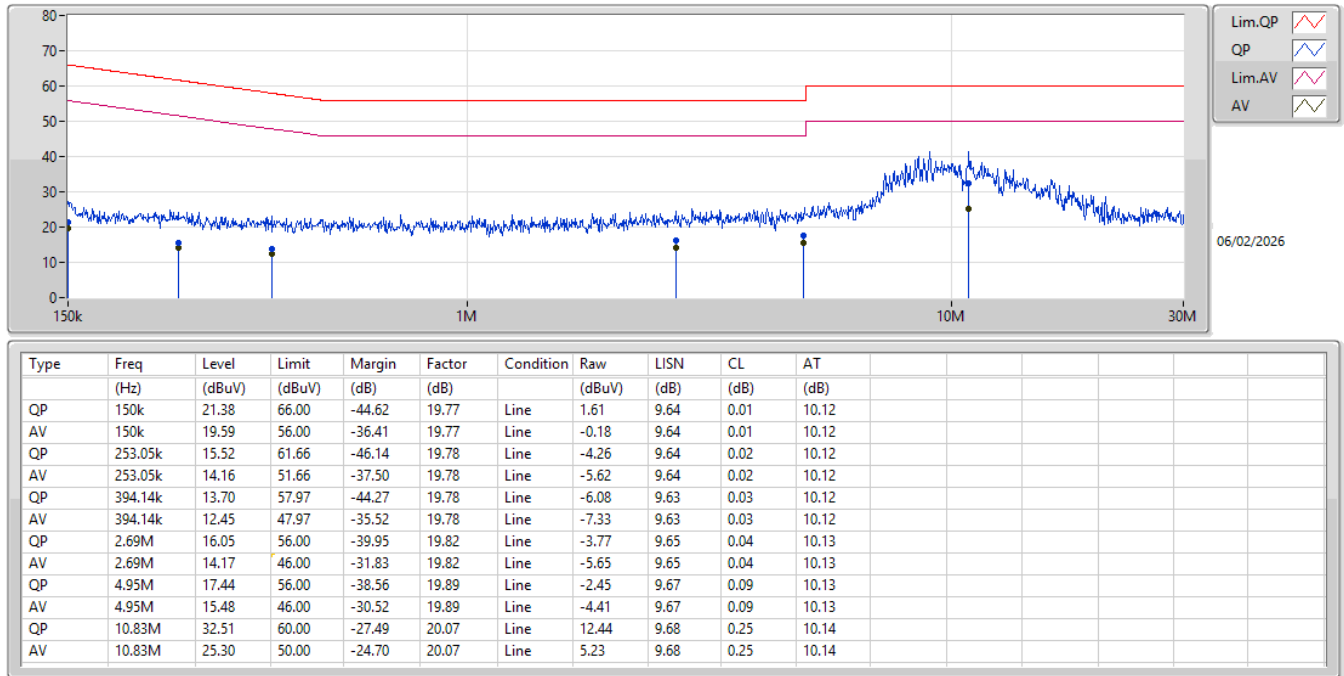

Conducted Emissions at Powerline_Mode 1

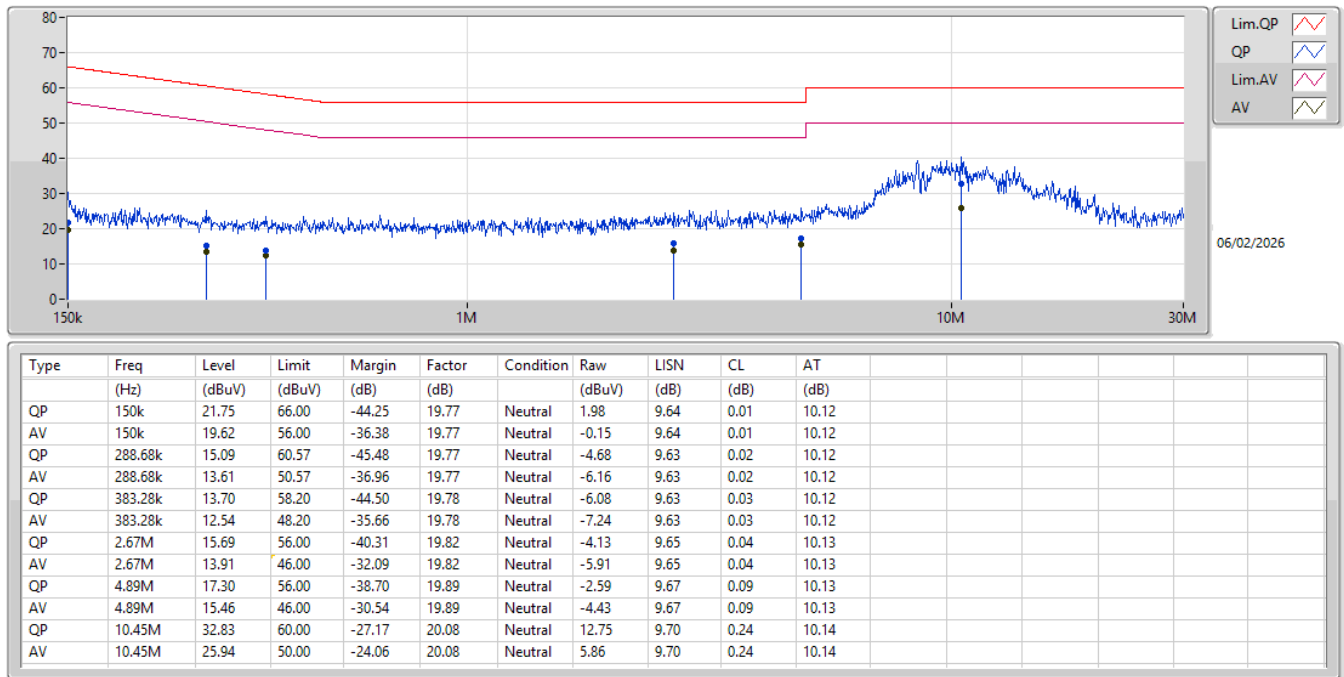

**Summary**

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-BR(1Mbps)	940.5k	872.096k	872KF1D	871.75k	863.67k
BT-EDR(2Mbps)	1.372M	1.22M	1M22G1D	1.317M	1.209M
BT-EDR(3Mbps)	1.345M	1.218M	1M22G1D	1.287M	1.213M

Max-N dB = Maximum 20dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 20dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-BR(1Mbps)	-	-	-	-
2402MHz	Pass	Inf	940.5k	867.967k
2440MHz	Pass	Inf	907.5k	872.096k
2480MHz	Pass	Inf	871.75k	863.67k
BT-EDR(2Mbps)	-	-	-	-
2402MHz	Pass	Inf	1.372M	1.22M
2440MHz	Pass	Inf	1.317M	1.212M
2480MHz	Pass	Inf	1.326M	1.209M
BT-EDR(3Mbps)	-	-	-	-
2402MHz	Pass	Inf	1.345M	1.216M
2440MHz	Pass	Inf	1.334M	1.213M
2480MHz	Pass	Inf	1.287M	1.218M



Port X-N dB = Port X 20dB down bandwidth;
Port X-OBW = Port X 99% occupied bandwidth

2.4-2.4835GHz_BT-BR(1Mbps)

EBW-FS

2402MHz

05/02/2026

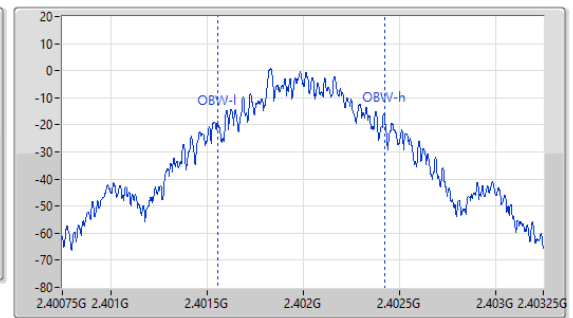
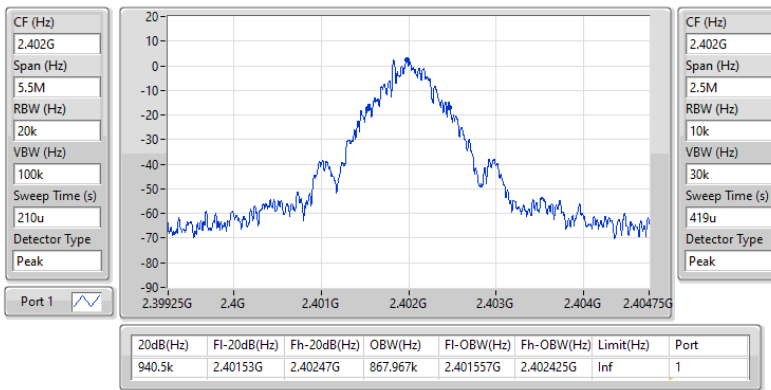


2.4-2.4835GHz_BT-EDR(2Mbps)

EBW-FS

2402MHz

05/02/2026

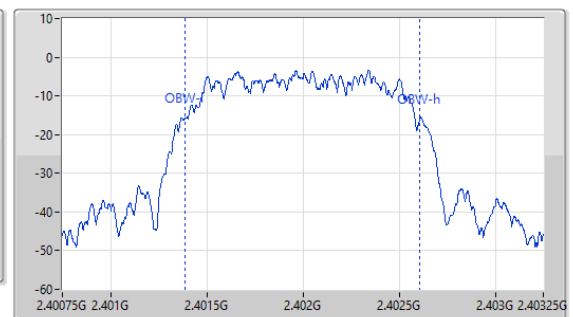
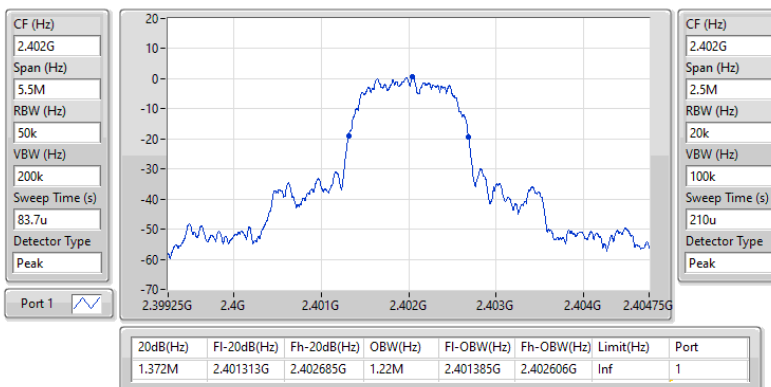


2.4-2.4835GHz_BT-EDR(3Mbps)

EBW-FS

2402MHz

05/02/2026

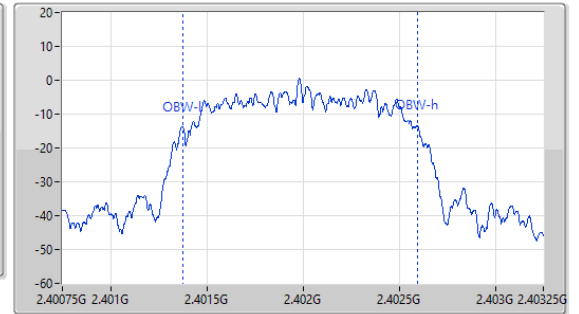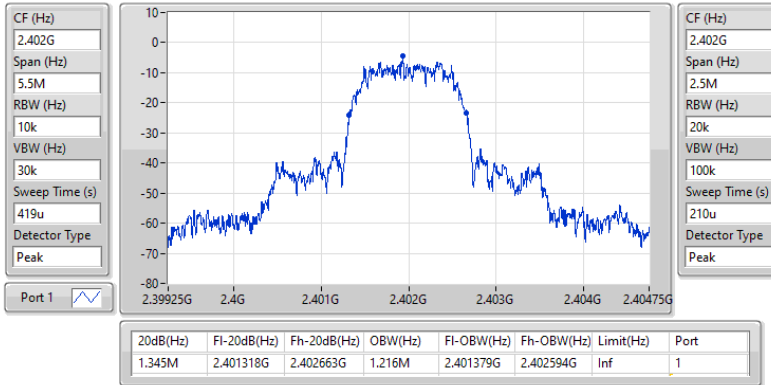

**Summary**

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-BR(1Mbps)	932.25k	882.059k	882KF1D	932.25k	874.563k
BT-EDR(2Mbps)	1.32M	1.224M	1M22G1D	1.315M	1.204M
BT-EDR(3Mbps)	1.306M	1.218M	1M22G1D	1.29M	1.198M

Max-N dB = Maximum 20dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 20dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-BR(1Mbps)	-	-	-	-
2402MHz	Pass	Inf	932.25k	878.311k
2440MHz	Pass	Inf	932.25k	874.563k
2480MHz	Pass	Inf	932.25k	882.059k
BT-EDR(2Mbps)	-	-	-	-
2402MHz	Pass	Inf	1.317M	1.224M
2440MHz	Pass	Inf	1.315M	1.204M
2480MHz	Pass	Inf	1.32M	1.213M
BT-EDR(3Mbps)	-	-	-	-
2402MHz	Pass	Inf	1.306M	1.217M
2440MHz	Pass	Inf	1.29M	1.198M
2480MHz	Pass	Inf	1.295M	1.218M



Port X-N dB = Port X 20dB down bandwidth;
Port X-OBW = Port X 99% occupied bandwidth

2.4-2.4835GHz_BT-BR(1Mbps)

EBW-FS

2402MHz

25/02/2026

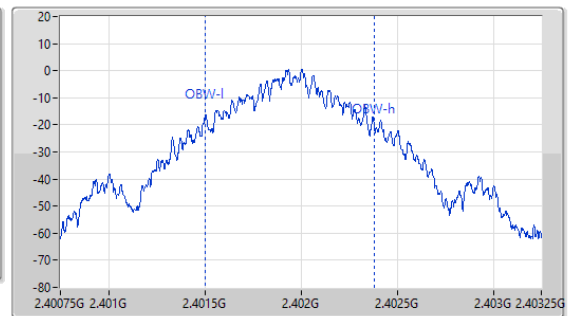
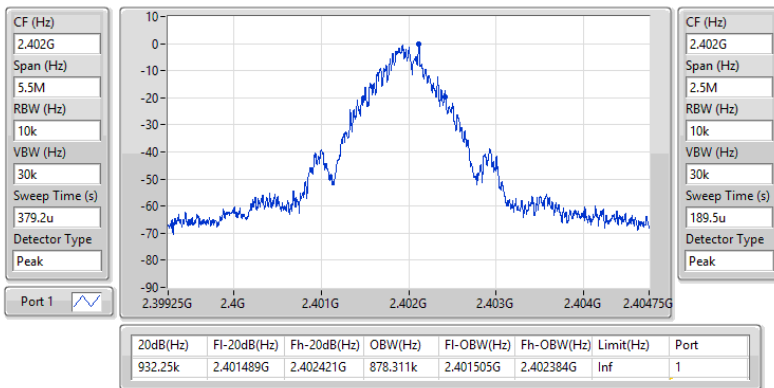


2.4-2.4835GHz_BT-EDR(2Mbps)

EBW-FS

2480MHz

05/02/2026

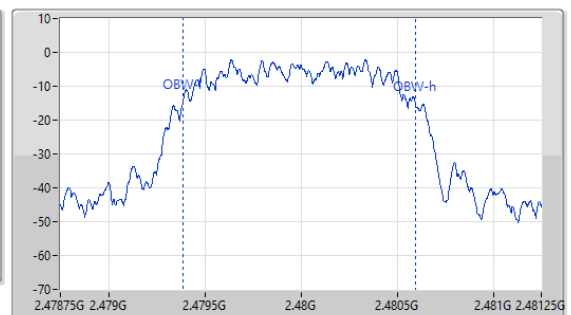
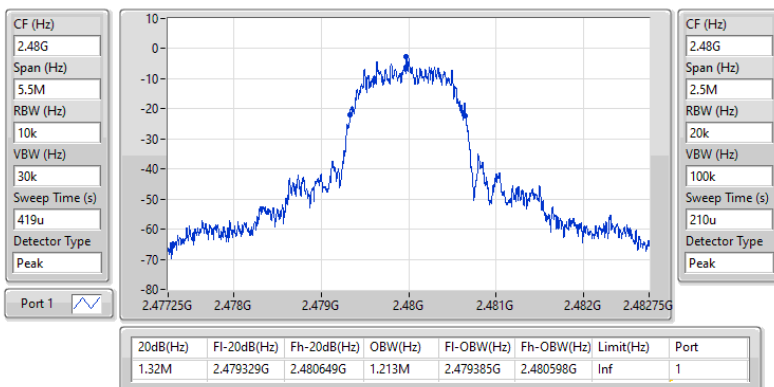


2.4-2.4835GHz_BT-EDR(3Mbps)

EBW-FS

2402MHz

05/02/2026

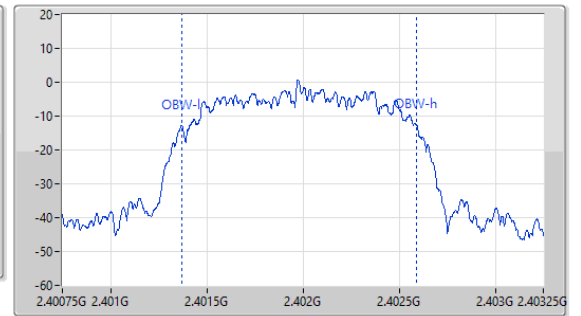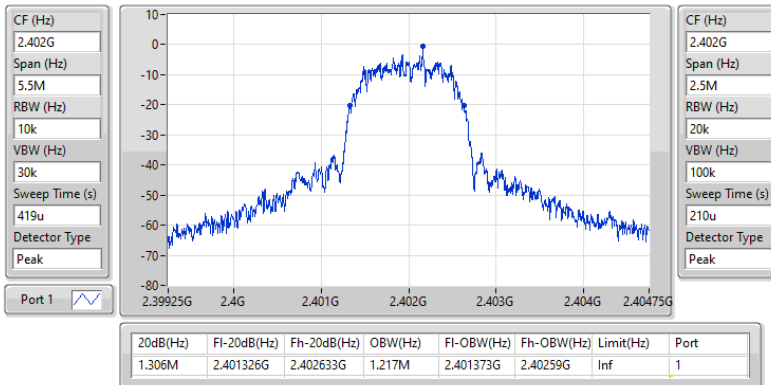



Summary

Mode	Max-Space (Hz)	Min-Space (Hz)
2.4-2.4835GHz	-	-
BT-BR(1Mbps)	1.002M	1.0005M
BT-EDR(2Mbps)	1.0065M	993k
BT-EDR(3Mbps)	1.167M	999k

Result


Mode	Result	Fl (Hz)	Fh (Hz)	Ch.Space (Hz)	Limit (Hz)
BT-BR(1Mbps)	-	-	-	-	-
2402MHz	Pass	2.40183G	2.40283G	1.0005M	626.373k
2440MHz	Pass	2.439828G	2.44083G	1.002M	604.395k
2480MHz	Pass	2.478828G	2.479829G	1.0005M	580.5855k
BT-EDR(2Mbps)	-	-	-	-	-
2402MHz	Pass	2.402001G	2.402994G	993k	913.752k
2440MHz	Pass	2.439999G	2.440994G	994.5k	877.122k
2480MHz	Pass	2.478993G	2.48G	1.0065M	883.116k
BT-EDR(3Mbps)	-	-	-	-	-
2402MHz	Pass	2.401993G	2.402992G	999k	895.77k
2440MHz	Pass	2.439993G	2.440992G	999k	888.444k
2480MHz	Pass	2.478992G	2.480159G	1.167M	857.142k

2.4-2.4835GHz_BT-BR(1Mbps)

Channel Separation-FS

2.402G/2.403GHz

05/02/2026

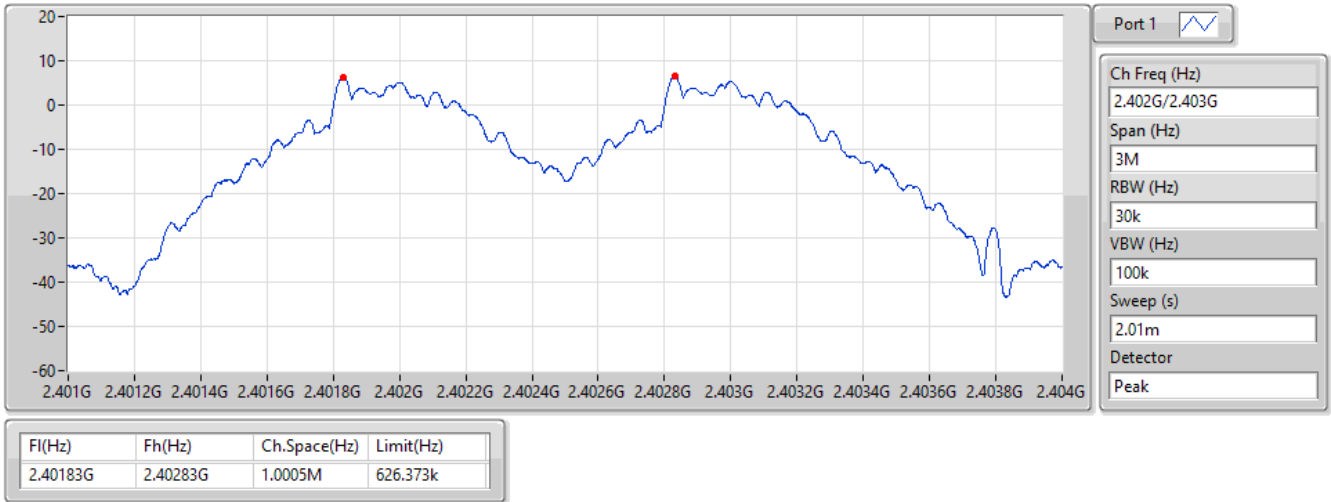


2.4-2.4835GHz_BT-EDR(2Mbps)

Channel Separation-FS

2.402G/2.403GHz

05/02/2026

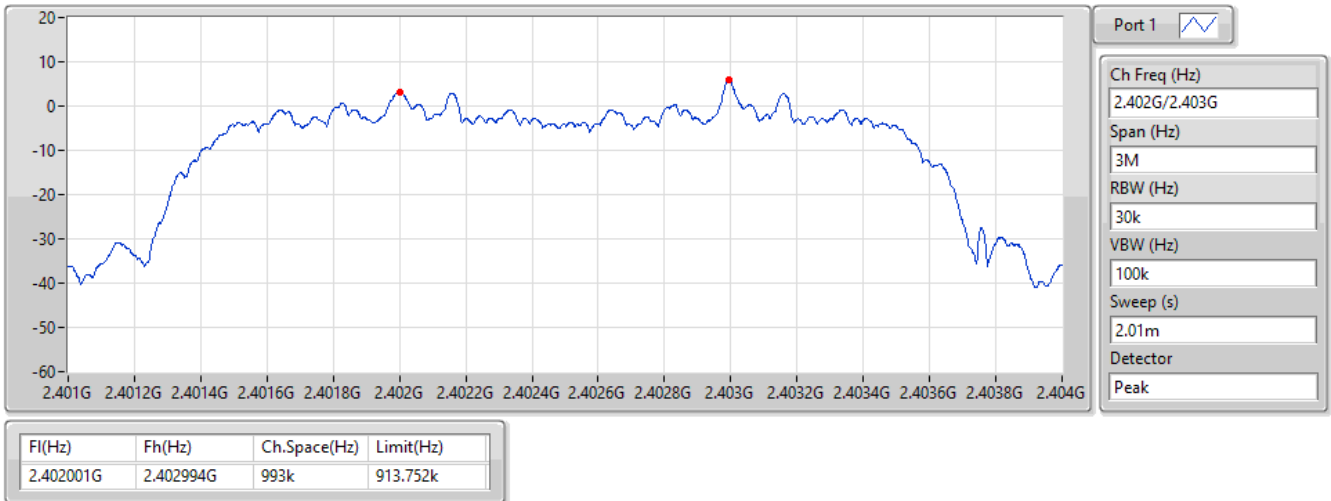


2.4-2.4835GHz_BT-EDR(3Mbps)

Channel Separation-FS

2.402G/2.403GHz

05/02/2026

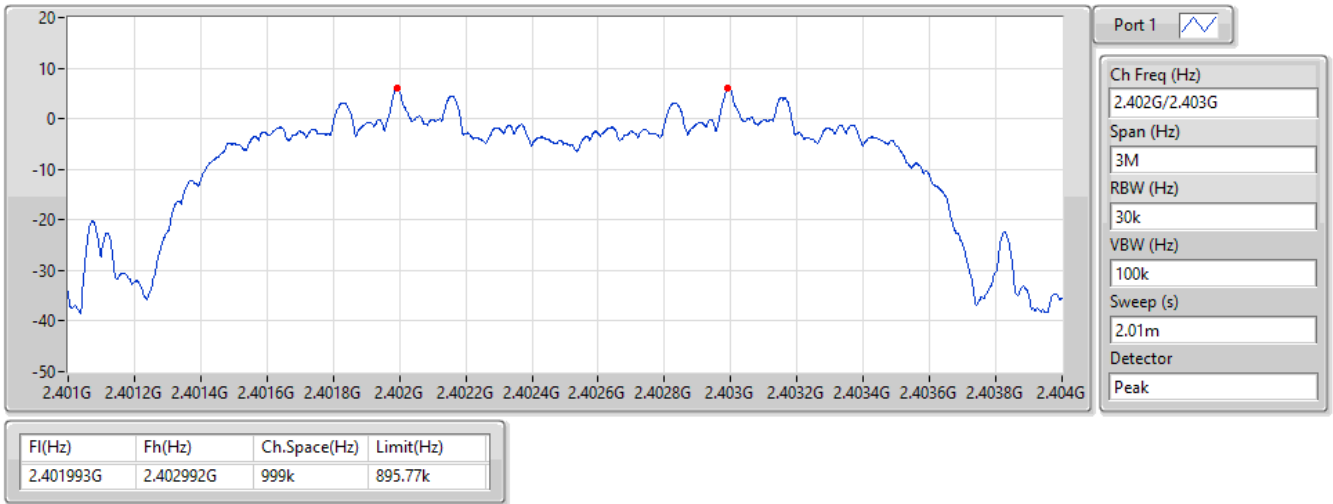



Summary

Mode	Max-Space (Hz)	Min-Space (Hz)
2.4-2.4835GHz	-	-
BT-BR(1Mbps)	1.0035M	999k
BT-EDR(2Mbps)	1.002M	996k
BT-EDR(3Mbps)	1.0005M	996k

Result


Mode	Result	Fl (Hz)	Fh (Hz)	Ch.Space (Hz)	Limit (Hz)
BT-BR(1Mbps)	-	-	-	-	-
2402MHz	Pass	2.402113G	2.403112G	999k	620.8785k
2440MHz	Pass	2.44011G	2.441114G	1.0035M	620.8785k
2480MHz	Pass	2.479112G	2.480111G	999k	620.8785k
BT-EDR(2Mbps)	-	-	-	-	-
2402MHz	Pass	2.401992G	2.402988G	996k	877.122k
2440MHz	Pass	2.439992G	2.440988G	996k	875.79k
2480MHz	Pass	2.478987G	2.479989G	1.002M	879.12k
BT-EDR(3Mbps)	-	-	-	-	-
2402MHz	Pass	2.401992G	2.402988G	996k	869.796k
2440MHz	Pass	2.439987G	2.440988G	1.0005M	859.14k
2480MHz	Pass	2.478987G	2.479988G	1.0005M	862.47k

2.4-2.4835GHz_BT-BR(1Mbps)

Channel Separation-FS

2.402G/2.403GHz

25/02/2026

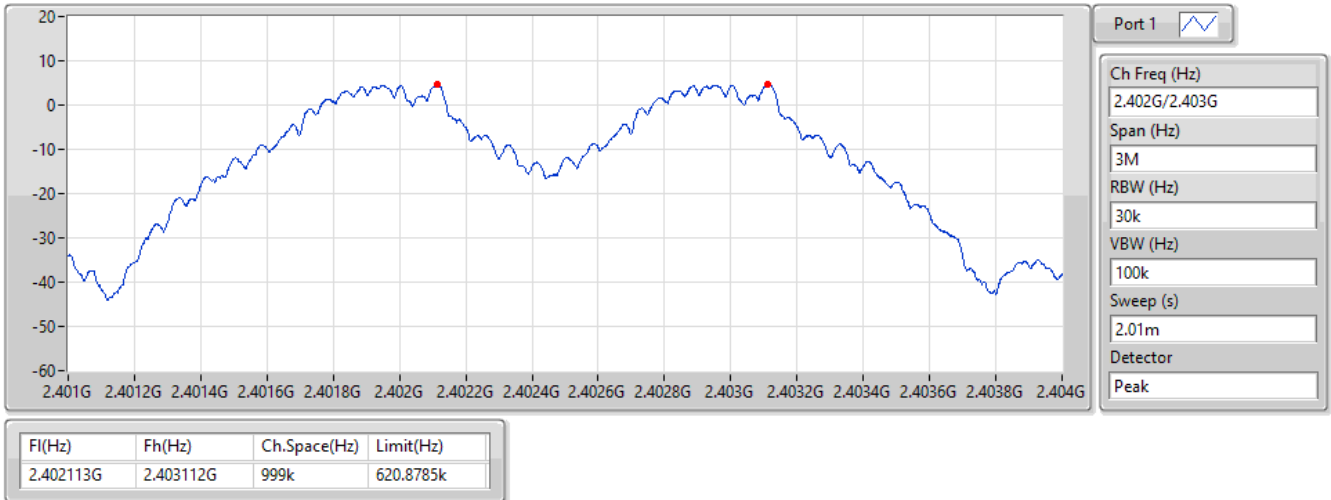


2.4-2.4835GHz_BT-EDR(2Mbps)

Channel Separation-FS

2.402G/2.403GHz

05/02/2026

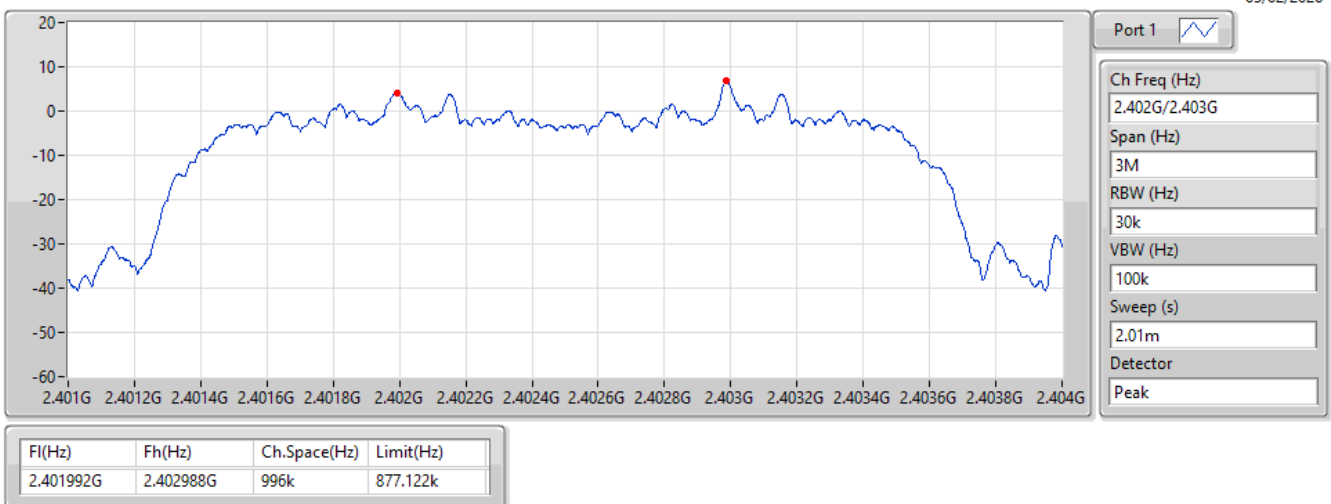


2.4-2.4835GHz_BT-EDR(3Mbps)

Channel Separation-FS

2.402G/2.403GHz

05/02/2026

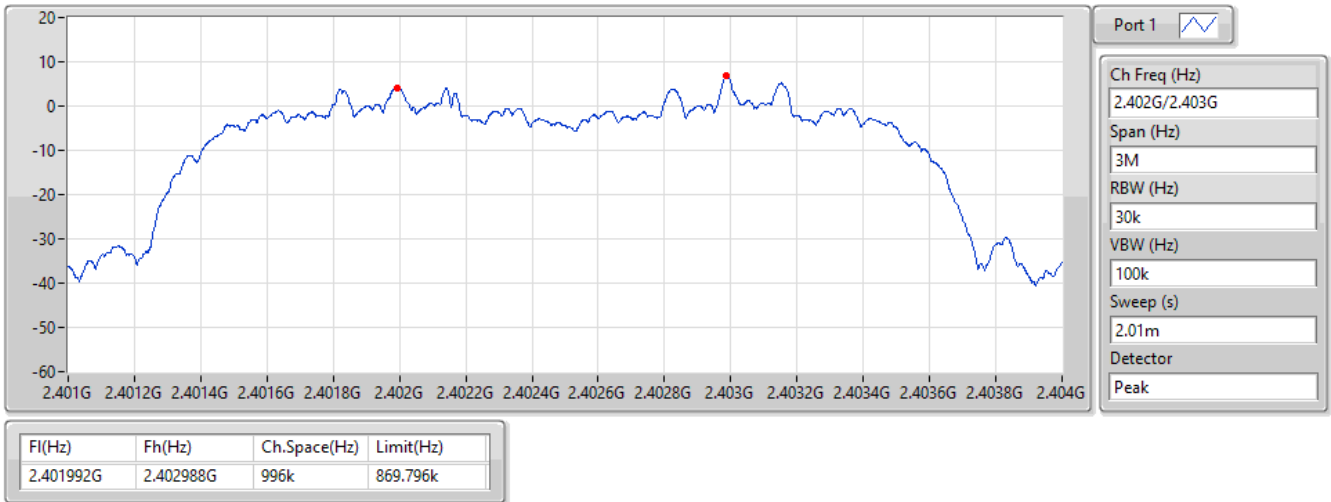



Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
BT-BR(1Mbps)	7.60	0.00575
BT-EDR(2Mbps)	7.89	0.00615
BT-EDR(3Mbps)	7.99	0.00630



Result

Mode	Result	DG (dBi)	Total Power (dBm)	Power Limit (dBm)
BT-BR(1Mbps)	-	-	-	-
2402MHz	Pass	2.48	7.51	21.00
2440MHz	Pass	2.48	7.60	21.00
2480MHz	Pass	2.48	7.33	21.00
BT-EDR(2Mbps)	-	-	-	-
2402MHz	Pass	2.48	7.85	21.00
2440MHz	Pass	2.48	7.89	21.00
2480MHz	Pass	2.48	7.88	21.00
BT-EDR(3Mbps)	-	-	-	-
2402MHz	Pass	2.48	7.98	21.00
2440MHz	Pass	2.48	7.99	21.00
2480MHz	Pass	2.48	7.86	21.00

DG = Directional Gain; Port X = Port X output power;
Inf = There's no restriction for the limit.



Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
BT-BR(1Mbps)	7.52	0.00565
BT-EDR(2Mbps)	7.96	0.00625
BT-EDR(3Mbps)	7.92	0.00619

**Result**

Mode	Result	DG (dBi)	Total Power (dBm)	Power Limit (dBm)
BT-BR(1Mbps)	-	-	-	-
2402MHz	Pass	2.48	7.42	21.00
2440MHz	Pass	2.48	7.52	21.00
2480MHz	Pass	2.48	7.48	21.00
BT-EDR(2Mbps)	-	-	-	-
2402MHz	Pass	2.48	7.96	21.00
2440MHz	Pass	2.48	7.95	21.00
2480MHz	Pass	2.48	7.86	21.00
BT-EDR(3Mbps)	-	-	-	-
2402MHz	Pass	2.48	7.92	21.00
2440MHz	Pass	2.48	7.90	21.00
2480MHz	Pass	2.48	7.81	21.00

DG = Directional Gain; Port X = Port X output power;
Inf = There's no restriction for the limit.



Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
BT-BR(1Mbps)	7.40	0.00550
BT-EDR(2Mbps)	5.61	0.00364
BT-EDR(3Mbps)	5.79	0.00379



Result

Mode	Result	DG (dBi)	Total Power (dBm)	Power Limit (dBm)
BT-BR(1Mbps)	-	-	-	-
2402MHz	Pass	2.48	6.61	21.00
2440MHz	Pass	2.48	7.40	21.00
2480MHz	Pass	2.48	7.13	21.00
BT-EDR(2Mbps)	-	-	-	-
2402MHz	Pass	2.48	5.61	21.00
2440MHz	Pass	2.48	5.57	21.00
2480MHz	Pass	2.48	5.39	21.00
BT-EDR(3Mbps)	-	-	-	-
2402MHz	Pass	2.48	5.79	21.00
2440MHz	Pass	2.48	5.78	21.00
2480MHz	Pass	2.48	5.54	21.00

DG = Directional Gain; Port X = Port X output power;
Inf = There's no restriction for the limit.



Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
BT-BR(1Mbps)	7.35	0.00543
BT-EDR(2Mbps)	6.22	0.00419
BT-EDR(3Mbps)	6.30	0.00427



Result

Mode	Result	DG (dBi)	Total Power (dBm)	Power Limit (dBm)
BT-BR(1Mbps)	-	-	-	-
2402MHz	Pass	2.48	7.25	21.00
2440MHz	Pass	2.48	7.35	21.00
2480MHz	Pass	2.48	7.29	21.00
BT-EDR(2Mbps)	-	-	-	-
2402MHz	Pass	2.48	6.22	21.00
2440MHz	Pass	2.48	6.07	21.00
2480MHz	Pass	2.48	5.89	21.00
BT-EDR(3Mbps)	-	-	-	-
2402MHz	Pass	2.48	6.30	21.00
2440MHz	Pass	2.48	6.19	21.00
2480MHz	Pass	2.48	6.11	21.00

DG = Directional Gain; Port X = Port X output power;
Inf = There's no restriction for the limit.



Summary

Mode	Max-Hop No
2.4-2.4835GHz	-
BT-BR(1Mbps)	79
BT-EDR(2Mbps)	79
BT-EDR(3Mbps)	79

Result


Mode	Result	Hopping No	Limit
BT-BR(1Mbps)	-	-	-
2440MHz	Pass	79	15
BT-EDR(2Mbps)	-	-	-
2440MHz	Pass	79	15
BT-EDR(3Mbps)	-	-	-
2440MHz	Pass	79	15

2.4-2.4835GHz_BT-BR(1Mbps)

Hopping-FS

2440MHz

05/02/2026

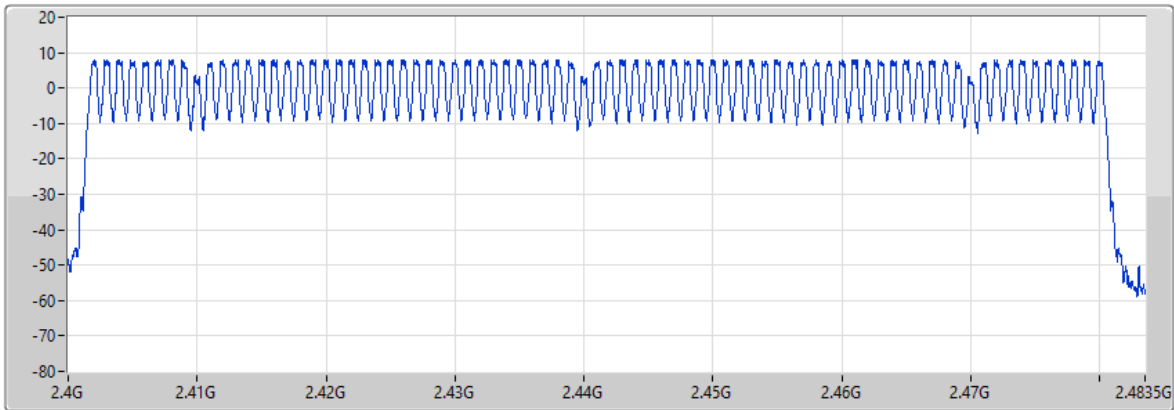

Port 1 

Hopping No
79

Span (Hz)
83.5M

RBW (Hz)
100k

VBW (Hz)
300kHz

Sweep (s)
83.7us

Detector
Peak


Hopping No	Limit
79	15

2.4-2.4835GHz_BT-BR(1Mbps)

2440MHz

Hopping Ch Bandedge (Non-restricted Band)

05/02/2026

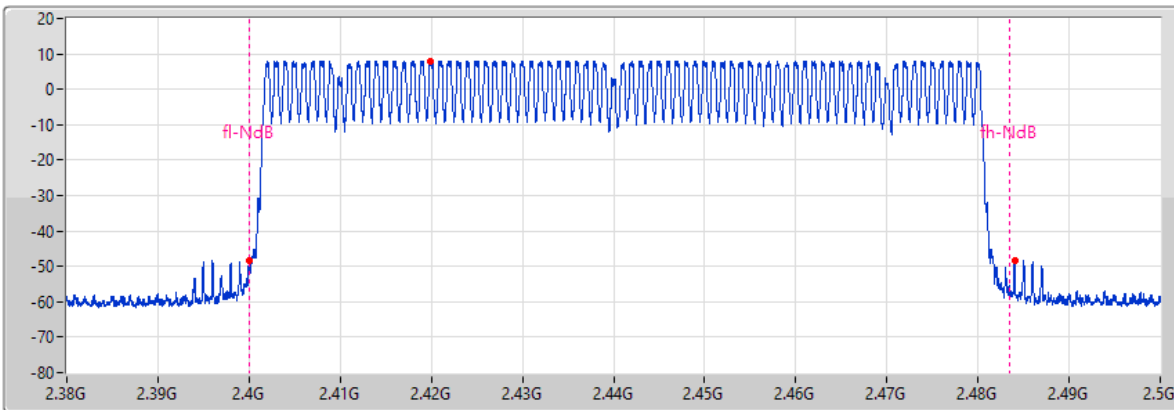

Port 1 

Span (Hz)
120M

RBW (Hz)
100k

VBW (Hz)
300k

Sweep (s)
83.7u

Detector
Peak


Limit(dBm)	Ref(Hz)	Ref(dBm)	BE-l(Hz)	BE-l(dBm)	BE-h(Hz)	BE-h(dBm)
-11.97	2.419825G	8.03	2.39998G	-48.29	2.483995G	-48.51

2.4-2.4835GHz_BT-BR(1Mbps)

2440MHz

Hopping Ch Bandedge (Restricted Band)

05/02/2026

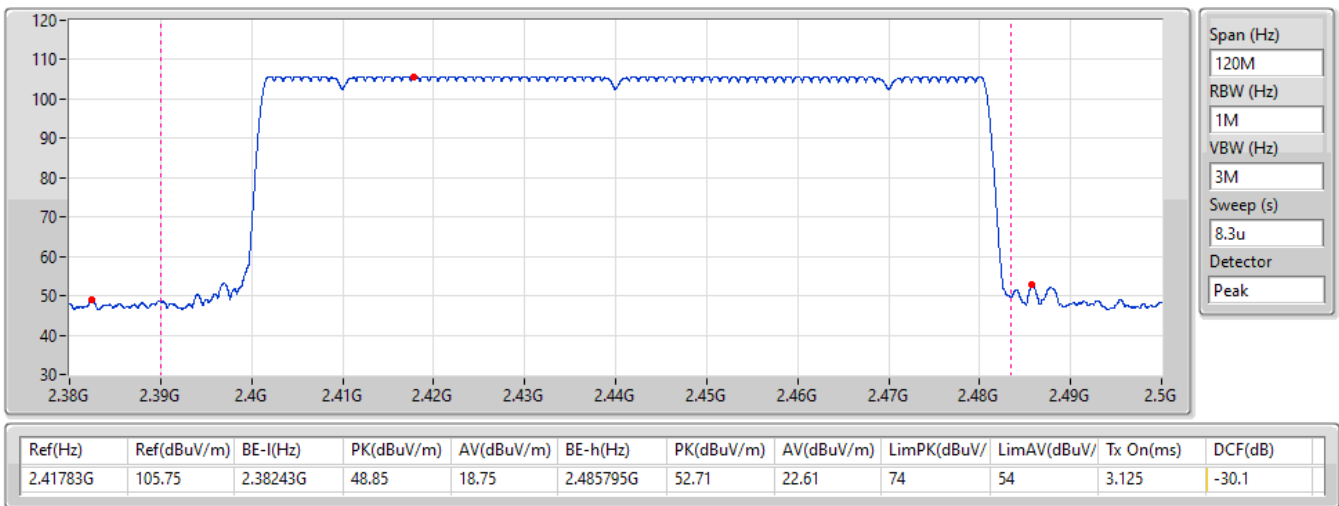


2.4-2.4835GHz_BT-EDR(2Mbps)

Hopping-FS

2440MHz

05/02/2026

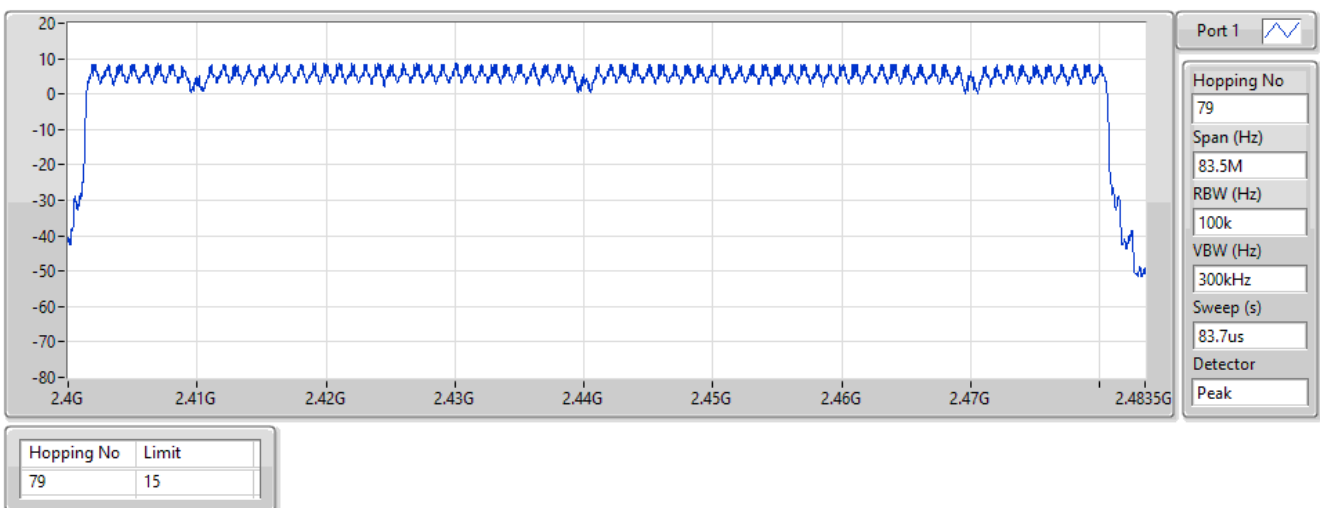


2.4-2.4835GHz_BT-EDR(2Mbps)

2440MHz

Hopping Ch Bandedge (Non-restricted Band)

05/02/2026

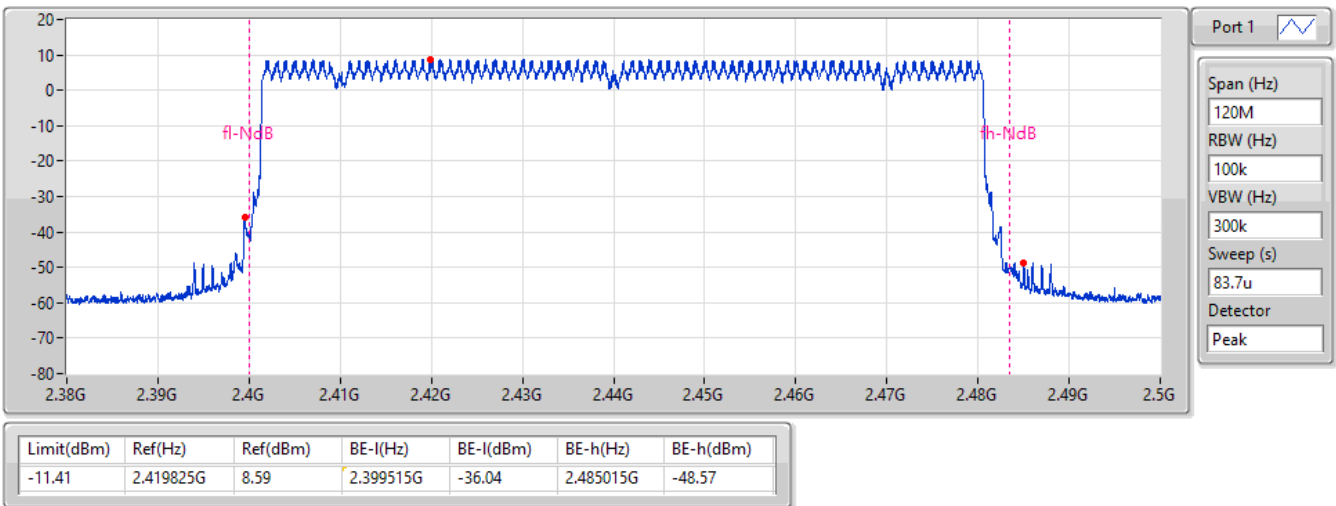


2.4-2.4835GHz_BT-EDR(2Mbps)

2440MHz

Hopping Ch Bandedge (Restricted Band)

05/02/2026

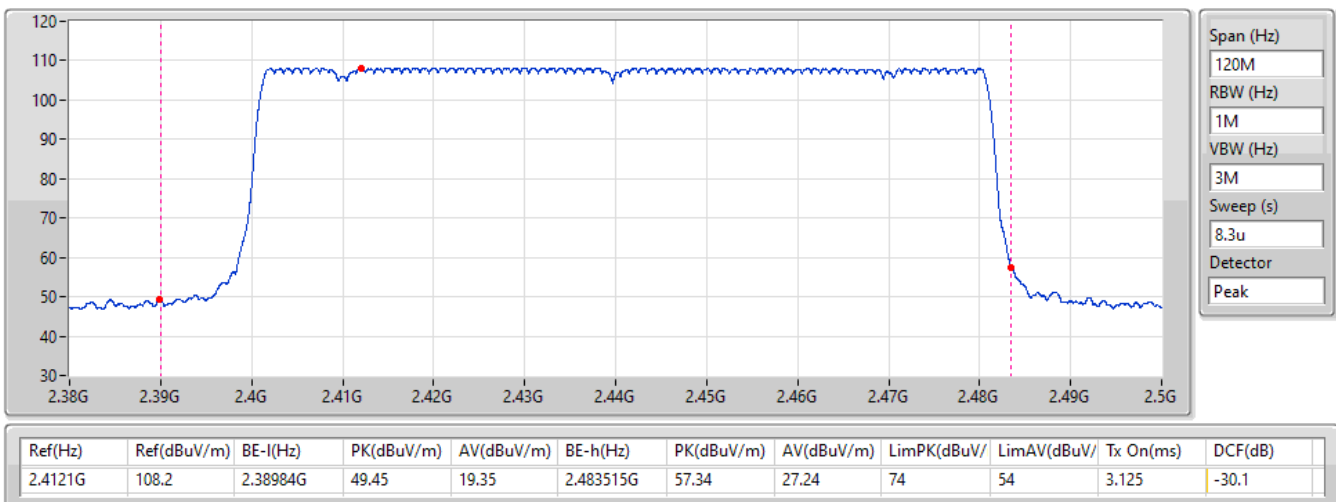


2.4-2.4835GHz_BT-EDR(3Mbps)

Hopping-FS

2440MHz

05/02/2026

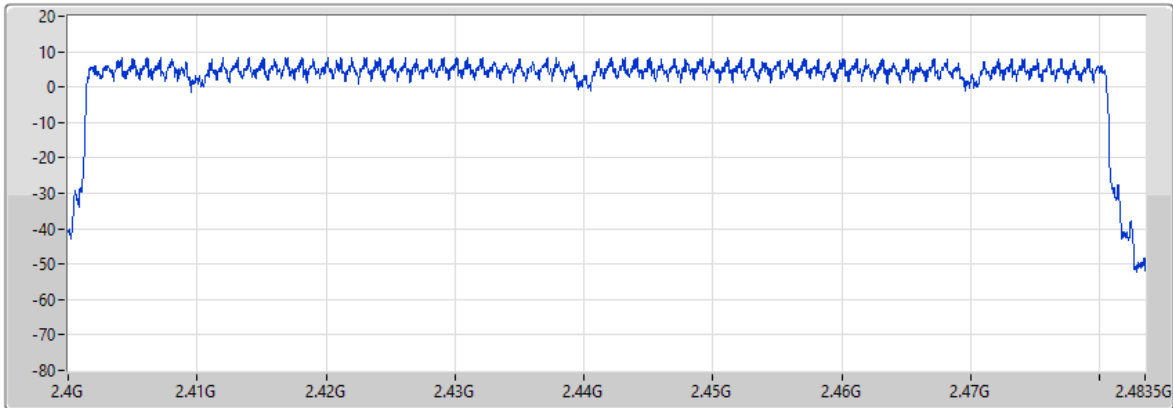

Port 1 

Hopping No
79

Span (Hz)
83.5M

RBW (Hz)
100k

VBW (Hz)
300kHz

Sweep (s)
83.7us

Detector
Peak


Hopping No	Limit
79	15

2.4-2.4835GHz_BT-EDR(3Mbps)

2440MHz

Hopping Ch Bandedge (Non-restricted Band)

05/02/2026

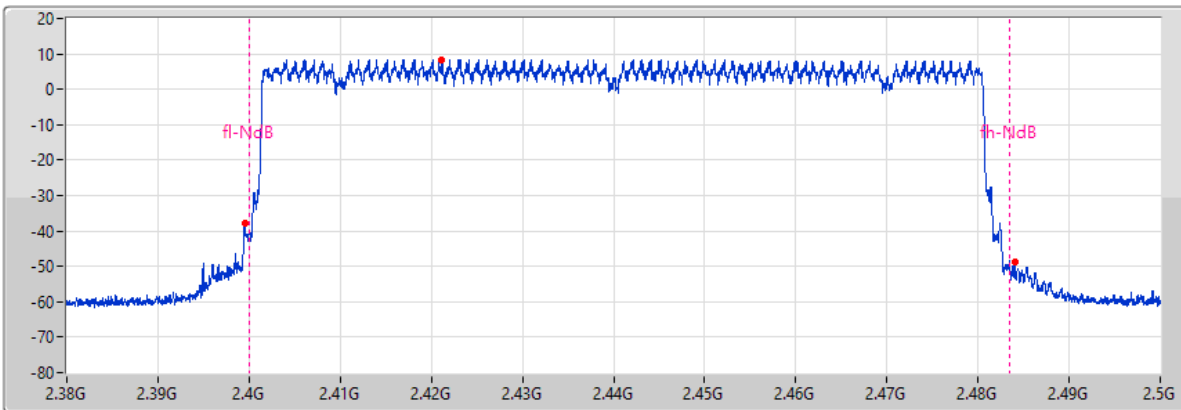

Port 1 

Span (Hz)
120M

RBW (Hz)
100k

VBW (Hz)
300k

Sweep (s)
83.7u

Detector
Peak


Limit(dBm)	Ref(Hz)	Ref(dBm)	BE-l(Hz)	BE-l(dBm)	BE-h(Hz)	BE-h(dBm)
-11.77	2.42116G	8.23	2.3995G	-37.71	2.48401G	-48.78

2.4-2.4835GHz_BT-EDR(3Mbps)

2440MHz

Hopping Ch Bandedge (Restricted Band)

05/02/2026

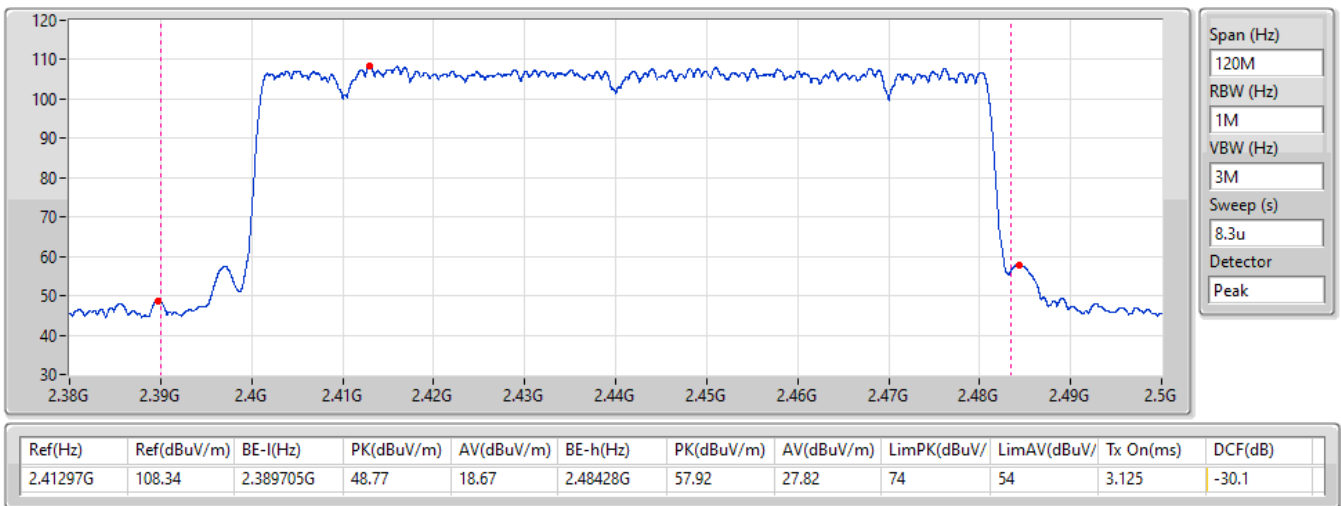



Summary

Mode	Max-Hop No
2.4-2.4835GHz	-
BT-BR(1Mbps)	79
BT-EDR(2Mbps)	79
BT-EDR(3Mbps)	79

Result


Mode	Result	Hopping No	Limit
BT-BR(1Mbps)	-	-	-
2440MHz	Pass	79	15
BT-EDR(2Mbps)	-	-	-
2440MHz	Pass	79	15
BT-EDR(3Mbps)	-	-	-
2440MHz	Pass	79	15

2.4-2.4835GHz_BT-BR(1Mbps)

Hopping-FS

2440MHz

05/02/2026

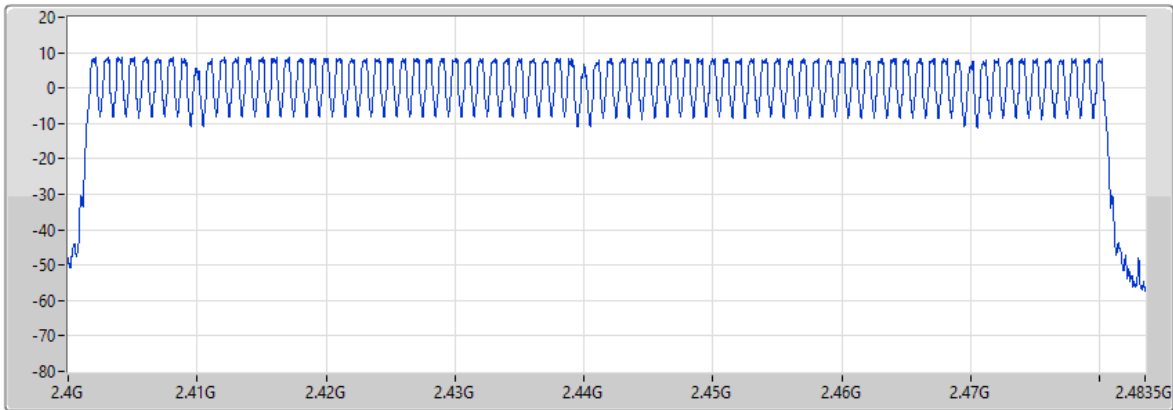

Port 1 

Hopping No
79

Span (Hz)
83.5M

RBW (Hz)
100k

VBW (Hz)
300kHz

Sweep (s)
83.7us

Detector
Peak


Hopping No	Limit
79	15

2.4-2.4835GHz_BT-BR(1Mbps)

2440MHz

Hopping Ch Bandedge (Non-restricted Band)

05/02/2026

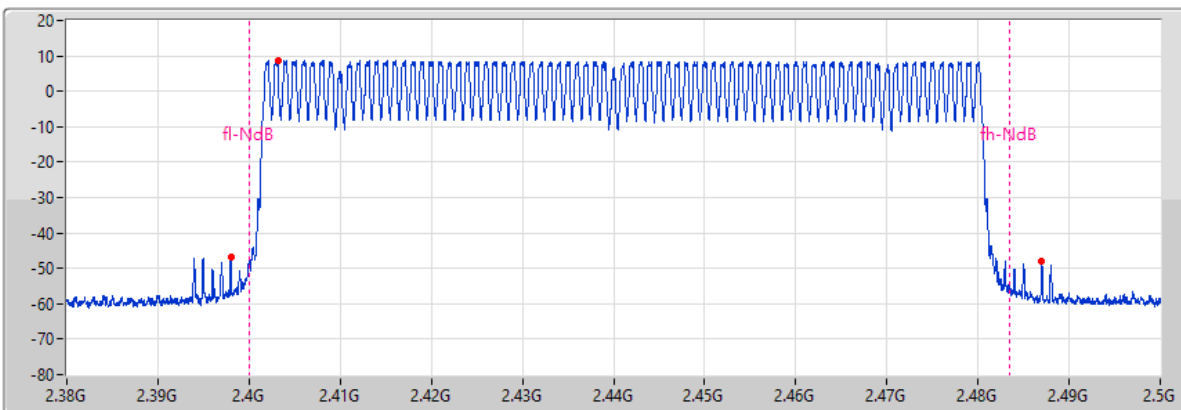

Port 1 

Span (Hz)
120M

RBW (Hz)
100k

VBW (Hz)
300k

Sweep (s)
83.7u

Detector
Peak


Limit(dBm)	Ref(Hz)	Ref(dBm)	BE-l(Hz)	BE-l(dBm)	BE-h(Hz)	BE-h(dBm)
-11.48	2.403145G	8.52	2.397985G	-46.82	2.486995G	-47.98

2.4-2.4835GHz_BT-BR(1Mbps)

2440MHz

Hopping Ch Bandedge (Restricted Band)

05/02/2026

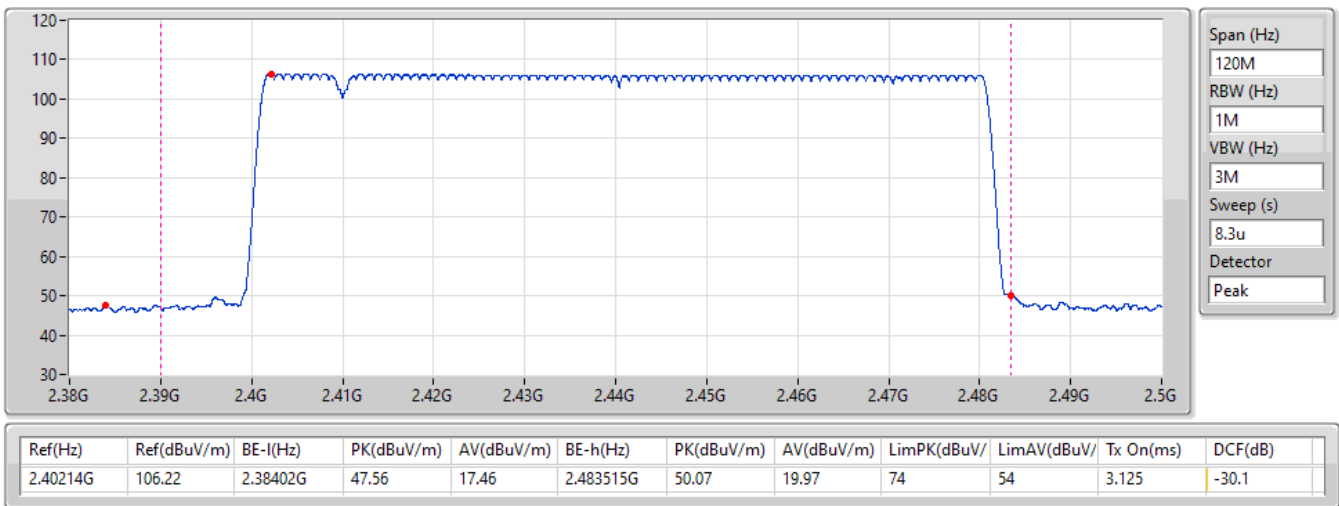


2.4-2.4835GHz_BT-EDR(2Mbps)

2440MHz

Hopping-FS

05/02/2026

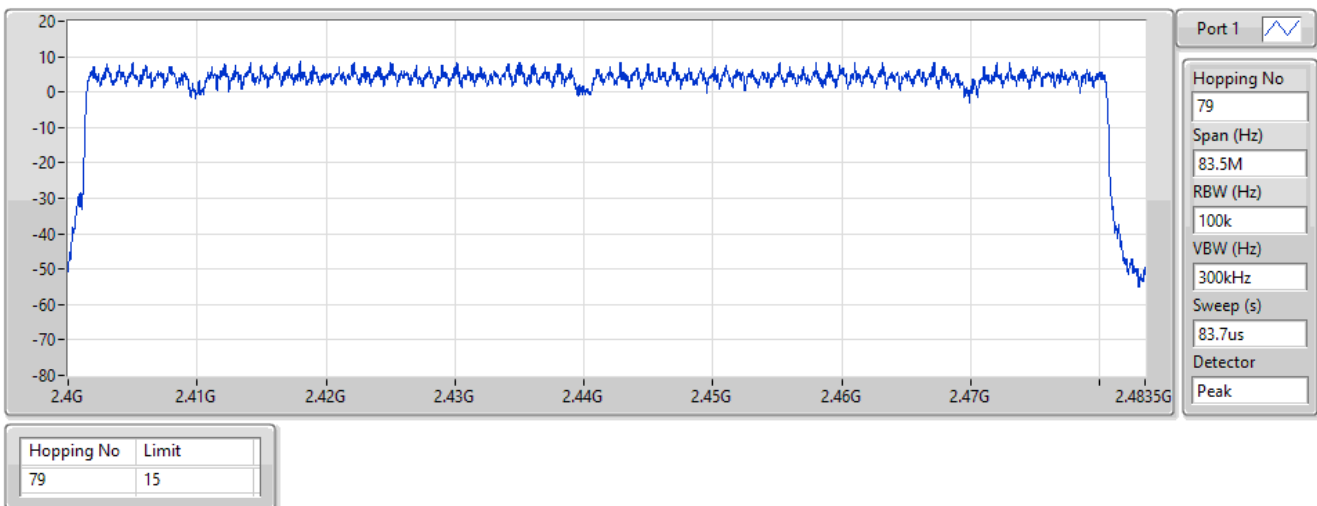


2.4-2.4835GHz_BT-EDR(2Mbps)

2440MHz

Hopping Ch Bandedge (Non-restricted Band)

05/02/2026

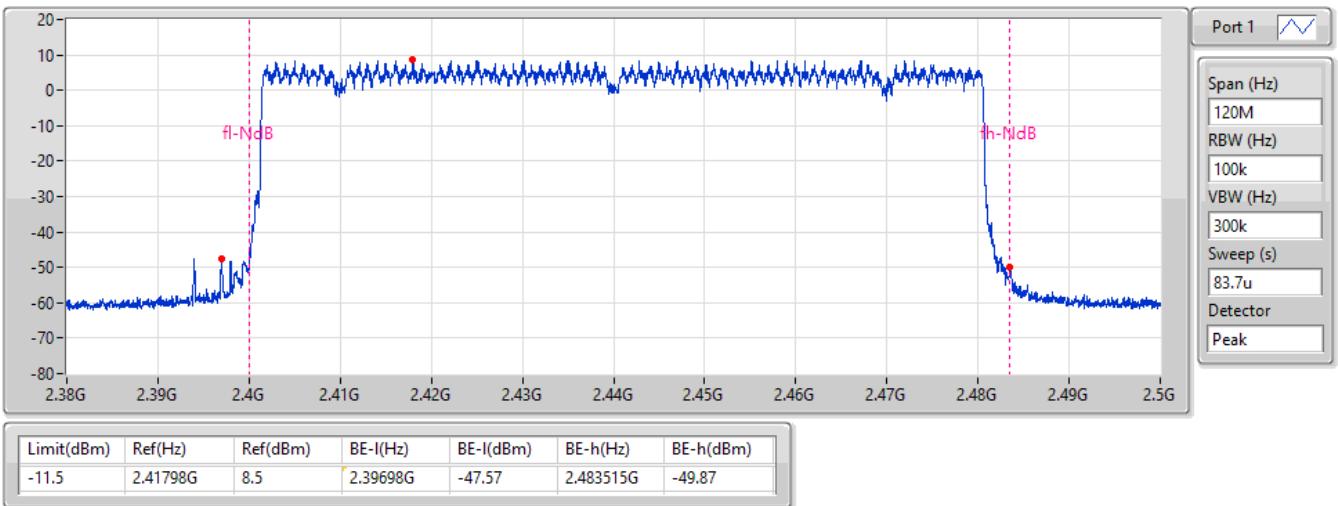


2.4-2.4835GHz_BT-EDR(2Mbps)

2440MHz

Hopping Ch Bandedge (Restricted Band)

05/02/2026

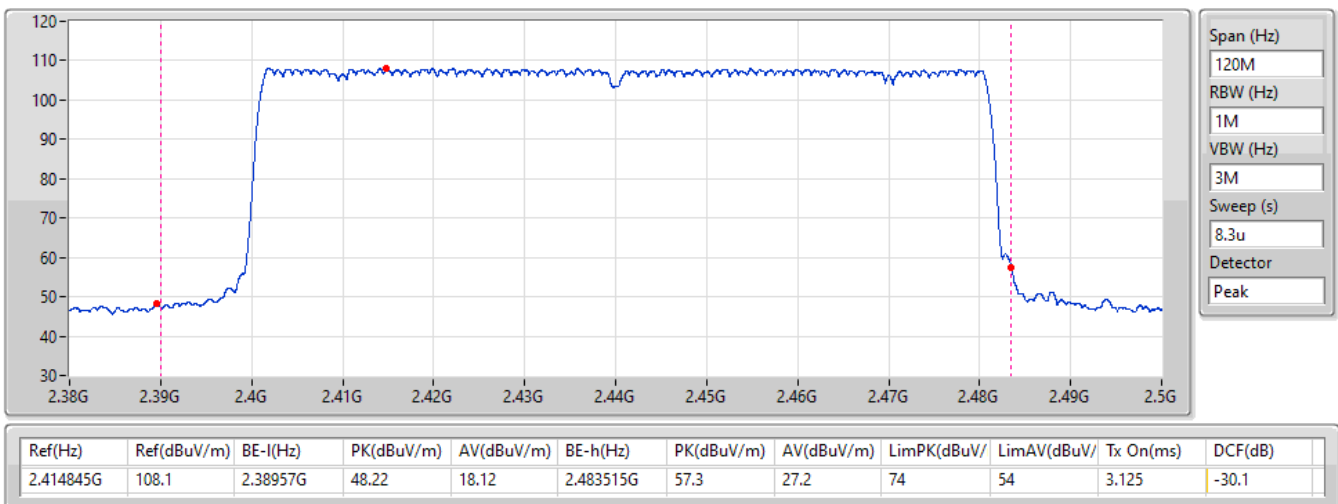


2.4-2.4835GHz_BT-EDR(3Mbps)

Hopping-FS

2440MHz

05/02/2026

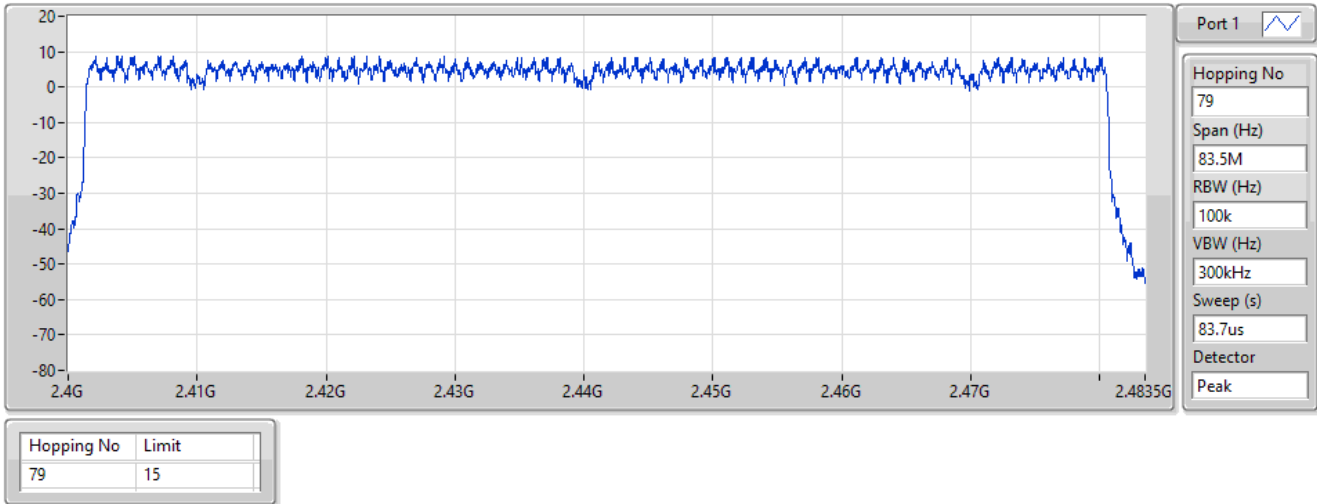


2.4-2.4835GHz_BT-EDR(3Mbps)

2440MHz

Hopping Ch Bandedge (Non-restricted Band)

05/02/2026

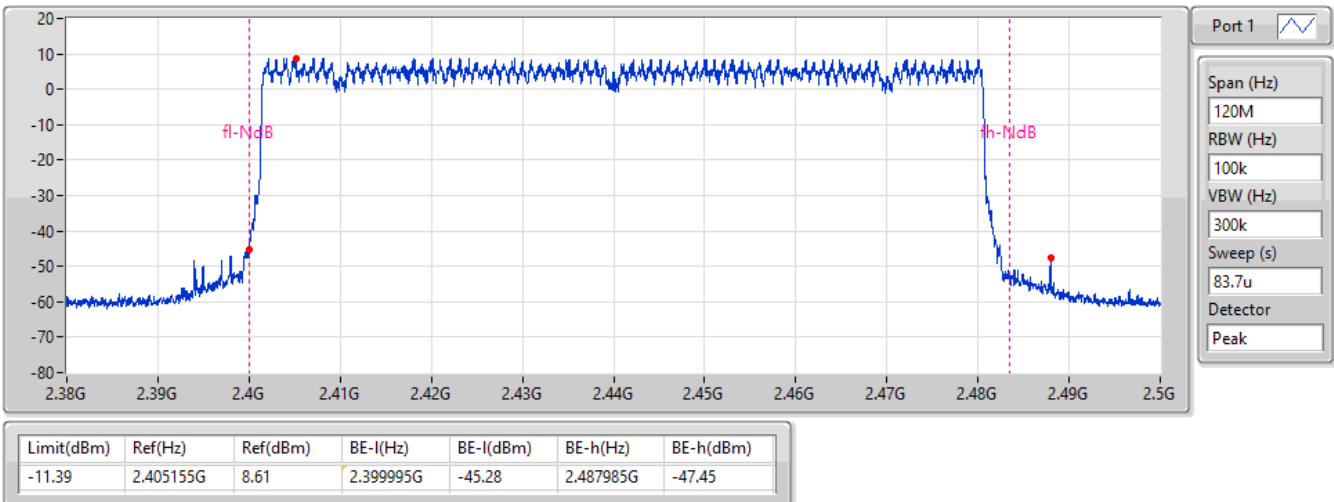


2.4-2.4835GHz_BT-EDR(3Mbps)

2440MHz

Hopping Ch Bandedge (Restricted Band)

05/02/2026

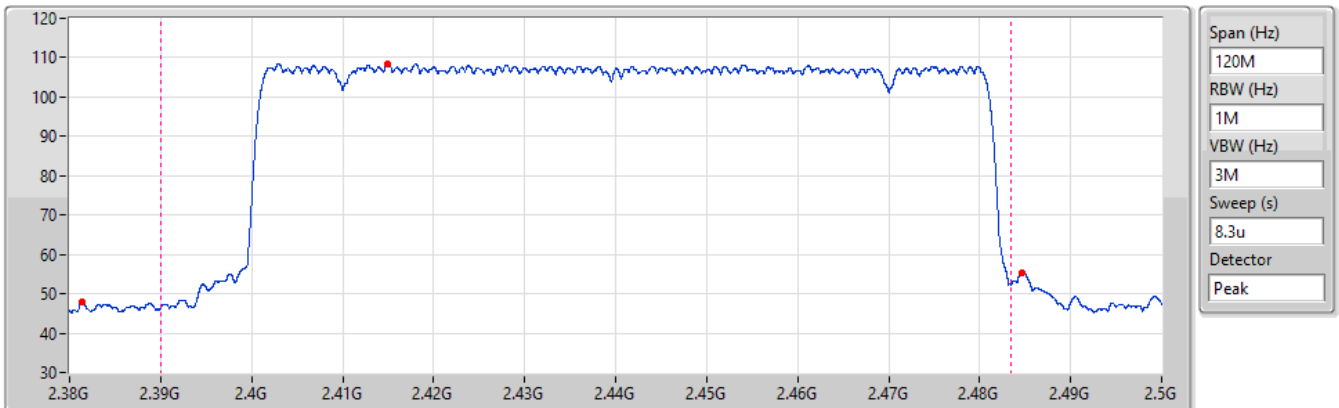

Ref(Hz)	Ref(dBuV/m)	BE-l(Hz)	PK(dBuV/m)	AV(dBuV/m)	BE-h(Hz)	PK(dBuV/m)	AV(dBuV/m)	LimPK(dBuV/	LimAV(dBuV/	Tx On(ms)	DCF(dB)
2.41498G	108.56	2.381425G	48	17.9	2.48467G	55.47	25.37	74	54	3.125	-30.1



Summary

2.4-2.4835GHz	-
BT-BR(1Mbps)	41.60065m_DH5
BT-EDR(2Mbps)	309.2999m_DH5
BT-EDR(3Mbps)	309.4598m_DH5

Result


Mode	Result	Period (s)	Dwell (s)	Limit (s)	Tx On (s)
BT-BR(1Mbps)	-	-	-	-	-
2440MHz	Pass	31.6	41.60065m_DH5	400m	390.25u
2440MHz	Pass	8	20.81365m_DH5-AFH	400m	390.5u
BT-EDR(2Mbps)	-	-	-	-	-
2440MHz	Pass	31.6	309.2999m_DH5	400m	2.9015m
2440MHz	Pass	8	154.663275m_DH5-AFH	400m	2.90175m
BT-EDR(3Mbps)	-	-	-	-	-
2440MHz	Pass	31.6	309.4598m_DH5	400m	2.903m
2440MHz	Pass	8	154.743225m_DH5-AFH	400m	2.90325m

2.4-2.4835GHz_BT-BR(1Mbps)

Dwell-FS

2440MHz

05/02/2026

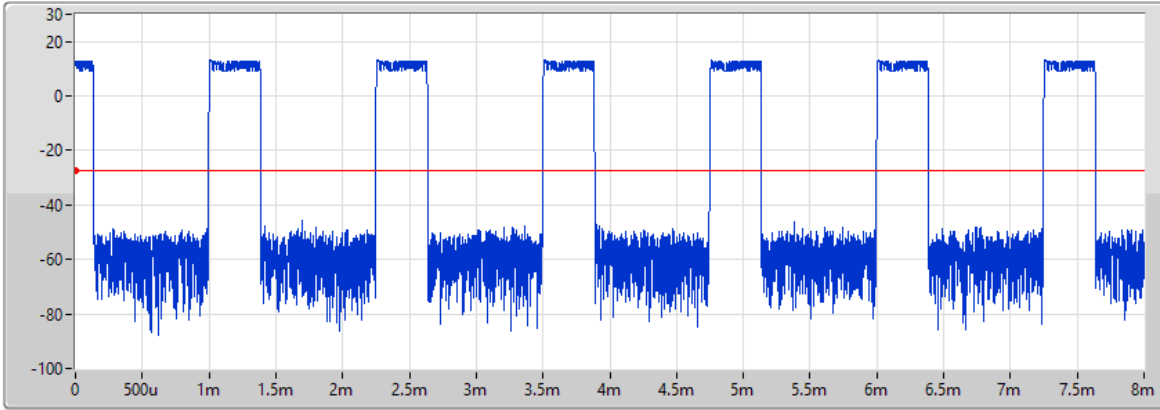

Port 1 

Ch Freq (Hz)
2.44G

RBW (Hz)
300k

VBW (Hz)
1M

Sweep Time (s)
8m

TX Time (s)
390.25u

DH5


Period(s)	Dwell(s)	Limit(s)	Tx On(s)
31.6	41.60065m_DH5	400m	390.25u

2.4-2.4835GHz_BT-BR(1Mbps)

Dwell-FS

2440MHz

05/02/2026

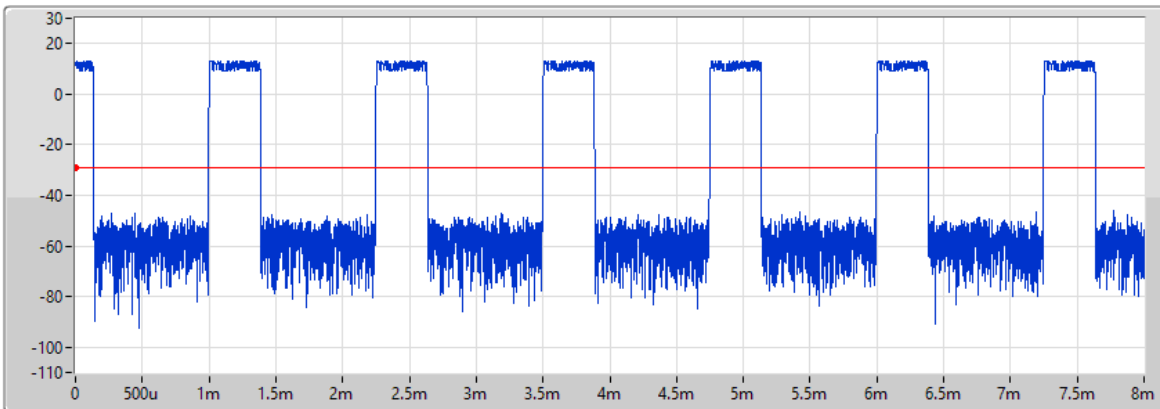

Port 1 

Ch Freq (Hz)
2.44G

RBW (Hz)
300k

VBW (Hz)
1M

Sweep Time (s)
8m

TX Time (s)
390.5u

DH5-AFH


Period(s)	Dwell(s)	Limit(s)	Tx On(s)
8	20.81365m_DH5-AFH	400m	390.5u

2.4-2.4835GHz_BT-EDR(2Mbps)

Dwell-FS

2440MHz

05/02/2026

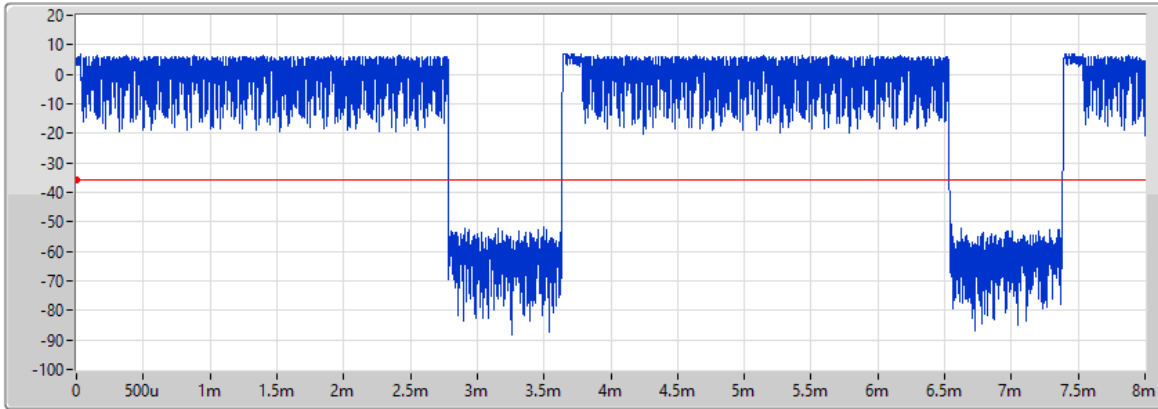

Port 1 

Ch Freq (Hz)
2.44G

RBW (Hz)
300k

VBW (Hz)
1M

Sweep Time (s)
8m

TX Time (s)
2.9015m

Period(s)	Dwell(s)	Limit(s)	Tx On(s)
31.6	309.2999m_DH5	400m	2.9015m


DH5

2.4-2.4835GHz_BT-EDR(2Mbps)

Dwell-FS

2440MHz

05/02/2026

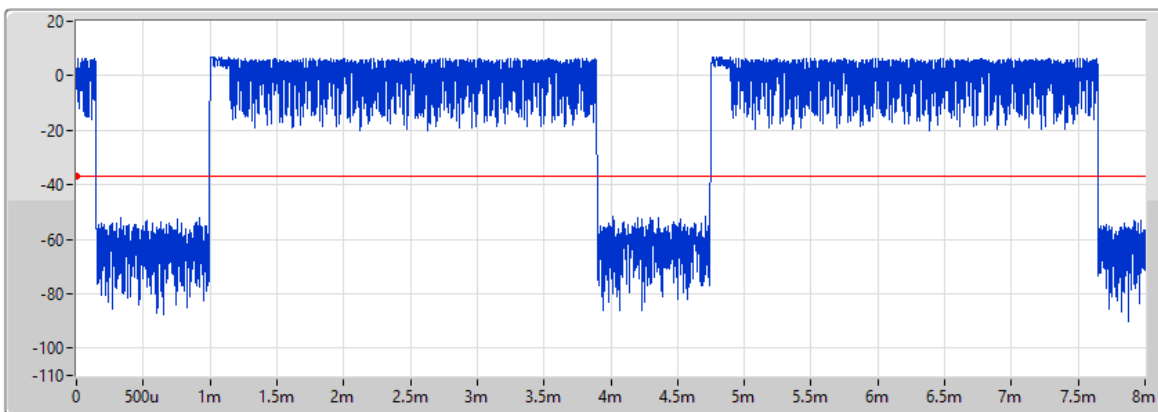

Port 1 

Ch Freq (Hz)
2.44G

RBW (Hz)
300k

VBW (Hz)
1M

Sweep Time (s)
8m

TX Time (s)
2.90175m

Period(s)	Dwell(s)	Limit(s)	Tx On(s)
8	154.663275m_DH5-AFI	400m	2.90175m


DH5-AFH

2.4-2.4835GHz_BT-EDR(3Mbps)

Dwell-FS

2440MHz

05/02/2026

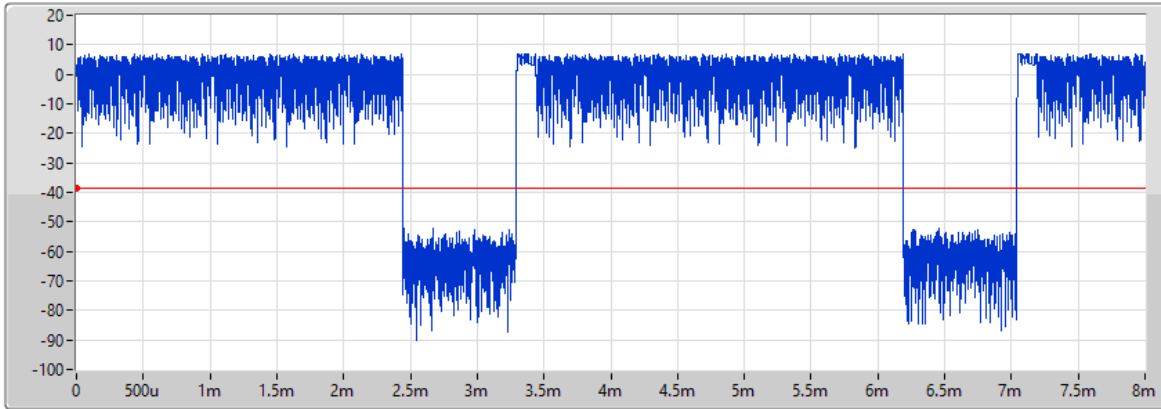

Port 1 

Ch Freq (Hz)
2.44G

RBW (Hz)
300k

VBW (Hz)
1M

Sweep Time (s)
8m

TX Time (s)
2.903m

Period(s)	Dwell(s)	Limit(s)	Tx On(s)
31.6	309.4598m_DH5	400m	2.903m


DH5

2.4-2.4835GHz_BT-EDR(3Mbps)

Dwell-FS

2440MHz

05/02/2026

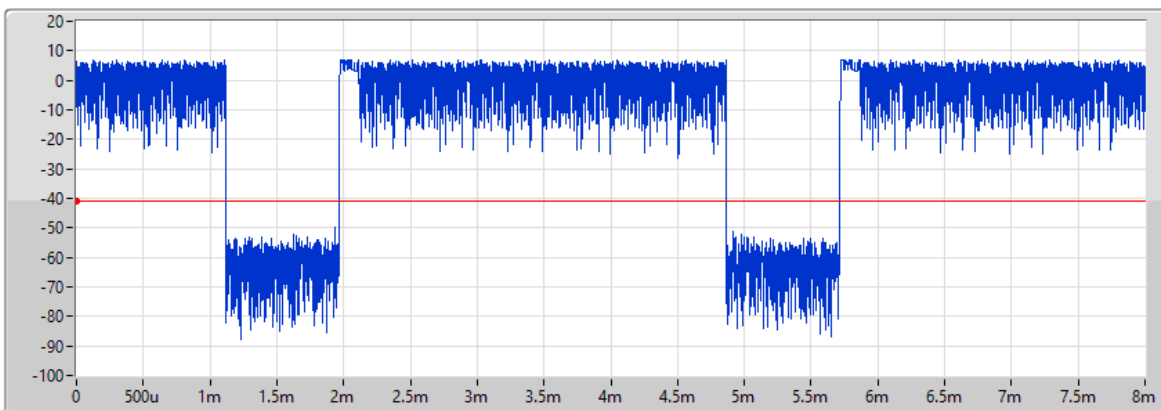

Port 1 

Ch Freq (Hz)
2.44G

RBW (Hz)
300k

VBW (Hz)
1M

Sweep Time (s)
8m

TX Time (s)
2.90325m

Period(s)	Dwell(s)	Limit(s)	Tx On(s)
8	154.743225m_DH5-AFH	400m	2.90325m

DH5-AFH



Summary

2.4-2.4835GHz	-
BT-BR(1Mbps)	308.58035m_DH5
BT-EDR(2Mbps)	309.2999m_DH5
BT-EDR(3Mbps)	309.4598m_DH5

Result


Mode	Result	Period (s)	Dwell (s)	Limit (s)	Tx On (s)
BT-BR(1Mbps)	-	-	-	-	-
2440MHz	Pass	31.6	308.58035m_DH5	400m	2.89475m
2440MHz	Pass	8	154.27685m_DH5-AFH	400m	2.8945m
BT-EDR(2Mbps)	-	-	-	-	-
2440MHz	Pass	31.6	309.2999m_DH5	400m	2.9015m
2440MHz	Pass	8	154.689925m_DH5-AFH	400m	2.90225m
BT-EDR(3Mbps)	-	-	-	-	-
2440MHz	Pass	31.6	309.4598m_DH5	400m	2.903m
2440MHz	Pass	8	154.7299m_DH5-AFH	400m	2.903m

2.4-2.4835GHz_BT-BR(1Mbps)

Dwell-FS

2440MHz

05/02/2026

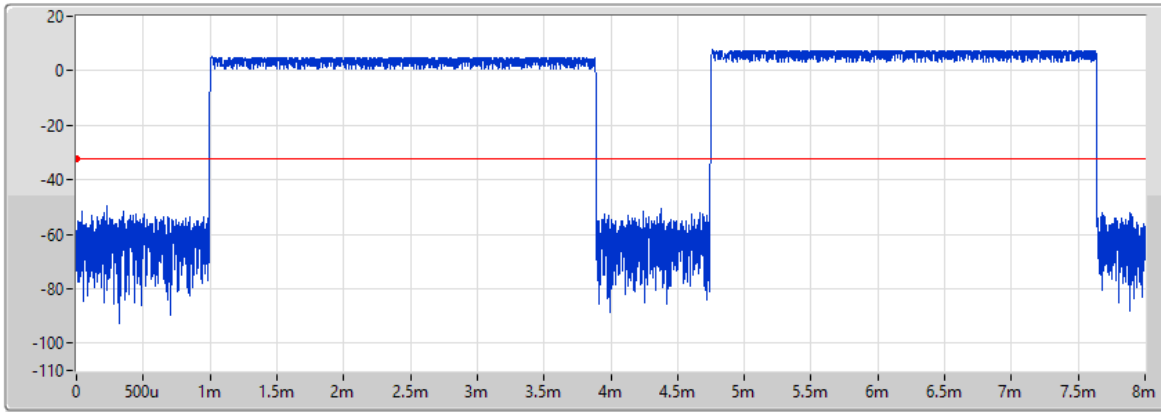

Port 1 

Ch Freq (Hz)
2.44G

RBW (Hz)
300k

VBW (Hz)
1M

Sweep Time (s)
8m

TX Time (s)
2.89475m

Period(s)	Dwell(s)	Limit(s)	Tx On(s)
31.6	308.58035m_DH5	400m	2.89475m


DH5

2.4-2.4835GHz_BT-BR(1Mbps)

Dwell-FS

2440MHz

05/02/2026

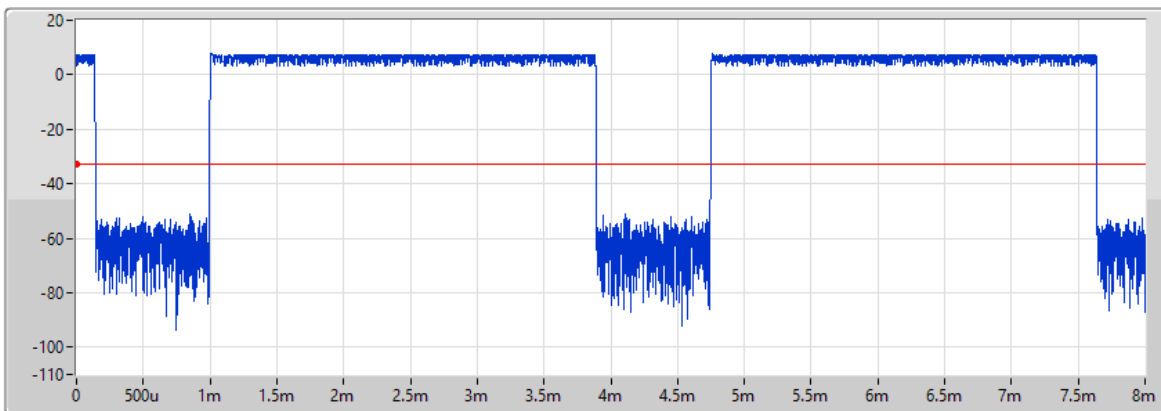

Port 1 

Ch Freq (Hz)
2.44G

RBW (Hz)
300k

VBW (Hz)
1M

Sweep Time (s)
8m

TX Time (s)
2.8945m

Period(s)	Dwell(s)	Limit(s)	Tx On(s)
8	154.27685m_DH5-AFH	400m	2.8945m


DH5-AFH

2.4-2.4835GHz_BT-EDR(2Mbps)

Dwell-FS

2440MHz

05/02/2026

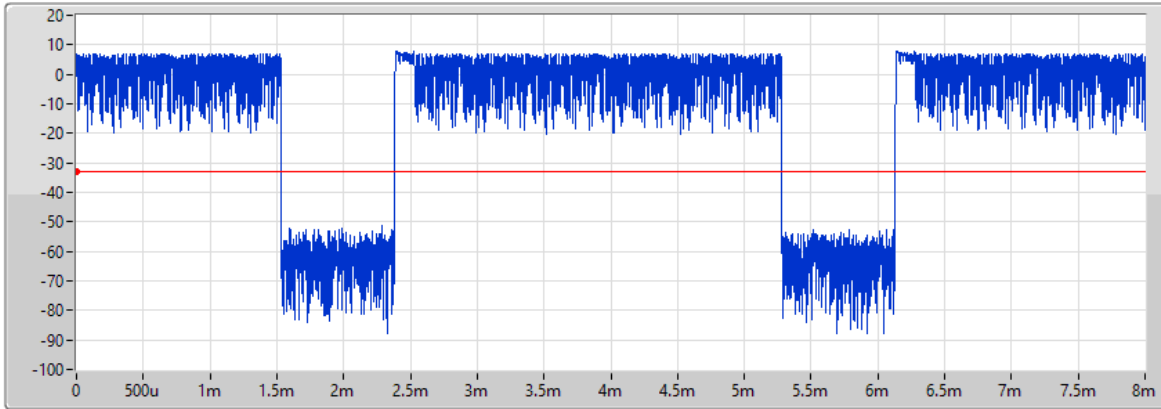

Port 1 

Ch Freq (Hz)
2.44G

RBW (Hz)
300k

VBW (Hz)
1M

Sweep Time (s)
8m

TX Time (s)
2.9015m

Period(s)	Dwell(s)	Limit(s)	Tx On(s)
31.6	309.2999m_DH5	400m	2.9015m


DH5

2.4-2.4835GHz_BT-EDR(2Mbps)

Dwell-FS

2440MHz

05/02/2026

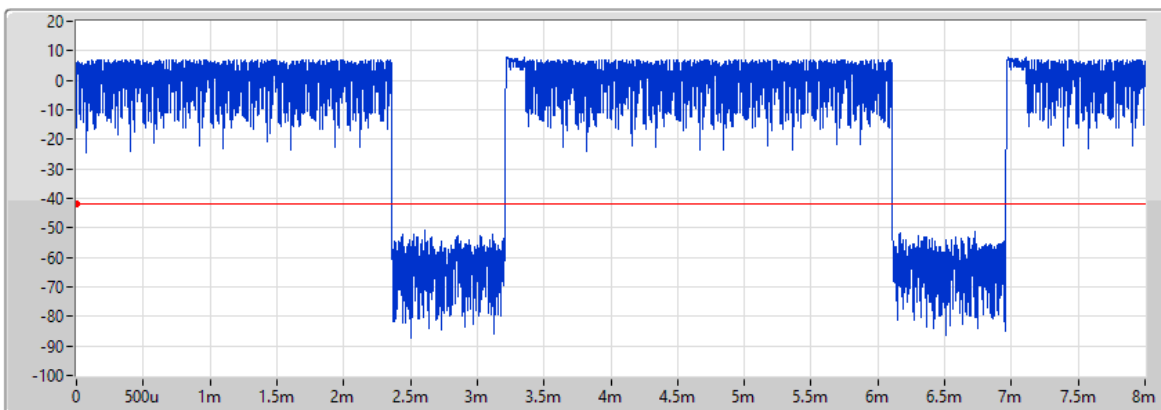

Port 1 

Ch Freq (Hz)
2.44G

RBW (Hz)
300k

VBW (Hz)
1M

Sweep Time (s)
8m

TX Time (s)
2.90225m

Period(s)	Dwell(s)	Limit(s)	Tx On(s)
8	154.689925m_DH5-AFH	400m	2.90225m


DH5-AFH

2.4-2.4835GHz_BT-EDR(3Mbps)

Dwell-FS

2440MHz

05/02/2026

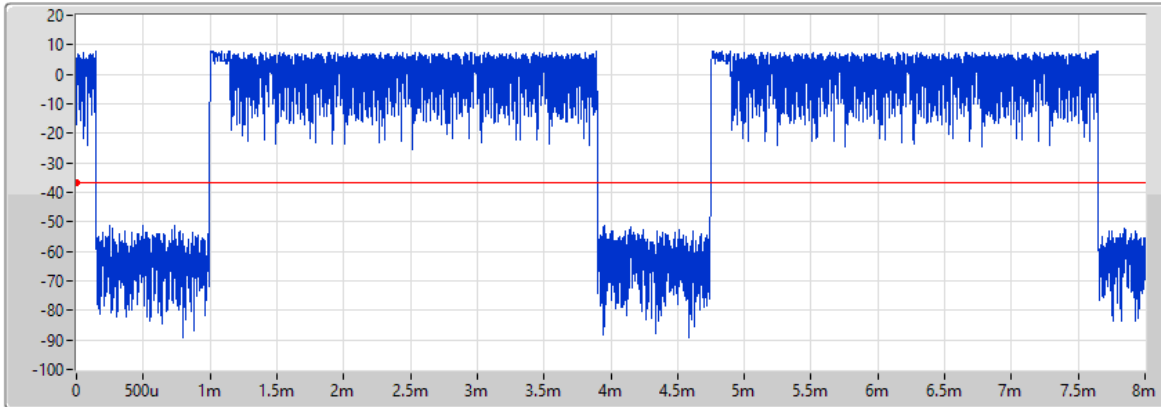

DH5


Period(s)	Dwell(s)	Limit(s)	Tx On(s)
31.6	309.4598m_DH5	400m	2.903m

2.4-2.4835GHz_BT-EDR(3Mbps)

Dwell-FS

2440MHz

05/02/2026

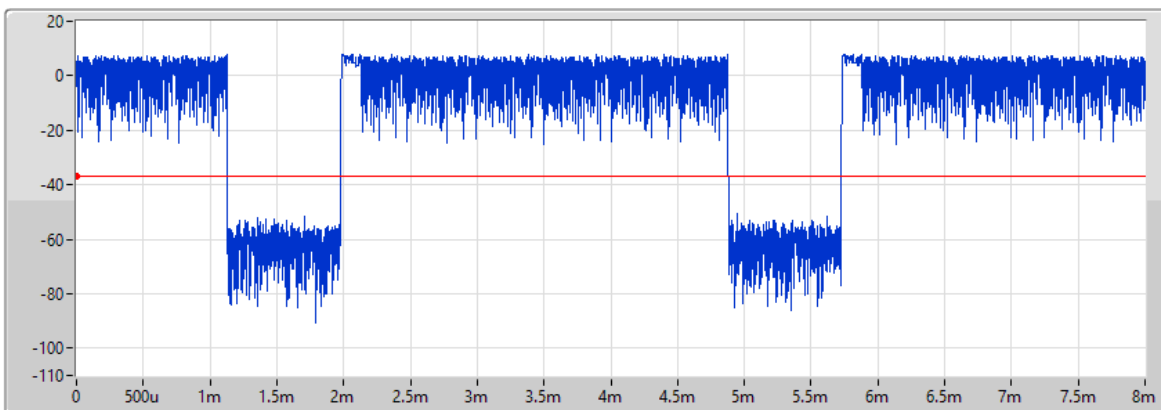

DH5-AFH

Period(s)	Dwell(s)	Limit(s)	Tx On(s)
8	154.7299m_DH5-AFH	400m	2.903m

Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BT-BR(1Mbps)	Pass	2.43975G	7.76	-12.24	2.30598G	-53.98	2.394G	-49.23	2.4G	-50.68	2.5029G	-53.66	21.9686G	-42.91	1
BT-EDR(2Mbps)	Pass	2.402G	6.06	-13.94	1.73023G	-54.17	2.39956G	-38.85	2.4G	-44.40	2.50258G	-54.47	21.98828G	-42.91	1
BT-EDR(3Mbps)	Pass	2.402G	4.81	-15.19	2.1591G	-54.66	2.39956G	-39.11	2.4G	-41.63	2.50034G	-53.68	21.9236G	-43.06	1

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
BT-BR(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	2.43975G	7.76	-12.24	2.30598G	-53.98	2.394G	-49.23	2.4G	-50.68	2.5029G	-53.66	21.9686G	-42.91	1
2440MHz	Pass	2.43975G	7.76	-12.24	2.14148G	-53.52	2.39516G	-54.45	2.4G	-57.12	2.5021G	-54.63	21.86736G	-42.58	1
2480MHz	Pass	2.43975G	7.76	-12.24	1.8113G	-54.27	2.396G	-54.43	2.4G	-56.70	2.5035G	-54.86	21.93766G	-41.52	1
BT-EDR(2Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	2.402G	6.06	-13.94	1.73023G	-54.17	2.39956G	-38.85	2.4G	-44.40	2.50258G	-54.47	21.98828G	-42.91	1
2440MHz	Pass	2.402G	6.06	-13.94	1.71848G	-54.56	2.39892G	-53.67	2.4G	-56.75	2.50094G	-54.11	21.99672G	-43.33	1
2480MHz	Pass	2.402G	6.06	-13.94	1.71025G	-54.46	2.3906G	-54.23	2.4G	-56.75	2.50002G	-54.64	22.00515G	-42.31	1
BT-EDR(3Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	2.402G	4.81	-15.19	2.1591G	-54.66	2.39956G	-39.11	2.4G	-41.63	2.50034G	-53.68	21.9236G	-43.06	1
2440MHz	Pass	2.402G	4.81	-15.19	2.13208G	-54.53	2.39864G	-54.58	2.4G	-56.77	2.50246G	-54.20	21.90111G	-41.85	1
2480MHz	Pass	2.402G	4.81	-15.19	2.15323G	-54.08	2.39256G	-53.95	2.4G	-56.93	2.50086G	-54.19	21.85611G	-43.04	1


2.4-2.4835GHz_BT-BR(1Mbps)

CSEndB-FS

2402MHz

05/02/2026

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

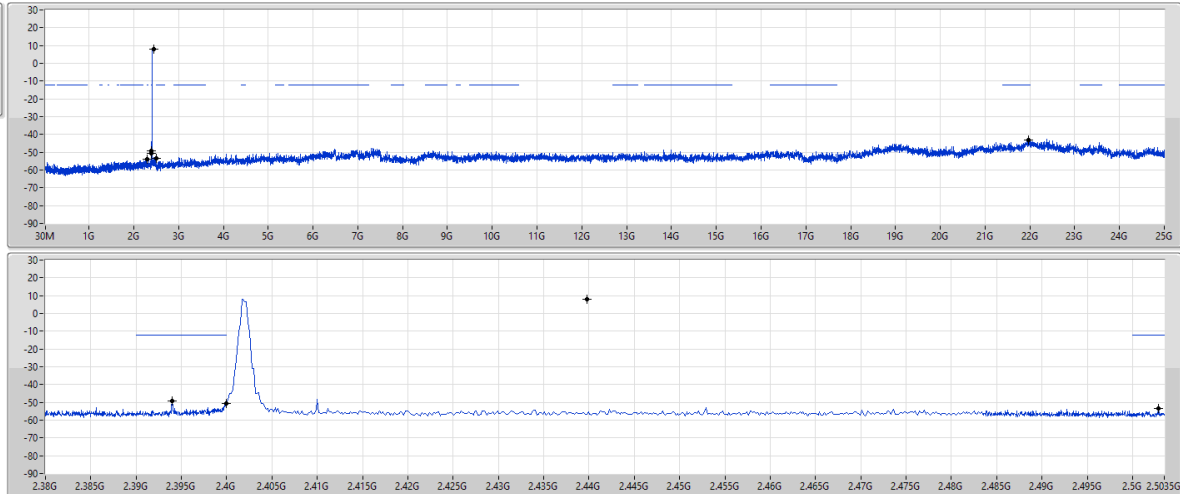

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43975G	7.76	-12.24	2.30598G	-53.98	2.394G	-49.23	2.4G	-50.68	2.5029G	-53.66	21.9686G	-42.91	1


2.4-2.4835GHz_BT-EDR(2Mbps)

CSEndB-FS

2402MHz

05/02/2026

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

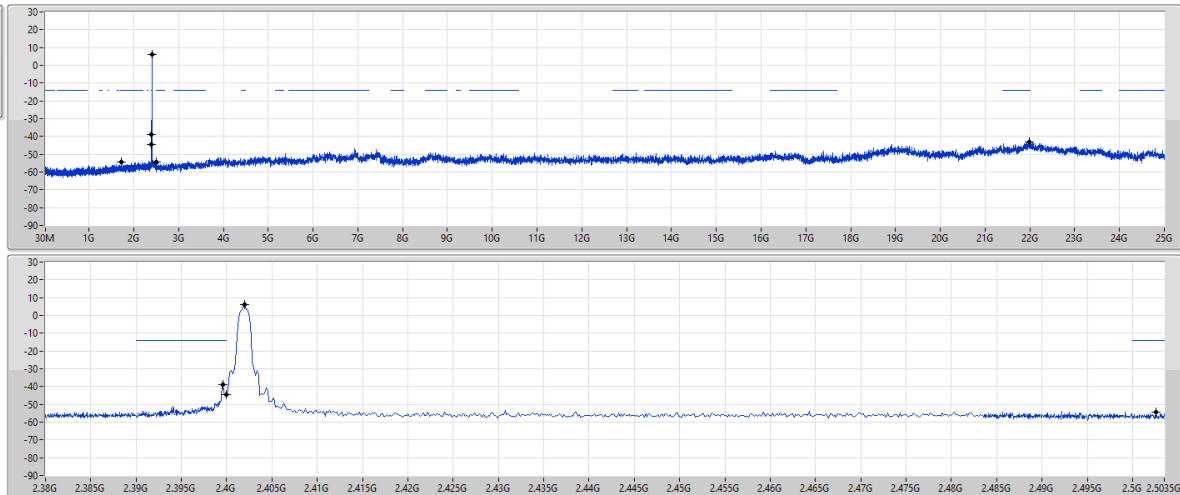

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.402G	6.06	-13.94	1.73023G	-54.17	2.39956G	-38.85	2.4G	-44.40	2.50258G	-54.47	21.98828G	-42.91	1

2.4-2.4835GHz_BT-EDR(3Mbps)


CSEndB-FS

2402MHz

05/02/2026

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

Port 1

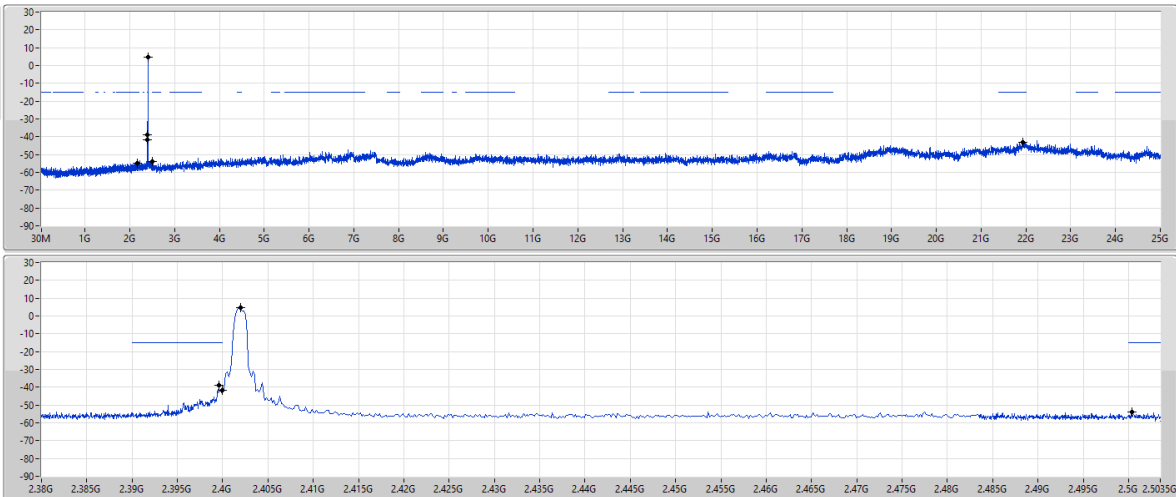

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.402G	4.81	-15.19	2.1591G	-54.66	2.39956G	-39.11	2.4G	-41.63	2.50034G	-53.68	2.1.9236G	-43.06	1

**Summary**

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BT-BR(1Mbps)	Pass	2.44008G	7.08	-12.92	2.17438G	-54.83	2.39396G	-48.65	2.4G	-48.60	2.50198G	-53.27	17.61552G	-42.03	1
BT-EDR(2Mbps)	Pass	2.402G	5.57	-14.43	1.82305G	-53.42	2.39952G	-43.75	2.4G	-46.47	2.50074G	-54.54	21.96297G	-42.23	1
BT-EDR(3Mbps)	Pass	2.402G	6.83	-13.17	2.12385G	-54.69	2.4G	-43.67	2.4G	-41.65	2.5003G	-53.48	21.95172G	-43.64	1

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
BT-BR(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	2.44008G	7.08	-12.92	2.17438G	-54.83	2.39396G	-48.65	2.4G	-48.60	2.50198G	-53.27	17.61552G	-42.03	1
2440MHz	Pass	2.44008G	7.08	-12.92	2.15088G	-54.64	2.39384G	-53.35	2.4G	-54.69	2.50026G	-53.47	17.61834G	-42.45	1
2480MHz	Pass	2.44008G	7.08	-12.92	2.0134G	-55.24	2.39272G	-53.59	2.4G	-56.29	2.5031G	-52.65	17.60709G	-42.37	1
BT-EDR(2Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	2.402G	5.57	-14.43	1.82305G	-53.42	2.39952G	-43.75	2.4G	-46.47	2.50074G	-54.54	21.96297G	-42.23	1
2440MHz	Pass	2.402G	5.57	-14.43	2.17203G	-54.24	2.39356G	-54.35	2.4G	-57.12	2.5023G	-54.80	21.90392G	-42.85	1
2480MHz	Pass	2.402G	5.57	-14.43	2.1591G	-54.46	2.39672G	-54.49	2.4G	-57.64	2.5023G	-54.83	21.9686G	-42.70	1
BT-EDR(3Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	2.402G	6.83	-13.17	2.12385G	-54.69	2.4G	-43.67	2.4G	-41.65	2.5003G	-53.48	21.95172G	-43.64	1
2440MHz	Pass	2.402G	6.83	-13.17	2.19788G	-54.42	2.39552G	-54.14	2.4G	-55.86	2.5033G	-55.00	21.95735G	-42.71	1
2480MHz	Pass	2.402G	6.83	-13.17	1.81365G	-54.27	2.39704G	-54.70	2.4G	-56.15	2.50058G	-54.28	21.9461G	-42.53	1


2.4-2.4835GHz_BT-BR(1Mbps)

CSEndB-FS

2402MHz

25/02/2026

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

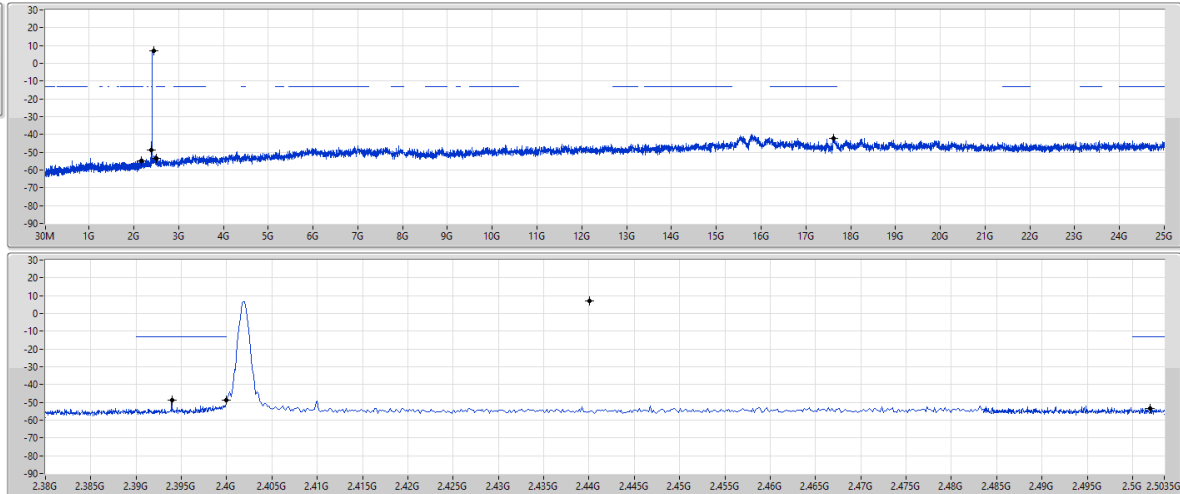

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44008G	7.08	-12.92	2.17438G	-54.83	2.39396G	-48.65	2.4G	-48.60	2.50198G	-53.27	17.61552G	-42.03	1


2.4-2.4835GHz_BT-EDR(2Mbps)

CSEndB-FS

2402MHz

05/02/2026

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

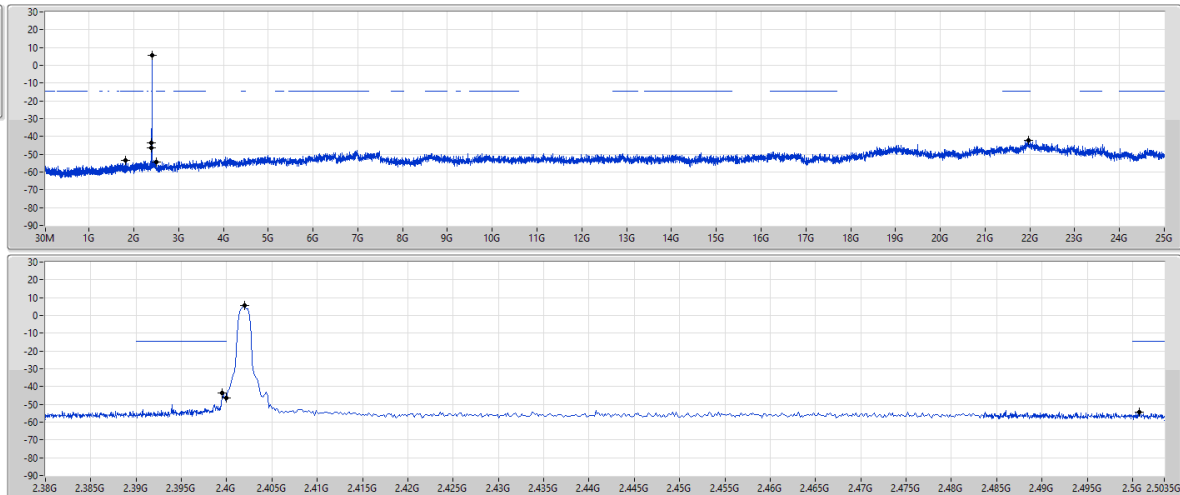

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.402G	5.57	-14.43	1.82305G	-53.42	2.39952G	-43.75	2.4G	-46.47	2.50074G	-54.54	21.96297G	-42.23	1

2.4-2.4835GHz_BT-EDR(3Mbps)


CSEndB-FS

2402MHz

05/02/2026

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

Port 1

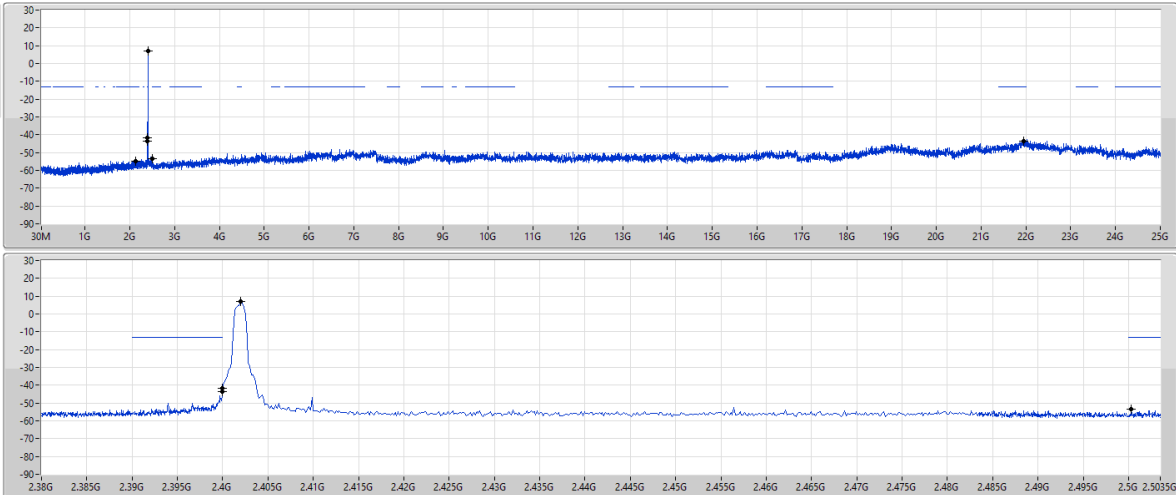

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.402G	6.83	-13.17	2.12385G	-54.69	2.4G	-43.67	2.4G	-41.65	2.5003G	-53.48	21.95172G	-43.64	1



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-
BT-EDR(3Mbps)	Pass	PK	39.7M	34.09	40.00	-5.91	3	Vertical	360	1.00


Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
BT-EDR(3Mbps)	-	-	-	-	-	-	-	-	-	-
2440MHz_DC Power Supply	Pass	PK	39.7M	34.09	40.00	-5.91	3	Vertical	360	1.00
2440MHz_DC Power Supply	Pass	PK	88.2M	27.46	43.50	-16.04	3	Vertical	360	1.00
2440MHz_DC Power Supply*	Pass	PK	142.52M	22.06	43.50	-21.44	3	Vertical	360	1.00
2440MHz_DC Power Supply*	Pass	PK	299.66M	23.25	46.00	-22.75	3	Vertical	360	1.00
2440MHz_DC Power Supply	Pass	PK	468.44M	33.78	46.00	-12.22	3	Vertical	360	1.00
2440MHz_DC Power Supply	Pass	QP	55.22M	30.44	40.00	-9.56	3	Vertical	301	1.00
2440MHz_DC Power Supply	Pass	PK	55.22M	28.64	40.00	-11.36	3	Horizontal	360	1.00
2440MHz_DC Power Supply	Pass	PK	134.76M	26.89	43.50	-16.61	3	Horizontal	360	1.00
2440MHz_DC Power Supply	Pass	PK	352.04M	34.63	46.00	-11.37	3	Horizontal	360	1.00
2440MHz_DC Power Supply	Pass	PK	416.06M	35.29	46.00	-10.71	3	Horizontal	360	1.00
2440MHz_DC Power Supply	Pass	PK	447.1M	32.51	46.00	-13.49	3	Horizontal	360	1.00
2440MHz_DC Power Supply	Pass	PK	480.08M	37.24	46.00	-8.76	3	Horizontal	360	1.00

*noise floor


2.4-2.4835GHz_BT-EDR(3Mbps)

2440MHz_DC Power Supply

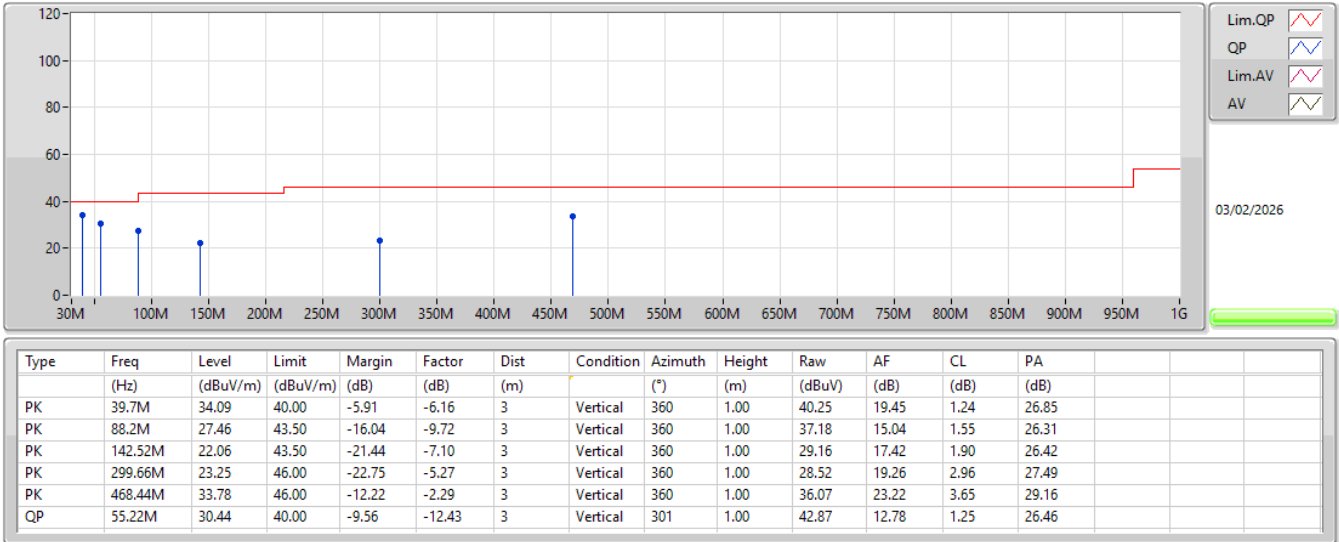

2.4-2.4835GHz_BT-EDR(3Mbps)

2440MHz_DC Power Supply

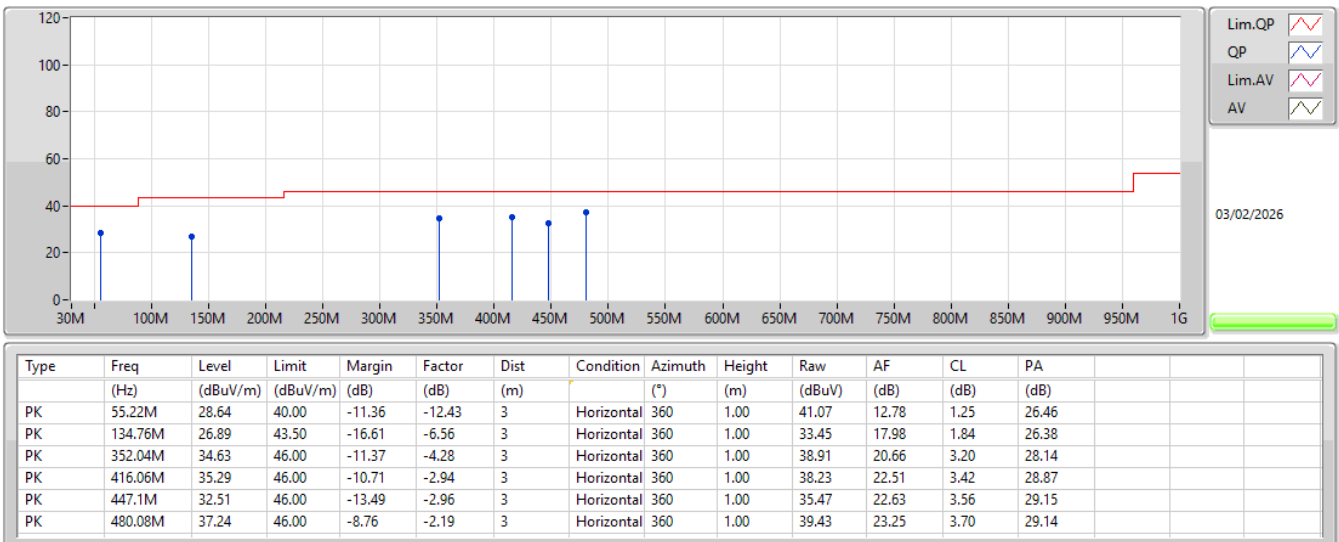



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-
BT-BR(1Mbps)	Pass	PK	2.488G	59.60	74.00	-14.40	3	Horizontal	166	1.50
BT-EDR(3Mbps)	Pass	PK	2.4842G	62.75	74.00	-11.25	3	Horizontal	165	1.00


Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
BT-BR(1Mbps)	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	AV	2.3624G	35.13	54.00	-18.87	3	Vertical	117	3.00
2402MHz	Pass	AV	2.4022G	78.63	Inf	-Inf	3	Vertical	117	3.00
2402MHz	Pass	PK	2.3624G	57.63	74.00	-16.37	3	Vertical	117	3.00
2402MHz	Pass	PK	2.4022G	101.13	Inf	-Inf	3	Vertical	117	3.00
2402MHz	Pass	AV	2.3808G	35.27	54.00	-18.73	3	Horizontal	190	1.89
2402MHz	Pass	AV	2.4022G	82.86	Inf	-Inf	3	Horizontal	190	1.89
2402MHz	Pass	PK	2.3808G	57.77	74.00	-16.23	3	Horizontal	190	1.89
2402MHz	Pass	PK	2.4022G	105.36	Inf	-Inf	3	Horizontal	190	1.89
2402MHz	Pass	AV	4.80408G	27.24	54.00	-26.76	3	Vertical	208	1.13
2402MHz	Pass	PK	4.80408G	49.74	74.00	-24.26	3	Vertical	208	1.13
2402MHz	Pass	AV	4.80429G	29.84	54.00	-24.16	3	Horizontal	214	1.05
2402MHz	Pass	PK	4.80429G	52.34	74.00	-21.66	3	Horizontal	214	1.05
2440MHz	Pass	AV	2.3608G	34.98	54.00	-19.02	3	Vertical	178	2.17
2440MHz	Pass	AV	2.44G	78.56	Inf	-Inf	3	Vertical	178	2.17
2440MHz	Pass	AV	2.4948G	36.16	54.00	-17.84	3	Vertical	178	2.17
2440MHz	Pass	PK	2.3608G	57.48	74.00	-16.52	3	Vertical	178	2.17
2440MHz	Pass	PK	2.44G	101.06	Inf	-Inf	3	Vertical	178	2.17
2440MHz	Pass	PK	2.4948G	58.66	74.00	-15.34	3	Vertical	178	2.17
2440MHz	Pass	AV	2.3716G	35.05	54.00	-18.95	3	Horizontal	166	1.50
2440MHz	Pass	AV	2.44G	83.92	Inf	-Inf	3	Horizontal	166	1.50
2440MHz	Pass	AV	2.488G	37.10	54.00	-16.90	3	Horizontal	166	1.50
2440MHz	Pass	PK	2.3716G	57.55	74.00	-16.45	3	Horizontal	166	1.50
2440MHz	Pass	PK	2.44G	106.42	Inf	-Inf	3	Horizontal	166	1.50
2440MHz	Pass	PK	2.488G	59.60	74.00	-14.40	3	Horizontal	166	1.50
2440MHz	Pass	AV	4.87978G	27.49	54.00	-26.51	3	Vertical	207	1.05
2440MHz	Pass	AV	7.32018G	31.60	54.00	-22.40	3	Vertical	227	1.64
2440MHz	Pass	PK	4.87978G	49.99	74.00	-24.01	3	Vertical	207	1.05
2440MHz	Pass	PK	7.32018G	54.10	74.00	-19.90	3	Vertical	227	1.64
2440MHz	Pass	AV	4.87995G	29.67	54.00	-24.33	3	Horizontal	213	1.00
2440MHz	Pass	AV	7.31964G	32.59	54.00	-21.41	3	Horizontal	295	1.00
2440MHz	Pass	PK	4.87995G	52.17	74.00	-21.83	3	Horizontal	213	1.00
2440MHz	Pass	PK	7.31964G	55.09	74.00	-18.91	3	Horizontal	295	1.00
2480MHz	Pass	AV	2.4798G	79.39	Inf	-Inf	3	Vertical	180	2.42
2480MHz	Pass	AV	2.488G	36.55	54.00	-17.45	3	Vertical	180	2.42
2480MHz	Pass	PK	2.4798G	101.89	Inf	-Inf	3	Vertical	180	2.42
2480MHz	Pass	PK	2.488G	59.05	74.00	-14.95	3	Vertical	180	2.42
2480MHz	Pass	AV	2.4798G	84.21	Inf	-Inf	3	Horizontal	164	1.64
2480MHz	Pass	AV	2.4838G	36.58	54.00	-17.42	3	Horizontal	164	1.64
2480MHz	Pass	PK	2.4798G	106.71	Inf	-Inf	3	Horizontal	164	1.64
2480MHz	Pass	PK	2.4838G	59.08	74.00	-14.92	3	Horizontal	164	1.64
2480MHz	Pass	AV	4.96036G	27.74	54.00	-26.26	3	Vertical	198	1.31
2480MHz	Pass	AV	7.44028G	31.42	54.00	-22.58	3	Vertical	226	1.75
2480MHz	Pass	PK	4.96036G	50.24	74.00	-23.76	3	Vertical	198	1.31
2480MHz	Pass	PK	7.44028G	53.92	74.00	-20.08	3	Vertical	226	1.75
2480MHz	Pass	AV	4.95957G	29.41	54.00	-24.59	3	Horizontal	171	1.74
2480MHz	Pass	AV	7.43949G	32.18	54.00	-21.82	3	Horizontal	292	1.07
2480MHz	Pass	PK	4.95957G	51.91	74.00	-22.09	3	Horizontal	171	1.74
2480MHz	Pass	PK	7.43949G	54.68	74.00	-19.32	3	Horizontal	292	1.07
BT-EDR(3Mbps)	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	AV	2.357G	35.28	54.00	-18.72	3	Vertical	217	1.85
2402MHz	Pass	AV	2.402G	76.56	Inf	-Inf	3	Vertical	217	1.85
2402MHz	Pass	PK	2.357G	57.78	74.00	-16.22	3	Vertical	217	1.85
2402MHz	Pass	PK	2.402G	99.06	Inf	-Inf	3	Vertical	217	1.85
2402MHz	Pass	AV	2.3756G	35.11	54.00	-18.89	3	Horizontal	59	1.22
2402MHz	Pass	AV	2.402G	84.85	Inf	-Inf	3	Horizontal	59	1.22
2402MHz	Pass	PK	2.3756G	57.61	74.00	-16.39	3	Horizontal	59	1.22
2402MHz	Pass	PK	2.402G	107.35	Inf	-Inf	3	Horizontal	59	1.22
2402MHz	Pass	AV	4.80405G	27.58	54.00	-26.42	3	Vertical	37	1.50
2402MHz	Pass	PK	4.80405G	50.08	74.00	-23.92	3	Vertical	37	1.50
2402MHz	Pass	AV	4.80422G	30.12	54.00	-23.88	3	Horizontal	214	1.04

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
2402MHz	Pass	PK	4.80422G	52.62	74.00	-21.38	3	Horizontal	214	1.04
2440MHz	Pass	AV	2.3732G	35.61	54.00	-18.39	3	Vertical	179	2.16
2440MHz	Pass	AV	2.44G	80.09	Inf	-Inf	3	Vertical	179	2.16
2440MHz	Pass	AV	2.494G	35.51	54.00	-18.49	3	Vertical	179	2.16
2440MHz	Pass	PK	2.3732G	58.11	74.00	-15.89	3	Vertical	179	2.16
2440MHz	Pass	PK	2.44G	102.59	Inf	-Inf	3	Vertical	179	2.16
2440MHz	Pass	PK	2.494G	58.01	74.00	-15.99	3	Vertical	179	2.16
2440MHz	Pass	AV	2.3584G	35.62	54.00	-18.38	3	Horizontal	166	1.50
2440MHz	Pass	AV	2.44G	85.57	Inf	-Inf	3	Horizontal	166	1.50
2440MHz	Pass	AV	2.4948G	36.01	54.00	-17.99	3	Horizontal	166	1.50
2440MHz	Pass	PK	2.3584G	58.12	74.00	-15.88	3	Horizontal	166	1.50
2440MHz	Pass	PK	2.44G	108.07	Inf	-Inf	3	Horizontal	166	1.50
2440MHz	Pass	PK	2.4948G	58.51	74.00	-15.49	3	Horizontal	166	1.50
2440MHz	Pass	AV	4.8796G	27.55	54.00	-26.45	3	Vertical	207	1.05
2440MHz	Pass	AV	7.32024G	32.64	54.00	-21.36	3	Vertical	152	1.00
2440MHz	Pass	PK	4.8796G	50.05	74.00	-23.95	3	Vertical	207	1.05
2440MHz	Pass	PK	7.32024G	55.14	74.00	-18.86	3	Vertical	152	1.00
2440MHz	Pass	AV	4.87956G	30.20	54.00	-23.80	3	Horizontal	213	1.02
2440MHz	Pass	AV	7.32026G	33.00	54.00	-21.00	3	Horizontal	295	1.00
2440MHz	Pass	PK	4.87956G	52.70	74.00	-21.30	3	Horizontal	213	1.02
2440MHz	Pass	PK	7.32026G	55.50	74.00	-18.50	3	Horizontal	295	1.00
2480MHz	Pass	AV	2.48G	79.51	Inf	-Inf	3	Vertical	176	2.33
2480MHz	Pass	AV	2.4862G	36.11	54.00	-17.89	3	Vertical	176	2.33
2480MHz	Pass	PK	2.48G	102.01	Inf	-Inf	3	Vertical	176	2.33
2480MHz	Pass	PK	2.4862G	58.61	74.00	-15.39	3	Vertical	176	2.33
2480MHz	Pass	AV	2.48G	85.80	Inf	-Inf	3	Horizontal	165	1.00
2480MHz	Pass	AV	2.4842G	40.25	54.00	-13.75	3	Horizontal	165	1.00
2480MHz	Pass	PK	2.48G	108.30	Inf	-Inf	3	Horizontal	165	1.00
2480MHz	Pass	PK	2.4842G	62.75	74.00	-11.25	3	Horizontal	165	1.00
2480MHz	Pass	AV	4.96037G	27.20	54.00	-26.80	3	Vertical	206	1.43
2480MHz	Pass	AV	7.43916G	31.58	54.00	-22.42	3	Vertical	226	1.67
2480MHz	Pass	PK	4.96037G	49.70	74.00	-24.30	3	Vertical	206	1.43
2480MHz	Pass	PK	7.43916G	54.08	74.00	-19.92	3	Vertical	226	1.67
2480MHz	Pass	AV	4.95957G	29.41	54.00	-24.59	3	Horizontal	172	1.74
2480MHz	Pass	AV	7.44072G	32.28	54.00	-21.72	3	Horizontal	292	1.07
2480MHz	Pass	PK	4.95957G	51.91	74.00	-22.09	3	Horizontal	172	1.74
2480MHz	Pass	PK	7.44072G	54.78	74.00	-19.22	3	Horizontal	292	1.07


2.4-2.4835GHz_BT-BR(1Mbps)

2440MHz_TX

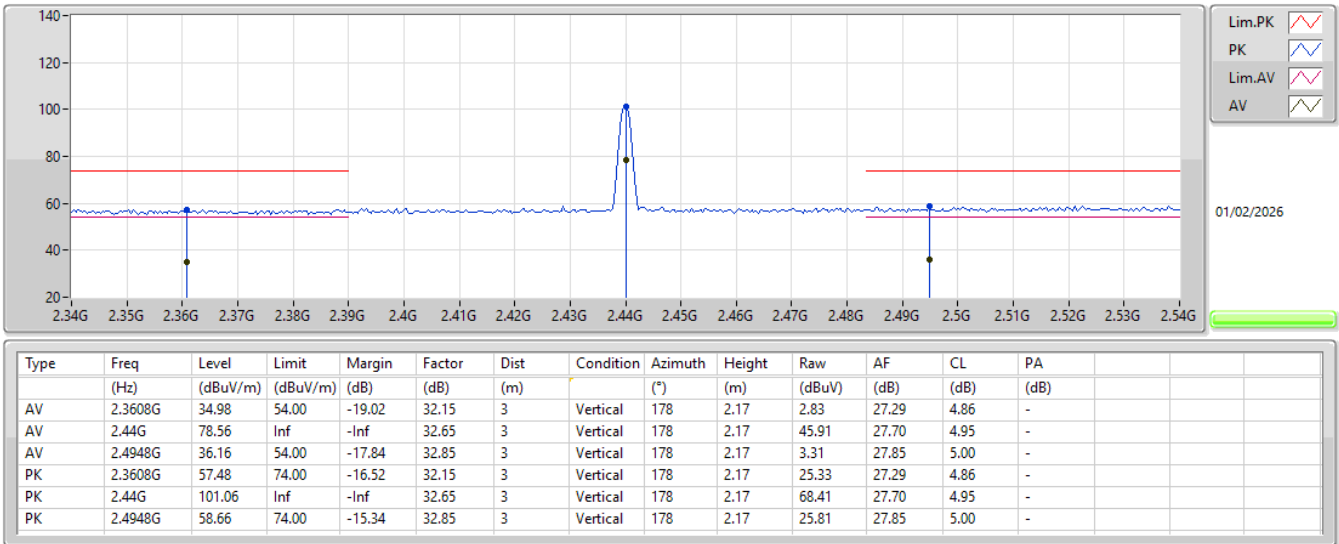


2.4-2.4835GHz_BT-BR(1Mbps)

2440MHz_TX

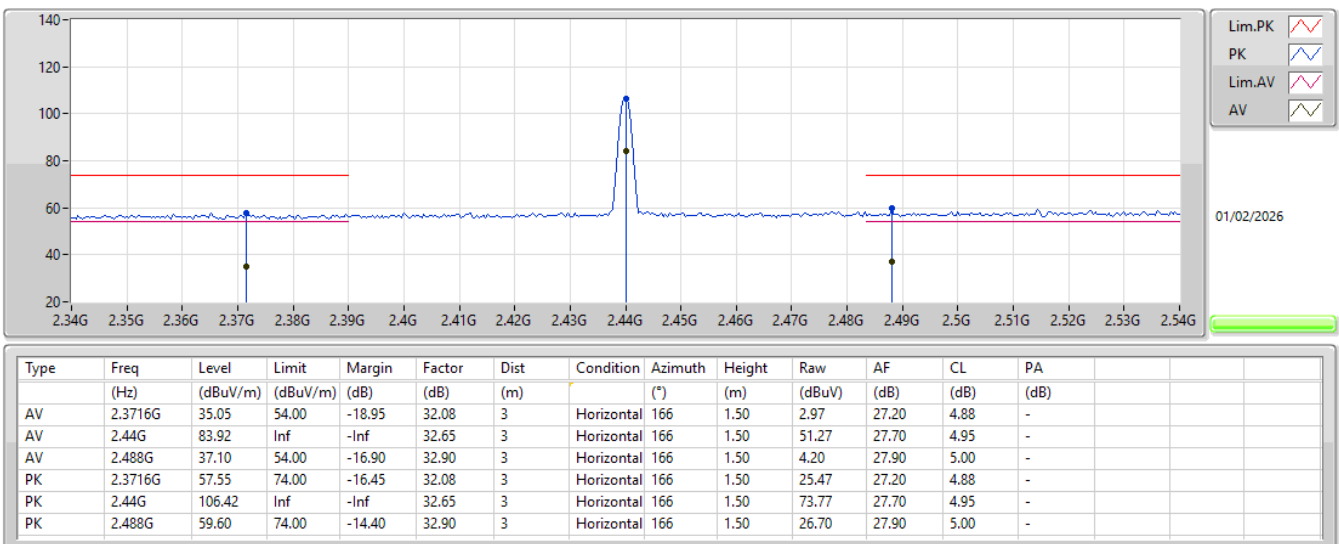


2.4-2.4835GHz_BT-BR(1Mbps)

2440MHz_TX

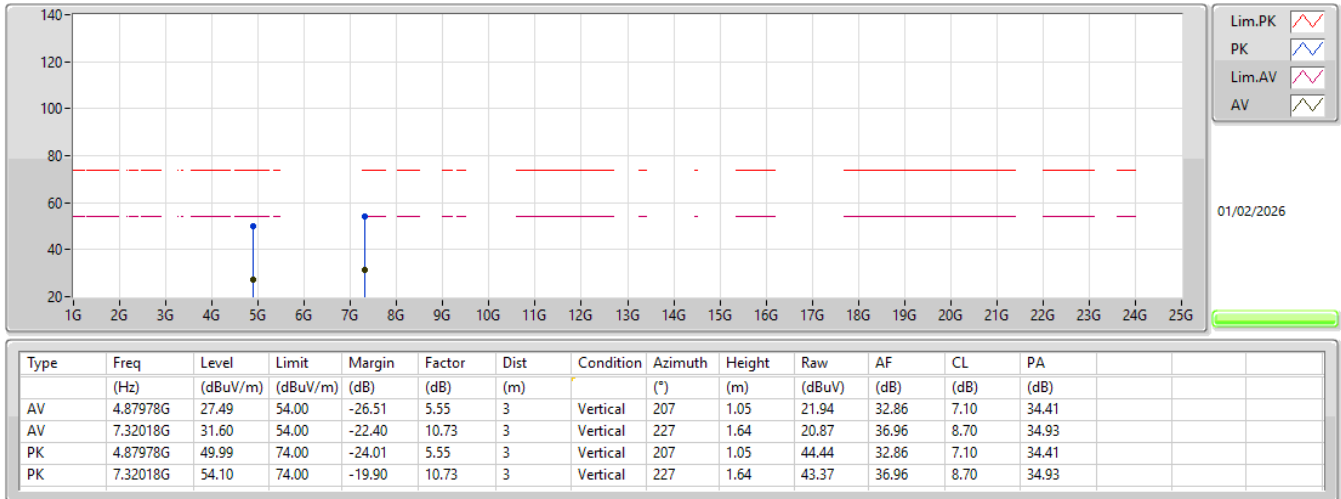


2.4-2.4835GHz_BT-BR(1Mbps)

2440MHz_TX

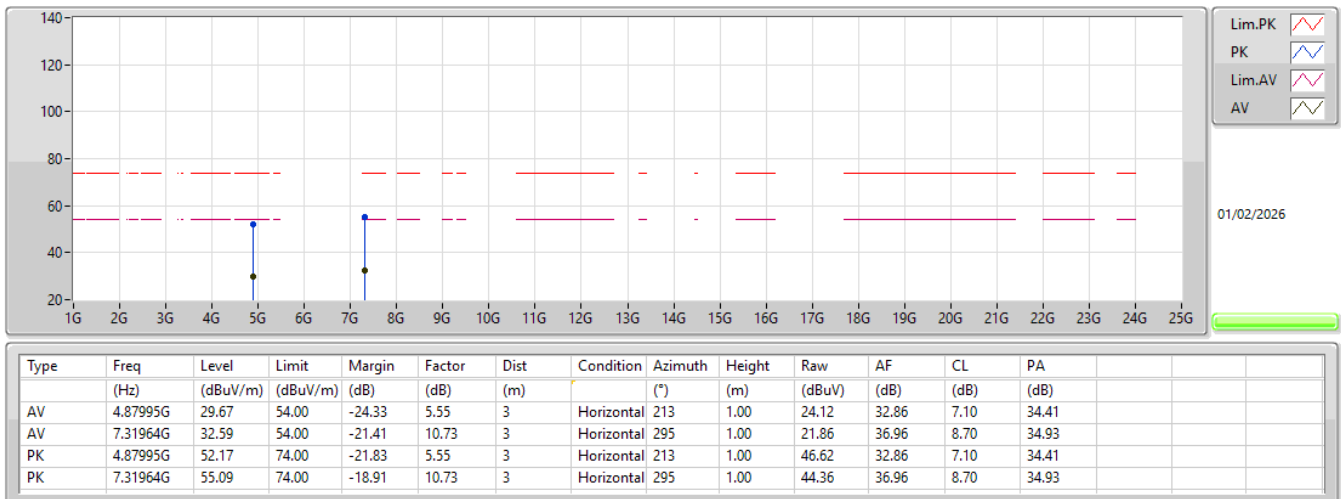


2.4-2.4835GHz_BT-EDR(3Mbps)

2480MHz_TX

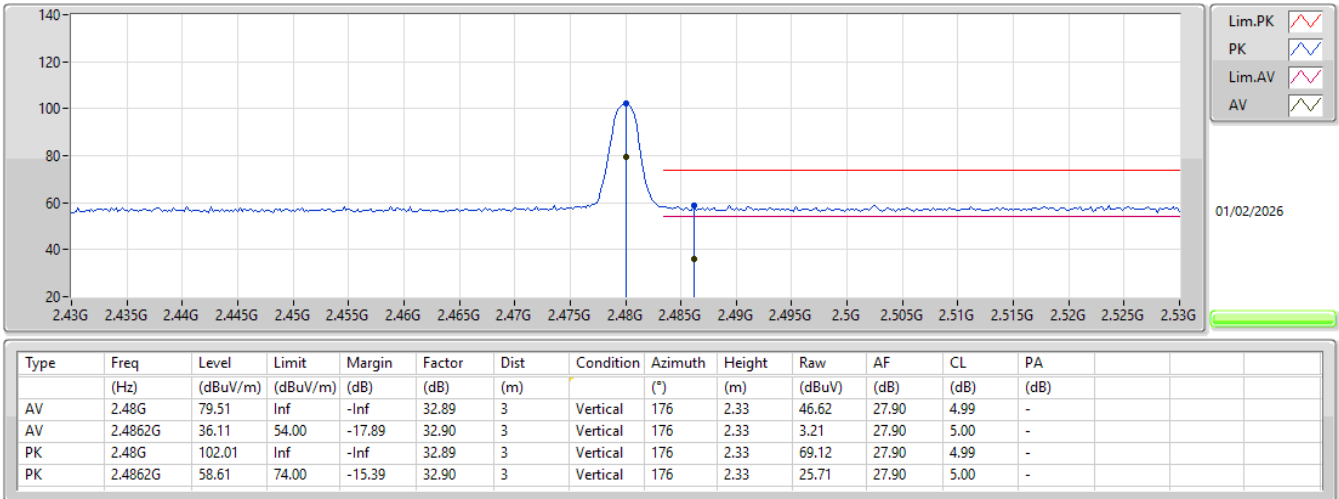


2.4-2.4835GHz_BT-EDR(3Mbps)

2480MHz_TX

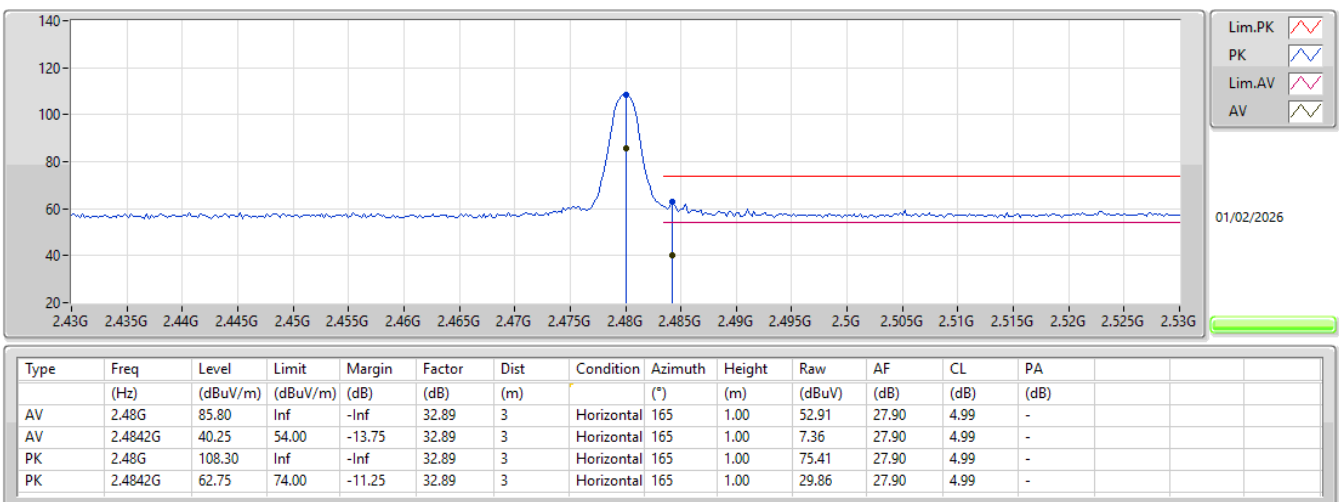


2.4-2.4835GHz_BT-EDR(3Mbps)

2480MHz_TX

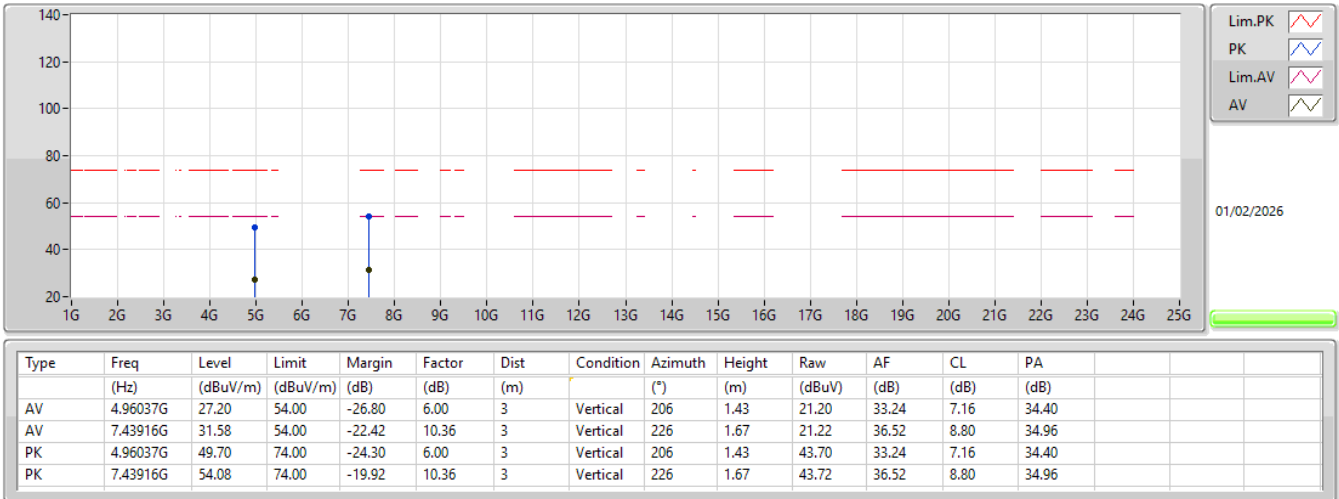

2.4-2.4835GHz_BT-EDR(3Mbps)

2480MHz_TX

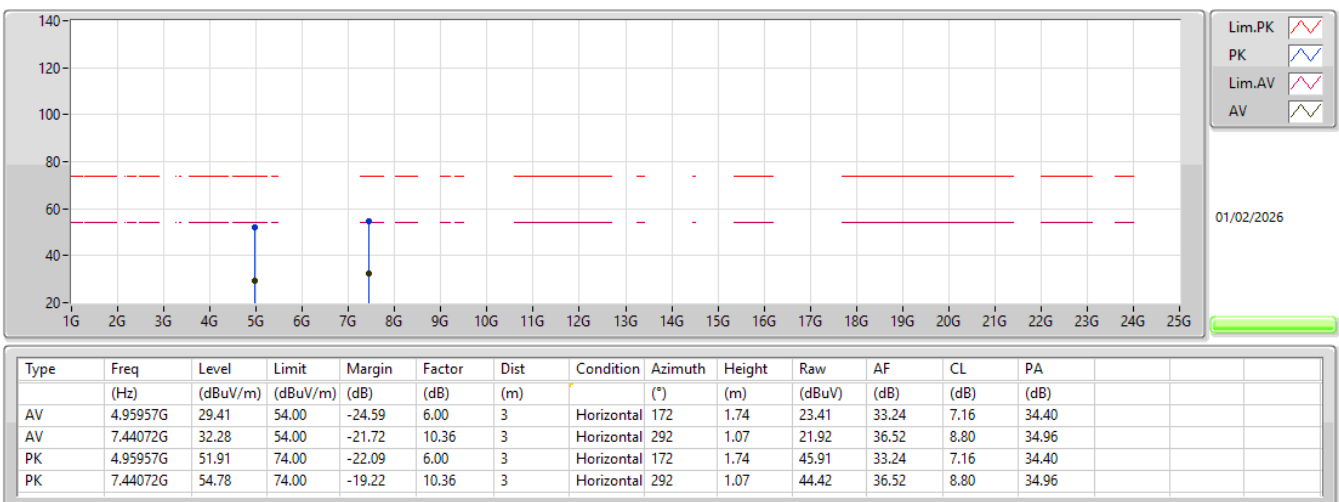



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-
BT-EDR(3Mbps)	Pass	PK	53.28M	31.27	40.00	-8.73	3	Horizontal	0	1.00


Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
BT-EDR(3Mbps)	-	-	-	-	-	-	-	-	-	-
2440MHz_DC Power supply	Pass	PK	86.26M	25.11	40.00	-14.89	3	Vertical	360	1.00
2440MHz_DC Power supply*	Pass	PK	171.62M	21.59	43.50	-21.91	3	Vertical	360	1.00
2440MHz_DC Power supply*	Pass	PK	334.58M	24.96	46.00	-21.04	3	Vertical	360	1.00
2440MHz_DC Power supply	Pass	PK	480.08M	29.00	46.00	-17.00	3	Vertical	360	1.00
2440MHz_DC Power supply	Pass	PK	551.86M	29.74	46.00	-16.26	3	Vertical	360	1.00
2440MHz_DC Power supply	Pass	QP	53.28M	29.22	40.00	-10.78	3	Vertical	279	1.01
2440MHz_DC Power supply	Pass	PK	53.28M	31.27	40.00	-8.73	3	Horizontal	0	1.00
2440MHz_DC Power supply*	Pass	PK	189.08M	23.37	43.50	-20.13	3	Horizontal	0	1.00
2440MHz_DC Power supply	Pass	PK	352.04M	28.01	46.00	-17.99	3	Horizontal	0	1.00
2440MHz_DC Power supply	Pass	PK	416.06M	31.24	46.00	-14.76	3	Horizontal	0	1.00
2440MHz_DC Power supply	Pass	PK	447.1M	30.94	46.00	-15.06	3	Horizontal	0	1.00
2440MHz_DC Power supply	Pass	PK	480.08M	36.88	46.00	-9.12	3	Horizontal	0	1.00

*noise floor


2.4-2.4835GHz_BT-EDR(3Mbps)

2440MHz_DC Power supply

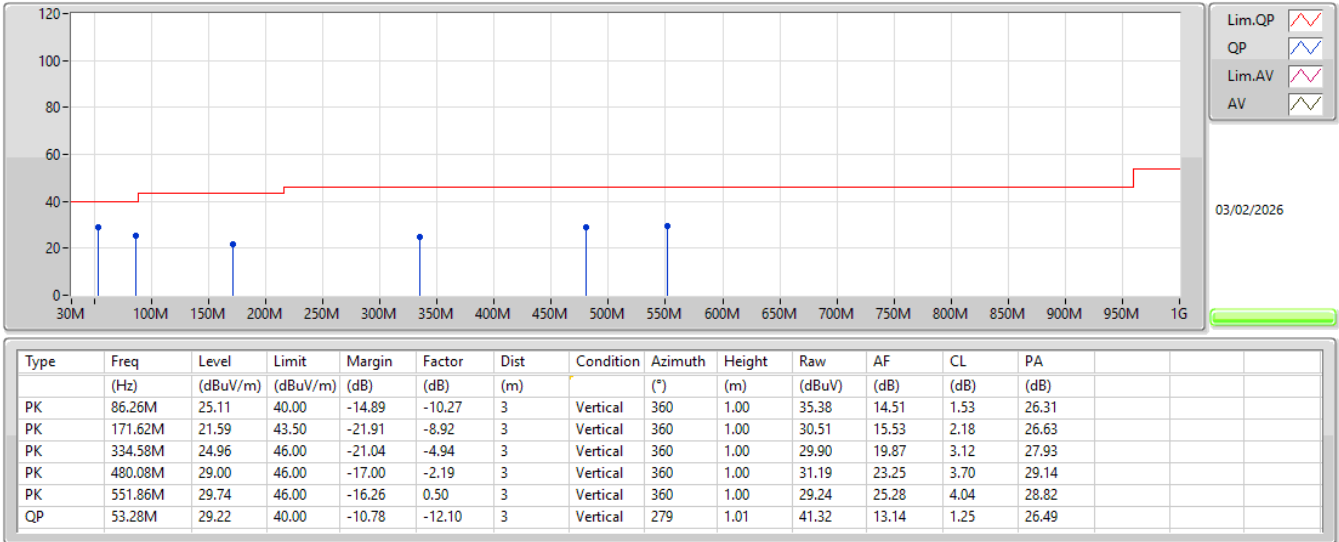

2.4-2.4835GHz_BT-EDR(3Mbps)

2440MHz_DC Power supply

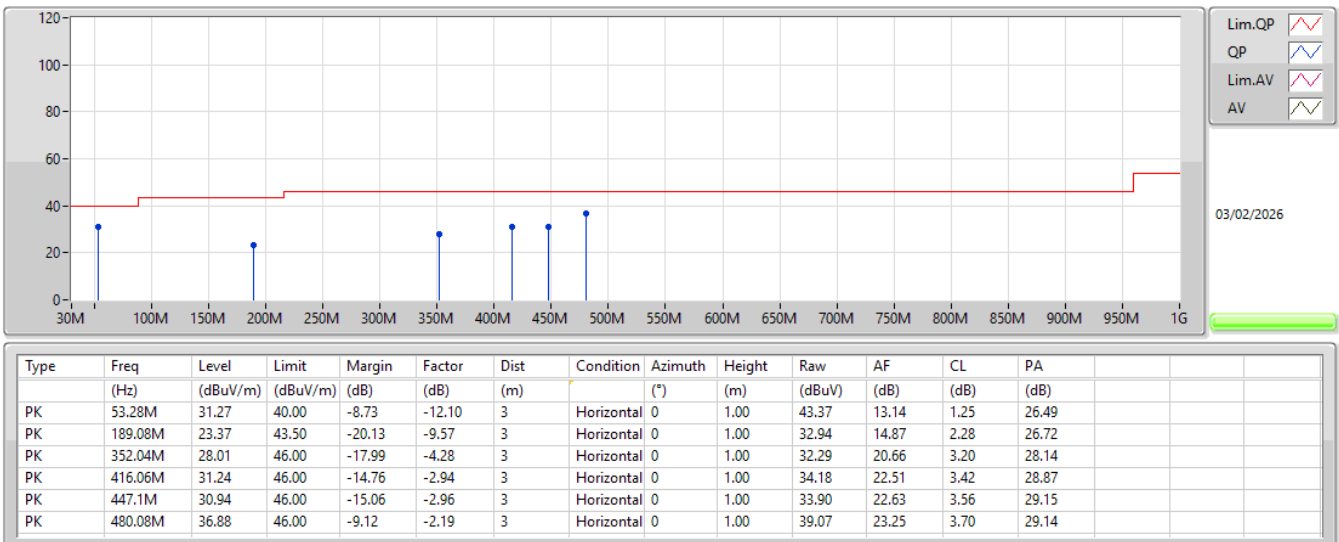



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-
BT-BR(1Mbps)	Pass	PK	2.4934G	59.11	74.00	-14.89	3	Horizontal	337	1.07
BT-EDR(3Mbps)	Pass	PK	2.4835G	60.90	74.00	-13.10	3	Horizontal	337	1.14


Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
BT-BR(1Mbps)	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	AV	2.368G	34.88	54.00	-19.12	3	Vertical	226	1.48
2402MHz	Pass	AV	2.4022G	74.96	Inf	-Inf	3	Vertical	226	1.48
2402MHz	Pass	PK	2.368G	57.38	74.00	-16.62	3	Vertical	226	1.48
2402MHz	Pass	PK	2.4022G	97.46	Inf	-Inf	3	Vertical	226	1.48
2402MHz	Pass	AV	2.36G	34.92	54.00	-19.08	3	Horizontal	11	1.14
2402MHz	Pass	AV	2.4022G	82.39	Inf	-Inf	3	Horizontal	11	1.14
2402MHz	Pass	PK	2.36G	57.42	74.00	-16.58	3	Horizontal	11	1.14
2402MHz	Pass	PK	2.4022G	104.89	Inf	-Inf	3	Horizontal	11	1.14
2402MHz	Pass	AV	4.80396G	28.44	54.00	-25.56	3	Vertical	345	1.08
2402MHz	Pass	PK	4.80396G	50.94	74.00	-23.06	3	Vertical	345	1.08
2402MHz	Pass	AV	4.80426G	32.16	54.00	-21.84	3	Horizontal	187	2.47
2402MHz	Pass	PK	4.80426G	54.66	74.00	-19.34	3	Horizontal	187	2.47
2440MHz	Pass	AV	2.366G	35.71	54.00	-18.29	3	Vertical	41	2.95
2440MHz	Pass	AV	2.4396G	78.77	Inf	-Inf	3	Vertical	41	2.95
2440MHz	Pass	AV	2.4976G	36.07	54.00	-17.93	3	Vertical	41	2.95
2440MHz	Pass	PK	2.366G	58.21	74.00	-15.79	3	Vertical	41	2.95
2440MHz	Pass	PK	2.4396G	101.27	Inf	-Inf	3	Vertical	41	2.95
2440MHz	Pass	PK	2.4976G	58.57	74.00	-15.43	3	Vertical	41	2.95
2440MHz	Pass	AV	2.358G	36.17	54.00	-17.83	3	Horizontal	335	1.13
2440MHz	Pass	AV	2.44G	82.63	Inf	-Inf	3	Horizontal	335	1.13
2440MHz	Pass	AV	2.4956G	35.75	54.00	-18.25	3	Horizontal	335	1.13
2440MHz	Pass	PK	2.358G	58.67	74.00	-15.33	3	Horizontal	335	1.13
2440MHz	Pass	PK	2.44G	105.13	Inf	-Inf	3	Horizontal	335	1.13
2440MHz	Pass	PK	2.4956G	58.25	74.00	-15.75	3	Horizontal	335	1.13
2440MHz	Pass	AV	4.87987G	29.01	54.00	-24.99	3	Vertical	305	1.29
2440MHz	Pass	AV	7.31929G	32.61	54.00	-21.39	3	Vertical	69	1.08
2440MHz	Pass	PK	4.87987G	51.51	74.00	-22.49	3	Vertical	305	1.29
2440MHz	Pass	PK	7.31929G	55.11	74.00	-18.89	3	Vertical	69	1.08
2440MHz	Pass	AV	4.87997G	32.34	54.00	-21.66	3	Horizontal	160	2.86
2440MHz	Pass	AV	7.31967G	31.81	54.00	-22.19	3	Horizontal	355	1.08
2440MHz	Pass	PK	4.87997G	54.84	74.00	-19.16	3	Horizontal	160	2.86
2440MHz	Pass	PK	7.31967G	54.31	74.00	-19.69	3	Horizontal	355	1.08
2480MHz	Pass	AV	2.4798G	77.67	Inf	-Inf	3	Vertical	217	1.00
2480MHz	Pass	AV	2.4868G	36.25	54.00	-17.75	3	Vertical	217	1.00
2480MHz	Pass	PK	2.4798G	100.17	Inf	-Inf	3	Vertical	217	1.00
2480MHz	Pass	PK	2.4868G	58.75	74.00	-15.25	3	Vertical	217	1.00
2480MHz	Pass	AV	2.4802G	84.34	Inf	-Inf	3	Horizontal	337	1.07
2480MHz	Pass	AV	2.4934G	36.61	54.00	-17.39	3	Horizontal	337	1.07
2480MHz	Pass	PK	2.4802G	106.84	Inf	-Inf	3	Horizontal	337	1.07
2480MHz	Pass	PK	2.4934G	59.11	74.00	-14.89	3	Horizontal	337	1.07
2480MHz	Pass	AV	4.95996G	28.52	54.00	-25.48	3	Vertical	304	1.20
2480MHz	Pass	AV	7.44022G	32.49	54.00	-21.51	3	Vertical	81	1.12
2480MHz	Pass	PK	4.95996G	51.02	74.00	-22.98	3	Vertical	304	1.20
2480MHz	Pass	PK	7.44022G	54.99	74.00	-19.01	3	Vertical	81	1.12
2480MHz	Pass	AV	4.96026G	30.83	54.00	-23.17	3	Horizontal	164	2.64
2480MHz	Pass	AV	7.44029G	31.58	54.00	-22.42	3	Horizontal	10	1.09
2480MHz	Pass	PK	4.96026G	53.33	74.00	-20.67	3	Horizontal	164	2.64
2480MHz	Pass	PK	7.44029G	54.08	74.00	-19.92	3	Horizontal	10	1.09
BT-EDR(3Mbps)	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	AV	2.3872G	35.44	54.00	-18.56	3	Vertical	261	1.00
2402MHz	Pass	AV	2.402G	75.87	Inf	-Inf	3	Vertical	261	1.00
2402MHz	Pass	PK	2.3872G	57.94	74.00	-16.06	3	Vertical	261	1.00
2402MHz	Pass	PK	2.402G	98.37	Inf	-Inf	3	Vertical	261	1.00
2402MHz	Pass	AV	2.3586G	35.35	54.00	-18.65	3	Horizontal	180	1.01
2402MHz	Pass	AV	2.402G	82.92	Inf	-Inf	3	Horizontal	180	1.01
2402MHz	Pass	PK	2.3586G	57.85	74.00	-16.15	3	Horizontal	180	1.01
2402MHz	Pass	PK	2.402G	105.42	Inf	-Inf	3	Horizontal	180	1.01
2402MHz	Pass	AV	4.80392G	29.60	54.00	-24.40	3	Vertical	303	1.01
2402MHz	Pass	PK	4.80392G	52.10	74.00	-21.90	3	Vertical	303	1.01
2402MHz	Pass	AV	4.80387G	33.36	54.00	-20.64	3	Horizontal	161	2.78

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
2402MHz	Pass	PK	4.80387G	55.86	74.00	-18.14	3	Horizontal	161	2.78
2440MHz	Pass	AV	2.3784G	34.91	54.00	-19.09	3	Vertical	40	2.95
2440MHz	Pass	AV	2.44G	80.41	Inf	-Inf	3	Vertical	40	2.95
2440MHz	Pass	AV	2.494G	35.85	54.00	-18.15	3	Vertical	40	2.95
2440MHz	Pass	PK	2.3784G	57.41	74.00	-16.59	3	Vertical	40	2.95
2440MHz	Pass	PK	2.44G	102.91	Inf	-Inf	3	Vertical	40	2.95
2440MHz	Pass	PK	2.494G	58.35	74.00	-15.65	3	Vertical	40	2.95
2440MHz	Pass	AV	2.3816G	35.26	54.00	-18.74	3	Horizontal	335	1.12
2440MHz	Pass	AV	2.44G	84.25	Inf	-Inf	3	Horizontal	335	1.12
2440MHz	Pass	AV	2.4844G	36.07	54.00	-17.93	3	Horizontal	335	1.12
2440MHz	Pass	PK	2.3816G	57.76	74.00	-16.24	3	Horizontal	335	1.12
2440MHz	Pass	PK	2.44G	106.75	Inf	-Inf	3	Horizontal	335	1.12
2440MHz	Pass	PK	2.4844G	58.57	74.00	-15.43	3	Horizontal	335	1.12
2440MHz	Pass	AV	4.8799G	29.07	54.00	-24.93	3	Vertical	305	1.30
2440MHz	Pass	AV	7.31994G	33.08	54.00	-20.92	3	Vertical	69	1.08
2440MHz	Pass	PK	4.8799G	51.57	74.00	-22.43	3	Vertical	305	1.30
2440MHz	Pass	PK	7.31994G	55.58	74.00	-18.42	3	Vertical	69	1.08
2440MHz	Pass	AV	4.8799G	32.07	54.00	-21.93	3	Horizontal	159	2.86
2440MHz	Pass	AV	7.31992G	31.37	54.00	-22.63	3	Horizontal	356	1.06
2440MHz	Pass	PK	4.8799G	54.57	74.00	-19.43	3	Horizontal	159	2.86
2440MHz	Pass	PK	7.31992G	53.87	74.00	-20.13	3	Horizontal	356	1.06
2480MHz	Pass	AV	2.48G	79.32	Inf	-Inf	3	Vertical	218	1.00
2480MHz	Pass	AV	2.4946G	36.45	54.00	-17.55	3	Vertical	218	1.00
2480MHz	Pass	PK	2.48G	101.82	Inf	-Inf	3	Vertical	218	1.00
2480MHz	Pass	PK	2.4946G	58.95	74.00	-15.05	3	Vertical	218	1.00
2480MHz	Pass	AV	2.48G	86.04	Inf	-Inf	3	Horizontal	337	1.14
2480MHz	Pass	AV	2.4835G	38.40	54.00	-15.60	3	Horizontal	337	1.14
2480MHz	Pass	PK	2.48G	108.54	Inf	-Inf	3	Horizontal	337	1.14
2480MHz	Pass	PK	2.4835G	60.90	74.00	-13.10	3	Horizontal	337	1.14
2480MHz	Pass	AV	4.95949G	28.30	54.00	-25.70	3	Vertical	305	1.18
2480MHz	Pass	AV	7.43943G	31.99	54.00	-22.01	3	Vertical	96	1.26
2480MHz	Pass	PK	4.95949G	50.80	74.00	-23.20	3	Vertical	305	1.18
2480MHz	Pass	PK	7.43943G	54.49	74.00	-19.51	3	Vertical	96	1.26
2480MHz	Pass	AV	4.9604G	30.40	54.00	-23.60	3	Horizontal	156	2.79
2480MHz	Pass	AV	7.43939G	32.21	54.00	-21.79	3	Horizontal	11	1.15
2480MHz	Pass	PK	4.9604G	52.90	74.00	-21.10	3	Horizontal	156	2.79
2480MHz	Pass	PK	7.43939G	54.71	74.00	-19.29	3	Horizontal	11	1.15


2.4-2.4835GHz_BT-BR(1Mbps)

2480MHz_TX

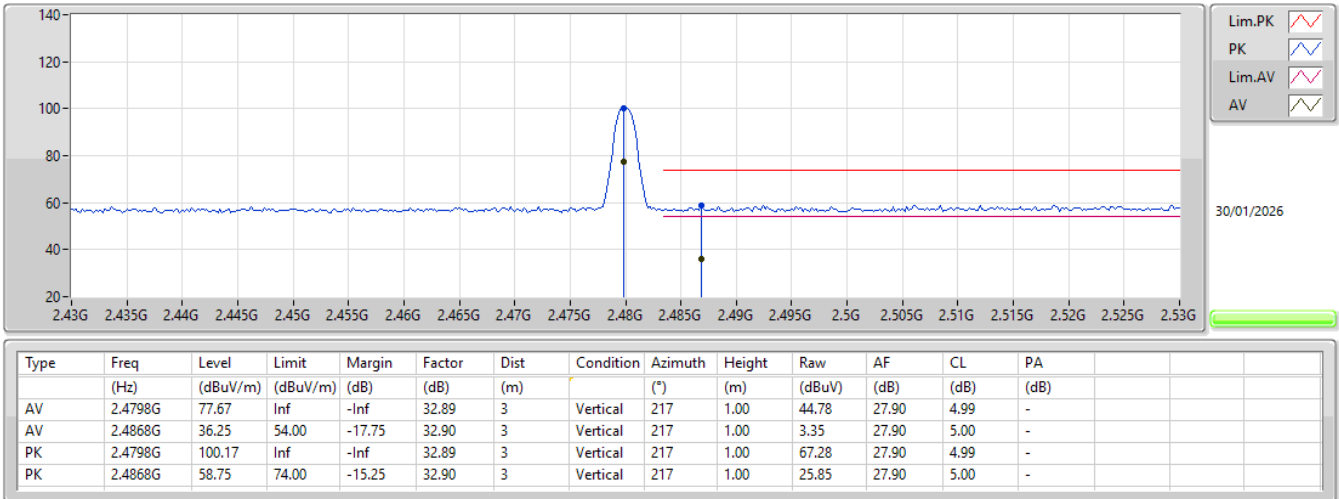


2.4-2.4835GHz_BT-BR(1Mbps)

2480MHz_TX

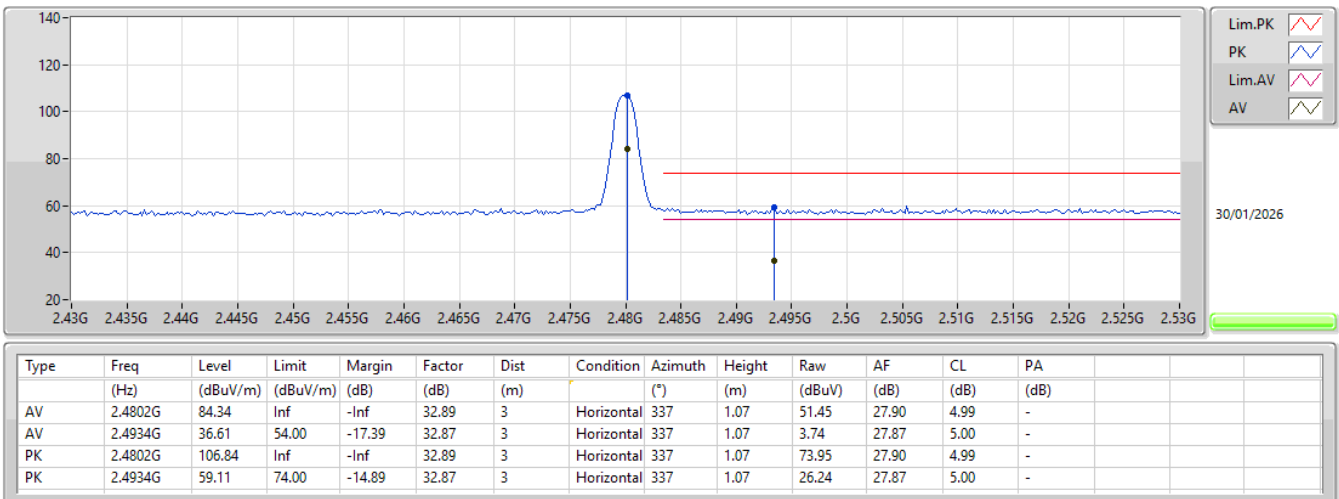


2.4-2.4835GHz_BT-BR(1Mbps)

2480MHz_TX

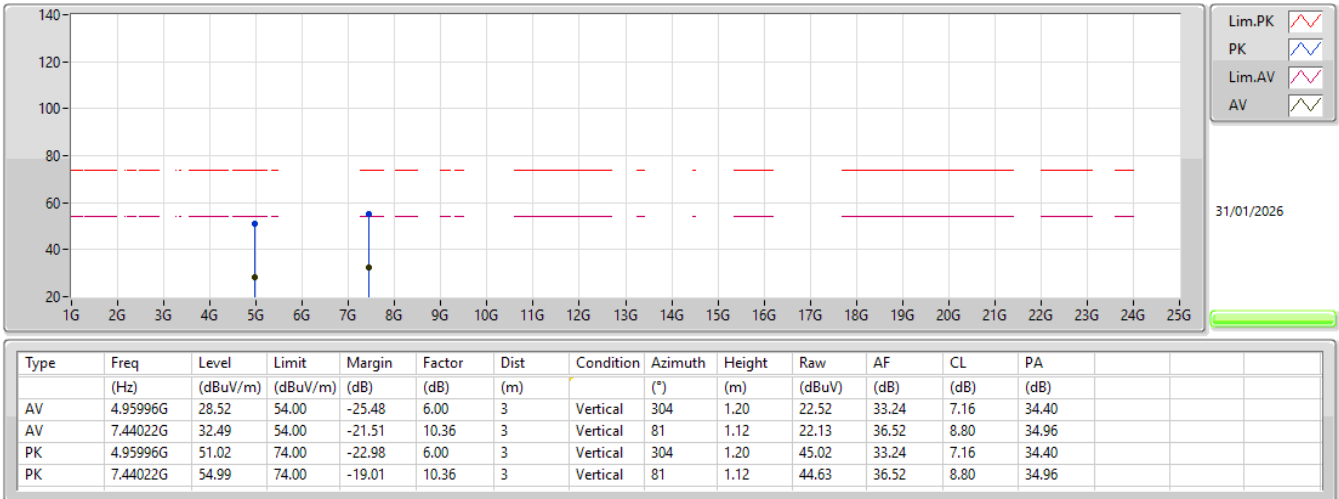


2.4-2.4835GHz_BT-BR(1Mbps)

2480MHz_TX

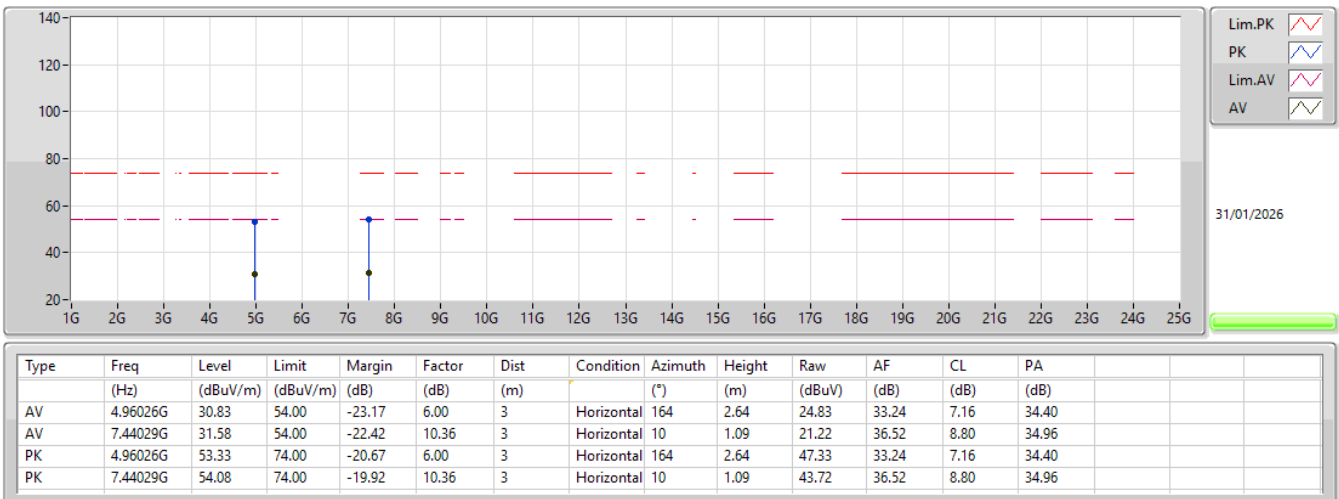


2.4-2.4835GHz_BT-EDR(3Mbps)

2480MHz_TX

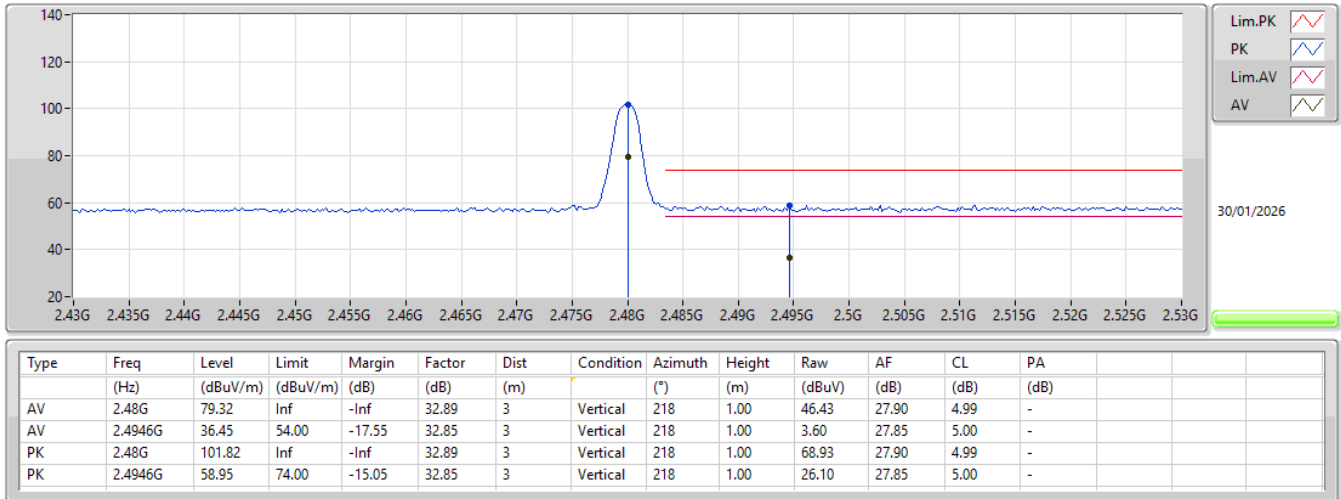


2.4-2.4835GHz_BT-EDR(3Mbps)

2480MHz_TX

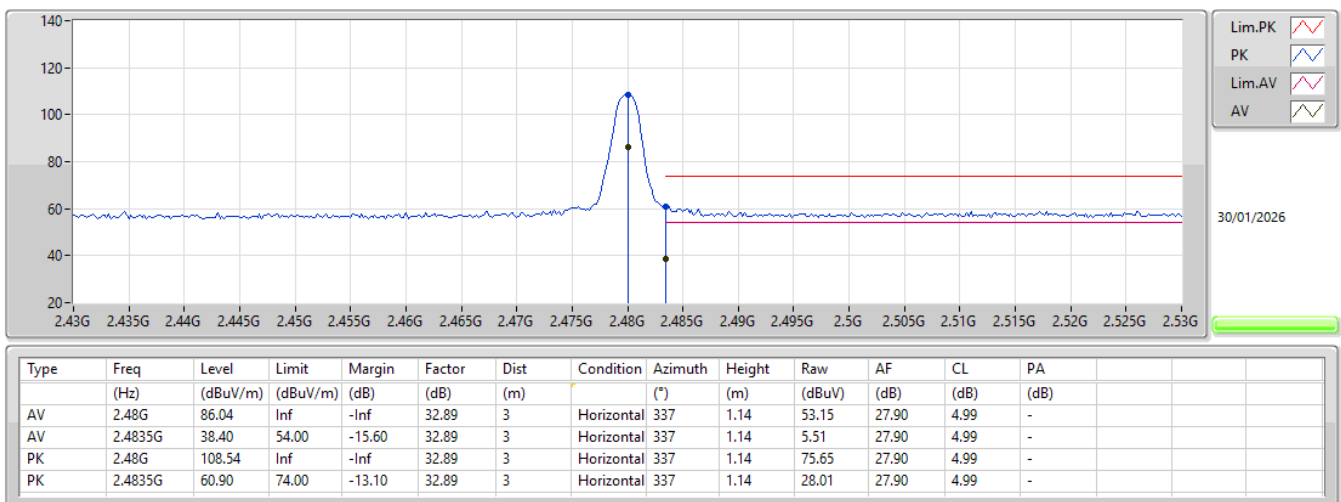

2.4-2.4835GHz_BT-EDR(3Mbps)

2480MHz_TX

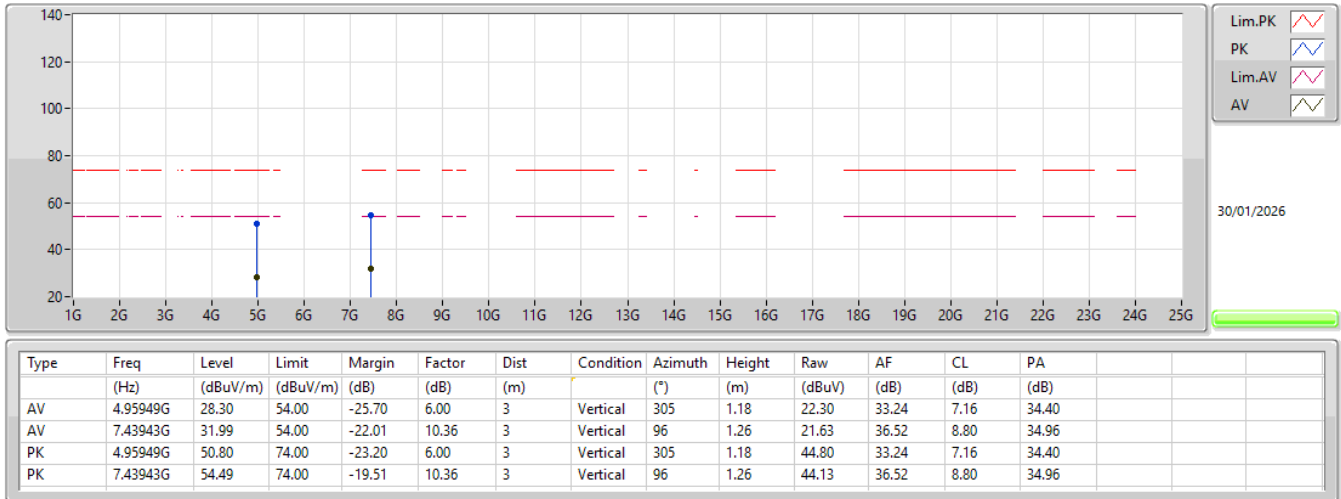

2.4-2.4835GHz_BT-EDR(3Mbps)

2480MHz_TX

