

 MOTOROLA SOLUTIONS	    SMM 826 CERTIFICATE 2518.05																																																		
SAR TEST REPORT Part 2 of 2																																																			
Motorola Solutions Inc. EME Test Laboratory Motorola Solutions Malaysia Sdn Bhd Plot 2A, Medan Bayan Lepas, Mukim 12 SWD 11900 Bayan Lepas Penang, Malaysia.	Date of Report: 03/12/2026 Report Revision: D																																																		
<table style="width: 100%; border: none;"> <tr> <td style="width: 30%;">Responsible Engineer:</td> <td>Yeng Yee Yeong (EME Engineer)</td> </tr> <tr> <td>Report Author:</td> <td>Yeng Yee Yeong (EME Engineer)</td> </tr> <tr> <td>Date/s Tested:</td> <td>9/24/2024-9/26/2024</td> </tr> <tr> <td>Test Location:</td> <td>Penang EME Laboratory</td> </tr> <tr> <td>Manufacturer:</td> <td>Motorola Solutions Malaysia Sdn. Bhd.</td> </tr> <tr> <td>Manufacturer Location:</td> <td>Plot 2A, Medan Bayan Lepas Mukim, 12 SWD, 11900 Bayan Lepas, Penang, Malaysia</td> </tr> <tr> <td>DUT Description:</td> <td>Portable – V200 Body Worn Camera</td> </tr> <tr> <td>Test TX mode(s):</td> <td>FHSS (Bluetooth / Bluetooth LE), 802.11b/g/n (WLAN 2.4GHz)</td> </tr> <tr> <td>Max. Power output:</td> <td>Refer Table 3 & Table 3a (Part 1 of 2)</td> </tr> <tr> <td>Tx Frequency Bands:</td> <td>Refer Table 3 & Table 3a (Part 1 of 2)</td> </tr> <tr> <td>Signaling type:</td> <td>Refer Table 3 & Table 3a (Part 1 of 2)</td> </tr> <tr> <td>Model(s) Tested:</td> <td>B20CJM2BE2AN</td> </tr> <tr> <td>Model(s) Certified:</td> <td>Refer 1.0 Introduction (Part 1 of 2)</td> </tr> <tr> <td>(HVIN/PMN)</td> <td></td> </tr> <tr> <td>Serial Number(s):</td> <td>663EAS0004, 663EAS0003</td> </tr> <tr> <td>Classification:</td> <td>Occupational/Controlled Environment</td> </tr> <tr> <td>Applicant Name:</td> <td>Motorola Solutions Inc.</td> </tr> <tr> <td>Applicant Address:</td> <td>Plot 2A, Medan Bayan Lepas Mukim, 12 SWD, 11900 Bayan Lepas, Penang, Malaysia</td> </tr> <tr> <td>Firmware Version (FVIN):</td> <td>PSS fs2-ARMV7A_PTF V24.4-ptf-V200-1.8-1-g501bb5026c</td> </tr> <tr> <td>FCC ID:</td> <td>AZ499FT7183</td> </tr> <tr> <td></td> <td>This report contains results that are immaterial for FCC equipment approval, which are clearly identified.</td> </tr> <tr> <td>FCC Test Firm Registration Number:</td> <td>823256</td> </tr> <tr> <td>IC:</td> <td>109U-99FT7183</td> </tr> <tr> <td></td> <td>This report contains results that are immaterial for ISED equipment approval, which are clearly identified.</td> </tr> <tr> <td>ISED Test Site registration:</td> <td>24843</td> </tr> </table> The test results clearly demonstrate compliance with General Population/Uncontrolled Environment RF Exposure limits of 1.6 W/kg averaged over 1 gram per the requirements of FCC 47 CFR § 2.1093 and RSS-102 (Issue 6) Based on the information and the testing results provided herein, the undersigned certifies that when used as stated in the operating instructions supplied, said product complies with the national and international reference standards and guidelines listed in section 4.0 of this report (no deviation from standard methods). This report shall not be reproduced without written approval from an officially designated representative of the Motorola Solutions Inc EME Laboratory. I attest to the accuracy of the data and assume full responsibility for the completeness of these measurements. The results and statements contained in this report pertain only to the device(s) evaluated.		Responsible Engineer:	Yeng Yee Yeong (EME Engineer)	Report Author:	Yeng Yee Yeong (EME Engineer)	Date/s Tested:	9/24/2024-9/26/2024	Test Location:	Penang EME Laboratory	Manufacturer:	Motorola Solutions Malaysia Sdn. Bhd.	Manufacturer Location:	Plot 2A, Medan Bayan Lepas Mukim, 12 SWD, 11900 Bayan Lepas, Penang, Malaysia	DUT Description:	Portable – V200 Body Worn Camera	Test TX mode(s):	FHSS (Bluetooth / Bluetooth LE), 802.11b/g/n (WLAN 2.4GHz)	Max. Power output:	Refer Table 3 & Table 3a (Part 1 of 2)	Tx Frequency Bands:	Refer Table 3 & Table 3a (Part 1 of 2)	Signaling type:	Refer Table 3 & Table 3a (Part 1 of 2)	Model(s) Tested:	B20CJM2BE2AN	Model(s) Certified:	Refer 1.0 Introduction (Part 1 of 2)	(HVIN/PMN)		Serial Number(s):	663EAS0004, 663EAS0003	Classification:	Occupational/Controlled Environment	Applicant Name:	Motorola Solutions Inc.	Applicant Address:	Plot 2A, Medan Bayan Lepas Mukim, 12 SWD, 11900 Bayan Lepas, Penang, Malaysia	Firmware Version (FVIN):	PSS fs2-ARMV7A_PTF V24.4-ptf-V200-1.8-1-g501bb5026c	FCC ID:	AZ499FT7183		This report contains results that are immaterial for FCC equipment approval, which are clearly identified.	FCC Test Firm Registration Number:	823256	IC:	109U-99FT7183		This report contains results that are immaterial for ISED equipment approval, which are clearly identified.	ISED Test Site registration:	24843
Responsible Engineer:	Yeng Yee Yeong (EME Engineer)																																																		
Report Author:	Yeng Yee Yeong (EME Engineer)																																																		
Date/s Tested:	9/24/2024-9/26/2024																																																		
Test Location:	Penang EME Laboratory																																																		
Manufacturer:	Motorola Solutions Malaysia Sdn. Bhd.																																																		
Manufacturer Location:	Plot 2A, Medan Bayan Lepas Mukim, 12 SWD, 11900 Bayan Lepas, Penang, Malaysia																																																		
DUT Description:	Portable – V200 Body Worn Camera																																																		
Test TX mode(s):	FHSS (Bluetooth / Bluetooth LE), 802.11b/g/n (WLAN 2.4GHz)																																																		
Max. Power output:	Refer Table 3 & Table 3a (Part 1 of 2)																																																		
Tx Frequency Bands:	Refer Table 3 & Table 3a (Part 1 of 2)																																																		
Signaling type:	Refer Table 3 & Table 3a (Part 1 of 2)																																																		
Model(s) Tested:	B20CJM2BE2AN																																																		
Model(s) Certified:	Refer 1.0 Introduction (Part 1 of 2)																																																		
(HVIN/PMN)																																																			
Serial Number(s):	663EAS0004, 663EAS0003																																																		
Classification:	Occupational/Controlled Environment																																																		
Applicant Name:	Motorola Solutions Inc.																																																		
Applicant Address:	Plot 2A, Medan Bayan Lepas Mukim, 12 SWD, 11900 Bayan Lepas, Penang, Malaysia																																																		
Firmware Version (FVIN):	PSS fs2-ARMV7A_PTF V24.4-ptf-V200-1.8-1-g501bb5026c																																																		
FCC ID:	AZ499FT7183																																																		
	This report contains results that are immaterial for FCC equipment approval, which are clearly identified.																																																		
FCC Test Firm Registration Number:	823256																																																		
IC:	109U-99FT7183																																																		
	This report contains results that are immaterial for ISED equipment approval, which are clearly identified.																																																		
ISED Test Site registration:	24843																																																		
 Saw Sun Hock (Approval Signatory) Approved Date: 03/16/2025																																																			

Appendix D

System Verification Check Scans

Motorola Solutions, Inc. EME Laboratory

Date/Time: 9/25/2024 5:24:31 PM

Robot#: DASY5-PG-3 | Run#: DAN(ABE)-SYSP-2450H-240925-12
 Dipole Model#: D2450V2
 Phantom#: ELI4 1109
 Tissue Temp: 21.3 (C)
 Serial#: 781
 Test Freq: 2450.0000(MHz)
 Start Power: 31.6 mW)
 Rotation (1D): 0.13 dB
 Adjusted SAR (1W): 50.32 mW/g (1g)

Comments:

Communication System Band: D2450 (2450.0 MHz), Communication System UID: 0, Duty Cycle: 1:1,

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.666$ S/m; $\epsilon_r = 37.48$; $\rho = 1000$ kg/m³

Probe: EX3DV4 - SN7486, Calibrated: 1/19/2024, Frequency: 2450 MHz, ConvF(7.87, 7.87, 7.87) @ 2450 MHz

Electronics: DAE4 Sn684, Calibrated: 2/22/2022

2-3 GHz-Rev.3/System Performance Check/Dipole Area Scan 2 (51x91x1): Interpolated grid:

dx=1.200 mm, dy=1.200 mm

Reference Value = 40.63 V/m; Power Drift = -0.13 dB

Fast SAR: SAR(1 g) = 1.62 W/kg; SAR(10 g) = 0.733 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 2.61 W/kg

2-3 GHz-Rev.3/System Performance Check/0-Degree Cube (7x7x7)/Cube 0: Measurement

grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 40.63 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 3.02 W/kg

SAR(1 g) = 1.59 W/kg; SAR(10 g) = 0.763 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9 mm


Ratio of SAR at M2 to SAR at M1 = 52.3%

Maximum value of SAR (measured) = 2.48 W/kg

2-3 GHz-Rev.3/System Performance Check/Z-Axis Retraction (1x1x17): Measurement grid:

dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 2.50 W/kg

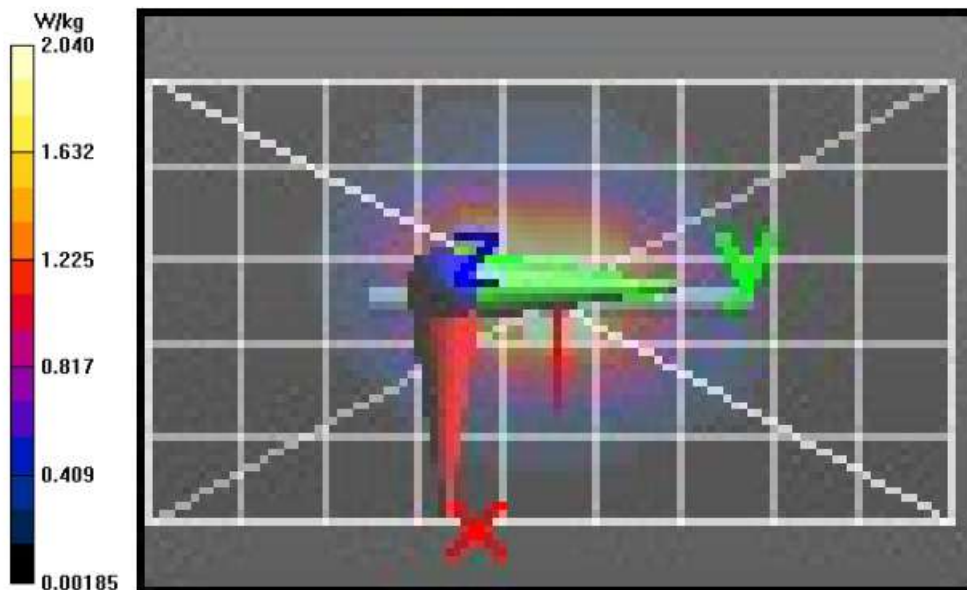

Appendix E

DUT Scans

Highest SAR at FCC WLAN 2.4GHz Body

Table 17

Motorola Solutions, Inc. EME Laboratory

Date/Time: 9/25/2024 8:45:26 AM

Robot#: DASY5-PG-3 | Run#: DAN(ABE)-AB-240925-07@
 Model#: PMMN2000A
 Phantom#: ELI4 1109
 Tissue Temp: 22.5 (C)
 Serial#: 663EAS0004
 Antenna: AN000474A03
 Test Freq: 2412.0000 (MHz)
 Battery: PMNN4578A
 Carry Acc: AC-LANYARD-05 w/ PMLN8121A
 Audio Acc: None
 Start Power: 0.067 (W)

Comments:

Communication System Band: WLAN 2.4GHz (2412.0 - 2484.0 MHz), Communication System UID: 10415 - AAA, Duty Cycle: 1:1.4243,

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.602$ S/m; $\epsilon_r = 38.931$; $\rho = 1000$ kg/m³

Probe: EX3DV4 - SN7486, Calibrated: 1/19/2024, Frequency: 2412 MHz, ConvF(7.87, 7.87, 7.87) @ 2412 MHz
 Electronics: DAE4 Sn684, Calibrated: 2/22/2022

2-3 GHz-Rev.3/Ab Scan/1-Area Scan (91x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Reference Value = 15.29 V/m; Power Drift = -0.71 dB

Fast SAR: SAR(1 g) = 0.323 W/kg; SAR(10 g) = 0.149 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 0.545 W/kg

2-3 GHz-Rev.3/Ab Scan/3-Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.29 V/m; Power Drift = -0.76 dB

Peak SAR (extrapolated) = 0.636 W/kg

SAR(1 g) = 0.343 W/kg; SAR(10 g) = 0.156 W/kg (SAR corrected for target medium)


Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 57%

Maximum value of SAR (measured) = 0.511 W/kg

2-3 GHz-Rev.3/Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 0.510 W/kg

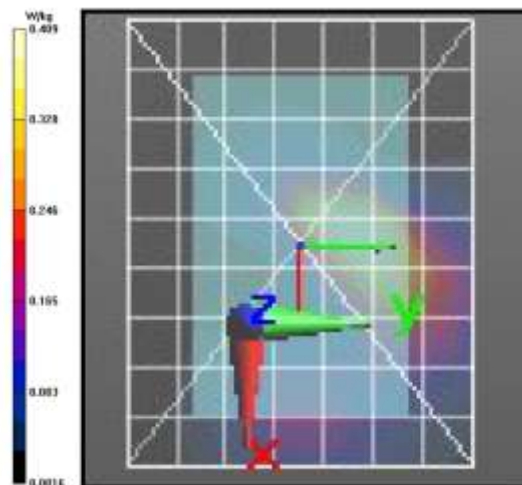

Highest SAR at ISED WLAN 2.4GHz Body

Table 18

Motorola Solutions, Inc. EME Laboratory

Date/Time: 9/25/2024 8:45:26 AM

Robot#: DASY5-PG-3 | Run#: DAN(ABE)-AB-240925-07@
 Model#: PMMN2000A
 Phantom#: ELI4 1109
 Tissue Temp: 22.5 (C)
 Serial#: 663EAS0004
 Antenna: AN000474A03
 Test Freq: 2412.0000 (MHz)
 Battery: PMNN4578A
 Carry Acc: AC-LANYARD-05 w/ PMLN8121A
 Audio Acc: None
 Start Power: 0.067 (W)

Comments:

Communication System Band: WLAN 2.4GHz (2412.0 - 2484.0 MHz), Communication System UID: 10415 - AAA, Duty Cycle: 1:1.4243,

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.602$ S/m; $\epsilon_r = 38.931$; $\rho = 1000$ kg/m³

Probe: EX3DV4 - SN7486, Calibrated: 1/19/2024, Frequency: 2412 MHz, ConvF(7.87, 7.87, 7.87) @ 2412 MHz

Electronics: DAE4 Sn684, Calibrated: 2/22/2022

2-3 GHz-Rev.3/Ab Scan/1-Area Scan (91x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Reference Value = 15.29 V/m; Power Drift = -0.71 dB

Fast SAR: SAR(1 g) = 0.323 W/kg; SAR(10 g) = 0.149 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 0.545 W/kg

2-3 GHz-Rev.3/Ab Scan/3-Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.29 V/m; Power Drift = -0.76 dB

Peak SAR (extrapolated) = 0.636 W/kg

SAR(1 g) = 0.343 W/kg; SAR(10 g) = 0.156 W/kg (SAR corrected for target medium)


Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 57%

Maximum value of SAR (measured) = 0.511 W/kg

2-3 GHz-Rev.3/Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 0.510 W/kg

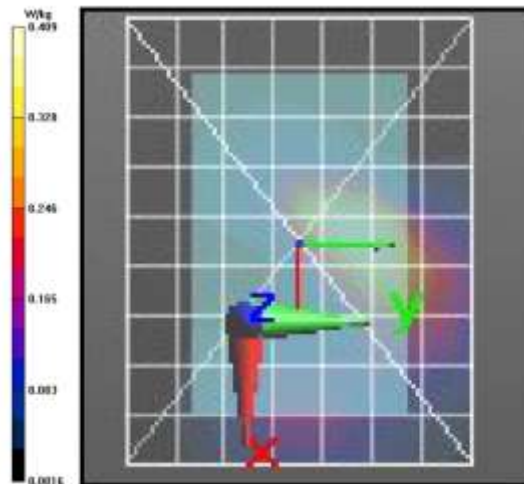

APPENDIX F

Shortened Scan of Highest SAR configuration

Shortened Scan Assessment

Table 19

Motorola Solutions, Inc. EME Laboratory

Date/Time: 9/25/2024 9:36:02 AM

Robot#: DASY5-PG-3 | Run#: DAN(ABE)-AB-240925-08@
 Model#: PMMN2000A
 Phantom#: ELI4 1109
 Tissue Temp: 22.5 (C)
 Serial#: 663EAS0004
 Antenna: AN000474A03
 Test Freq: 2412.0000 (MHz)
 Battery: PMNN4578A
 Carry Acc: AC-LANYARD-05 w/ PMLN8121A
 Audio Acc: None
 Start Power: 0.067 (W)

Comments: Shorten scan

Communication System Band: WLAN 2.4GHz (2412.0 - 2484.0 MHz), Communication System UID: 10415 - AAA, Duty Cycle: 1:1.4243,

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.602$ S/m; $\epsilon_r = 38.931$; $\rho = 1000$ kg/m³

Probe: EX3DV4 - SN7486, Calibrated: 1/19/2024, Frequency: 2412 MHz, ConvF(7.87, 7.87, 7.87) @ 2412 MHz

Electronics: DAE4 Sn684, Calibrated: 2/22/2022

2-3 GHz-Rev.3/Ab Scan/1-Area Scan (91x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Reference Value = 12.78 V/m; Power Drift = -0.74 dB

Fast SAR: SAR(1 g) = 0.301 W/kg; SAR(10 g) = 0.141 W/kg (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 0.497 W/kg

2-3 GHz-Rev.3/Ab Scan/3-Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.22 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.601 W/kg

SAR(1 g) = 0.328 W/kg; SAR(10 g) = 0.148 W/kg (SAR corrected for target medium)


Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 57%

Maximum value of SAR (measured) = 0.489 W/kg

2-3 GHz-Rev.3/Ab Scan/4-Z-Axis Scan (1x1x17): Measurement grid: dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 0.486 W/kg

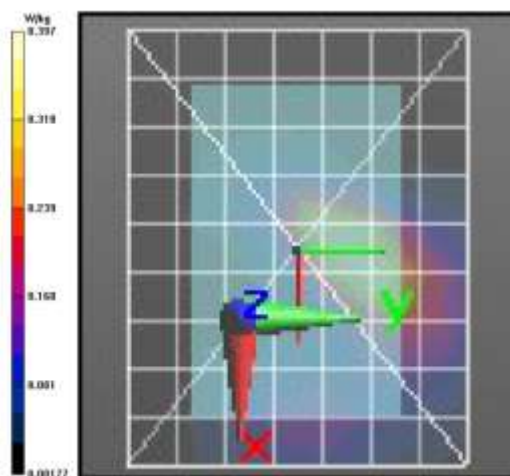

Shortened scan reflects highest SAR producing configuration and is compared to the full scan.

Scan Description	Referenced Table	Test Time (min.)	SAR 1g (W/kg)
Shorten Scan (Zoom)	19	20	0.357
Full Scan (Area & Zoom)	17	30	0.436

APPENDIX G

DUT Test Position Photos

Photos available in Exhibit 7B

APPENDIX H

DUT, Body worn and audio accessories Photos

Photos available in Exhibit 7B