



FCC/ISED RADIO TEST REPORT

FCC ID : AZ499FT7192
IC : 109U-99FT7192
Equipment : C5
Brand Name : Motorola
Model Name : C5
Model Number : HK2227A
HVIN : HK2227A
PMN : C5
Applicant : Motorola Solutions, Inc.
Plot 2A, Medan Bayan Lepas, Mukim 12, S.W.D,
11900 Bayan Lepas, Penang, Malaysia
Manufacturer : Motorola Solutions Malaysia Sdn. Bhd.
Plot 2A, Medan Bayan Lepas, Mukim 12, S.W.D,
11900 Bayan Lepas, Penang, Malaysia
Standard : FCC Part 15 Subpart C §15.247
ISED RSS-247 Issue 4

The product was received on Apr. 27, 2026 and testing was performed from May 08, 2026 to Jun. 26, 2026. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	6
1.3 Modification of EUT	6
1.4 Testing Location	6
1.5 Applicable Standards.....	7
2 Test Configuration of Equipment Under Test	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	11
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	11
3 Test Result	12
3.1 6dB and 99% Bandwidth Measurement	12
3.2 Output Power Measurement.....	13
3.3 Power Spectral Density Measurement	14
3.4 Conducted Band Edges and Spurious Emission Measurement	15
3.5 Radiated Band Edges and Spurious Emission Measurement	16
3.6 AC Conducted Emission Measurement.....	20
3.7 Antenna Requirements.....	22
4 List of Measuring Equipment.....	23
5 Measurement Uncertainty	25
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Result	
Appendix D. Duty Cycle Plots	



History of this test report

Report No.	Version	Description	Issue Date
FR640815C	01	Initial issue of report	Jun. 30, 2026

Summary of Test Result

Report Clause	FCC Ref Std. Clause	ISED Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	RSS-247 6.3.1	6dB Bandwidth	Pass	-
3.1	2.1049	RSS-Gen 6.7	99% Occupied Bandwidth	Pass	-
3.1	2.1049	RSS-Gen 6.7	Emission Designator	Report only	802.11b:11M6G1D 802.11g:17M5D1D 802.11n20:18M5D1D 802.11ax20:19M2D1D
3.2	15.247(b)	RSS-247 6.3.2	Power Output Measurement	Pass	802.11b:20.15dBm(0.104W) 802.11g:22.91dBm(0.195W) 802.11n20:23.39dBm(0.218W) 802.11ax20:23.54dBm(0.226W)
3.3	15.247(e)	RSS-247 6.3.1	Power Spectral Density	Pass	-
3.4	15.247(d)	RSS-247 6.6	Conducted Band Edges	Pass	-
			Conducted Spurious Emission	Pass	-
3.5	15.247(d)	RSS-247 6.6	Radiated Band Edges and Radiated Spurious Emission	Pass	5.22 dB under the limit at 2389.56 MHz
3.6	15.207	RSS-Gen 8.8	AC Conducted Emission	Pass	-
3.7	15.203	N/A	Antenna Requirement	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Keven Cheng

Report Producer: Aya Yang



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	C5
Brand Name	Motorola
Model Name	C5
FCC Model Number	HK2227A
IC Model Number	HK2227A
HVIN	HK2227A
PMN	C5
FVIN	F.02.02.01.20260415.02
FCC ID	AZ499FT7192
IC	109U-99FT7192
EUT supports Radios application	WLAN 11a/b/g/n HT20 WLAN 11ac VHT20 WLAN 11ax HE20 Bluetooth BR/EDR/LE
HW Version	P2
SW Version	F.02.02.01.20260415.02

Remark: The above EUT's information was declared by manufacturer.

EUT Information List	
S/N	Performed Test Item
64222CG1111	RF Conducted Measurement
64222CG1609	Radiated Spurious Emission
64222CG1262 64222CG2052 64222CG2257 64222CG2308 64222CG2012 64222CG2239 64222CG2333 64222CG1929 64222CG2314 64222CG2420 64222CG2177 64222CG2332	Conducted Emission

1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx/Rx Frequency	2400 MHz ~ 2483.5 MHz
Antenna Type / Gain	PIFA with gain 0.87 dBi
Type of Modulation	802.11b: DSSS (DBPSK / DQPSK / CCK) 802.11g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ax: OFDMA (BPSK/QPSK/16QAM/64QAM/256QAM/1024QAM)

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary

1.3 Modification of EUT

No modifications made to the EUT during the testing.

1.4 Testing Location

The test location is accredited based on TAF code 1190 and 3786 designated by NCC (National Communication Commission).

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)
Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)

FCC designation No.: TW1190 and TW3786

ISED CABID: TW1190 and TW3786

ISED Company Number: 4086B and 4086H

Note:

1. The test site complies with ANSI C63.4 2014 requirement.
2. The RF Conducted Measurement test item subcontracted to Sporton International Inc. Wensan Laboratory. (TAF Code:3786)



1.5 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.

<For FCC>

- ♦ FCC Part 15 Subpart C §15.247
- ♦ ANSI C63.10-2020 + Cor. 1-2023

<For ISED>

- ♦ ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024
- ♦ ISED RSS-247 Issue 4
- ♦ ISED RSS-Gen Issue 5

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, ICES-003, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and accessory (Adapter /Earphone/Badge clip), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

2.2 Test Mode

This device support 26/52/106

The PSD of partial RU is reduced to be smaller than full RU according to TCB workshop interim guidance Oct. 2018.

The 802.11ax mode is investigated among different tones, full resource units (RU), partial resource units. The partial RU has no higher power than full RU's, thus the full RU is chosen as main test configuration.

The final test modes include the worst data rates for each modulation shown in the table below.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11ax HE20	MCS0


Test Cases	
AC Conducted Emission	Mode 1 :Charging from MUC-A PSU + WLAN (2.4G) Link
Remark: . 1. The detailed Radiated test modes are shown in Appendix C. 2. For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.	

2.3 Connection Diagram of Test System

<WLAN Tx Mode>



<AC Conducted Emission Mode>

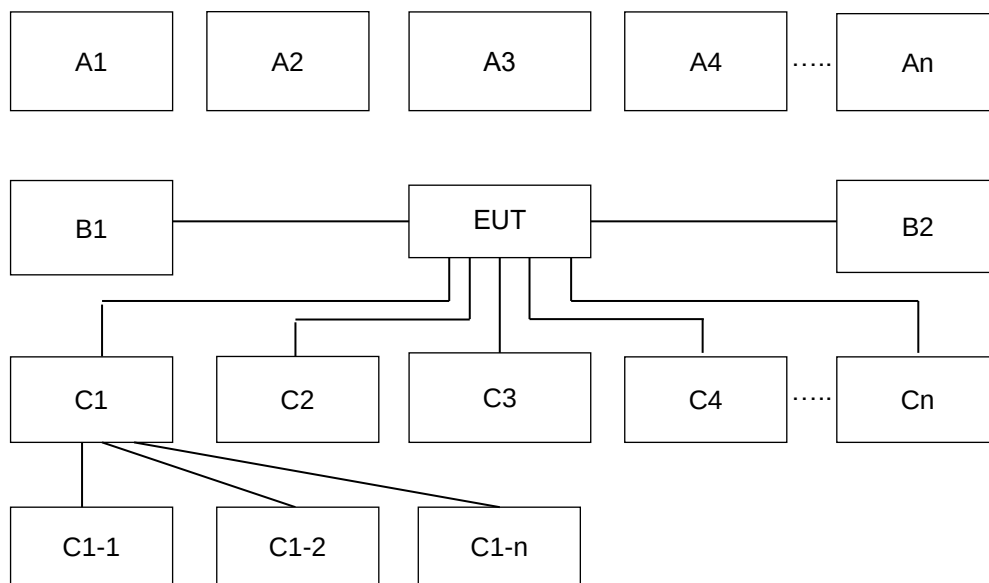

Conduction Test Setup									
No.	Wireless Station	Connection Type	Test Mode						
			1	-	-	-	-	-	-
A1	AP router	WiFi	X	-	-	-	-	-	-
A2	Notebook	WiFi	X	-	-	-	-	-	-
No.	Power Source	Connection Type	1	-	-	-	-	-	-
B1	AC : 120V/60Hz	AC Power Cable	X	-	-	-	-	-	-
No.	Setup Peripherals	Connection Type	1	-	-	-	-	-	-
C1	MUC-A	Pogo pin	X	-	-	-	-	-	-

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
2.	Notebook	Dell	Latitude 3420	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	MUC-A	Theatro	CR10-C1	N/A	N/A	N/A
4.	PSU-A	ADAPTER TECH.	ATS050-P050-C1	N/A	N/A	N/A
5.	MUC-A Power cord	Digikey	412012-01	N/A	N/A	N/A
6.	MUC-B	Motorola	PMPN4705A	N/A	N/A	N/A
7.	MUC-B PSU	Motorola	PS000674A01	N/A	N/A	N/A
8.	MUC-B Power cord	Motorola	3004209T04	N/A	N/A	N/A
9.	Embedded Battery	Motorola	PMNN4912A	N/A	N/A	N/A
10.	Wired earpiece	Motorola	PMLN8928A	N/A	N/A	N/A
11.	Badge Clip	Motorola	PMLN8929A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “Tera Term V4.95” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 4.2 + 10 = 14.2 (dB)

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 1% to 5% of the OBW but not less than 100 kHz. Set the Video bandwidth VBW $\geq 3 * RBW$. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth, and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna with directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. For Peak Power, the testing follows ANSI C63.10 Section 11.9.1.2 PKPM1
3. The RF output of EUT is connected to the power meter by RF cable and attenuator. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

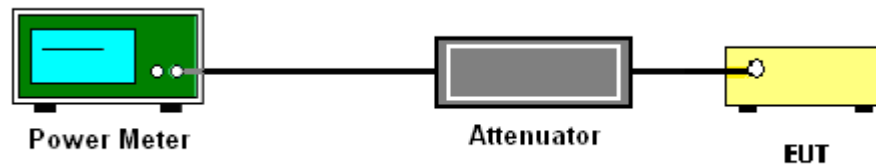

3.2.5 Test Result of Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = No faster than coupled (auto) time, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

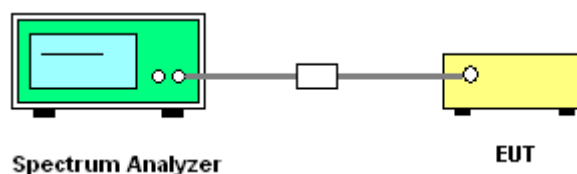

3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Please refer to Appendix A.

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.


7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

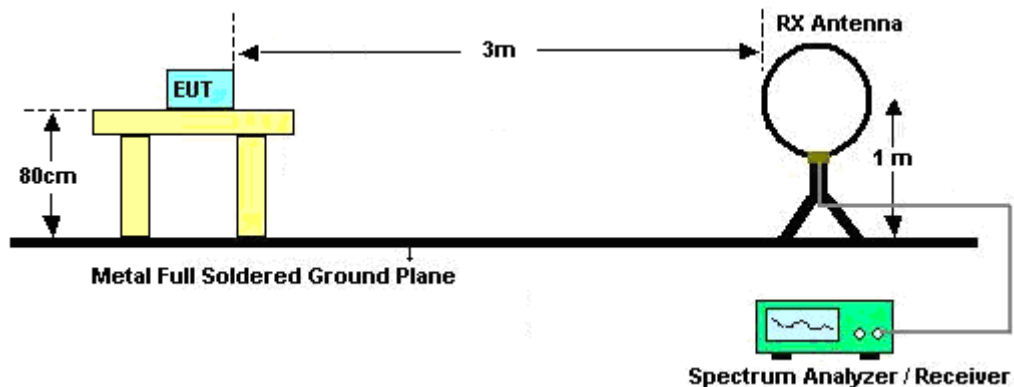


For radiated emissions from 30MHz to 1GHz

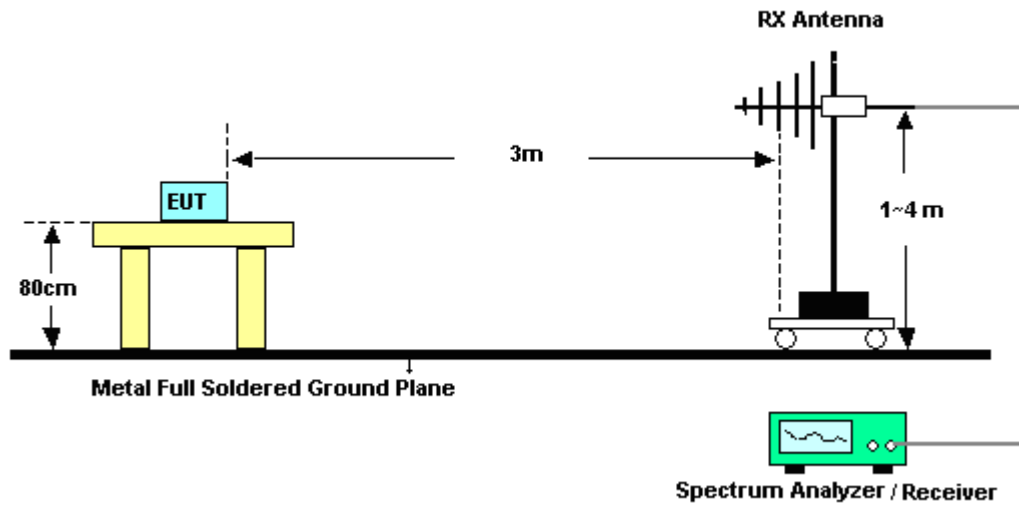

For radiated test from 1GHz to 18GHz

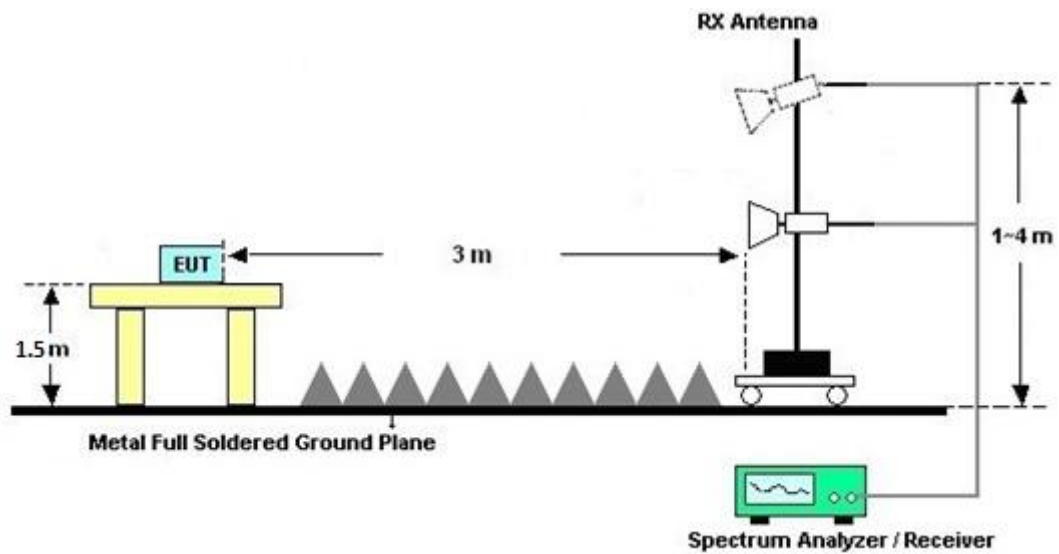

For radiated test above 18GHz

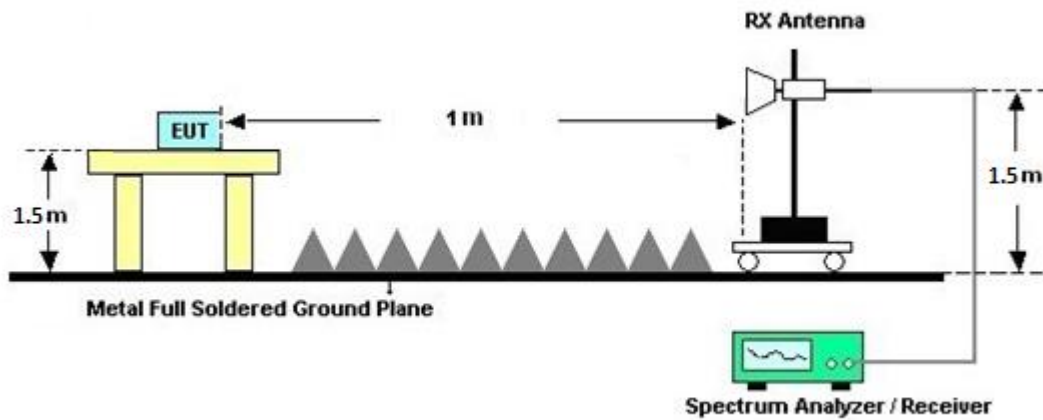

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site **v01r01**, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
6. The frequency range from 150 kHz to 30 MHz is scanned.
7. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

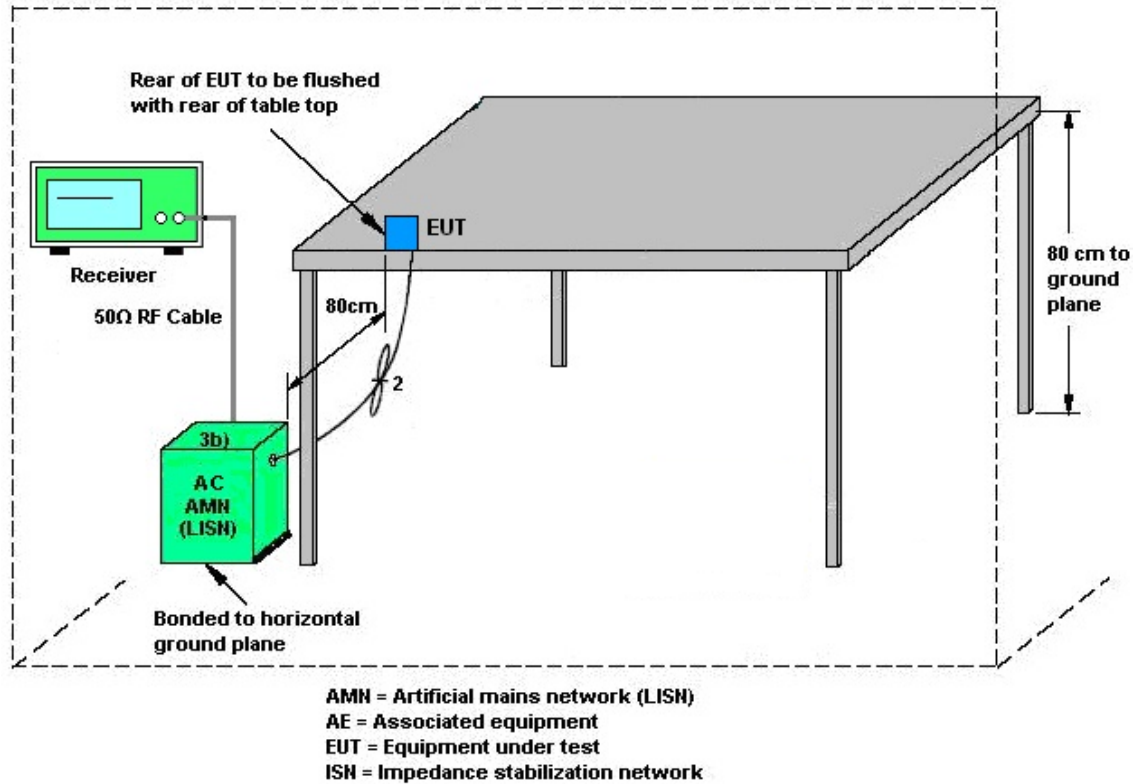

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.7.2 Antenna Anti-Replacement Construction

Antenna permanently attached.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 04, 2025	May 08, 2026 ~ Jun. 26, 2026	Nov. 03, 2026	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	17I00015SNO 37 (NO:167)	10MHz~6GHz	Nov. 14, 2025	May 08, 2026 ~ Jun. 26, 2026	Nov. 13, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101466	10HZ~44GHZ	Nov. 12, 2025	May 08, 2026 ~ Jun. 26, 2026	Nov. 11, 2026	Conducted (TH05-HY)
Switch Control Mainframe	E-Instument	ETF-1405-0	EC1900067 (BOX7)	N/A	Jul. 02, 2025	May 08, 2026 ~ Jun. 26, 2026	Jul. 01, 2026	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final version_24051 3	N/A	Conducted Other Test Item	N/A	May 08, 2026 ~ Jun. 26, 2026	N/A	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	May 15, 2026	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	N/A	Dec. 16, 2025	May 15, 2026	Dec. 15, 2026	Conduction (CO05-HY)
Hygrometer	TECPEL	DTM-303A	TP210031	N/A	Jun. 26, 2025	May 15, 2026	Jun. 25, 2026	Conduction (CO05-HY)
Two-Line V-Network	Rohde & Schwarz	ENV 216 +EMCI-EXP-U S-US S	100080+N-02 1	N/A	Apr. 22, 2026	May 15, 2026	Apr. 21, 2027	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32	N/A	N/A	N/A	May 15, 2026	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	00691	N/A	Jul. 29, 2025	May 15, 2026	Jul. 28, 2026	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	MQT2408250 1	N/A	Oct. 14, 2025	May 15, 2026	Oct. 13, 2026	Conduction (CO05-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N -06	35419 & 03	30MHz~1GHz	Mar. 21,2026	May 15, 2026 ~ Jun. 09, 2026	Mar. 20, 2027	Radiation (03CH07-HY)
Double Ridged Guide Horn Antenna	ETS-Lindgren	3117	00075962	1GHz ~ 18GHz	Dec. 09,2025	May 15, 2026 ~ Jun. 09, 2026	Dec. 08, 2026	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Mar. 16,2026	May 15, 2026 ~ Jun. 09, 2026	Mar. 15, 2027	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590075	1GHz~18GHz	Apr. 17,2026	May 15, 2026 ~ Jun. 09, 2026	Apr. 16, 2027	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz~1GHz	Sep. 30,2025	May 15, 2026 ~ Jun. 09, 2026	Sep. 29, 2026	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~26.5GHz	Mar. 21,2026	May 15, 2026 ~ Jun. 09, 2026	Mar. 20, 2027	Radiation (03CH07-HY)
Preamplifier	EMEC	EM18G40G	0600789	18-40GHz	Aug. 08,2025	May 15, 2026 ~ Jun. 09, 2026	Aug. 07, 2026	Radiation (03CH07-HY)
Signal Analyzer	Agilent	N9030A	MY52350276	3Hz~44GHz	Apr. 09,2026	May 15, 2026 ~ Jun. 09, 2026	Apr. 08, 2027	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4 MY24971/4 MY15682/4	30MHz to 18GHz	Feb. 19,2026	May 15, 2026 ~ Jun. 09, 2026	Feb. 18, 2027	Radiation (03CH07-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4 MY24971/4	9kHz to 30MHz	Feb. 19,2026	May 15, 2026 ~ Jun. 09, 2026	Feb. 18, 2027	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126	532078/126E	30MHz~18GHz	Sep. 13,2025	May 15, 2026 ~ Jun. 09, 2026	Sep. 12, 2026	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2858/2	18GHz~40GHz	Feb. 19,2026	May 15, 2026 ~ Jun. 09, 2026	Feb. 18, 2027	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	801606/2	9KHz ~ 40GHz	Apr. 22,2026	May 15, 2026 ~ Jun. 09, 2026	Apr. 21, 2027	Radiation (03CH07-HY)
Controller	EMEC	EM1000	N/A	Control Ant Mast	N/A	May 15, 2026 ~ Jun. 09, 2026	N/A	Radiation (03CH07-HY)
Controller	MF	MF-7802	N/A	Control Turn table	N/A	May 15, 2026 ~ Jun. 09, 2026	N/A	Radiation (03CH07-HY)
Antenna Mast	EMEC	AM-BS-4500E	N/A	Boresight mast 1M~4M	N/A	May 15, 2026 ~ Jun. 09, 2026	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	May 15, 2026 ~ Jun. 09, 2026	N/A	Radiation (03CH07-HY)
Software	Audix	E3	RK-002396	N/A	N/A	May 15, 2026 ~ Jun. 09, 2026	N/A	Radiation (03CH07-HY)
USB Data Logger	TECPEL	TR-32	HE17XB2495	N/A	Mar. 02,2026	May 15, 2026 ~ Jun. 09, 2026	Mar. 01, 2027	Radiation (03CH07-HY)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA917025 1	18GHz~40GHz	Dec. 09,2025	May 15, 2026 ~ Jun. 09, 2026	Dec. 08, 2026	Radiation (03CH07-HY)

5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.70 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.30 dB
---	---------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.70 dB
---	---------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.50 dB
---	---------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.90 dB
---	---------

Uncertainty of 6dB Bandwidth Measurement

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	0.0040 MHz
---	------------

Uncertainty of 99% Occupied Bandwidth Measurement

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	0.0080 MHz
---	------------

Uncertainty of Maximum Conducted Output Power Measurement

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	0.84 dB
---	---------

Uncertainty of Power Spectral Density Measurement

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	1.10 dB
---	---------

Uncertainty of Conducted Band Edges and Spurious Emission Measurement

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	1.08 dB
---	---------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Hank Hsu/Eason Huang	Temperature:	21~25	°C
Test Date:	2026/05/08~06/26	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band Single Antenna										
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
					Ant1	Ant2	Ant1	Ant2		
11b	1Mbps	1	1	2412	11.61	-	8.07	-	0.50	Pass
11b	1Mbps	1	6	2437	11.56	-	8.07	-	0.50	Pass
11b	1Mbps	1	11	2462	11.47	-	8.06	-	0.50	Pass
11g	6Mbps	1	1	2412	17.46	-	16.19	-	0.50	Pass
11g	6Mbps	1	6	2437	17.48	-	16.15	-	0.50	Pass
11g	6Mbps	1	11	2462	17.49	-	16.18	-	0.50	Pass
HT20	MCS0	1	1	2412	18.48	-	17.36	-	0.50	Pass
HT20	MCS0	1	6	2437	18.48	-	17.43	-	0.50	Pass
HT20	MCS0	1	11	2462	18.47	-	17.32	-	0.50	Pass

TEST RESULTS DATA
Average Output Power

2.4GHz Band Single Antenna																
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
11b	1Mbps	1	1	2412	17.60	-		30.00	-	0.87	-	18.47	-	36.00	-	Pass
11b	1Mbps	1	6	2437	17.50	-		30.00	-	0.87	-	18.37	-	36.00	-	Pass
11b	1Mbps	1	11	2462	17.30	-		30.00	-	0.87	-	18.17	-	36.00	-	Pass
11g	6Mbps	1	1	2412	16.90	-		30.00	-	0.87	-	17.77	-	36.00	-	Pass
11g	6Mbps	1	6	2437	16.80	-		30.00	-	0.87	-	17.67	-	36.00	-	Pass
11g	6Mbps	1	11	2462	16.80	-		30.00	-	0.87	-	17.67	-	36.00	-	Pass
HT20	MCS0	1	1	2412	16.90	-		30.00	-	0.87	-	17.77	-	36.00	-	Pass
HT20	MCS0	1	6	2437	16.80	-		30.00	-	0.87	-	17.67	-	36.00	-	Pass
HT20	MCS0	1	11	2462	16.80	-		30.00	-	0.87	-	17.67	-	36.00	-	Pass

Setting	
Ant1	Ant2
17.00	-
17.00	-
17.00	-
16.00	-
16.00	-
16.00	-
16.00	-
16.00	-
16.00	-
16.00	-

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band Single Antenna												
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
					Ant1	Ant2	Worse + 3.01	Ant1	Ant2	Ant1	Ant2	
11b	1Mbps	1	1	2412	-5.48	-		0.87	-	8.00	-	Pass
11b	1Mbps	1	6	2437	-3.11	-		0.87	-	8.00	-	Pass
11b	1Mbps	1	11	2462	-4.73	-		0.87	-	8.00	-	Pass
11g	6Mbps	1	1	2412	-8.20	-		0.87	-	8.00	-	Pass
11g	6Mbps	1	6	2437	-7.93	-		0.87	-	8.00	-	Pass
11g	6Mbps	1	11	2462	-8.11	-		0.87	-	8.00	-	Pass
HT20	MCS0	1	1	2412	-7.59	-		0.87	-	8.00	-	Pass
HT20	MCS0	1	6	2437	-8.15	-		0.87	-	8.00	-	Pass
HT20	MCS0	1	11	2462	-7.25	-		0.87	-	8.00	-	Pass

Measured power density (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Output Power

2.4GHz Band Single Antenna																
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Peak Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
11b	1Mbps	1	1	2412	20.15	-		30.00	-	0.87	-	21.02	-	36.00	-	Pass
11b	1Mbps	1	6	2437	20.01	-		30.00	-	0.87	-	20.88	-	36.00	-	Pass
11b	1Mbps	1	11	2462	19.89	-		30.00	-	0.87	-	20.76	-	36.00	-	Pass
11g	6Mbps	1	1	2412	22.91	-		30.00	-	0.87	-	23.78	-	36.00	-	Pass
11g	6Mbps	1	6	2437	22.63	-		30.00	-	0.87	-	23.50	-	36.00	-	Pass
11g	6Mbps	1	11	2462	22.48	-		30.00	-	0.87	-	23.35	-	36.00	-	Pass
HT20	MCS0	1	1	2412	23.39	-		30.00	-	0.87	-	24.26	-	36.00	-	Pass
HT20	MCS0	1	6	2437	23.10	-		30.00	-	0.87	-	23.97	-	36.00	-	Pass
HT20	MCS0	1	11	2462	23.07	-		30.00	-	0.87	-	23.94	-	36.00	-	Pass

Note: Measured power (dBm) has offset with cable loss.

Setting	
Ant 1	Ant 2
17.00	-
17.00	-
17.00	-
16.00	-
16.00	-
16.00	-
16.00	-
16.00	-
16.00	-

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band Single Antenna											
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	RU Config	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
						Ant1	Ant2	Ant1	Ant2		
HE20	MCS0	1	1	2412	Full	19.18	-	18.86	-	0.50	Pass
HE20	MCS0	1	6	2437	Full	19.17	-	18.69	-	0.50	Pass
HE20	MCS0	1	11	2462	Full	19.19	-	18.78	-	0.50	Pass

TEST RESULTS DATA
Average Output Power

2.4GHz Band Single Antenna																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
HE20	MCS0	1	1	2412	Full	17.00	-		30.00	-	0.87	-	17.87	-	36.00	-	Pass
HE20	MCS0	1	1	2412	26/0	9.50	-		30.00	-	0.87	-	10.37	-	36.00	-	Pass
HE20	MCS0	1	1	2412	52/37	11.90	-		30.00	-	0.87	-	12.77	-	36.00	-	Pass
HE20	MCS0	1	1	2412	106/53	14.00	-		30.00	-	0.87	-	14.87	-	36.00	-	Pass
HE20	MCS0	1	6	2437	Full	16.90	-		30.00	-	0.87	-	17.77	-	36.00	-	Pass
HE20	MCS0	1	6	2437	26/4	10.20	-		30.00	-	0.87	-	11.07	-	36.00	-	Pass
HE20	MCS0	1	6	2437	52/38	12.50	-		30.00	-	0.87	-	13.37	-	36.00	-	Pass
HE20	MCS0	1	6	2437	106/53	15.50	-		30.00	-	0.87	-	16.37	-	36.00	-	Pass
HE20	MCS0	1	11	2462	Full	16.90	-		30.00	-	0.87	-	17.77	-	36.00	-	Pass
HE20	MCS0	1	11	2462	26/8	9.40	-		30.00	-	0.87	-	10.27	-	36.00	-	Pass
HE20	MCS0	1	11	2462	52/40	11.90	-		30.00	-	0.87	-	12.77	-	36.00	-	Pass
HE20	MCS0	1	11	2462	106/54	15.50	-		30.00	-	0.87	-	16.37	-	36.00	-	Pass

Setting	
Ant1	Ant2
16.00	-
9.00	-
11.00	-
13.00	-
16.00	-
9.00	-
11.00	-
14.00	-
16.00	-
9.00	-
11.00	-
14.00	-

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band Single Antenna													
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	RU Config	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
						Ant1	Ant2	Worse + 3.01	Ant1	Ant2	Ant1	Ant2	
HE20	MCS0	1	1	2412	Full	-8.20	-		0.87	-	8.00	-	Pass
HE20	MCS0	1	1	2412	26/0	-8.58	-		0.87	-	8.00	-	Pass
HE20	MCS0	1	1	2412	52/37	-8.48	-		0.87	-	8.00	-	Pass
HE20	MCS0	1	1	2412	106/53	-8.59	-		0.87	-	8.00	-	Pass
HE20	MCS0	1	6	2437	Full	-7.93	-		0.87	-	8.00	-	Pass
HE20	MCS0	1	6	2437	26/4	-8.07	-		0.87	-	8.00	-	Pass
HE20	MCS0	1	6	2437	52/38	-8.25	-		0.87	-	8.00	-	Pass
HE20	MCS0	1	6	2437	106/53	-8.17	-		0.87	-	8.00	-	Pass
HE20	MCS0	1	11	2462	Full	-8.11	-		0.87	-	8.00	-	Pass
HE20	MCS0	1	11	2462	26/8	-8.31	-		0.87	-	8.00	-	Pass
HE20	MCS0	1	11	2462	52/40	-8.34	-		0.87	-	8.00	-	Pass
HE20	MCS0	1	11	2462	106/54	-8.23	-		0.87	-	8.00	-	Pass

Measured power density (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Output Power

2.4GHz Band Single Antenna																	
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config	Peak Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
HE20	MCS0	1	1	2412	Full	23.54	-		30.00	-	0.87	-	24.41	-	36.00	-	Pass
HE20	MCS0	1	1	2412	26/0	18.30	-		30.00	-	0.87	-	19.17	-	36.00	-	Pass
HE20	MCS0	1	1	2412	52/37	21.00	-		30.00	-	0.87	-	21.87	-	36.00	-	Pass
HE20	MCS0	1	1	2412	106/53	22.50	-		30.00	-	0.87	-	23.37	-	36.00	-	Pass
HE20	MCS0	1	6	2437	Full	23.16	-		30.00	-	0.87	-	24.03	-	36.00	-	Pass
HE20	MCS0	1	6	2437	26/4	19.00	-		30.00	-	0.87	-	19.87	-	36.00	-	Pass
HE20	MCS0	1	6	2437	52/38	21.50	-		30.00	-	0.87	-	22.37	-	36.00	-	Pass
HE20	MCS0	1	6	2437	106/53	22.90	-		30.00	-	0.87	-	23.77	-	36.00	-	Pass
HE20	MCS0	1	11	2462	Full	23.13	-		30.00	-	0.87	-	24.00	-	36.00	-	Pass
HE20	MCS0	1	11	2462	26/8	18.20	-		30.00	-	0.87	-	19.07	-	36.00	-	Pass
HE20	MCS0	1	11	2462	52/40	21.00	-		30.00	-	0.87	-	21.87	-	36.00	-	Pass
HE20	MCS0	1	11	2462	106/54	22.80	-		30.00	-	0.87	-	23.67	-	36.00	-	Pass


Setting	
Ant 1	Ant 2
16.00	-
9.00	-
11.00	-
13.00	-
16.00	-
9.00	-
11.00	-
14.00	-
16.00	-
9.00	-
11.00	-
14.00	-

Note: Measured power (dBm) has offset with cable loss.

**6dB and 99% Occupied Bandwidth**


<802.11b>

SISO <Ant. 1>

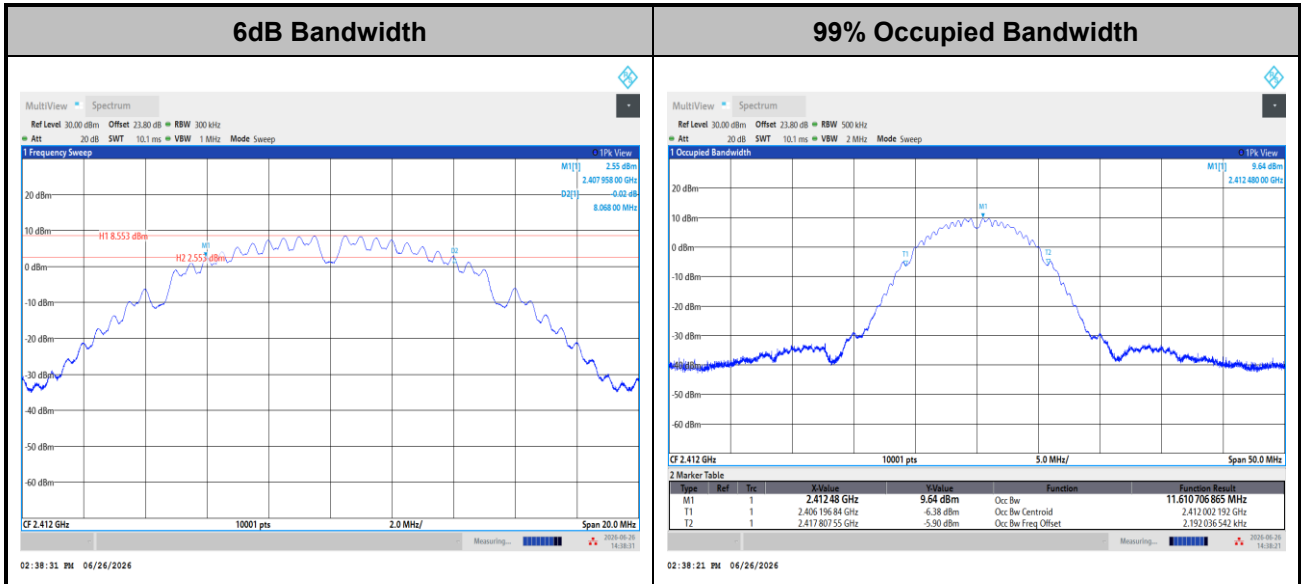

<802.11g>


SISO <Ant. 1>

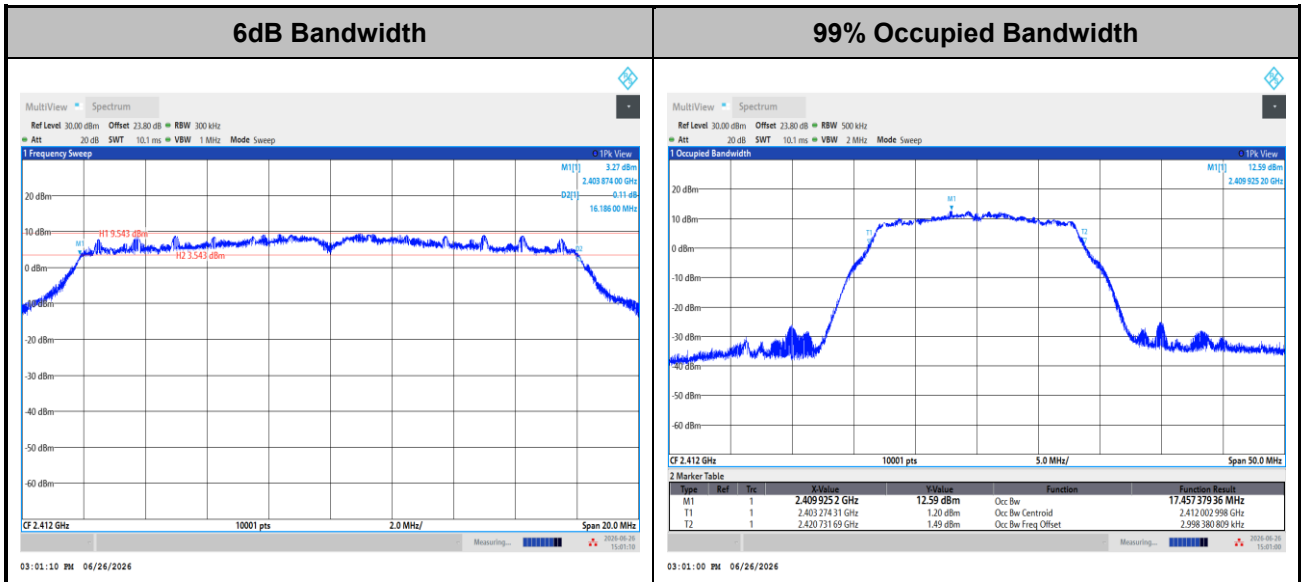



<802.11n HT20>


SISO <Ant. 1>

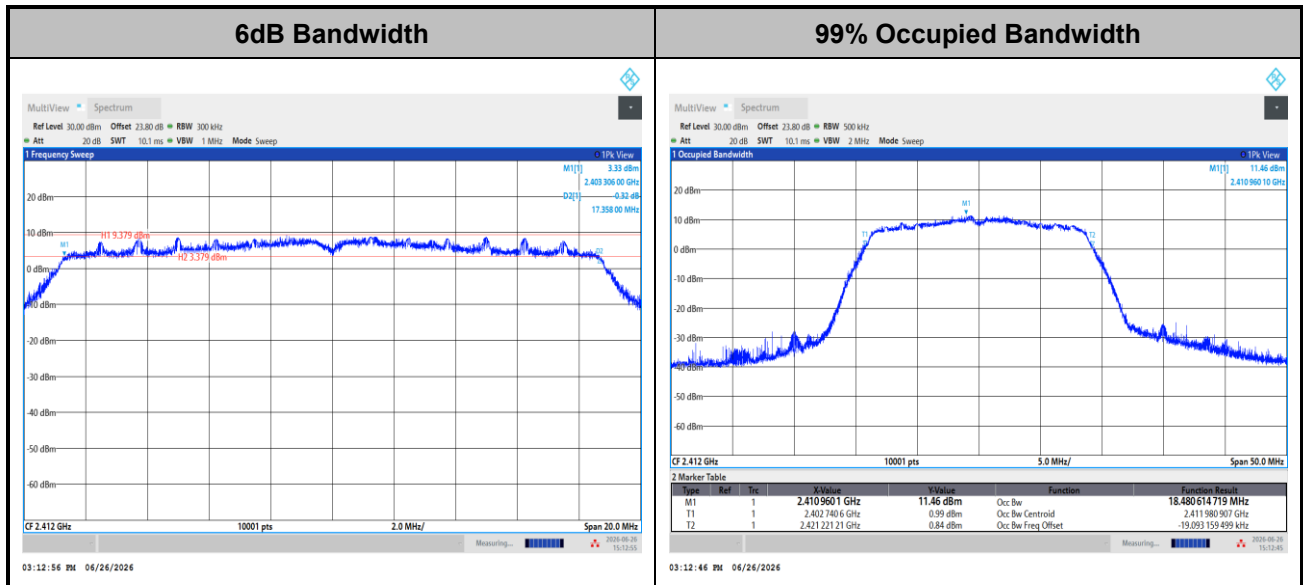

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

<802.11ax HE20>

SISO <Ant. 1>

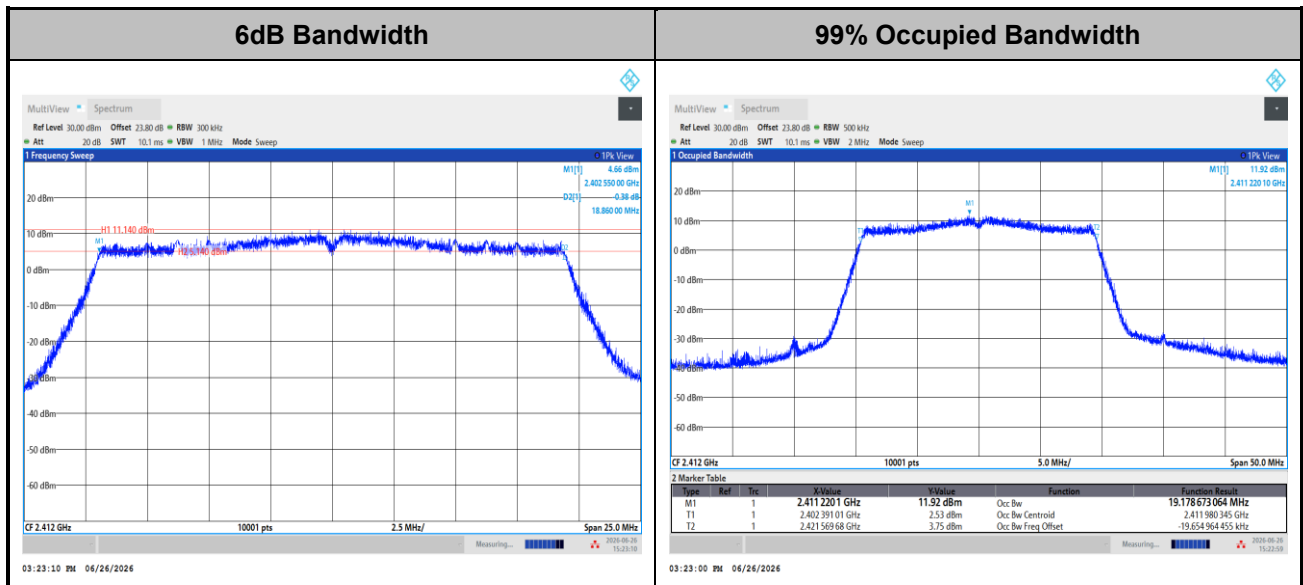


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

**Power Spectral Density(dBm/3kHz)**


<802.11b>

SISO <Ant. 1>

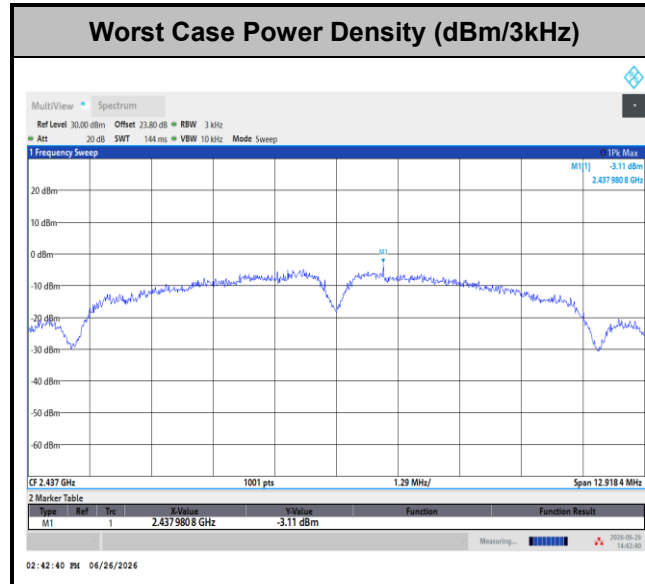

<802.11g>


SISO <Ant. 1>

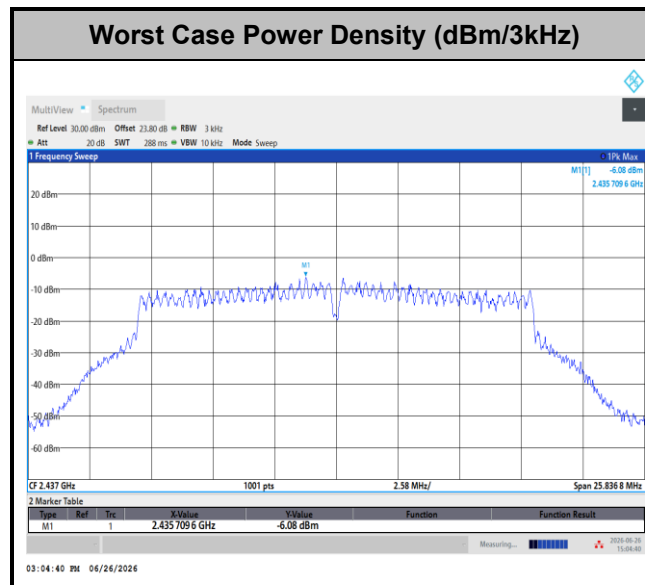




<802.11n HT20>

SISO <Ant. 1>

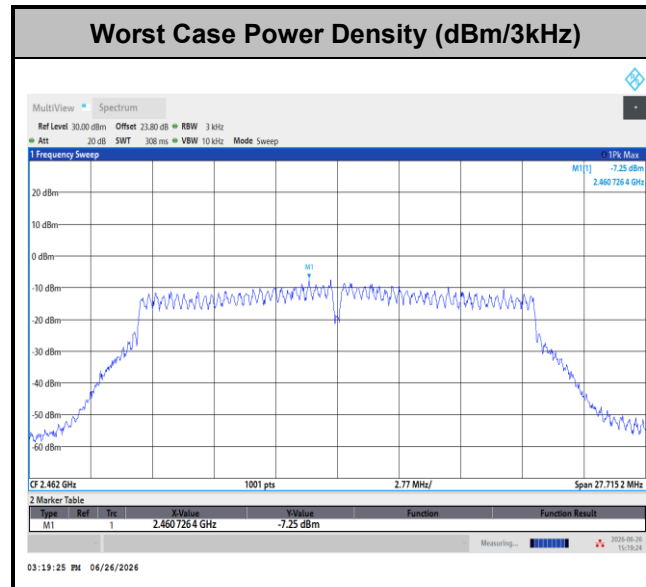


<802.11ax HE20>


SISO <Ant. 1>

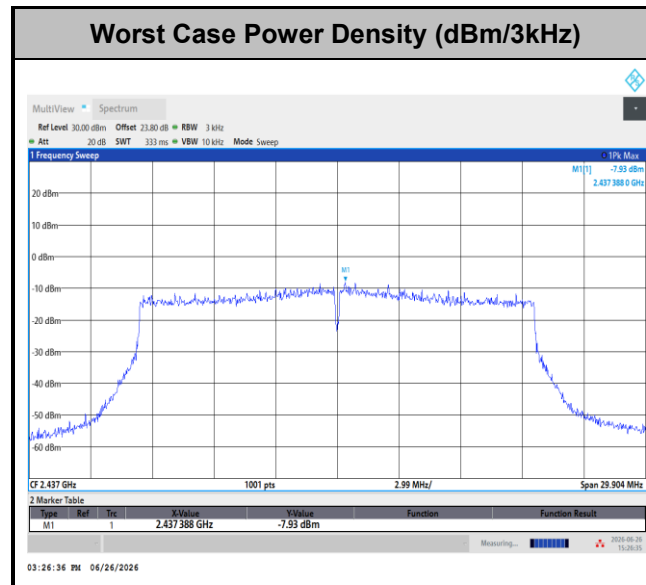

**Band Edges and Spurious Emission**

Number of TX = 1, Ant. 1 (Measured)

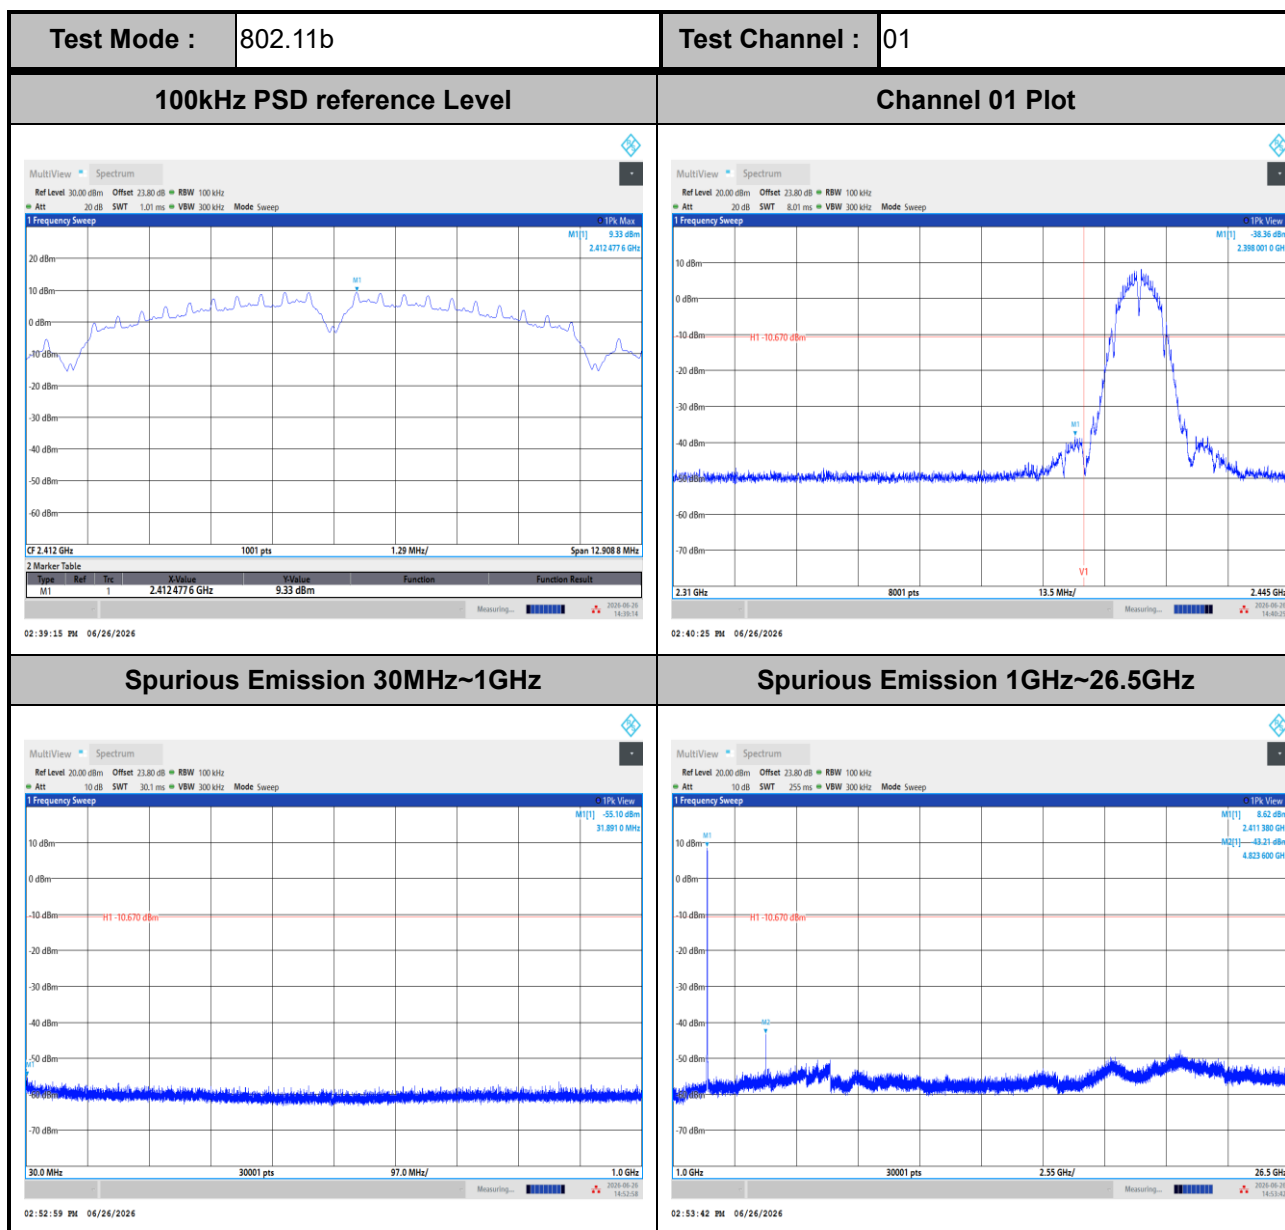

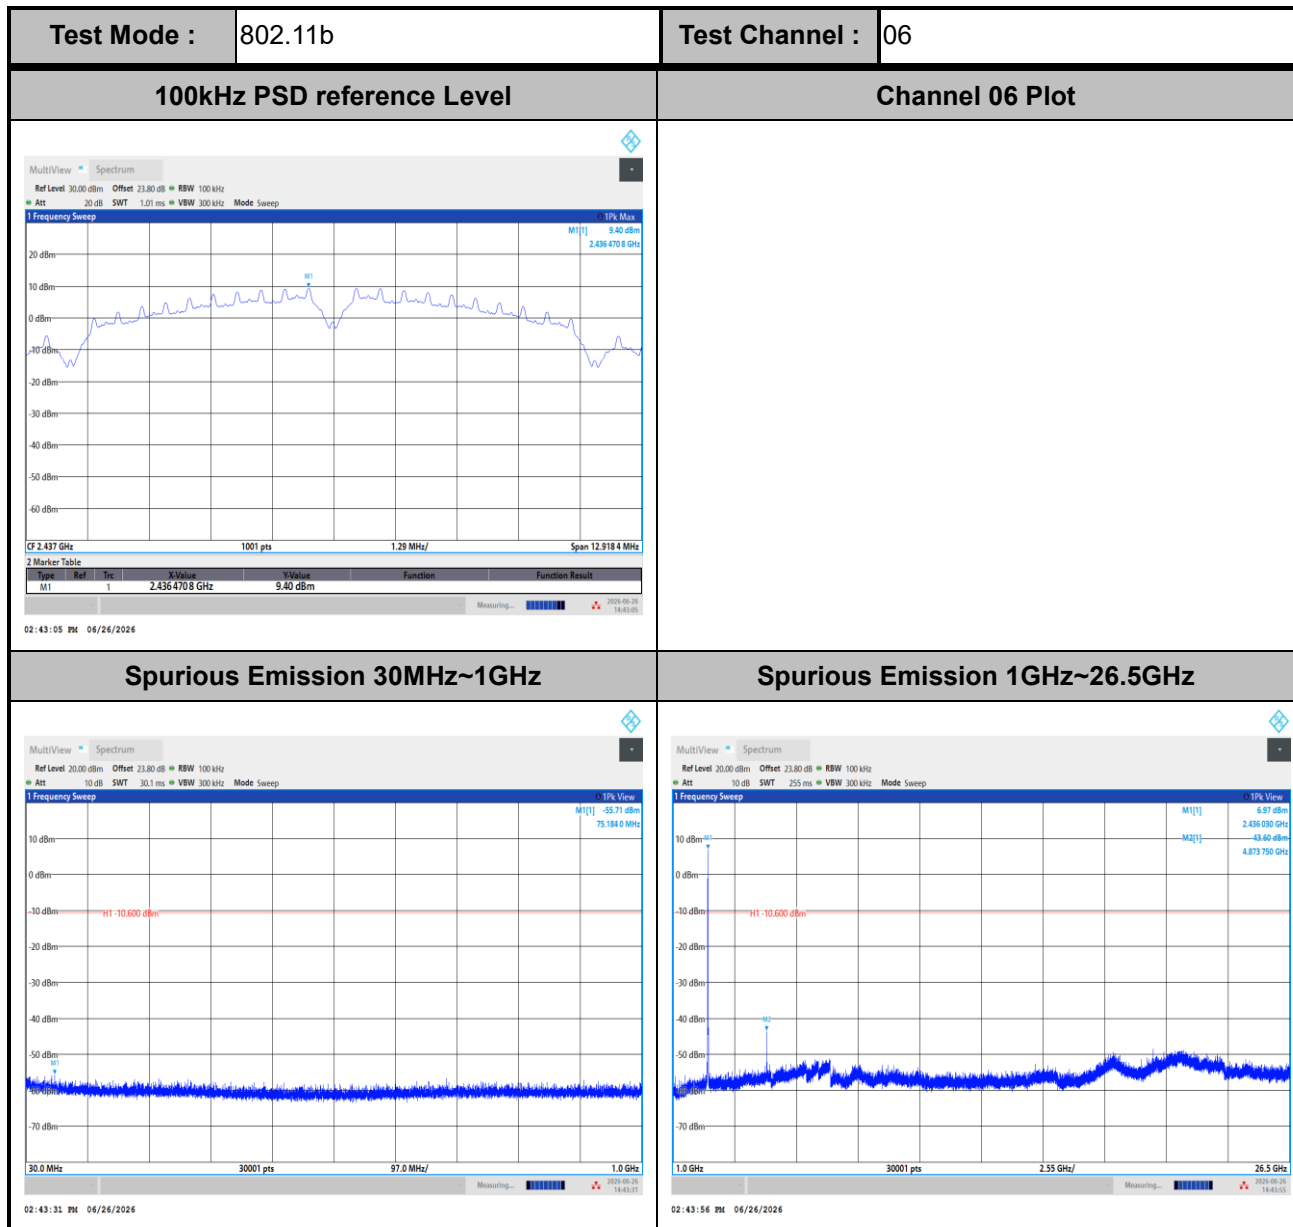





Test Mode : 802.11b

Test Channel : 11


100kHz PSD reference Level

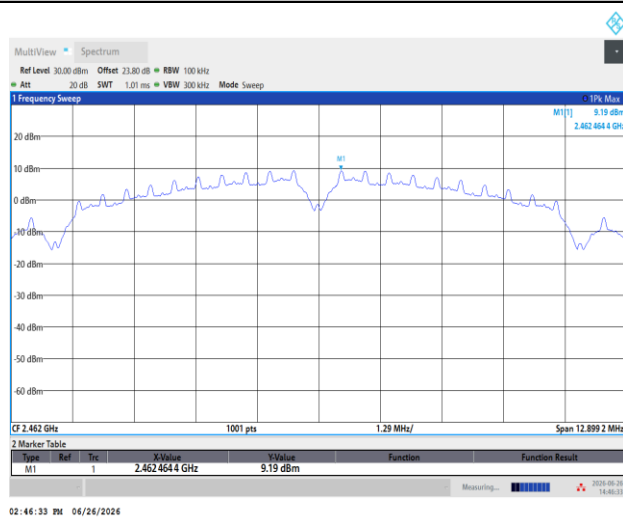


Channel 11 Plot

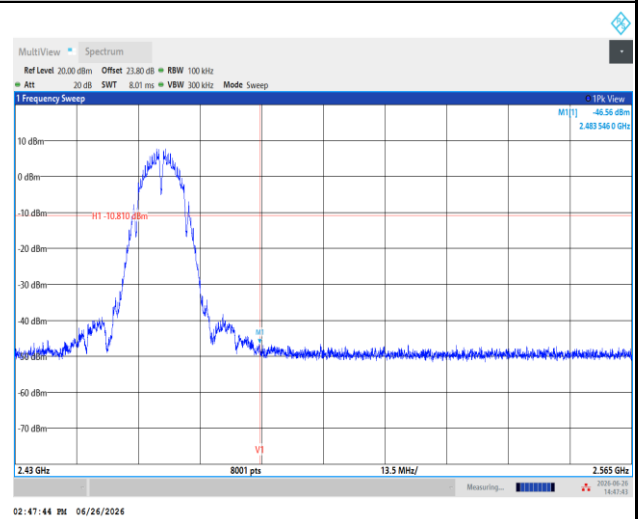



Spurious Emission 30MHz~1GHz

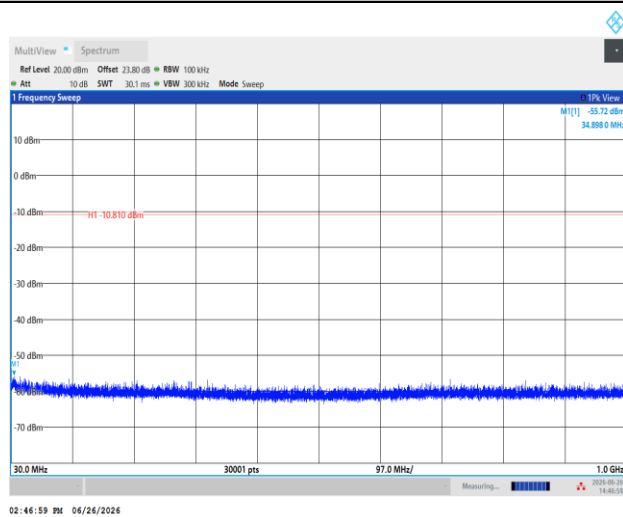

Spurious Emission 1GHz~26.5GHz

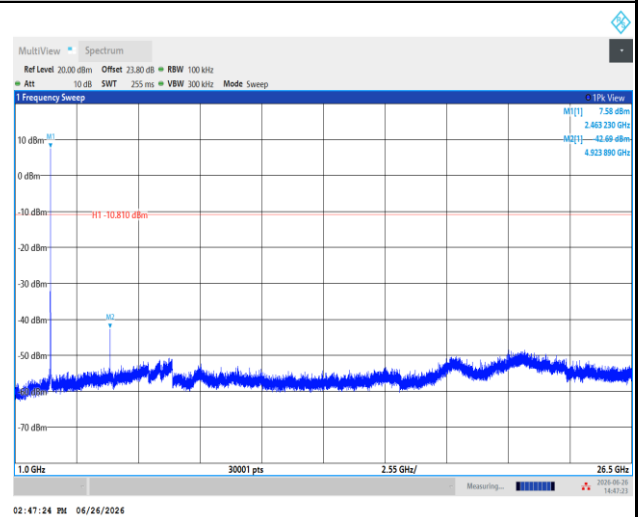

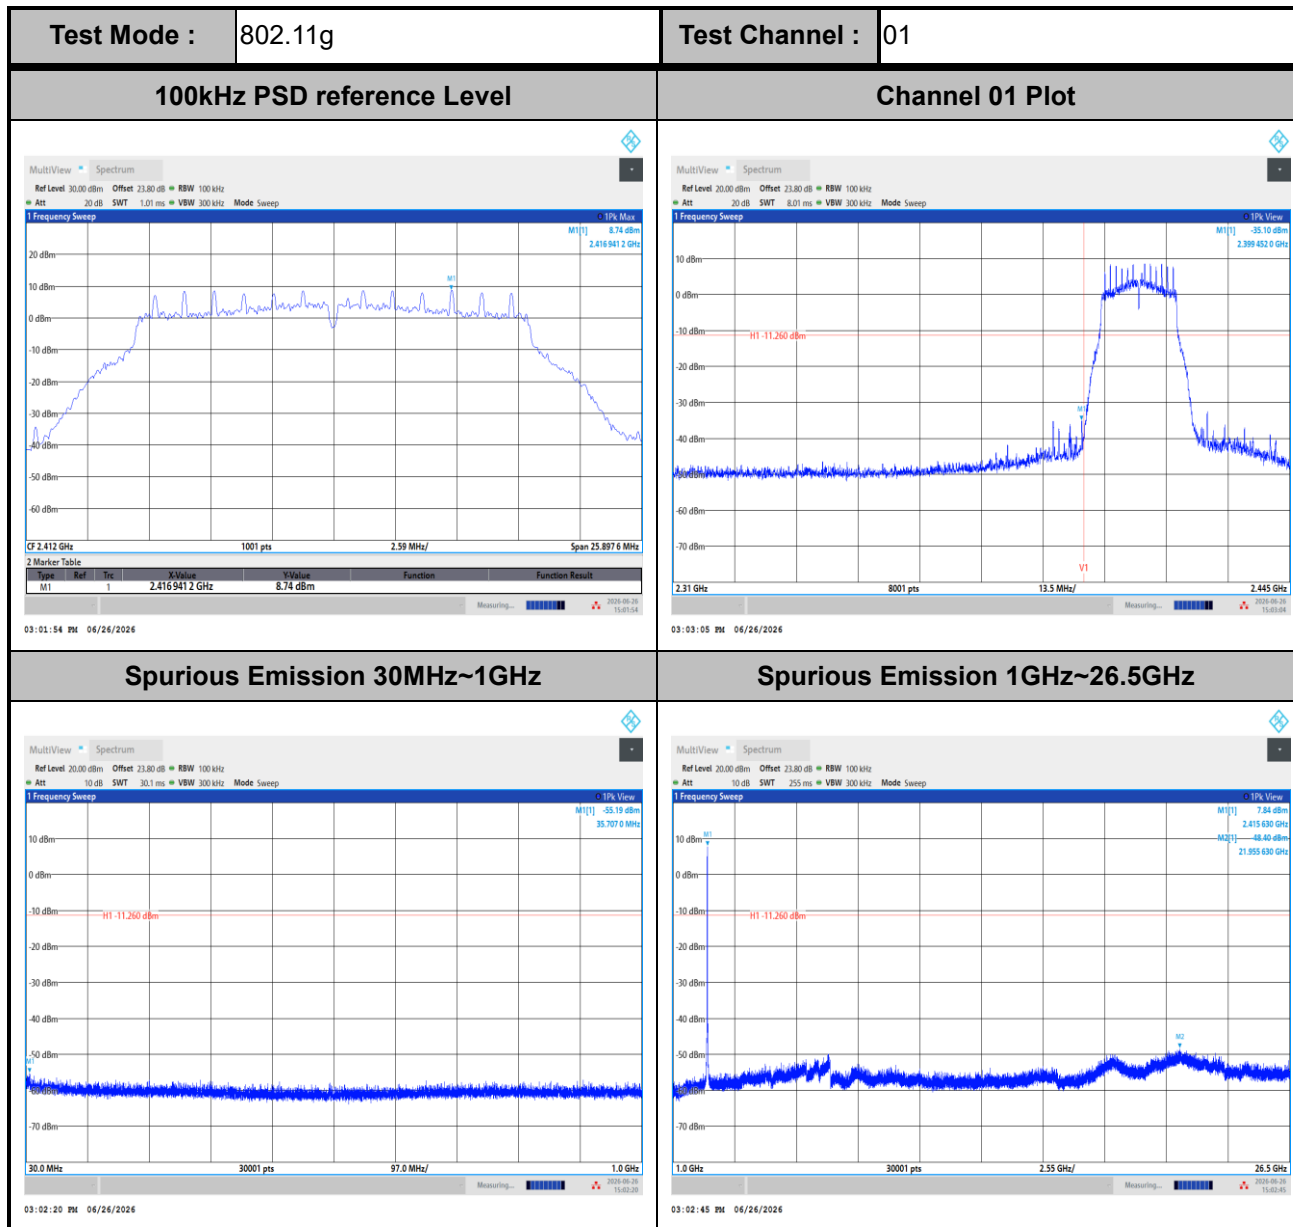

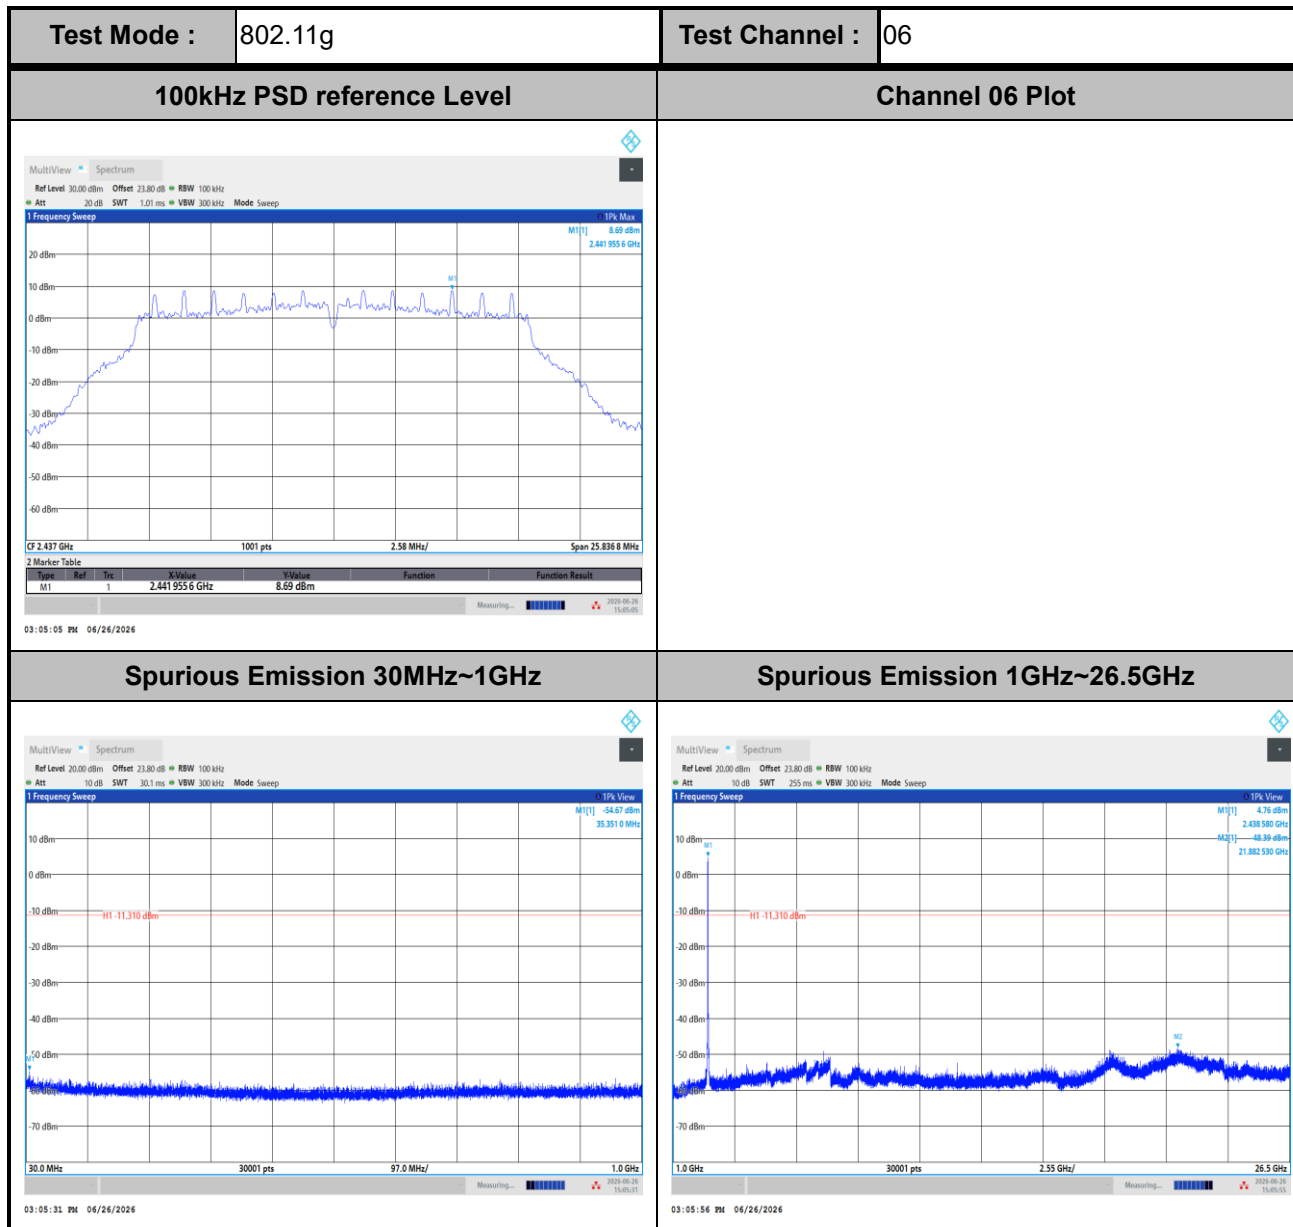





Test Mode : 802.11g

Test Channel : 11


100kHz PSD reference Level

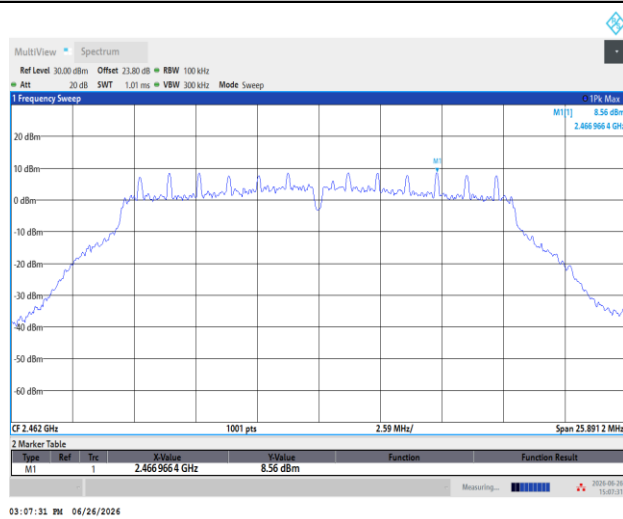


Channel 11 Plot

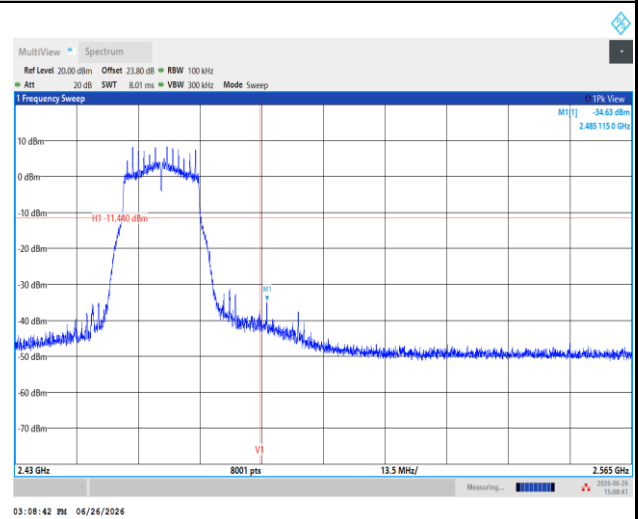

Spurious Emission 30MHz~1GHz

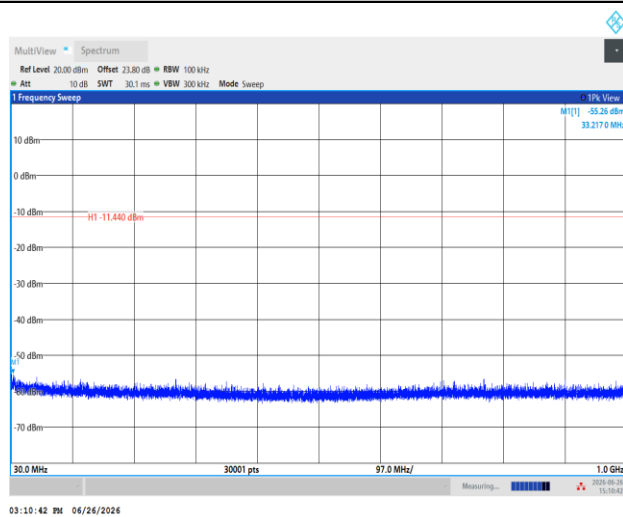

Spurious Emission 1GHz~26.5GHz

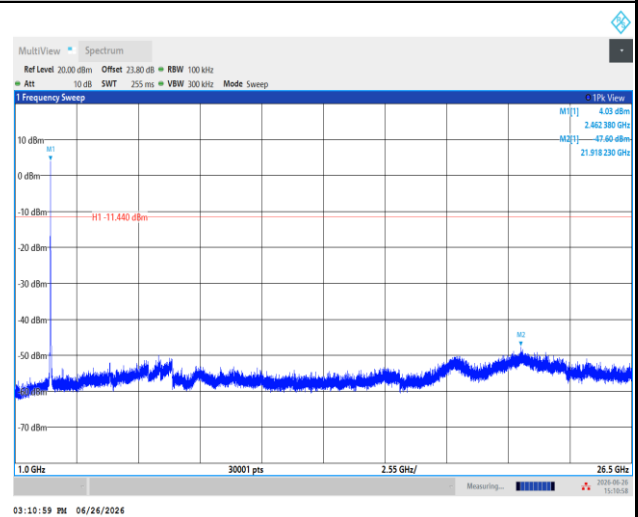





Test Mode : 802.11n20

Test Channel : 01


100kHz PSD reference Level

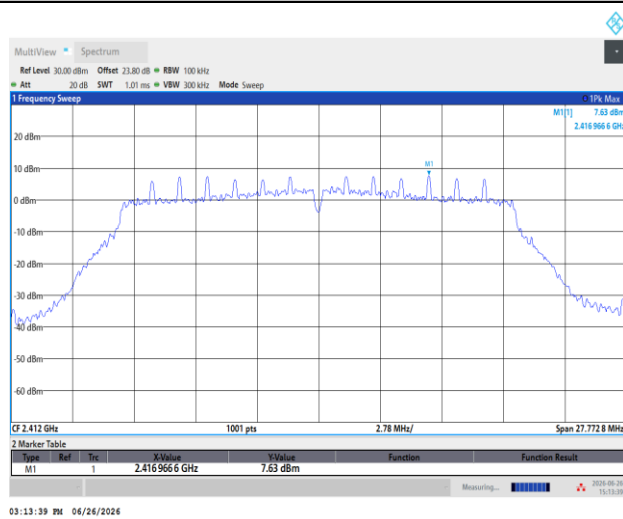


Channel 01 Plot

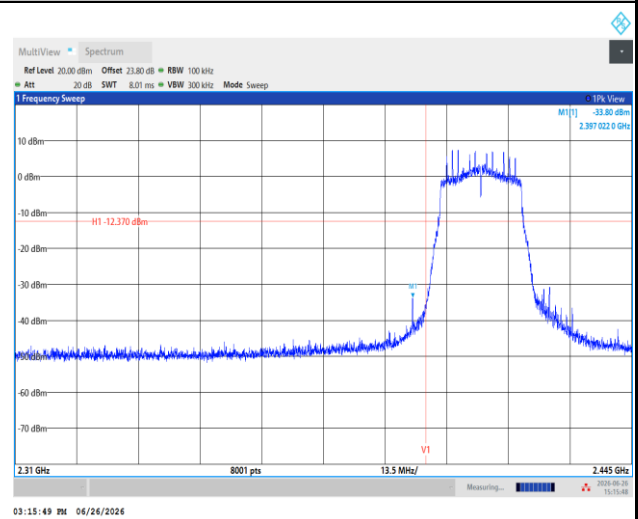


Spurious Emission 30MHz~1GHz

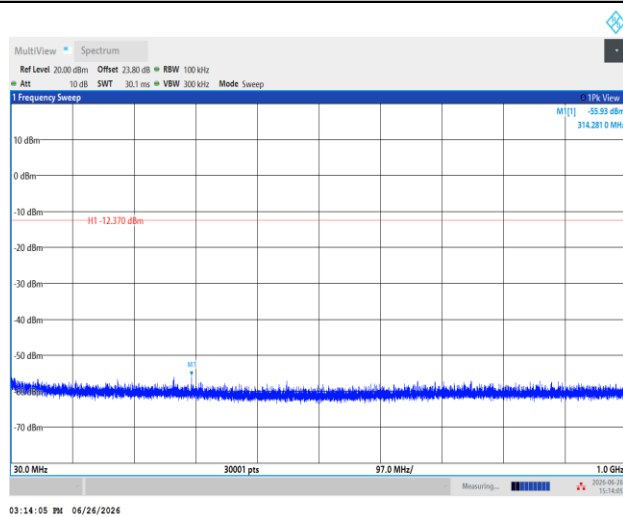

Spurious Emission 1GHz~26.5GHz

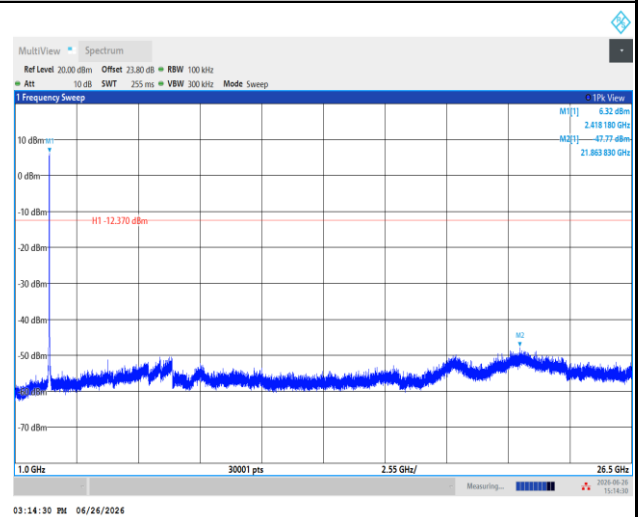

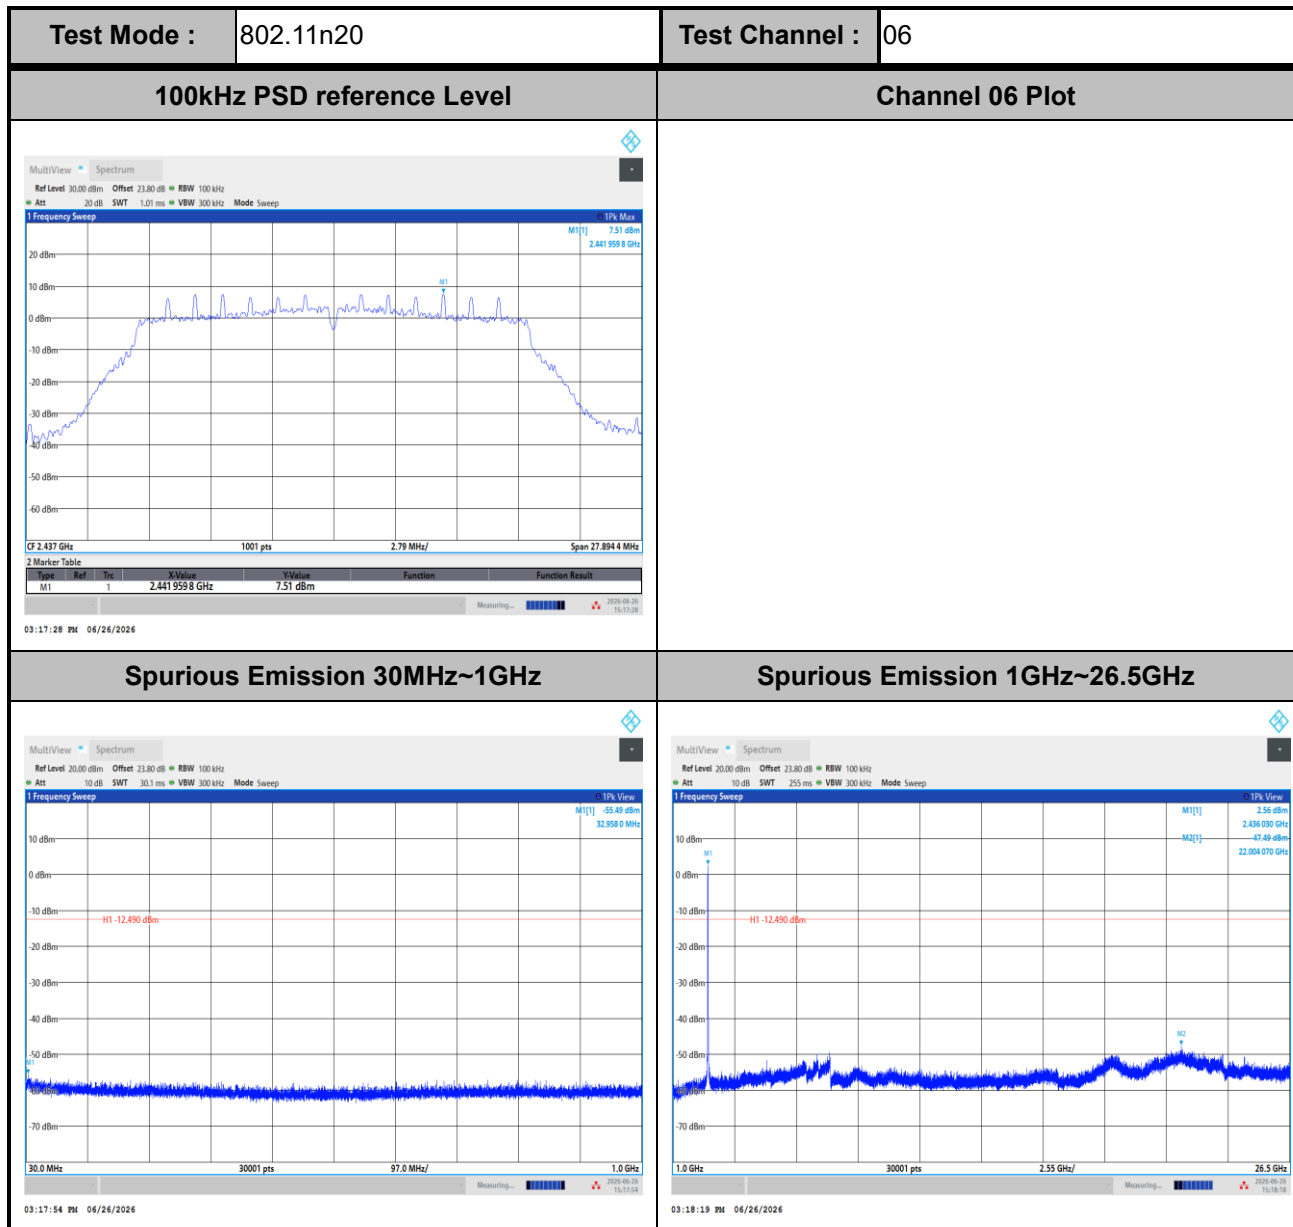





Test Mode : 802.11n20

Test Channel : 11


100kHz PSD reference Level

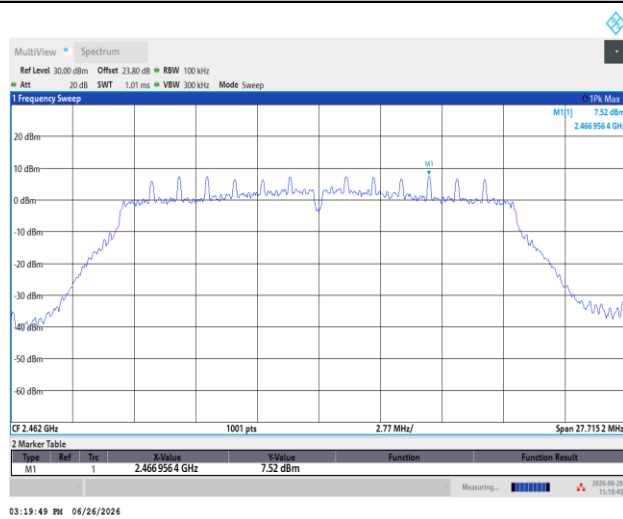


Channel 11 Plot

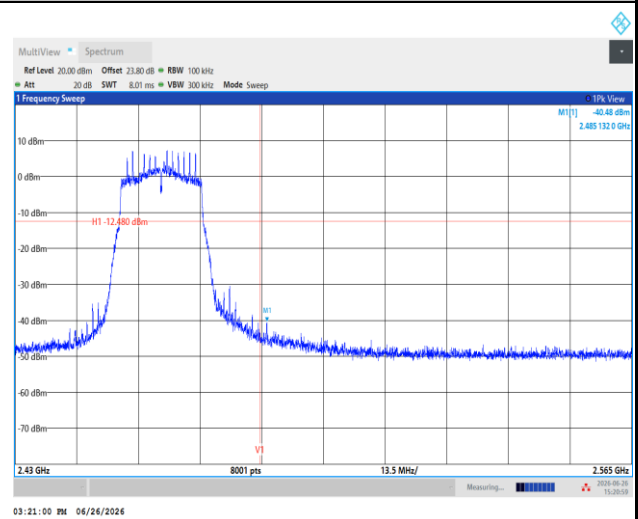

Spurious Emission 30MHz~1GHz

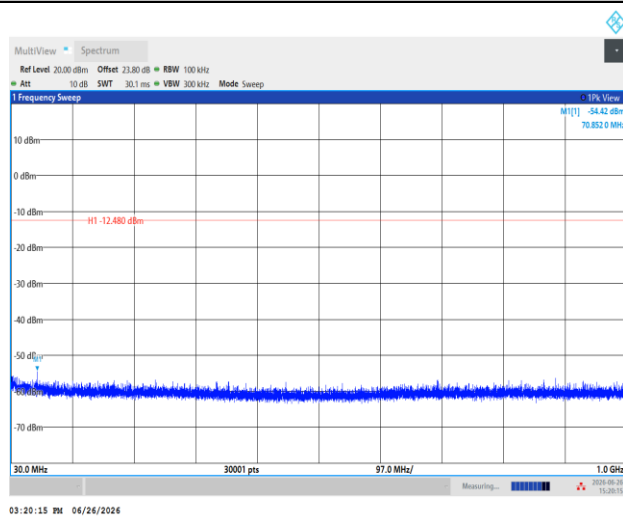

Spurious Emission 1GHz~26.5GHz

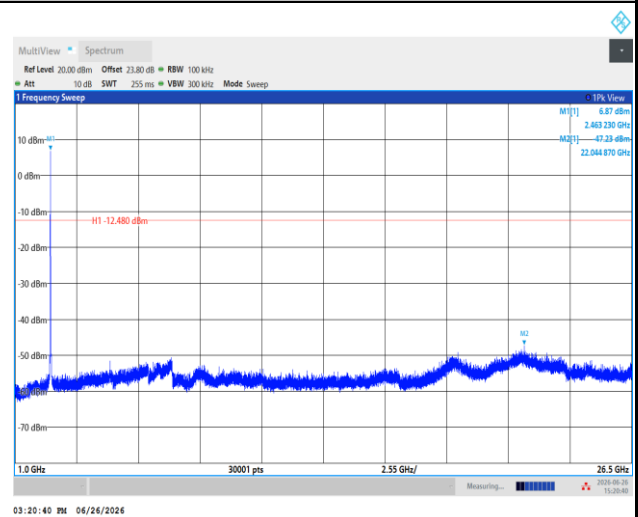





Test Mode : 802.11ax20

Test Channel : 01


100kHz PSD reference Level

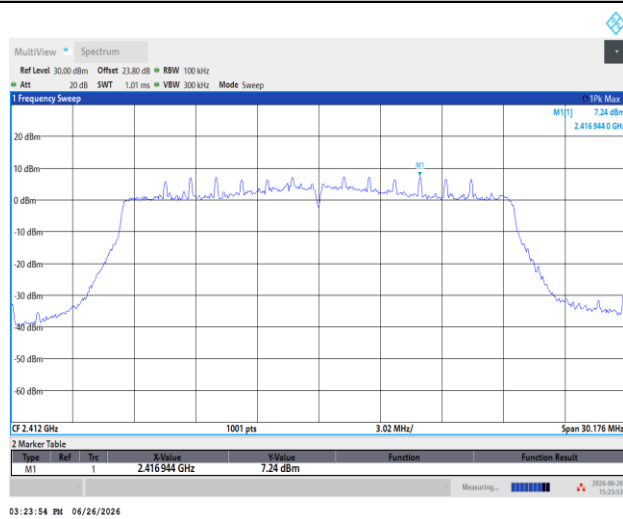


Channel 01 Plot

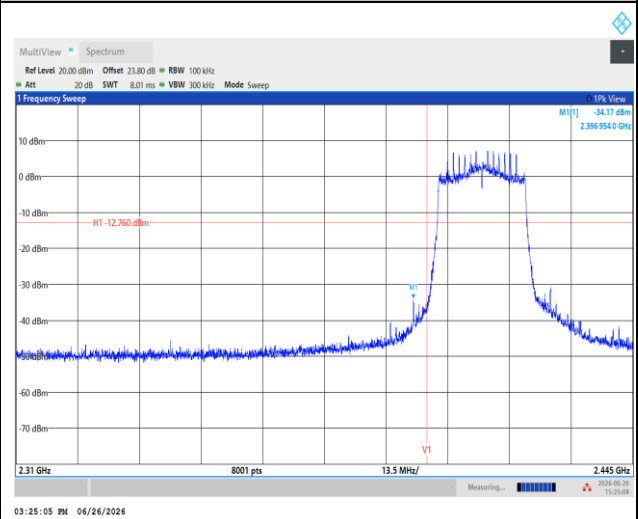


Spurious Emission 30MHz~1GHz

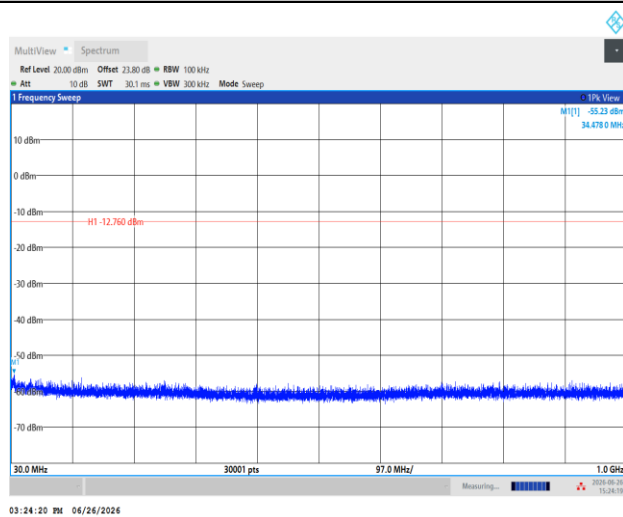

Spurious Emission 1GHz~26.5GHz

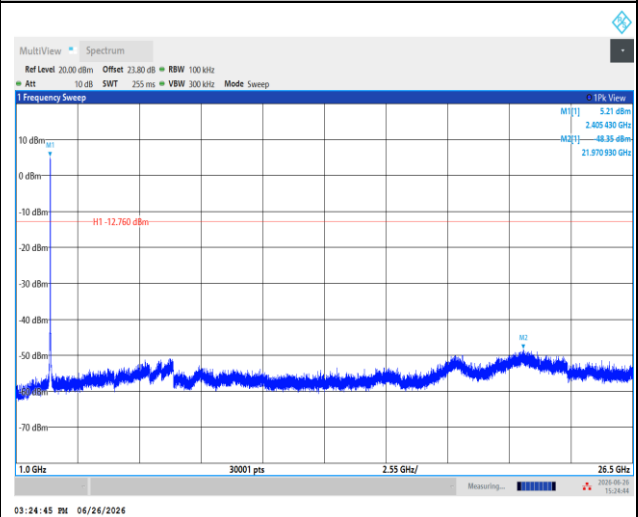

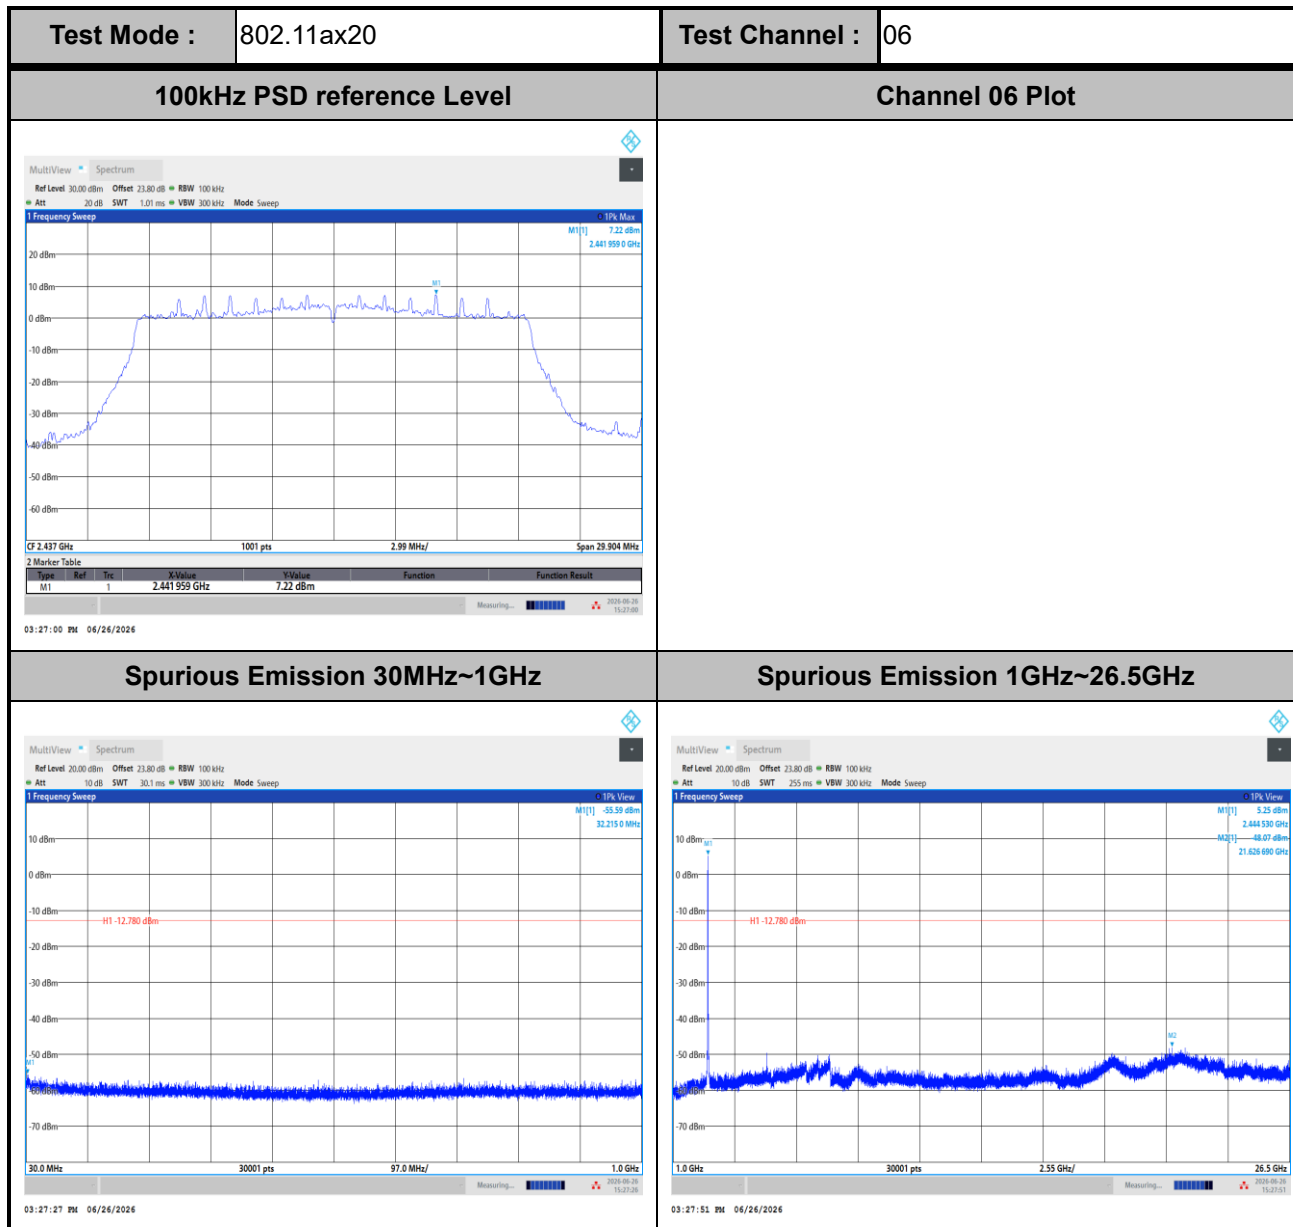





Test Mode : 802.11ax20

Test Channel : 11


100kHz PSD reference Level

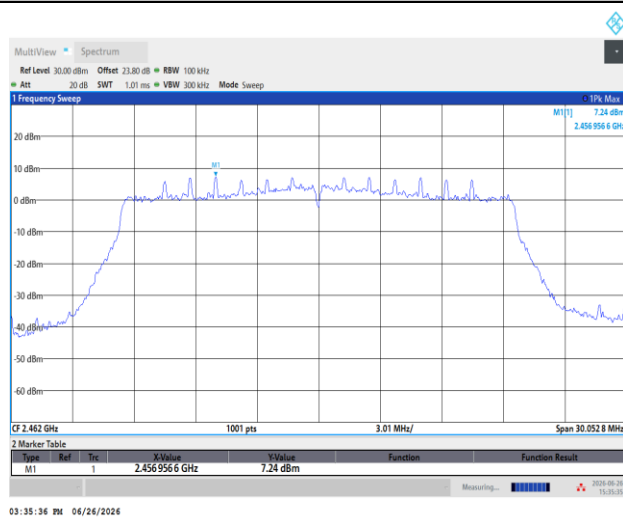


Channel 11 Plot

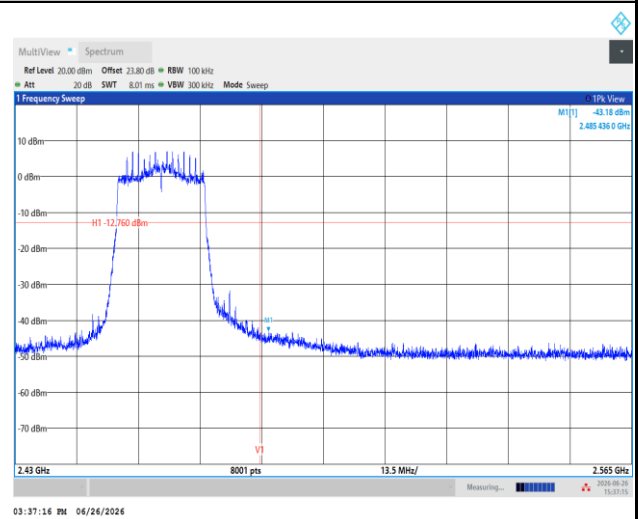

Spurious Emission 30MHz~1GHz

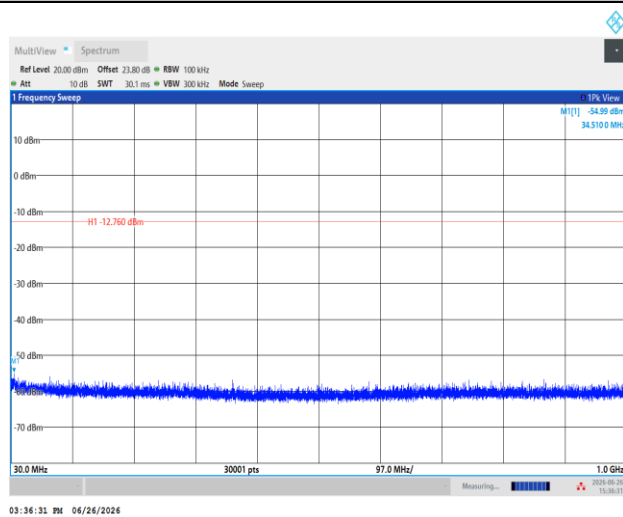

Spurious Emission 1GHz~26.5GHz

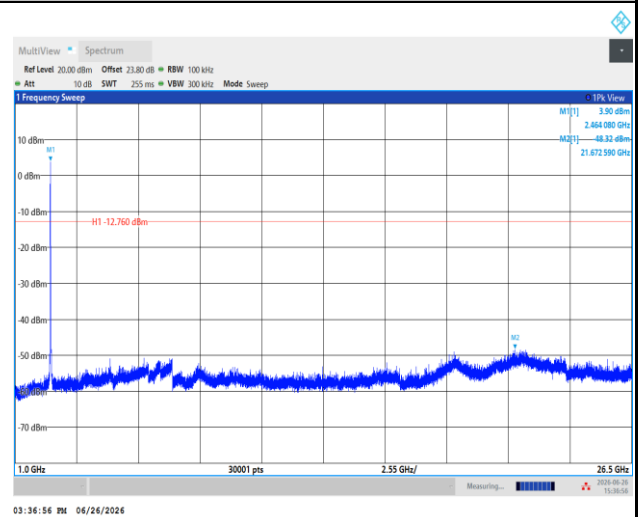




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Brian Chen	Temperature :	23~26℃
		Relative Humidity :	45~55%

EUT Information

Report NO : 640815
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

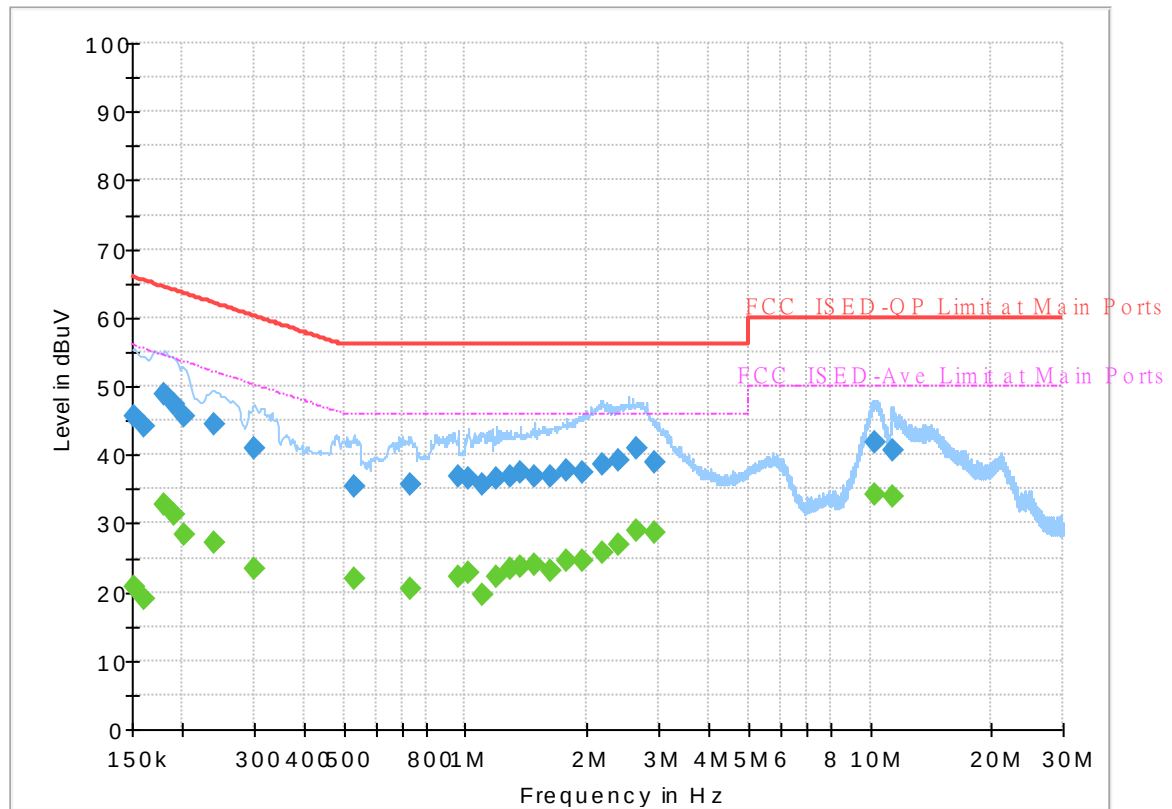

Final Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	20.90	55.88	34.98	L1	OFF	19.9
0.152250	45.48	---	65.88	20.40	L1	OFF	19.9
0.161250	---	18.92	55.40	36.48	L1	OFF	19.9
0.161250	44.17	---	65.40	21.23	L1	OFF	19.9
0.179250	---	32.71	54.52	21.81	L1	OFF	19.9
0.179250	48.95	---	64.52	15.57	L1	OFF	19.9
0.190500	---	31.43	54.02	22.59	L1	OFF	19.9
0.190500	47.25	---	64.02	16.77	L1	OFF	19.9
0.201750	---	28.23	53.54	25.31	L1	OFF	19.9
0.201750	45.54	---	63.54	18.00	L1	OFF	19.9
0.240000	---	27.31	52.10	24.79	L1	OFF	19.9
0.240000	44.57	---	62.10	17.53	L1	OFF	19.9
0.300750	---	23.25	50.22	26.97	L1	OFF	19.9
0.300750	40.83	---	60.22	19.39	L1	OFF	19.9
0.530250	---	21.79	46.00	24.21	L1	OFF	19.9
0.530250	35.45	---	56.00	20.55	L1	OFF	19.9
0.735000	---	20.52	46.00	25.48	L1	OFF	19.9
0.735000	35.68	---	56.00	20.32	L1	OFF	19.9
0.957750	---	22.36	46.00	23.64	L1	OFF	19.9
0.957750	36.85	---	56.00	19.15	L1	OFF	19.9
1.020750	---	22.76	46.00	23.24	L1	OFF	20.0

1.020750	36.64	---	56.00	19.36	L1	OFF	20.0
1.106250	---	19.70	46.00	26.30	L1	OFF	20.0
1.106250	35.63	---	56.00	20.37	L1	OFF	20.0
1.194000	---	22.30	46.00	23.70	L1	OFF	20.0
1.194000	36.59	---	56.00	19.41	L1	OFF	20.0
1.288500	---	23.37	46.00	22.63	L1	OFF	20.0
1.288500	36.96	---	56.00	19.04	L1	OFF	20.0
1.365000	---	23.61	46.00	22.39	L1	OFF	20.0
1.365000	37.33	---	56.00	18.67	L1	OFF	20.0
1.482000	---	23.93	46.00	22.07	L1	OFF	20.0
1.482000	36.95	---	56.00	19.05	L1	OFF	20.0
1.630500	---	23.11	46.00	22.89	L1	OFF	20.0
1.630500	36.78	---	56.00	19.22	L1	OFF	20.0
1.772250	---	24.56	46.00	21.44	L1	OFF	20.0
1.772250	37.61	---	56.00	18.39	L1	OFF	20.0
1.941000	---	24.51	46.00	21.49	L1	OFF	20.0
1.941000	37.54	---	56.00	18.46	L1	OFF	20.0
2.188500	---	25.81	46.00	20.19	L1	OFF	20.0
2.188500	38.69	---	56.00	17.31	L1	OFF	20.0
2.395500	---	27.01	46.00	18.99	L1	OFF	20.0
2.395500	39.30	---	56.00	16.70	L1	OFF	20.0
2.638500	---	28.96	46.00	17.04	L1	OFF	20.0
2.638500	40.87	---	56.00	15.13	L1	OFF	20.0
2.940000	---	28.52	46.00	17.48	L1	OFF	20.0
2.940000	38.91	---	56.00	17.09	L1	OFF	20.0
10.293000	---	34.35	50.00	15.65	L1	OFF	20.5
10.293000	41.70	---	60.00	18.30	L1	OFF	20.5
11.348250	---	33.82	50.00	16.18	L1	OFF	20.6
11.348250	40.54	---	60.00	19.46	L1	OFF	20.6

EUT Information

Report NO : 640815
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

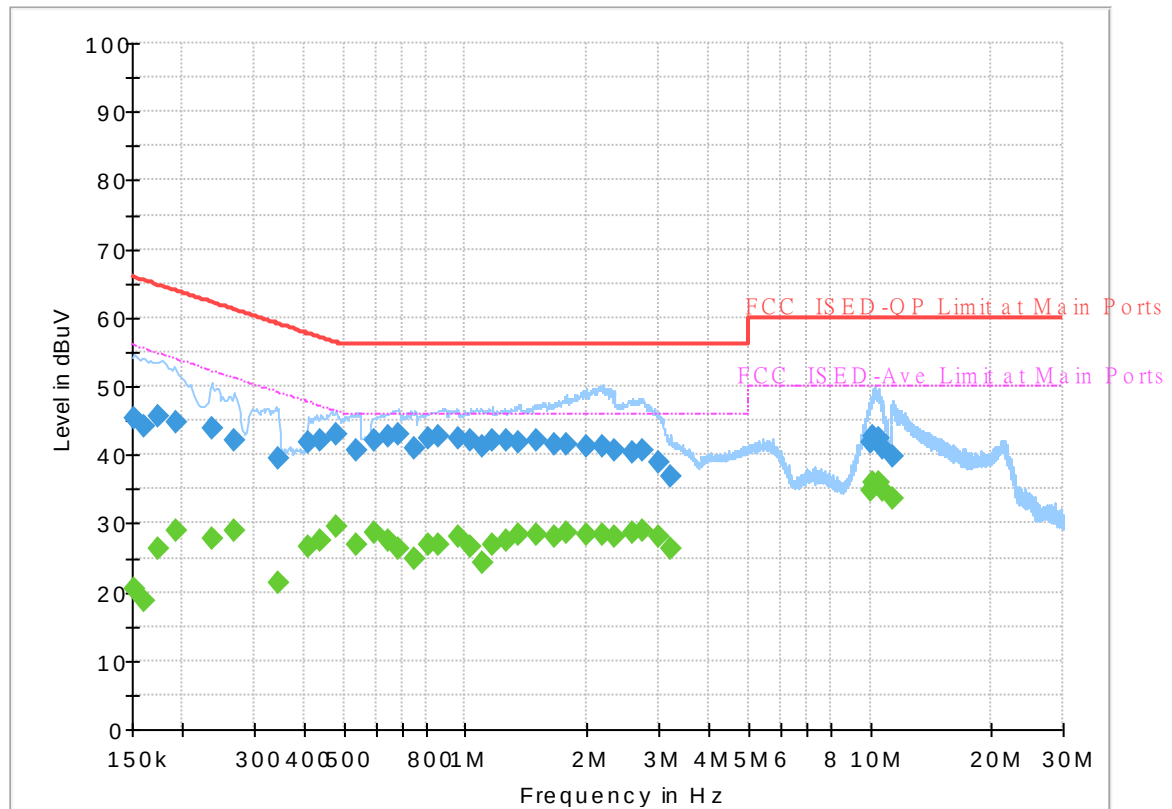

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	20.47	55.88	35.41	N	OFF	19.9
0.152250	45.44	---	65.88	20.44	N	OFF	19.9
0.161250	---	18.72	55.40	36.68	N	OFF	19.9
0.161250	44.13	---	65.40	21.27	N	OFF	19.9
0.174750	---	26.26	54.73	28.47	N	OFF	19.9
0.174750	45.70	---	64.73	19.03	N	OFF	19.9
0.192750	---	29.02	53.92	24.90	N	OFF	19.9
0.192750	44.59	---	63.92	19.33	N	OFF	19.9
0.235500	---	27.80	52.25	24.45	N	OFF	19.9
0.235500	43.76	---	62.25	18.49	N	OFF	19.9
0.267000	---	28.91	51.21	22.30	N	OFF	19.9
0.267000	42.15	---	61.21	19.06	N	OFF	19.9
0.343500	---	21.31	49.12	27.81	N	OFF	19.9
0.343500	39.43	---	59.12	19.69	N	OFF	19.9
0.411000	---	26.57	47.63	21.06	N	OFF	19.9
0.411000	41.71	---	57.63	15.92	N	OFF	19.9
0.438000	---	27.39	47.10	19.71	N	OFF	19.9
0.438000	42.24	---	57.10	14.86	N	OFF	19.9
0.478500	---	29.53	46.37	16.84	N	OFF	19.9
0.478500	43.08	---	56.37	13.29	N	OFF	19.9
0.539250	---	26.82	46.00	19.18	N	OFF	19.9

0.539250	40.67	---	56.00	15.33	N	OFF	19.9
0.595500	---	28.53	46.00	17.47	N	OFF	19.9
0.595500	42.22	---	56.00	13.78	N	OFF	19.9
0.645000	---	27.58	46.00	18.42	N	OFF	19.9
0.645000	42.60	---	56.00	13.40	N	OFF	19.9
0.685500	---	26.39	46.00	19.61	N	OFF	19.9
0.685500	43.02	---	56.00	12.98	N	OFF	19.9
0.748500	---	24.72	46.00	21.28	N	OFF	19.9
0.748500	40.82	---	56.00	15.18	N	OFF	19.9
0.807000	---	27.04	46.00	18.96	N	OFF	19.9
0.807000	42.32	---	56.00	13.68	N	OFF	19.9
0.861000	---	26.88	46.00	19.12	N	OFF	19.9
0.861000	42.64	---	56.00	13.36	N	OFF	19.9
0.960000	---	28.02	46.00	17.98	N	OFF	20.0
0.960000	42.41	---	56.00	13.59	N	OFF	20.0
1.032000	---	26.50	46.00	19.50	N	OFF	20.0
1.032000	41.96	---	56.00	14.04	N	OFF	20.0
1.106250	---	24.22	46.00	21.78	N	OFF	20.0
1.106250	41.10	---	56.00	14.90	N	OFF	20.0
1.164750	---	27.03	46.00	18.97	N	OFF	20.0
1.164750	42.21	---	56.00	13.79	N	OFF	20.0
1.266000	---	27.44	46.00	18.56	N	OFF	20.0
1.266000	42.03	---	56.00	13.97	N	OFF	20.0
1.356000	---	28.39	46.00	17.61	N	OFF	20.0
1.356000	41.90	---	56.00	14.10	N	OFF	20.0
1.504500	---	28.44	46.00	17.56	N	OFF	20.0
1.504500	42.11	---	56.00	13.89	N	OFF	20.0
1.657500	---	28.08	46.00	17.92	N	OFF	20.0
1.657500	41.43	---	56.00	14.57	N	OFF	20.0
1.781250	---	28.73	46.00	17.27	N	OFF	20.0
1.781250	41.64	---	56.00	14.36	N	OFF	20.0
1.986000	---	28.39	46.00	17.61	N	OFF	20.0
1.986000	41.28	---	56.00	14.72	N	OFF	20.0
2.193000	---	28.46	46.00	17.54	N	OFF	20.0
2.193000	41.34	---	56.00	14.66	N	OFF	20.0
2.325750	---	27.97	46.00	18.03	N	OFF	20.0
2.325750	40.63	---	56.00	15.37	N	OFF	20.0
2.582250	---	28.66	46.00	17.34	N	OFF	20.0
2.582250	40.46	---	56.00	15.54	N	OFF	20.0
2.739750	---	29.05	46.00	16.95	N	OFF	20.0
2.739750	40.68	---	56.00	15.32	N	OFF	20.0
2.989500	---	28.10	46.00	17.90	N	OFF	20.0
2.989500	38.75	---	56.00	17.25	N	OFF	20.0
3.221250	---	26.41	46.00	19.59	N	OFF	20.1
3.221250	36.73	---	56.00	19.27	N	OFF	20.1
10.027500	---	34.69	50.00	15.31	N	OFF	20.6
10.027500	41.69	---	60.00	18.31	N	OFF	20.6
10.218750	---	36.09	50.00	13.91	N	OFF	20.6
10.218750	42.73	---	60.00	17.27	N	OFF	20.6
10.511250	---	36.09	50.00	13.91	N	OFF	20.6
10.511250	42.33	---	60.00	17.67	N	OFF	20.6
10.698000	---	34.74	50.00	15.26	N	OFF	20.6
10.698000	41.04	---	60.00	18.96	N	OFF	20.6
11.330250	---	33.51	50.00	16.49	N	OFF	20.7
11.330250	39.87	---	60.00	20.13	N	OFF	20.7



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Jesse Wang, Stan Hsieh, Ken Wu	Temperature :	18.2~21.3°C
		Relative Humidity :	56.4~68.6%

Note symbol

-L	Low channel location
-R	High channel location

C1.Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 28	2400-2483.5	1	802.11b	01	2412	1Mbps	-	-
Mode 29	2400-2483.5	1	802.11b	06	2437	1Mbps	-	-
Mode 30	2400-2483.5	1	802.11b	11	2462	1Mbps	-	-
Mode 31	2400-2483.5	1	802.11g	01	2412	6Mbps	-	-
Mode 32	2400-2483.5	1	802.11g	06	2437	6Mbps	-	-
Mode 33	2400-2483.5	1	802.11g	11	2462	6Mbps	-	-
Mode 34	2400-2483.5	1	802.11ax HE20	1	2412	MCS0	Full RU	-
Mode 35	2400-2483.5	1	802.11ax HE20	6	2437	MCS0	Full RU	-
Mode 36	2400-2483.5	1	802.11ax HE20	11	2462	MCS0	Full RU	-
Mode 37	2400-2483.5	1	802.11n HT20	11	2462	MCS0	-	-
Mode 38	2400-2483.5	1	802.11ax HE20	1	2412	MCS0	Partial RU 106/53	-



Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 39	2400-2483.5	1	802.11ax HE20	11	2462	MCS0	Partial RU 106/54	-
Mode 40	2400-2483.5	1	802.11ax HE20	1	2412	MCS0	Partial RU 106/53	LF
Mode 41	2400-2483.5	1	802.11ax HE20	1	2412	MCS0	Partial RU 106/53	SHF

C2.Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
28	802.11b	01	2388.13	42.93	54.00	-11.07	H	Avg.	Pass	-	Band Edge
	802.11b	01	4824.00	46.77	54.00	-7.23	H	Avg.	Pass	-	Harmonic
29	802.11b	06	2499.24	43.56	54.00	-10.44	V	Avg.	Pass	-	Band Edge
	802.11b	06	4874.00	47.33	54.00	-6.67	H	Avg.	Pass	-	Harmonic
30	802.11b	11	2483.51	44.13	54.00	-9.87	H	Avg.	Pass	-	Band Edge
	802.11b	11	4924.00	45.56	54.00	-8.44	H	Avg.	Pass	-	Harmonic
31	802.11g	01	2389.56	45.01	54.00	-8.99	H	Avg.	Pass	-	Band Edge
	802.11g	01	4824.00	44.13	54.00	-9.87	V	Avg.	Pass	-	Harmonic
32	802.11g	06	2483.94	44.13	54.00	-9.87	H	Avg.	Pass	-	Band Edge
	802.11g	06	4874.00	44.23	54.00	-9.77	V	Avg.	Pass	-	Harmonic
33	802.11g	11	2483.51	48.15	54.00	-5.85	H	Avg.	Pass	-	Band Edge



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
33	802.11g	11	4924.00	42.90	54.00	-11.10	V	Avg.	Pass	-	Harmonic
34	802.11ax HE20	1	2389.95	46.00	54.00	-8.00	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	1	4824.00	38.05	54.00	-15.95	H	Avg.	Pass	Full RU	Harmonic
35	802.11ax HE20	6	2494.14	44.36	54.00	-9.64	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	6	4874.00	43.09	54.00	-10.91	V	Avg.	Pass	Full RU	Harmonic
36	802.11ax HE20	11	2484.19	48.33	54.00	-5.67	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	11	7386.00	38.43	54.00	-15.57	V	Avg.	Pass	Full RU	Harmonic
37	802.11n HT20	11	2483.51	47.57	54.00	-6.43	H	Avg.	Pass	-	Band Edge
	802.11n HT20	11	7386.00	38.16	54.00	-15.84	V	Avg.	Pass	-	Harmonic
38	802.11ax HE20	1	2389.56	48.78	54.00	-5.22	H	Avg.	Pass	Partial RU 106/53	Band Edge
	802.11ax HE20	1	4824.00	40.04	54.00	-13.96	H	Avg.	Pass	Partial RU 106/53	Harmonic



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
39	802.11ax HE20	11	2483.74	47.95	54.00	-6.05	H	Avg.	Pass	Partial RU 106/54	Band Edge
	802.11ax HE20	11	7386.00	38.73	54.00	-15.27	V	Avg.	Pass	Partial RU 106/54	Harmonic
40	LF	1	30.00	31.60	40.00	-8.40	V	Peak	Pass	-	LF
41	SHF	1	24661.75	39.71	74.00	-34.29	V	Peak	Pass	-	SHF



Mode	28																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2026-06-06 Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2374.35</td><td>54.01</td><td>74.00</td><td>-19.99</td><td>37.01</td><td>32.10</td><td>8.65</td><td>34.58</td><td>10.03</td><td>313</td><td>334</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2374.35	54.01	74.00	-19.99	37.01	32.10	8.65	34.58	10.03	313	334	Peak	Level (dBuV/m) Date: 2026-06-06 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>103.07</td><td>-----</td><td>-----</td><td>86.71</td><td>32.22</td><td>8.71</td><td>34.60</td><td>10.03</td><td>313</td><td>334</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	103.07	-----	-----	86.71	32.22	8.71	34.60	10.03	313	334	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2374.35	54.01	74.00	-19.99	37.01	32.10	8.65	34.58	10.03	313	334	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2412.00	103.07	-----	-----	86.71	32.22	8.71	34.60	10.03	313	334	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2026-06-06 Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.13</td><td>42.93</td><td>54.00</td><td>-11.07</td><td>26.71</td><td>32.10</td><td>8.67</td><td>34.59</td><td>10.04</td><td>313</td><td>334</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.13	42.93	54.00	-11.07	26.71	32.10	8.67	34.59	10.04	313	334	Average	Level (dBuV/m) Date: 2026-06-06 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>99.93</td><td>-----</td><td>-----</td><td>83.59</td><td>32.20</td><td>8.71</td><td>34.60</td><td>10.03</td><td>313</td><td>334</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	99.93	-----	-----	83.59	32.20	8.71	34.60	10.03	313	334	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2388.13	42.93	54.00	-11.07	26.71	32.10	8.67	34.59	10.04	313	334	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2412.00	99.93	-----	-----	83.59	32.20	8.71	34.60	10.03	313	334	Average																																																																																								

Remark: In the left figure, points 1 are the noise floor







Mode	28																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2026-06-06 Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2364.00</td><td>54.16</td><td>74.00</td><td>-19.84</td><td>37.92</td><td>32.15</td><td>8.63</td><td>34.57</td><td>10.03</td><td>398</td><td>269</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2364.00	54.16	74.00	-19.84	37.92	32.15	8.63	34.57	10.03	398	269	Peak	Level (dBuV/m) Date: 2026-06-06 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>100.91</td><td>-----</td><td>-----</td><td>84.52</td><td>32.24</td><td>8.72</td><td>34.60</td><td>10.03</td><td>398</td><td>269</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	100.91	-----	-----	84.52	32.24	8.72	34.60	10.03	398	269	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2364.00	54.16	74.00	-19.84	37.92	32.15	8.63	34.57	10.03	398	269	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2412.00	100.91	-----	-----	84.52	32.24	8.72	34.60	10.03	398	269	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2026-06-06 Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>42.68</td><td>54.00</td><td>-11.32</td><td>26.46</td><td>32.10</td><td>8.67</td><td>34.59</td><td>10.04</td><td>398</td><td>269</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	42.68	54.00	-11.32	26.46	32.10	8.67	34.59	10.04	398	269	Average	Level (dBuV/m) Date: 2026-06-06 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>97.91</td><td>-----</td><td>-----</td><td>81.52</td><td>32.24</td><td>8.72</td><td>34.60</td><td>10.03</td><td>398</td><td>269</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	97.91	-----	-----	81.52	32.24	8.72	34.60	10.03	398	269	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.95	42.68	54.00	-11.32	26.46	32.10	8.67	34.59	10.04	398	269	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2412.00	97.91	-----	-----	81.52	32.24	8.72	34.60	10.03	398	269	Average																																																																																								

Remark: In the left figure, points 1 are the noise floor



Mode	28																																																																																																																										
	Harmonic																																																																																																																										
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																																										
ANT	1																																																																																																																										
Pol.	Horizontal						Vertical																																																																																																																				
Peak Avg	Level (dBuV/m) Date: 2026-06-06 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>48.02</td><td>74.00</td><td>-25.98</td><td>58.35</td><td>34.50</td><td>12.34</td><td>58.07</td><td>0.90</td><td>100</td><td>119 Peak</td></tr><tr><td>2</td><td>4824.00</td><td>46.77</td><td>54.00</td><td>-7.23</td><td>57.10</td><td>34.50</td><td>12.34</td><td>58.07</td><td>0.90</td><td>100</td><td>119 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	48.02	74.00	-25.98	58.35	34.50	12.34	58.07	0.90	100	119 Peak	2	4824.00	46.77	54.00	-7.23	57.10	34.50	12.34	58.07	0.90	100	119 Average	Level (dBuV/m) Date: 2026-06-06 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>46.45</td><td>74.00</td><td>-27.55</td><td>56.78</td><td>34.50</td><td>12.34</td><td>58.07</td><td>0.90</td><td>400</td><td>92 Peak</td></tr><tr><td>2</td><td>4824.00</td><td>43.97</td><td>54.00</td><td>-10.03</td><td>54.30</td><td>34.50</td><td>12.34</td><td>58.07</td><td>0.90</td><td>400</td><td>92 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4824.00	46.45	74.00	-27.55	56.78	34.50	12.34	58.07	0.90	400	92 Peak	2	4824.00	43.97	54.00	-10.03	54.30	34.50	12.34	58.07	0.90	400	92 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																	
1	4824.00	48.02	74.00	-25.98	58.35	34.50	12.34	58.07	0.90	100	119 Peak																																																																																																																
2	4824.00	46.77	54.00	-7.23	57.10	34.50	12.34	58.07	0.90	100	119 Average																																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																
1	4824.00	46.45	74.00	-27.55	56.78	34.50	12.34	58.07	0.90	400	92 Peak																																																																																																																
2	4824.00	43.97	54.00	-10.03	54.30	34.50	12.34	58.07	0.90	400	92 Average																																																																																																																

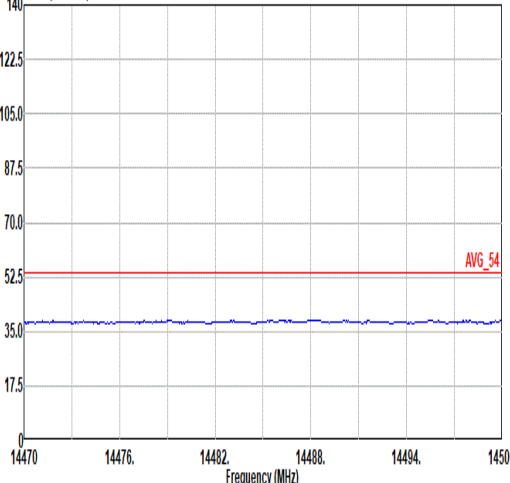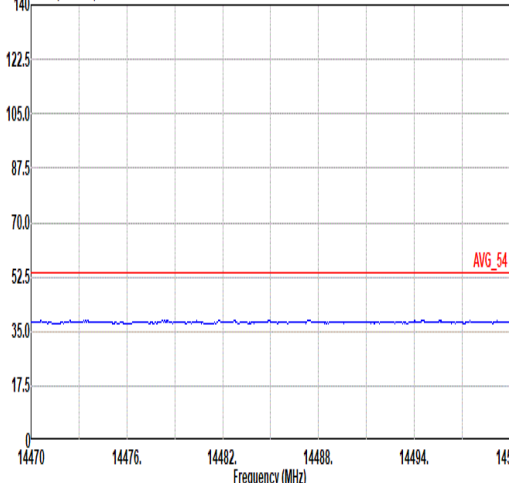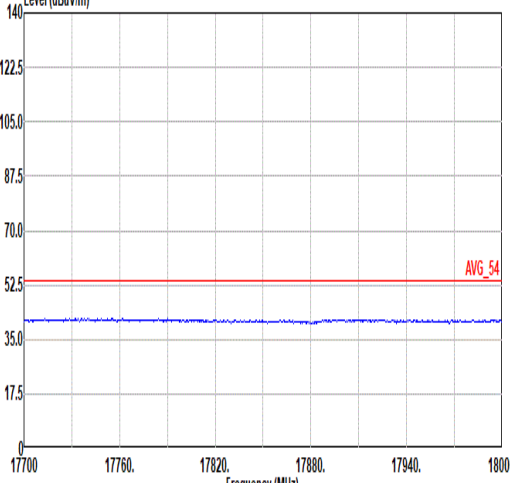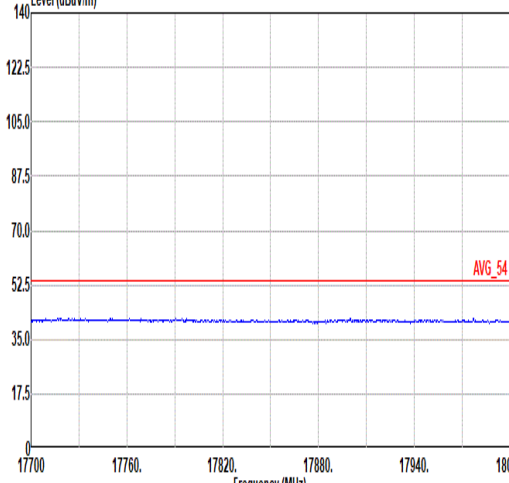

Mode	28	
	Harmonic	
	2400-2483.5_802.11b_CH01_2412MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-06-06  Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	Level (dBuV/m) Date: 2026-06-06  Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
	Level (dBuV/m) Date: 2026-06-06  Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	Level (dBuV/m) Date: 2026-06-06  Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL



Mode	29																																																																																									
	Band Edge - L																																																																																									
	2400-2483.5_802.11b_CH06_2437MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2026-06-06 Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2324.61</td><td>53.44</td><td>74.00</td><td>-20.56</td><td>37.32</td><td>32.10</td><td>8.56</td><td>34.55</td><td>10.01</td><td>341</td><td>360</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2324.61	53.44	74.00	-20.56	37.32	32.10	8.56	34.55	10.01	341	360	Peak	Level (dBuV/m) Date: 2026-06-06 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2437.00</td><td>102.72</td><td>-----</td><td>-----</td><td>86.19</td><td>32.38</td><td>8.76</td><td>34.62</td><td>10.01</td><td>341</td><td>360</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2437.00	102.72	-----	-----	86.19	32.38	8.76	34.62	10.01	341	360	Peak
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2324.61	53.44	74.00	-20.56	37.32	32.10	8.56	34.55	10.01	341	360	Peak																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2437.00	102.72	-----	-----	86.19	32.38	8.76	34.62	10.01	341	360	Peak																																																																														
Avg	Level (dBuV/m) Date: 2026-06-06 Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2359.15</td><td>42.60</td><td>54.00</td><td>-11.40</td><td>26.34</td><td>32.19</td><td>8.62</td><td>34.57</td><td>10.02</td><td>341</td><td>360</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2359.15	42.60	54.00	-11.40	26.34	32.19	8.62	34.57	10.02	341	360	Average	Level (dBuV/m) Date: 2026-06-06 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2437.00</td><td>99.57</td><td>-----</td><td>-----</td><td>83.06</td><td>32.36</td><td>8.76</td><td>34.62</td><td>10.01</td><td>341</td><td>360</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2437.00	99.57	-----	-----	83.06	32.36	8.76	34.62	10.01	341	360	Average
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2359.15	42.60	54.00	-11.40	26.34	32.19	8.62	34.57	10.02	341	360	Average																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2437.00	99.57	-----	-----	83.06	32.36	8.76	34.62	10.01	341	360	Average																																																																														

Remark: In the left figure, points 1 are the noise floor



Mode	29																																														
	Band Edge - R																																														
	2400-2483.5_802.11b_CH06_2437MHz																																														
ANT	1																																														
Pol.	Horizontal						Fundamental																																								
Peak	Level (dBuV/m) Date: 2026-06-06 Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2484.63</td><td>54.56</td><td>74.00</td><td>-19.44</td><td>37.64</td><td>32.75</td><td>8.85</td><td>34.65</td><td>9.97</td><td>341</td><td>360</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2484.63	54.56	74.00	-19.44	37.64	32.75	8.85	34.65	9.97	341	360	Peak	Blank				
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																					
1 2484.63	54.56	74.00	-19.44	37.64	32.75	8.85	34.65	9.97	341	360	Peak																																				
Avg	Level (dBuV/m) Date: 2026-06-06 Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2494.39</td><td>43.55</td><td>54.00</td><td>-10.45</td><td>26.55</td><td>32.84</td><td>8.86</td><td>34.66</td><td>9.96</td><td>341</td><td>360</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2494.39	43.55	54.00	-10.45	26.55	32.84	8.86	34.66	9.96	341	360	Average	Blank				
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																					
1 2494.39	43.55	54.00	-10.45	26.55	32.84	8.86	34.66	9.96	341	360	Average																																				

Remark: In the left figure, points 1 are the noise floor



Mode	29																																																																																			
	Band Edge - L																																																																																			
	2400-2483.5_802.11b_CH06_2437MHz																																																																																			
ANT	1																																																																																			
Pol.	Vertical						Fundamental																																																																													
Peak	Date: 2026-06-06 Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 2370.83</td><td>53.63</td><td>74.00</td><td>-20.37</td><td>37.44</td><td>32.10</td><td>8.64</td><td>34.58</td><td>10.03</td><td>400</td><td>269</td><td>Peak</td></tr></tbody></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2370.83	53.63	74.00	-20.37	37.44	32.10	8.64	34.58	10.03	400	269	Peak	Date: 2026-06-06 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 2437.00</td><td>100.02</td><td>-----</td><td>-----</td><td>83.49</td><td>32.38</td><td>8.76</td><td>34.62</td><td>10.01</td><td>400</td><td>269</td><td>Peak</td></tr></tbody></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2437.00	100.02	-----	-----	83.49	32.38	8.76	34.62	10.01	400	269	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2370.83	53.63	74.00	-20.37	37.44	32.10	8.64	34.58	10.03	400	269	Peak																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2437.00	100.02	-----	-----	83.49	32.38	8.76	34.62	10.01	400	269	Peak																																																																									
Avg	Date: 2026-06-06 Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 2358.51</td><td>42.62</td><td>54.00</td><td>-11.38</td><td>26.36</td><td>32.19</td><td>8.62</td><td>34.57</td><td>10.02</td><td>400</td><td>269</td><td>Average</td></tr></tbody></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2358.51	42.62	54.00	-11.38	26.36	32.19	8.62	34.57	10.02	400	269	Average	Date: 2026-06-06 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 2437.00</td><td>96.89</td><td>-----</td><td>-----</td><td>80.38</td><td>32.36</td><td>8.76</td><td>34.62</td><td>10.01</td><td>400</td><td>269</td><td>Average</td></tr></tbody></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2437.00	96.89	-----	-----	80.38	32.36	8.76	34.62	10.01	400	269	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2358.51	42.62	54.00	-11.38	26.36	32.19	8.62	34.57	10.02	400	269	Average																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2437.00	96.89	-----	-----	80.38	32.36	8.76	34.62	10.01	400	269	Average																																																																									

Remark: In the left figure, points 1 are the noise floor







Mode	29										
	Band Edge - R										
	2400-2483.5_802.11b_CH06_2437MHz										
ANT	1										
Pol.	Vertical						Fundamental				
Peak	<										

Remark: In the left figure, points 1 are the noise floor



Mode	29																																																																																																																																																																									
	Harmonic																																																																																																																																																																									
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																																																																																									
ANT	1																																																																																																																																																																									
Pol.	Horizontal						Vertical																																																																																																																																																																			
Peak Avg	Level (dBuV/m) Date: 2026-06-05 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>50.08</td><td>74.00</td><td>-23.92</td><td>60.34</td><td>34.45</td><td>12.40</td><td>58.00</td><td>0.89</td><td>100</td><td>116 Peak</td></tr><tr><td>2</td><td>4874.00</td><td>47.33</td><td>54.00</td><td>-6.67</td><td>57.59</td><td>34.45</td><td>12.40</td><td>58.00</td><td>0.89</td><td>100</td><td>116 Average</td></tr><tr><td>3</td><td>7311.00</td><td>45.03</td><td>74.00</td><td>-28.97</td><td>51.00</td><td>36.00</td><td>14.93</td><td>57.85</td><td>0.95</td><td>100</td><td>101 Peak</td></tr><tr><td>4</td><td>7311.00</td><td>38.32</td><td>54.00</td><td>-15.68</td><td>44.29</td><td>36.00</td><td>14.93</td><td>57.85</td><td>0.95</td><td>100</td><td>101 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	50.08	74.00	-23.92	60.34	34.45	12.40	58.00	0.89	100	116 Peak	2	4874.00	47.33	54.00	-6.67	57.59	34.45	12.40	58.00	0.89	100	116 Average	3	7311.00	45.03	74.00	-28.97	51.00	36.00	14.93	57.85	0.95	100	101 Peak	4	7311.00	38.32	54.00	-15.68	44.29	36.00	14.93	57.85	0.95	100	101 Average	Level (dBuV/m) Date: 2026-06-05 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>44.75</td><td>74.00</td><td>-29.25</td><td>55.01</td><td>34.45</td><td>12.40</td><td>58.00</td><td>0.89</td><td>359</td><td>231 Peak</td></tr><tr><td>2</td><td>4874.00</td><td>40.13</td><td>54.00</td><td>-13.87</td><td>50.39</td><td>34.45</td><td>12.40</td><td>58.00</td><td>0.89</td><td>359</td><td>231 Average</td></tr><tr><td>3</td><td>7311.00</td><td>46.88</td><td>74.00</td><td>-27.12</td><td>52.85</td><td>36.00</td><td>14.93</td><td>57.85</td><td>0.95</td><td>100</td><td>285 Peak</td></tr><tr><td>4</td><td>7311.00</td><td>40.89</td><td>54.00</td><td>-13.11</td><td>46.86</td><td>36.00</td><td>14.93</td><td>57.85</td><td>0.95</td><td>100</td><td>285 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	44.75	74.00	-29.25	55.01	34.45	12.40	58.00	0.89	359	231 Peak	2	4874.00	40.13	54.00	-13.87	50.39	34.45	12.40	58.00	0.89	359	231 Average	3	7311.00	46.88	74.00	-27.12	52.85	36.00	14.93	57.85	0.95	100	285 Peak	4	7311.00	40.89	54.00	-13.11	46.86	36.00	14.93	57.85	0.95	100	285 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																
1	4874.00	50.08	74.00	-23.92	60.34	34.45	12.40	58.00	0.89	100	116 Peak																																																																																																																																																															
2	4874.00	47.33	54.00	-6.67	57.59	34.45	12.40	58.00	0.89	100	116 Average																																																																																																																																																															
3	7311.00	45.03	74.00	-28.97	51.00	36.00	14.93	57.85	0.95	100	101 Peak																																																																																																																																																															
4	7311.00	38.32	54.00	-15.68	44.29	36.00	14.93	57.85	0.95	100	101 Average																																																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																
1	4874.00	44.75	74.00	-29.25	55.01	34.45	12.40	58.00	0.89	359	231 Peak																																																																																																																																																															
2	4874.00	40.13	54.00	-13.87	50.39	34.45	12.40	58.00	0.89	359	231 Average																																																																																																																																																															
3	7311.00	46.88	74.00	-27.12	52.85	36.00	14.93	57.85	0.95	100	285 Peak																																																																																																																																																															
4	7311.00	40.89	54.00	-13.11	46.86	36.00	14.93	57.85	0.95	100	285 Average																																																																																																																																																															

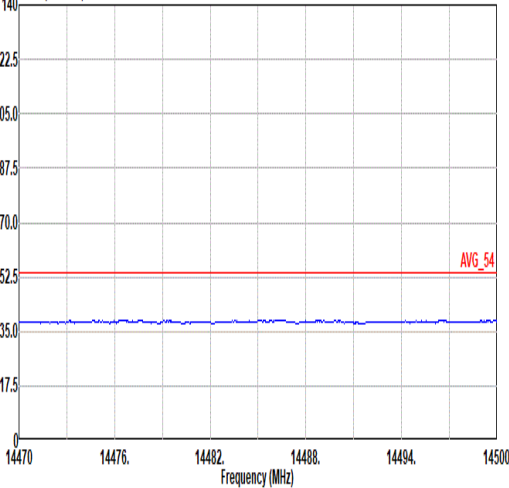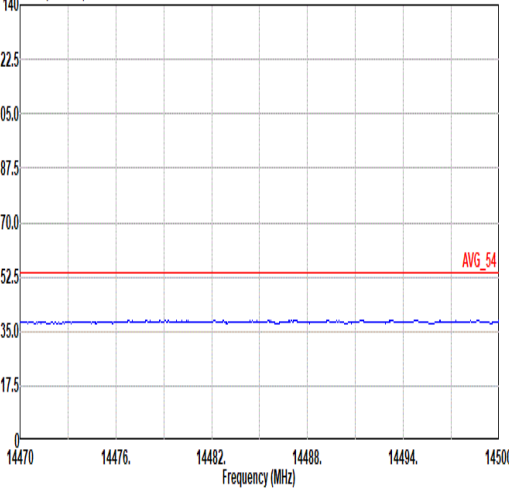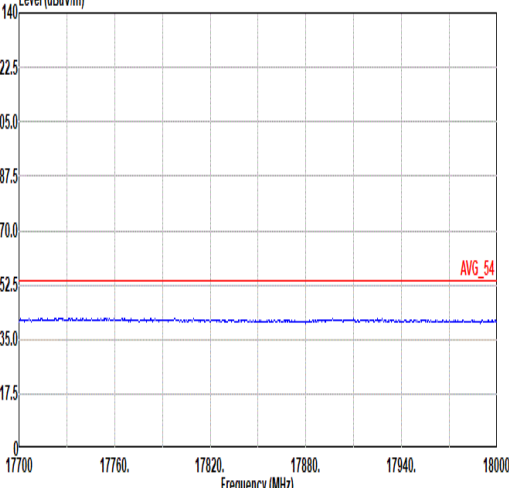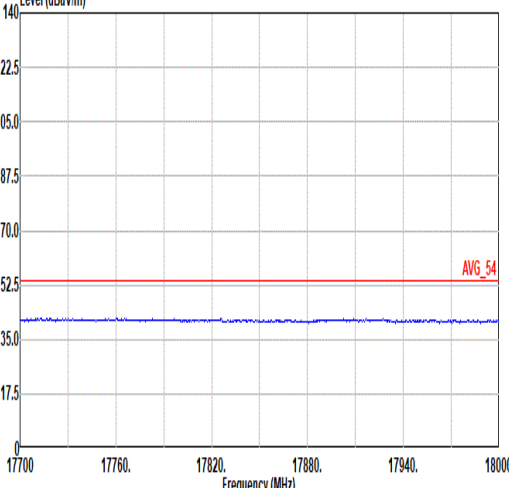

Mode	29	
	Harmonic	
	2400-2483.5_802.11b_CH06_2437MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-06-05  Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	Level (dBuV/m) Date: 2026-06-05  Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
	Level (dBuV/m) Date: 2026-06-05  Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	Level (dBuV/m) Date: 2026-06-05  Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL



Mode	30																																																																																			
	Band Edge																																																																																			
	2400-2483.5_802.11b_CH11_2462MHz																																																																																			
ANT	1																																																																																			
Pol.	Horizontal						Fundamental																																																																													
Peak	Level (dBuV/m) Date: 2026-06-06 Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 2489.40</td><td>54.74</td><td>74.00</td><td>-19.26</td><td>37.77</td><td>32.79</td><td>8.86</td><td>34.65</td><td>9.97</td><td>376</td><td></td><td>0 Peak</td></tr></tbody></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2489.40	54.74	74.00	-19.26	37.77	32.79	8.86	34.65	9.97	376		0 Peak	Level (dBuV/m) Date: 2026-06-06 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 2462.00</td><td>104.16</td><td>-----</td><td>-----</td><td>87.39</td><td>32.62</td><td>8.80</td><td>34.64</td><td>9.99</td><td>376</td><td></td><td>0 Peak</td></tr></tbody></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2462.00	104.16	-----	-----	87.39	32.62	8.80	34.64	9.99	376		0 Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2489.40	54.74	74.00	-19.26	37.77	32.79	8.86	34.65	9.97	376		0 Peak																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2462.00	104.16	-----	-----	87.39	32.62	8.80	34.64	9.99	376		0 Peak																																																																									
Avg	Level (dBuV/m) Date: 2026-06-06 Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 2483.51</td><td>44.13</td><td>54.00</td><td>-9.87</td><td>27.23</td><td>32.74</td><td>8.84</td><td>34.65</td><td>9.97</td><td>376</td><td></td><td>0 Average</td></tr></tbody></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2483.51	44.13	54.00	-9.87	27.23	32.74	8.84	34.65	9.97	376		0 Average	Level (dBuV/m) Date: 2026-06-06 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 2462.00</td><td>101.04</td><td>-----</td><td>-----</td><td>84.27</td><td>32.62</td><td>8.80</td><td>34.64</td><td>9.99</td><td>376</td><td></td><td>0 Average</td></tr></tbody></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2462.00	101.04	-----	-----	84.27	32.62	8.80	34.64	9.99	376		0 Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2483.51	44.13	54.00	-9.87	27.23	32.74	8.84	34.65	9.97	376		0 Average																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2462.00	101.04	-----	-----	84.27	32.62	8.80	34.64	9.99	376		0 Average																																																																									

Remark: In the left figure, points 1 are the noise floor







Mode	30																																																																																			
	Band Edge																																																																																			
	2400-2483.5_802.11b_CH11_2462MHz																																																																																			
ANT	1																																																																																			
Pol.	Vertical						Fundamental																																																																													
Peak	Level (dBuV/m) Date: 2026-06-06 Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2493.20</td><td>54.50</td><td>74.00</td><td>-19.50</td><td>37.50</td><td>32.83</td><td>8.86</td><td>34.66</td><td>9.97</td><td>340</td><td>266</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2493.20	54.50	74.00	-19.50	37.50	32.83	8.86	34.66	9.97	340	266	Peak	Level (dBuV/m) Date: 2026-06-06 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2462.00</td><td>101.77</td><td>-----</td><td>-----</td><td>85.00</td><td>32.62</td><td>8.80</td><td>34.64</td><td>9.99</td><td>340</td><td>266</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2462.00	101.77	-----	-----	85.00	32.62	8.80	34.64	9.99	340	266	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2493.20	54.50	74.00	-19.50	37.50	32.83	8.86	34.66	9.97	340	266	Peak																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2462.00	101.77	-----	-----	85.00	32.62	8.80	34.64	9.99	340	266	Peak																																																																									
Avg	Level (dBuV/m) Date: 2026-06-06 Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.66</td><td>43.67</td><td>54.00</td><td>-10.33</td><td>26.77</td><td>32.74</td><td>8.84</td><td>34.65</td><td>9.97</td><td>340</td><td>266</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2483.66	43.67	54.00	-10.33	26.77	32.74	8.84	34.65	9.97	340	266	Average	Level (dBuV/m) Date: 2026-06-06 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2462.00</td><td>98.67</td><td>-----</td><td>-----</td><td>81.90</td><td>32.62</td><td>8.80</td><td>34.64</td><td>9.99</td><td>340</td><td>266</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2462.00	98.67	-----	-----	81.90	32.62	8.80	34.64	9.99	340	266	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2483.66	43.67	54.00	-10.33	26.77	32.74	8.84	34.65	9.97	340	266	Average																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2462.00	98.67	-----	-----	81.90	32.62	8.80	34.64	9.99	340	266	Average																																																																									

Remark: In the left figure, points 1 are the noise floor







Mode	30																																																																																																																																																																								
	Harmonic																																																																																																																																																																								
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																																																																								
ANT	1																																																																																																																																																																								
Pol.	Horizontal						Vertical																																																																																																																																																																		
Peak Avg	Level (dBuV/m) Date: 2026-06-06 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>47.11</td><td>74.00</td><td>-26.89</td><td>57.24</td><td>34.45</td><td>12.46</td><td>57.93</td><td>0.89</td><td>100</td><td>112 Peak</td></tr><tr><td>2</td><td>4924.00</td><td>45.56</td><td>54.00</td><td>-8.44</td><td>55.69</td><td>34.45</td><td>12.46</td><td>57.93</td><td>0.89</td><td>100</td><td>112 Average</td></tr><tr><td>3</td><td>7386.00</td><td>43.80</td><td>74.00</td><td>-30.20</td><td>49.88</td><td>36.00</td><td>14.98</td><td>57.98</td><td>0.92</td><td>100</td><td>132 Peak</td></tr><tr><td>4</td><td>7386.00</td><td>39.13</td><td>54.00</td><td>-14.87</td><td>45.21</td><td>36.00</td><td>14.98</td><td>57.98</td><td>0.92</td><td>100</td><td>132 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	47.11	74.00	-26.89	57.24	34.45	12.46	57.93	0.89	100	112 Peak	2	4924.00	45.56	54.00	-8.44	55.69	34.45	12.46	57.93	0.89	100	112 Average	3	7386.00	43.80	74.00	-30.20	49.88	36.00	14.98	57.98	0.92	100	132 Peak	4	7386.00	39.13	54.00	-14.87	45.21	36.00	14.98	57.98	0.92	100	132 Average	Level (dBuV/m) Date: 2026-06-06 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>44.37</td><td>74.00</td><td>-29.63</td><td>54.58</td><td>34.45</td><td>12.46</td><td>57.93</td><td>0.89</td><td>400</td><td>207 Peak</td></tr><tr><td>2</td><td>4924.00</td><td>41.96</td><td>54.00</td><td>-12.04</td><td>52.09</td><td>34.45</td><td>12.46</td><td>57.93</td><td>0.89</td><td>400</td><td>207 Average</td></tr><tr><td>3</td><td>7386.00</td><td>44.95</td><td>74.00</td><td>-29.05</td><td>51.03</td><td>36.00</td><td>14.98</td><td>57.98</td><td>0.92</td><td>100</td><td>278 Peak</td></tr><tr><td>4</td><td>7386.00</td><td>41.43</td><td>54.00</td><td>-12.57</td><td>47.51</td><td>36.00</td><td>14.98</td><td>57.98</td><td>0.92</td><td>100</td><td>278 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	44.37	74.00	-29.63	54.58	34.45	12.46	57.93	0.89	400	207 Peak	2	4924.00	41.96	54.00	-12.04	52.09	34.45	12.46	57.93	0.89	400	207 Average	3	7386.00	44.95	74.00	-29.05	51.03	36.00	14.98	57.98	0.92	100	278 Peak	4	7386.00	41.43	54.00	-12.57	47.51	36.00	14.98	57.98	0.92	100	278 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																															
1	4924.00	47.11	74.00	-26.89	57.24	34.45	12.46	57.93	0.89	100	112 Peak																																																																																																																																																														
2	4924.00	45.56	54.00	-8.44	55.69	34.45	12.46	57.93	0.89	100	112 Average																																																																																																																																																														
3	7386.00	43.80	74.00	-30.20	49.88	36.00	14.98	57.98	0.92	100	132 Peak																																																																																																																																																														
4	7386.00	39.13	54.00	-14.87	45.21	36.00	14.98	57.98	0.92	100	132 Average																																																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																															
1	4924.00	44.37	74.00	-29.63	54.58	34.45	12.46	57.93	0.89	400	207 Peak																																																																																																																																																														
2	4924.00	41.96	54.00	-12.04	52.09	34.45	12.46	57.93	0.89	400	207 Average																																																																																																																																																														
3	7386.00	44.95	74.00	-29.05	51.03	36.00	14.98	57.98	0.92	100	278 Peak																																																																																																																																																														
4	7386.00	41.43	54.00	-12.57	47.51	36.00	14.98	57.98	0.92	100	278 Average																																																																																																																																																														

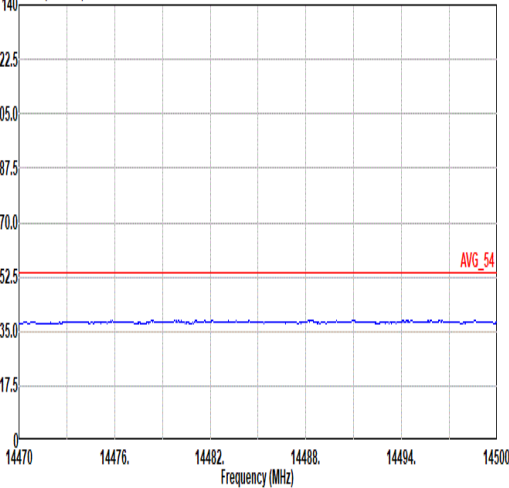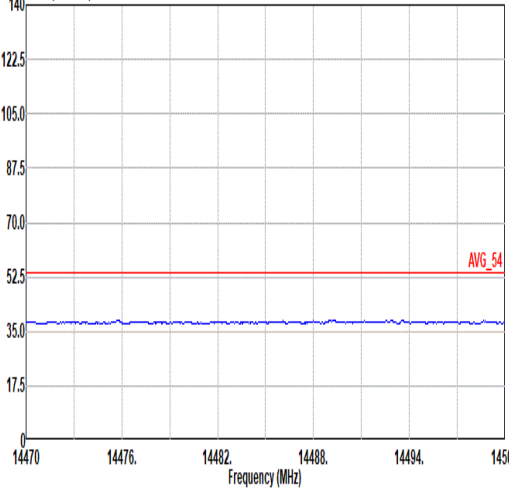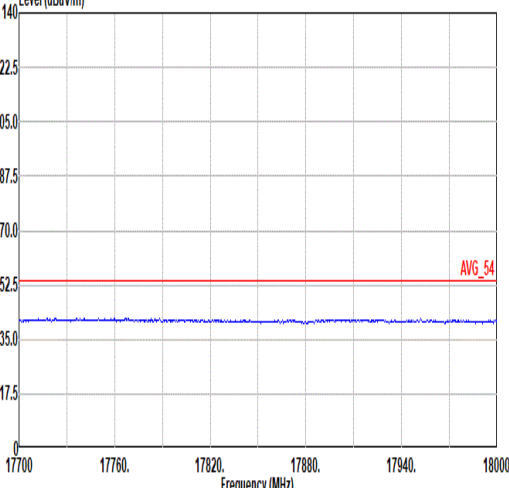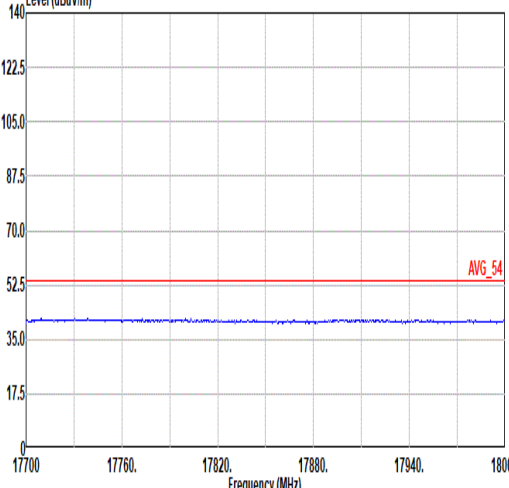

Mode	30	
	Harmonic	
	2400-2483.5_802.11b_CH11_2462MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-06-06  Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	Level (dBuV/m) Date: 2026-06-06  Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
	Level (dBuV/m) Date: 2026-06-06  Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	Level (dBuV/m) Date: 2026-06-06  Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL

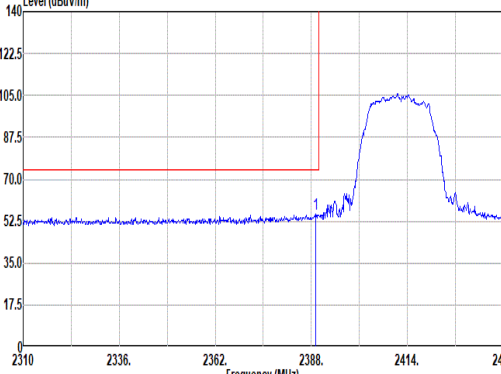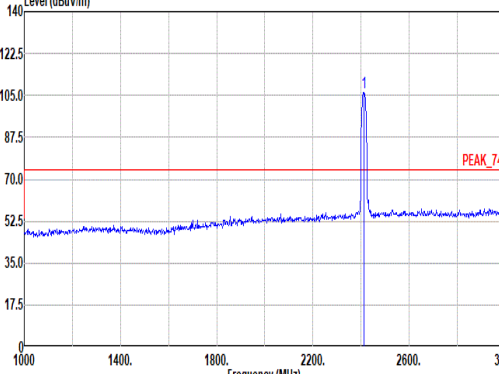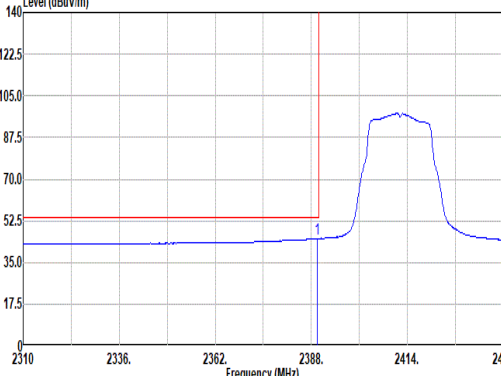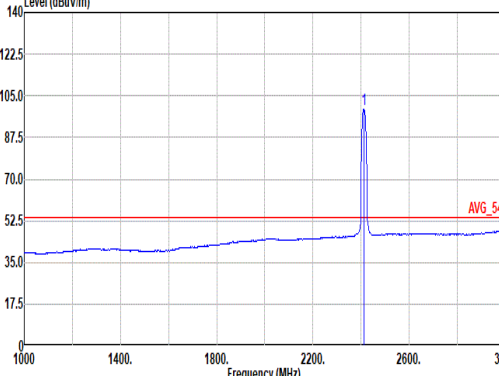



Mode	31																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak	Level (dBuV/m) Date: 2026-05-15 						Level (dBuV/m) Date: 2026-05-15 																																																																																												
	Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.17</td><td>55.53</td><td>74.00</td><td>-18.47</td><td>39.31</td><td>32.10</td><td>8.67</td><td>34.59</td><td>10.04</td><td>399</td><td>343</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.17	55.53	74.00	-18.47	39.31	32.10	8.67	34.59	10.04	399	343	Peak	Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>106.41</td><td>-----</td><td>-----</td><td>90.07</td><td>32.20</td><td>8.71</td><td>34.60</td><td>10.03</td><td>399</td><td>343</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	106.41	-----	-----	90.07	32.20	8.71	34.60	10.03	399	343
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2389.17	55.53	74.00	-18.47	39.31	32.10	8.67	34.59	10.04	399	343	Peak																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2412.00	106.41	-----	-----	90.07	32.20	8.71	34.60	10.03	399	343	Peak																																																																																							
Avg	Level (dBuV/m) Date: 2026-05-15 						Level (dBuV/m) Date: 2026-05-15 																																																																																												
	Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.56</td><td>45.01</td><td>54.00</td><td>-8.99</td><td>28.79</td><td>32.10</td><td>8.67</td><td>34.59</td><td>10.04</td><td>399</td><td>343</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.56	45.01	54.00	-8.99	28.79	32.10	8.67	34.59	10.04	399	343	Average	Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>99.31</td><td>-----</td><td>-----</td><td>82.95</td><td>32.22</td><td>8.71</td><td>34.60</td><td>10.03</td><td>399</td><td>343</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	99.31	-----	-----	82.95	32.22	8.71	34.60	10.03	399	343
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2389.56	45.01	54.00	-8.99	28.79	32.10	8.67	34.59	10.04	399	343	Average																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2412.00	99.31	-----	-----	82.95	32.22	8.71	34.60	10.03	399	343	Average																																																																																							



		31																																																																																								
Mode	Band Edge																																																																																									
	2400-2483.5_802.11g_CH01_2412MHz																																																																																									
ANT	1																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak	Date: 2026-05-15 Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2382.54</td><td>55.30</td><td>74.00</td><td>-18.70</td><td>39.09</td><td>32.10</td><td>8.66</td><td>34.58</td><td>10.03</td><td>400</td><td>66</td><td>Peak</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2382.54	55.30	74.00	-18.70	39.09	32.10	8.66	34.58	10.03	400	66	Peak	Date: 2026-05-15 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>104.00</td><td>-----</td><td>-----</td><td>87.61</td><td>32.24</td><td>8.72</td><td>34.60</td><td>10.03</td><td>400</td><td>66</td><td>Peak</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2412.00	104.00	-----	-----	87.61	32.24	8.72	34.60	10.03	400	66	Peak
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2382.54	55.30	74.00	-18.70	39.09	32.10	8.66	34.58	10.03	400	66	Peak																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2412.00	104.00	-----	-----	87.61	32.24	8.72	34.60	10.03	400	66	Peak																																																																														
Avg	Date: 2026-05-15 Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2389.56</td><td>43.48</td><td>54.00</td><td>-10.52</td><td>27.26</td><td>32.10</td><td>8.67</td><td>34.59</td><td>10.04</td><td>400</td><td>66</td><td>Average</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2389.56	43.48	54.00	-10.52	27.26	32.10	8.67	34.59	10.04	400	66	Average	Date: 2026-05-15 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>96.40</td><td>-----</td><td>-----</td><td>80.01</td><td>32.24</td><td>8.72</td><td>34.60</td><td>10.03</td><td>400</td><td>66</td><td>Average</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2412.00	96.40	-----	-----	80.01	32.24	8.72	34.60	10.03	400	66	Average
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2389.56	43.48	54.00	-10.52	27.26	32.10	8.67	34.59	10.04	400	66	Average																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2412.00	96.40	-----	-----	80.01	32.24	8.72	34.60	10.03	400	66	Average																																																																														

Remark: In the left figure, points 1 are the noise floor

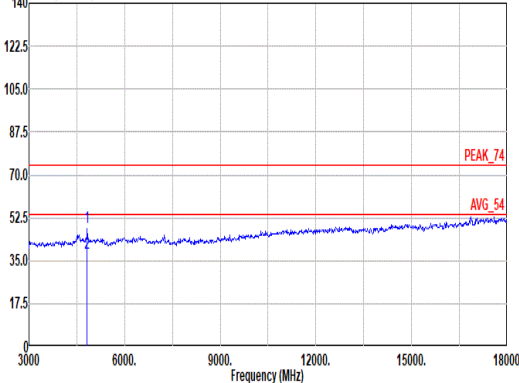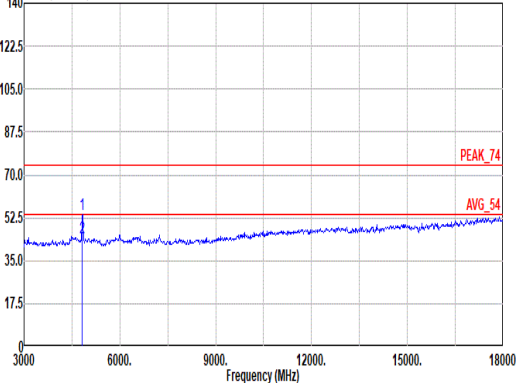

Mode	31																																																																																																																											
	Harmonic																																																																																																																											
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																																											
ANT	1																																																																																																																											
Pol.	Horizontal						Vertical																																																																																																																					
Peak Avg	Level (dBuV/m) Date: 2026-05-20  Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>48.43</td><td>74.00</td><td>-25.57</td><td>58.76</td><td>34.50</td><td>12.34</td><td>58.07</td><td>0.90</td><td>100</td><td>194</td><td>194</td><td>Peak</td></tr><tr><td>2</td><td>4824.00</td><td>38.20</td><td>54.00</td><td>-15.80</td><td>48.53</td><td>34.50</td><td>12.34</td><td>58.07</td><td>0.90</td><td>100</td><td>194</td><td>194</td><td>Average</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4824.00	48.43	74.00	-25.57	58.76	34.50	12.34	58.07	0.90	100	194	194	Peak	2	4824.00	38.20	54.00	-15.80	48.53	34.50	12.34	58.07	0.90	100	194	194	Average	Level (dBuV/m) Date: 2026-05-20  Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>54.08</td><td>74.00</td><td>-19.92</td><td>64.41</td><td>34.50</td><td>12.34</td><td>58.07</td><td>0.90</td><td>116</td><td>105</td><td>105</td><td>Peak</td></tr><tr><td>2</td><td>4824.00</td><td>44.13</td><td>54.00</td><td>-9.87</td><td>54.46</td><td>34.50</td><td>12.34</td><td>58.07</td><td>0.90</td><td>116</td><td>105</td><td>105</td><td>Average</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4824.00	54.08	74.00	-19.92	64.41	34.50	12.34	58.07	0.90	116	105	105	Peak	2	4824.00	44.13	54.00	-9.87	54.46	34.50	12.34	58.07	0.90	116	105	105	Average
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																
1	4824.00	48.43	74.00	-25.57	58.76	34.50	12.34	58.07	0.90	100	194	194	Peak																																																																																																															
2	4824.00	38.20	54.00	-15.80	48.53	34.50	12.34	58.07	0.90	100	194	194	Average																																																																																																															
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																
1	4824.00	54.08	74.00	-19.92	64.41	34.50	12.34	58.07	0.90	116	105	105	Peak																																																																																																															
2	4824.00	44.13	54.00	-9.87	54.46	34.50	12.34	58.07	0.90	116	105	105	Average																																																																																																															



Mode	31	
	Harmonic	
	2400-2483.5_802.11g_CH01_2412MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-05-20 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	Level (dBuV/m) Date: 2026-05-20 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
	Level (dBuV/m) Date: 2026-05-20 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	Level (dBuV/m) Date: 2026-05-20 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL



Mode	32																																																																																									
	Band Edge - L																																																																																									
	2400-2483.5_802.11g_CH06_2437MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2026-05-15 Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2345.56</td><td>54.73</td><td>74.00</td><td>-19.27</td><td>38.58</td><td>32.10</td><td>8.59</td><td>34.56</td><td>10.02</td><td>300</td><td>352</td><td>Peak</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2345.56	54.73	74.00	-19.27	38.58	32.10	8.59	34.56	10.02	300	352	Peak	Level (dBuV/m) Date: 2026-05-15 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>106.71</td><td>-----</td><td>-----</td><td>90.20</td><td>32.36</td><td>8.76</td><td>34.62</td><td>10.01</td><td>300</td><td>352</td><td>Peak</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2437.00	106.71	-----	-----	90.20	32.36	8.76	34.62	10.01	300	352	Peak
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2345.56	54.73	74.00	-19.27	38.58	32.10	8.59	34.56	10.02	300	352	Peak																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2437.00	106.71	-----	-----	90.20	32.36	8.76	34.62	10.01	300	352	Peak																																																																														
Avg	Level (dBuV/m) Date: 2026-05-15 Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2389.76</td><td>43.27</td><td>54.00</td><td>-10.73</td><td>27.05</td><td>32.10</td><td>8.67</td><td>34.59</td><td>10.04</td><td>300</td><td>352</td><td>Average</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2389.76	43.27	54.00	-10.73	27.05	32.10	8.67	34.59	10.04	300	352	Average	Level (dBuV/m) Date: 2026-05-15 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>99.60</td><td>-----</td><td>-----</td><td>83.09</td><td>32.36</td><td>8.76</td><td>34.62</td><td>10.01</td><td>300</td><td>352</td><td>Average</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2437.00	99.60	-----	-----	83.09	32.36	8.76	34.62	10.01	300	352	Average
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2389.76	43.27	54.00	-10.73	27.05	32.10	8.67	34.59	10.04	300	352	Average																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2437.00	99.60	-----	-----	83.09	32.36	8.76	34.62	10.01	300	352	Average																																																																														

Remark: In the left figure, points 1 are the noise floor



Mode	32											
	Band Edge - R											
	2400-2483.5_802.11g_CH06_2437MHz											
ANT	1											
Pol.	Horizontal						Fundamental					
Peak												

Remark: In the left figure, points 1 are the noise floor



Mode	32																																																																																			
	Band Edge - L																																																																																			
	2400-2483.5_802.11g_CH06_2437MHz																																																																																			
ANT	1																																																																																			
Pol.	Vertical						Fundamental																																																																													
Peak	Level (dBuV/m) Date: 2026-05-15 Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 2320.00</td><td>54.10</td><td>74.00</td><td>-19.90</td><td>37.99</td><td>32.10</td><td>8.55</td><td>34.55</td><td>10.01</td><td>400</td><td>289</td><td>Peak</td></tr></tbody></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2320.00	54.10	74.00	-19.90	37.99	32.10	8.55	34.55	10.01	400	289	Peak	Level (dBuV/m) Date: 2026-05-15 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 2437.00</td><td>102.31</td><td>-----</td><td>-----</td><td>85.00</td><td>32.36</td><td>8.76</td><td>34.62</td><td>10.01</td><td>400</td><td>289</td><td>Peak</td></tr></tbody></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2437.00	102.31	-----	-----	85.00	32.36	8.76	34.62	10.01	400	289	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2320.00	54.10	74.00	-19.90	37.99	32.10	8.55	34.55	10.01	400	289	Peak																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2437.00	102.31	-----	-----	85.00	32.36	8.76	34.62	10.01	400	289	Peak																																																																									
Avg	Level (dBuV/m) Date: 2026-05-15 Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 2360.93</td><td>43.11</td><td>54.00</td><td>-10.89</td><td>26.85</td><td>32.19</td><td>8.62</td><td>34.57</td><td>10.02</td><td>400</td><td>289</td><td>Average</td></tr></tbody></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2360.93	43.11	54.00	-10.89	26.85	32.19	8.62	34.57	10.02	400	289	Average	Level (dBuV/m) Date: 2026-05-15 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 2437.00</td><td>94.72</td><td>-----</td><td>-----</td><td>78.19</td><td>32.38</td><td>8.76</td><td>34.62</td><td>10.01</td><td>400</td><td>289</td><td>Average</td></tr></tbody></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2437.00	94.72	-----	-----	78.19	32.38	8.76	34.62	10.01	400	289	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2360.93	43.11	54.00	-10.89	26.85	32.19	8.62	34.57	10.02	400	289	Average																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2437.00	94.72	-----	-----	78.19	32.38	8.76	34.62	10.01	400	289	Average																																																																									

Remark: In the left figure, points 1 are the noise floor



Mode	32											
	Band Edge - R											
	2400-2483.5_802.11g_CH06_2437MHz											
ANT	1											
Pol.	Vertical						Fundamental					
Peak	<											

Remark: In the left figure, points 1 are the noise floor



Mode	32																																																																																																																																													
	Harmonic																																																																																																																																													
	2400-2483.5_802.11g_CH06_2437MHz																																																																																																																																													
ANT	1																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																												
Peak Avg	Level (dBuV/m) Date: 2026-05-20 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>50.88</td><td>74.00</td><td>-23.12</td><td>61.14</td><td>34.45</td><td>12.40</td><td>58.00</td><td>0.89</td><td>100</td><td>203</td><td>Peak</td></tr><tr><td>2</td><td>4874.00</td><td>40.32</td><td>54.00</td><td>-13.68</td><td>50.58</td><td>34.45</td><td>12.40</td><td>58.00</td><td>0.89</td><td>100</td><td>203</td><td>Average</td></tr><tr><td>3</td><td>7311.00</td><td>45.50</td><td>74.00</td><td>-28.50</td><td>51.47</td><td>36.00</td><td>14.93</td><td>57.85</td><td>0.95</td><td>--</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4874.00	50.88	74.00	-23.12	61.14	34.45	12.40	58.00	0.89	100	203	Peak	2	4874.00	40.32	54.00	-13.68	50.58	34.45	12.40	58.00	0.89	100	203	Average	3	7311.00	45.50	74.00	-28.50	51.47	36.00	14.93	57.85	0.95	--	--	Peak	Level (dBuV/m) Date: 2026-05-20 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>54.33</td><td>74.00</td><td>-19.67</td><td>64.59</td><td>34.45</td><td>12.40</td><td>58.00</td><td>0.89</td><td>100</td><td>96</td><td>Peak</td></tr><tr><td>2</td><td>4874.00</td><td>44.23</td><td>54.00</td><td>-9.77</td><td>54.49</td><td>34.45</td><td>12.40</td><td>58.00</td><td>0.89</td><td>100</td><td>96</td><td>Average</td></tr><tr><td>3</td><td>7311.00</td><td>44.10</td><td>74.00</td><td>-29.90</td><td>50.07</td><td>36.00</td><td>14.93</td><td>57.85</td><td>0.95</td><td>--</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4874.00	54.33	74.00	-19.67	64.59	34.45	12.40	58.00	0.89	100	96	Peak	2	4874.00	44.23	54.00	-9.77	54.49	34.45	12.40	58.00	0.89	100	96	Average	3	7311.00	44.10	74.00	-29.90	50.07	36.00	14.93	57.85	0.95	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																				
1	4874.00	50.88	74.00	-23.12	61.14	34.45	12.40	58.00	0.89	100	203	Peak																																																																																																																																		
2	4874.00	40.32	54.00	-13.68	50.58	34.45	12.40	58.00	0.89	100	203	Average																																																																																																																																		
3	7311.00	45.50	74.00	-28.50	51.47	36.00	14.93	57.85	0.95	--	--	Peak																																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																				
1	4874.00	54.33	74.00	-19.67	64.59	34.45	12.40	58.00	0.89	100	96	Peak																																																																																																																																		
2	4874.00	44.23	54.00	-9.77	54.49	34.45	12.40	58.00	0.89	100	96	Average																																																																																																																																		
3	7311.00	44.10	74.00	-29.90	50.07	36.00	14.93	57.85	0.95	--	--	Peak																																																																																																																																		

Remark: In the figure, points 2 are the noise floor



Mode	32	
	Harmonic	
	2400-2483.5_802.11g_CH06_2437MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-05-20 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	Level (dBuV/m) Date: 2026-05-20 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
	Level (dBuV/m) Date: 2026-05-20 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	Level (dBuV/m) Date: 2026-05-20 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL



Mode	33																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2026-05-15 PEAK_BE_74 Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.19</td><td>60.73</td><td>74.00</td><td>-13.27</td><td>43.82</td><td>32.74</td><td>8.85</td><td>34.65</td><td>9.97</td><td>373</td><td>360</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.19	60.73	74.00	-13.27	43.82	32.74	8.85	34.65	9.97	373	360	Peak	Level (dBuV/m) Date: 2026-05-15 PEAK_74 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>106.16</td><td>-----</td><td>-----</td><td>89.39</td><td>32.62</td><td>8.80</td><td>34.64</td><td>9.99</td><td>373</td><td>360</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	106.16	-----	-----	89.39	32.62	8.80	34.64	9.99	373	360	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2484.19	60.73	74.00	-13.27	43.82	32.74	8.85	34.65	9.97	373	360	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2462.00	106.16	-----	-----	89.39	32.62	8.80	34.64	9.99	373	360	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2026-05-15 AVG_BE_54 Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>48.15</td><td>54.00</td><td>-5.85</td><td>31.25</td><td>32.74</td><td>8.84</td><td>34.65</td><td>9.97</td><td>373</td><td>360</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	48.15	54.00	-5.85	31.25	32.74	8.84	34.65	9.97	373	360	Average	Level (dBuV/m) Date: 2026-05-15 AVG_54 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>98.26</td><td>-----</td><td>-----</td><td>81.49</td><td>32.62</td><td>8.80</td><td>34.64</td><td>9.99</td><td>373</td><td>360</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	98.26	-----	-----	81.49	32.62	8.80	34.64	9.99	373	360	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.51	48.15	54.00	-5.85	31.25	32.74	8.84	34.65	9.97	373	360	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2462.00	98.26	-----	-----	81.49	32.62	8.80	34.64	9.99	373	360	Average																																																																																								







Mode	33																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2026-05-15 Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.15</td><td>56.99</td><td>74.00</td><td>-17.01</td><td>40.08</td><td>32.74</td><td>8.85</td><td>34.65</td><td>9.97</td><td>383</td><td>42</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.15	56.99	74.00	-17.01	40.08	32.74	8.85	34.65	9.97	383	42	Peak	Level (dBuV/m) Date: 2026-05-15 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>103.00</td><td>-----</td><td>-----</td><td>87.03</td><td>32.62</td><td>8.80</td><td>34.64</td><td>9.99</td><td>383</td><td>42</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	103.00	-----	-----	87.03	32.62	8.80	34.64	9.99	383	42	Peak	
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2484.15	56.99	74.00	-17.01	40.08	32.74	8.85	34.65	9.97	383	42	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2462.00	103.00	-----	-----	87.03	32.62	8.80	34.64	9.99	383	42	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2026-05-15 Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>45.23</td><td>54.00</td><td>-8.77</td><td>28.33</td><td>32.74</td><td>8.84</td><td>34.65</td><td>9.97</td><td>383</td><td>42</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	45.23	54.00	-8.77	28.33	32.74	8.84	34.65	9.97	383	42	Average	Level (dBuV/m) Date: 2026-05-15 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>96.86</td><td>-----</td><td>-----</td><td>80.06</td><td>32.64</td><td>8.81</td><td>34.64</td><td>9.99</td><td>383</td><td>42</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	96.86	-----	-----	80.06	32.64	8.81	34.64	9.99	383	42	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.51	45.23	54.00	-8.77	28.33	32.74	8.84	34.65	9.97	383	42	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2462.00	96.86	-----	-----	80.06	32.64	8.81	34.64	9.99	383	42	Average																																																																																								







Mode	33																																																																																																																									
	Harmonic																																																																																																																									
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																																									
ANT	1																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																								
Peak Avg	Level (dBuV/m) Date: 2026-05-20 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 4924.00</td><td>50.93</td><td>74.00</td><td>-23.07</td><td>61.06</td><td>34.45</td><td>12.46</td><td>57.93</td><td>0.89</td><td>100 130 Peak</td></tr><tr><td>2 4924.00</td><td>41.31</td><td>54.00</td><td>-12.69</td><td>51.44</td><td>34.45</td><td>12.46</td><td>57.93</td><td>0.89</td><td>100 130 Average</td></tr><tr><td>3 7386.00</td><td>44.26</td><td>74.00</td><td>-29.74</td><td>50.34</td><td>36.00</td><td>14.98</td><td>57.98</td><td>0.92</td><td>-- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 4924.00	50.93	74.00	-23.07	61.06	34.45	12.46	57.93	0.89	100 130 Peak	2 4924.00	41.31	54.00	-12.69	51.44	34.45	12.46	57.93	0.89	100 130 Average	3 7386.00	44.26	74.00	-29.74	50.34	36.00	14.98	57.98	0.92	-- -- Peak	Level (dBuV/m) Date: 2026-05-20 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 4924.00</td><td>52.78</td><td>74.00</td><td>-21.22</td><td>62.91</td><td>34.45</td><td>12.46</td><td>57.93</td><td>0.89</td><td>100 95 Peak</td></tr><tr><td>2 4924.00</td><td>42.90</td><td>54.00</td><td>-11.10</td><td>53.03</td><td>34.45</td><td>12.46</td><td>57.93</td><td>0.89</td><td>100 95 Average</td></tr><tr><td>3 7386.00</td><td>43.82</td><td>74.00</td><td>-30.18</td><td>49.90</td><td>36.00</td><td>14.98</td><td>57.98</td><td>0.92</td><td>-- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 4924.00	52.78	74.00	-21.22	62.91	34.45	12.46	57.93	0.89	100 95 Peak	2 4924.00	42.90	54.00	-11.10	53.03	34.45	12.46	57.93	0.89	100 95 Average	3 7386.00	43.82	74.00	-30.18	49.90	36.00	14.98	57.98	0.92	-- -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1 4924.00	50.93	74.00	-23.07	61.06	34.45	12.46	57.93	0.89	100 130 Peak																																																																																																																	
2 4924.00	41.31	54.00	-12.69	51.44	34.45	12.46	57.93	0.89	100 130 Average																																																																																																																	
3 7386.00	44.26	74.00	-29.74	50.34	36.00	14.98	57.98	0.92	-- -- Peak																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1 4924.00	52.78	74.00	-21.22	62.91	34.45	12.46	57.93	0.89	100 95 Peak																																																																																																																	
2 4924.00	42.90	54.00	-11.10	53.03	34.45	12.46	57.93	0.89	100 95 Average																																																																																																																	
3 7386.00	43.82	74.00	-30.18	49.90	36.00	14.98	57.98	0.92	-- -- Peak																																																																																																																	

Remark: In the figure, points 2 are the noise floor

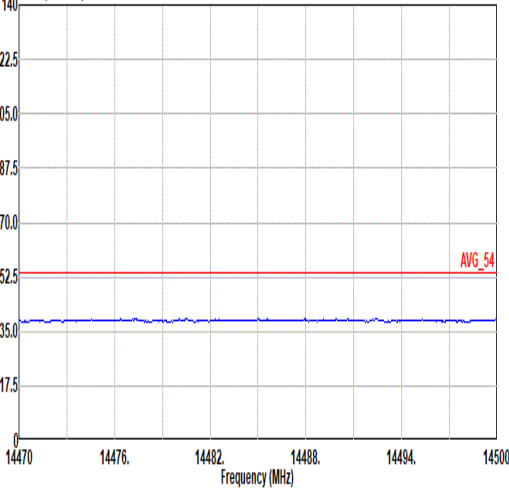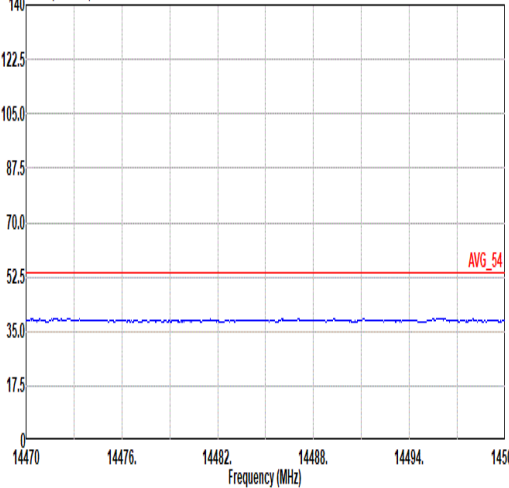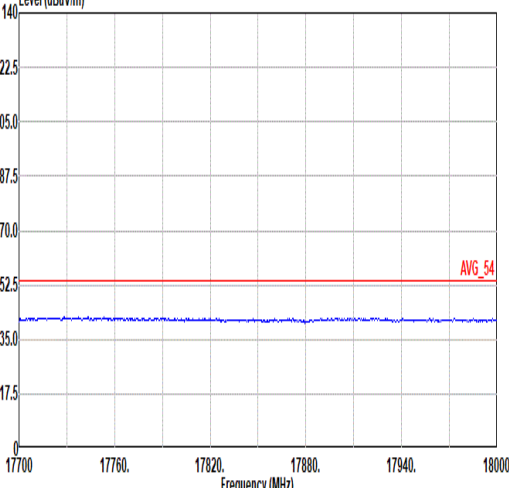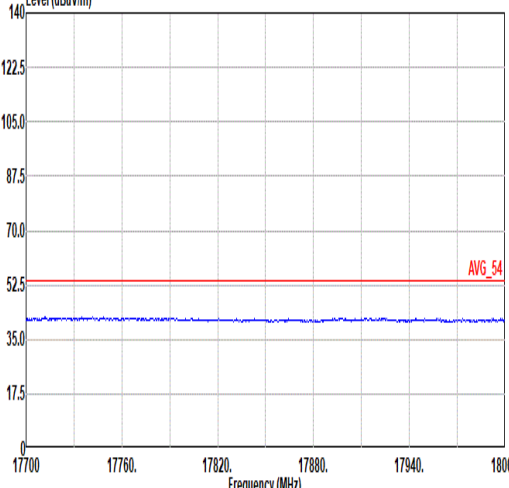

Mode	33	
	Harmonic	
	2400-2483.5_802.11g_CH11_2462MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-05-20  Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	Level (dBuV/m) Date: 2026-05-20  Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
	Level (dBuV/m) Date: 2026-05-20  Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	Level (dBuV/m) Date: 2026-05-20  Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL

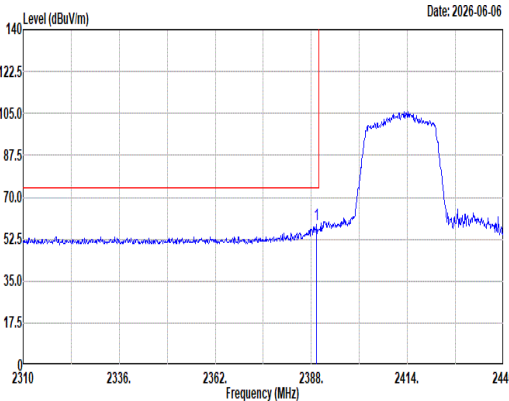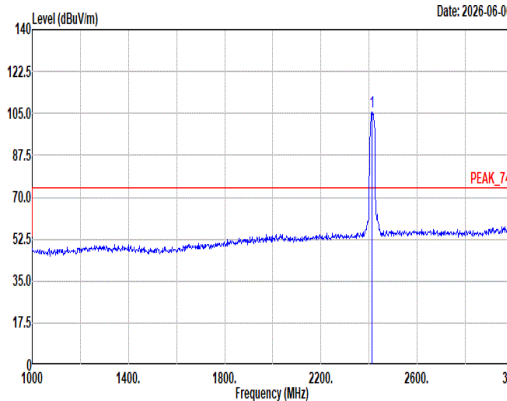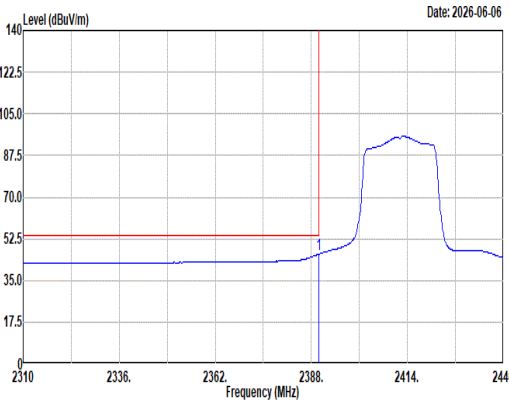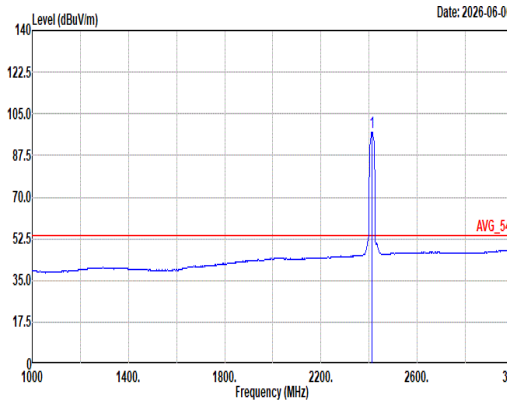

Mode	34																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_802.11ax HE20_CH1_Full RU_2412MHz																																																																																																	
ANT	1																																																																																																	
Pol.	Horizontal						Fundamental																																																																																											
Peak	 Level (dBuV/m) Date: 2026-06-06 Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.43</td><td>58.83</td><td>74.00</td><td>-15.17</td><td>42.61</td><td>32.10</td><td>8.67</td><td>34.59</td><td>10.04</td><td>346</td><td>0 Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.43	58.83	74.00	-15.17	42.61	32.10	8.67	34.59	10.04	346	0 Peak	 Level (dBuV/m) Date: 2026-06-06 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>105.80</td><td>-----</td><td>-----</td><td>89.44</td><td>32.22</td><td>8.71</td><td>34.60</td><td>10.03</td><td>346</td><td>0 Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	105.80	-----	-----	89.44	32.22	8.71	34.60	10.03	346	0 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2389.43	58.83	74.00	-15.17	42.61	32.10	8.67	34.59	10.04	346	0 Peak																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2412.00	105.80	-----	-----	89.44	32.22	8.71	34.60	10.03	346	0 Peak																																																																																							
Avg	 Level (dBuV/m) Date: 2026-06-06 Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>46.00</td><td>54.00</td><td>-8.00</td><td>29.78</td><td>32.10</td><td>8.67</td><td>34.59</td><td>10.04</td><td>346</td><td>0 Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	46.00	54.00	-8.00	29.78	32.10	8.67	34.59	10.04	346	0 Average	 Level (dBuV/m) Date: 2026-06-06 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>97.45</td><td>-----</td><td>-----</td><td>81.06</td><td>32.24</td><td>8.72</td><td>34.60</td><td>10.03</td><td>346</td><td>0 Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	97.45	-----	-----	81.06	32.24	8.72	34.60	10.03	346	0 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2389.95	46.00	54.00	-8.00	29.78	32.10	8.67	34.59	10.04	346	0 Average																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2412.00	97.45	-----	-----	81.06	32.24	8.72	34.60	10.03	346	0 Average																																																																																							



Mode	34																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_802.11ax HE20_CH1_Full RU_2412MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2026-06-06 Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2387.09</td><td>60.12</td><td>74.00</td><td>-13.88</td><td>43.91</td><td>32.10</td><td>8.67</td><td>34.59</td><td>10.03</td><td>397</td><td>270</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2387.09	60.12	74.00	-13.88	43.91	32.10	8.67	34.59	10.03	397	270	Peak	Level (dBuV/m) Date: 2026-06-06 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>103.10</td><td>-----</td><td>-----</td><td>86.71</td><td>32.24</td><td>8.72</td><td>34.60</td><td>10.03</td><td>397</td><td>270</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	103.10	-----	-----	86.71	32.24	8.72	34.60	10.03	397	270	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2387.09	60.12	74.00	-13.88	43.91	32.10	8.67	34.59	10.03	397	270	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2412.00	103.10	-----	-----	86.71	32.24	8.72	34.60	10.03	397	270	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2026-06-06 Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>45.64</td><td>54.00</td><td>-8.36</td><td>29.42</td><td>32.10</td><td>8.67</td><td>34.59</td><td>10.04</td><td>397</td><td>270</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	45.64	54.00	-8.36	29.42	32.10	8.67	34.59	10.04	397	270	Average	Level (dBuV/m) Date: 2026-06-06 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>95.10</td><td>-----</td><td>-----</td><td>78.71</td><td>32.24</td><td>8.72</td><td>34.60</td><td>10.03</td><td>397</td><td>270</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	95.10	-----	-----	78.71	32.24	8.72	34.60	10.03	397	270	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.95	45.64	54.00	-8.36	29.42	32.10	8.67	34.59	10.04	397	270	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2412.00	95.10	-----	-----	78.71	32.24	8.72	34.60	10.03	397	270	Average																																																																																								



Mode	34																																																																																																																									
	Harmonic																																																																																																																									
	2400-2483.5_802.11ax HE20_CH1_Full RU_2412MHz																																																																																																																									
ANT	1																																																																																																																									
Pol.	Horizontal						Vertical																																																																																																																			
Peak Avg	Level (dBuV/m) Date: 2026-06-06 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>43.96</td><td>74.00</td><td>-30.04</td><td>54.29</td><td>34.50</td><td>12.34</td><td>58.07</td><td>0.90</td><td>100</td><td>119 Peak</td></tr><tr><td>2</td><td>4824.00</td><td>38.05</td><td>54.00</td><td>-15.95</td><td>48.38</td><td>34.50</td><td>12.34</td><td>58.07</td><td>0.90</td><td>100</td><td>119 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	43.96	74.00	-30.04	54.29	34.50	12.34	58.07	0.90	100	119 Peak	2	4824.00	38.05	54.00	-15.95	48.38	34.50	12.34	58.07	0.90	100	119 Average	Level (dBuV/m) Date: 2026-06-06 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>42.96</td><td>74.00</td><td>-31.04</td><td>53.29</td><td>34.50</td><td>12.34</td><td>58.07</td><td>0.90</td><td>400</td><td>102 Peak</td></tr><tr><td>2</td><td>4824.00</td><td>35.87</td><td>54.00</td><td>-18.13</td><td>46.20</td><td>34.50</td><td>12.34</td><td>58.07</td><td>0.90</td><td>400</td><td>102 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	42.96	74.00	-31.04	53.29	34.50	12.34	58.07	0.90	400	102 Peak	2	4824.00	35.87	54.00	-18.13	46.20	34.50	12.34	58.07	0.90	400	102 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
	Freq	Level	Line Margin	Level Factor	Loss	Factor	Factor																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	4824.00	43.96	74.00	-30.04	54.29	34.50	12.34	58.07	0.90	100	119 Peak																																																																																																															
2	4824.00	38.05	54.00	-15.95	48.38	34.50	12.34	58.07	0.90	100	119 Average																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line Margin	Level Factor	Loss	Factor	Factor																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	4824.00	42.96	74.00	-31.04	53.29	34.50	12.34	58.07	0.90	400	102 Peak																																																																																																															
2	4824.00	35.87	54.00	-18.13	46.20	34.50	12.34	58.07	0.90	400	102 Average																																																																																																															