

APPENDIX 1: Photographs of EUT and SAR test setup

Appendix 1-1: Photograph of Platform: Digital camera (DS126631) and antenna position



SAR test

A: EUT (ES202)
*It was mounted in the inside of a platform.

B: Platform
(Digital camera)

D

C

A: EUT (ES202)

E (Host)

Antenna terminal port conducted power measurement

The movable position of LCD			
Close-Normal	Close-Reverse	Open 90 degrees-Normal	Open 180 degrees-Normal
			
		Open 90 degrees-Reverse	Open 180 degrees-Reverse
			

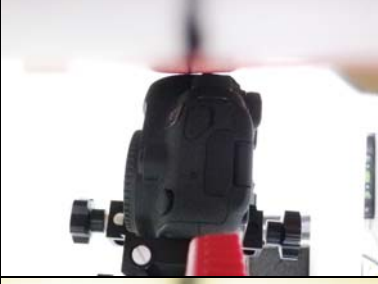
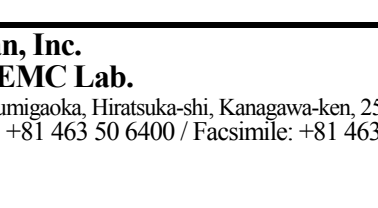
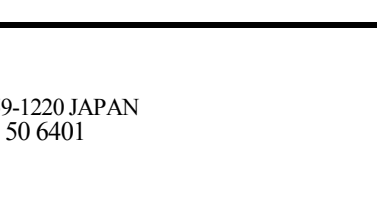
No.	Item	Model number	Serial number	Manufacturer	Remark
A	Communication module	ES202	3	Canon	EUT.
B	Digital Camera	DS126631	406	Canon	Platform (1).
C	Battery Pack (DC 7.2 V, 1800 mAh, 13 Wh (Li-ion))	LP-E6	#58	Canon	Accessory of DS126631, Battery No. #1.
D	Battery Charger	LC-E6	01	Canon	Support equipment.

*. DC1.8V and DC3.3V of ES202 was supplied via DC power supply. The host digital camera was operated with battery (LP-E6, item C).

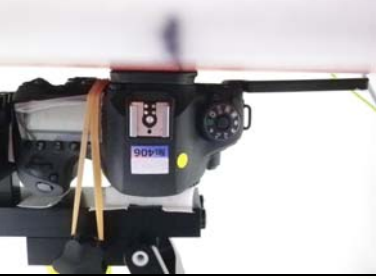
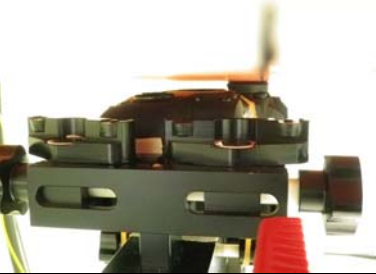
E	Digital Camera (Host)	-	530	Canon	Support equipment. (*.Ribbon cable=100mm)
---	-----------------------	---	-----	-------	---

Platform No.	Platform type	Model	SAR accessory	Battery option
(ES202's) Platform (1)	Digital camera	DS126631	none	Model: LP-E6, DC 7.2 V, 1800 mAh, 13 Wh (Li-ion)

Appendix 1-3: Photograph of test setup

Position	Setup photographs		
Top-left (Touch) LCD: Close- normal			
			
			
Top-left -front (Touch) LCD: Close- normal			
			
			
Top-front (Touch) LCD: Close- normal			

Appendix 1-3: Photograph of test setup (cont'd)

Position	Setup photographs		
Front-top (Touch) LCD: Open180- reverse			
			(no photograph)
Rear (Touch) LCD: Open180- normal			
			(no photograph)