


FCC RADIO TEST REPORT

FCC ID : B32E280BTWFDB
Equipment : Point of Sales Terminal
Brand Name : Verifone
Model name : e280 DB
Applicant : Verifone, Inc.
88 West Plumeria Drive, San Jose,
CA 95134, United States
Manufacturer : Verifone, Inc.
Standard : FCC Part 15 Subpart E §15.407

The product was received on Oct. 26, 2019 and testing was started from Nov. 12, 2019 and completed on Dec. 02, 2019. We, SPORTON INTERNATIONAL INC., EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 Test Result	11
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	11
3.2 Maximum Conducted Output Power Measurement	14
3.3 Power Spectral Density Measurement	15
3.4 Unwanted Emissions Measurement.....	17
3.5 AC Conducted Emission Measurement.....	22
3.6 Automatically Discontinue Transmission	24
3.7 Antenna Requirements.....	25
4 List of Measuring Equipment.....	26
5 Uncertainty of Evaluation	28
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission	
Appendix D. Radiated Spurious Emission Plots	
Appendix E. Duty Cycle Plots	
Appendix F. Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FR832801-05F	01	Initial issue of report	Dec. 16, 2019

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.403 (i)	6dB & 26dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.407 (a)	Maximum Conducted Output Power	Pass	-
3.3	15.407 (a)	Power Spectral Density	Pass	-
3.4	15.407(b)	Unwanted Emissions	Pass	Under limit 8.22 dB at 207.510 MHz
3.5	15.207	AC Conducted Emission	Pass	Under limit 11.59 dB at 13.636 MHz
3.6	15.407 (c)	Automatically Discontinue Transmission	Pass	-
3.7	15.203 & 15.407 (a)	Antenna Requirement	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Tina Chuang



1 General Description

1.1 Product Feature of Equipment Under Test

Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n/ac, and RFID.

Product Specification subjective to this standard	
Antenna Type	WLAN: Stamping Antenna Bluetooth: Stamping Antenna RFID: Loop Antenna

Specification of Accessory		
AC Adapter	Brand Name	Verifone
	Manufacturer	Phihong
	Model Name	PSAA05E-050QL6V
	Power Rating	Input:100-240Vac, 50-60Hz 0.2A Output: 5V/1A
	Power Cord	N/A
Battery	Brand Name	Verifone
	Model Name	BPK087-700
USB Cable	Brand Name	Verifone
	Model Name	N/A

1.2 Modification of EUT

No modifications are made to the EUT during all test items.



1.3 Testing Location

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory	
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH05-HY	CO05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	03CH12HY	

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW0007

1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 [#]	5775	165	5825

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "[#]" were 802.11ac VHT80.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT40 (Covered by HT40)	MCS0
802.11ac VHT80	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : Bluetooth Link + WLAN (5GHz) Link + RFID On + MSR + Smart Card + LED + Buzzer/Speaker + Display + USB Cable (Charging from Adapter)

Ch. #		Band IV : 5725-5850 MHz			
		802.11a	802.11n HT20	802.11n HT40	802.11ac VHT80
L	Low	149	149	151	-
M	Middle	157	157	-	155
H	High	165	165	159	-

2.3 Connection Diagram of Test System



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded,1.8m
2.	MSR Card	N/A	N/A	N/A	N/A	N/A
3.	Smart Card	N/A	N/A	N/A	N/A	N/A
4.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m



2.5 EUT Operation Test Setup

The RF test items, utility “Tera Term V4.83” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.

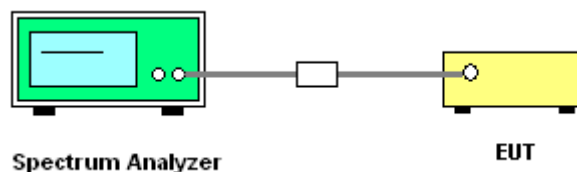
3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures

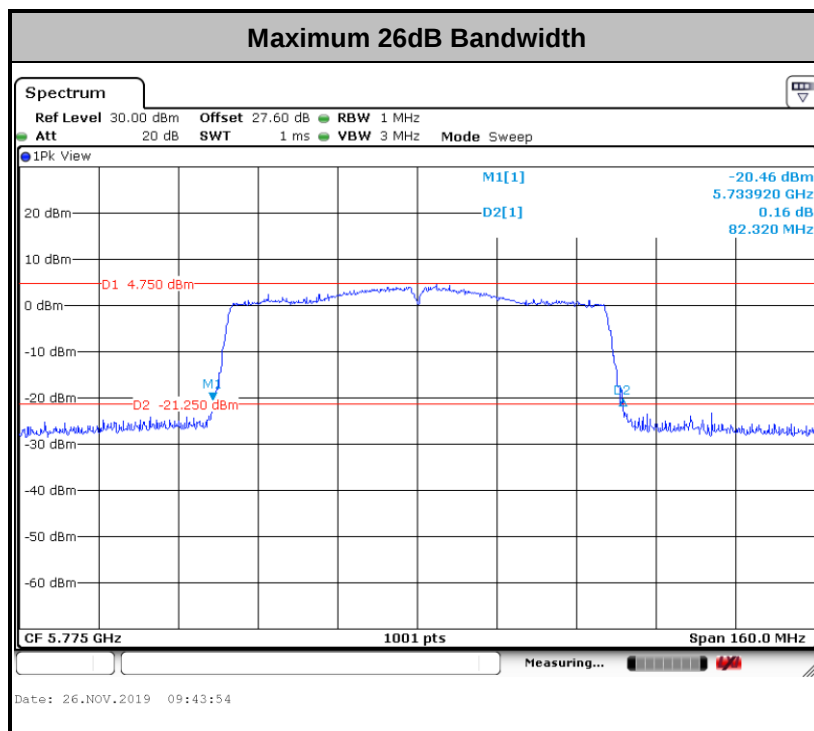
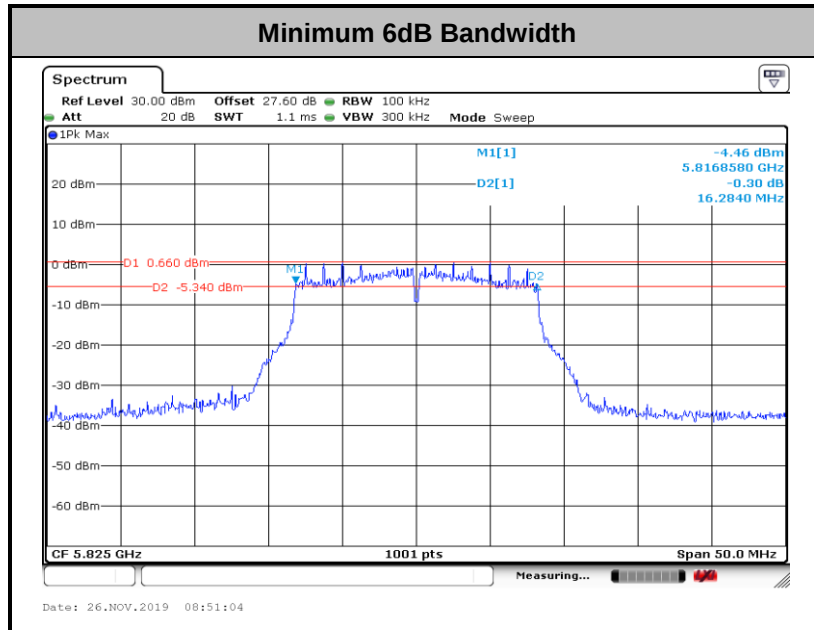
1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.

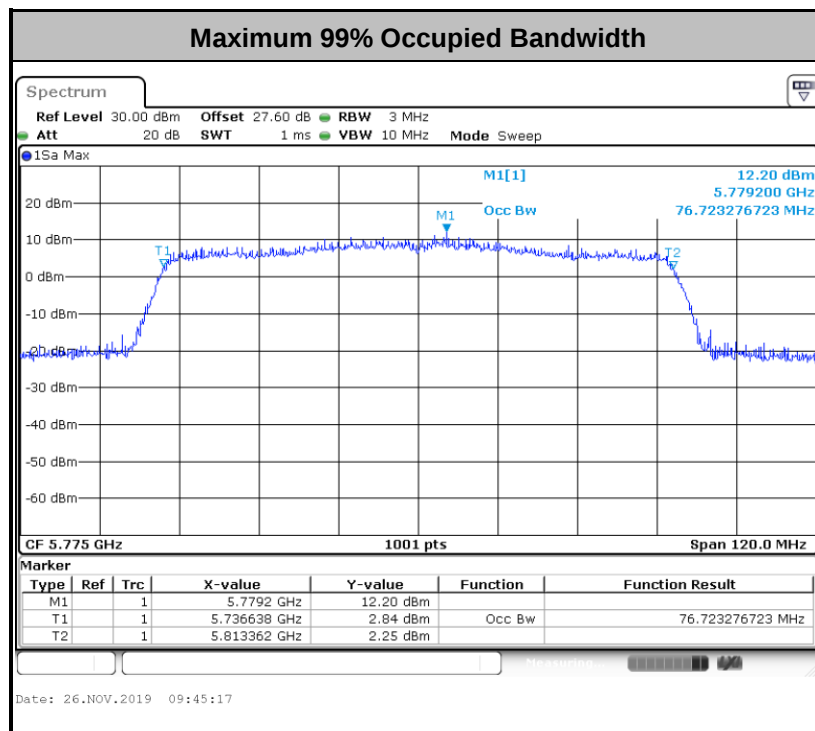
3.1.4 Test Setup



3.1.5 Test Result of 6dB and 26dB and 99% Occupied Bandwidth

Please refer to Appendix A.





Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

See list of measuring equipment of this test report.

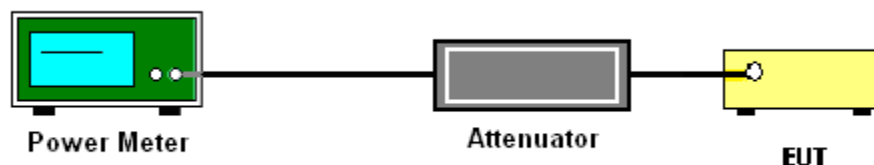
3.2.3 Test Procedures

The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

3.2.4 Test Setup



3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

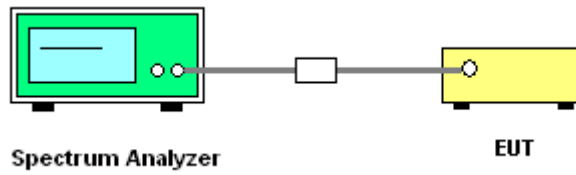
The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section F) Maximum power spectral density.

Method SA-3

(power averaging (rms) detection with max hold):

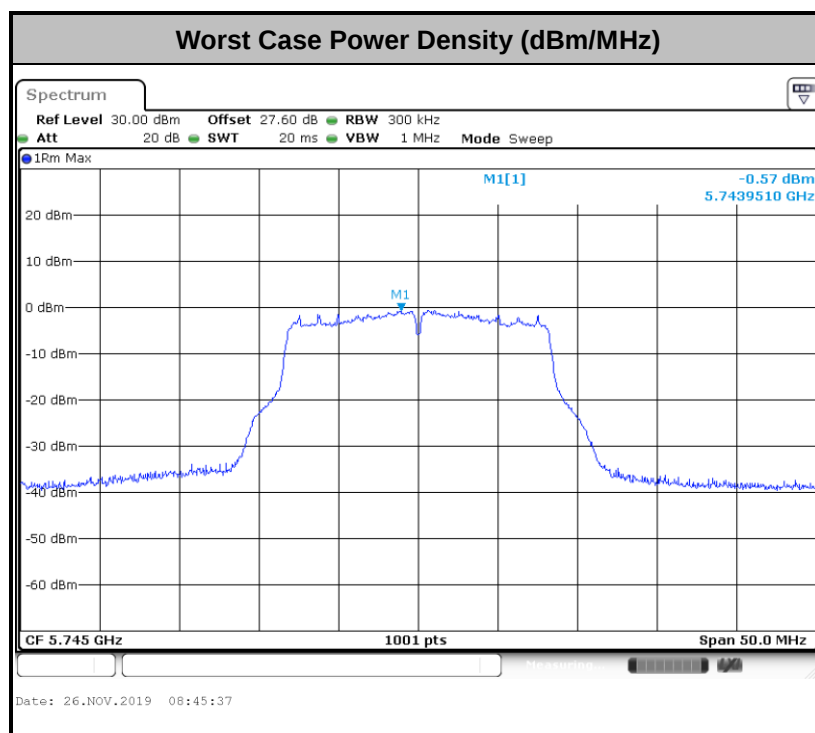
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 300 kHz.
 - Set VBW $\geq$ 1 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time $\leq$ (number of points in sweep) $\times$ T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
 - Detector = power averaging (rms).
 - Trace mode = max hold.
 - Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.



3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \quad \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dB μ V/m)
- 27	68.3

(3) KDB789033 D02 v02r01 G)2)c)

- (i) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.
- (ii) Section 15.407(b)(4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are based on the use of a peak detector.

3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW $\geq$ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz

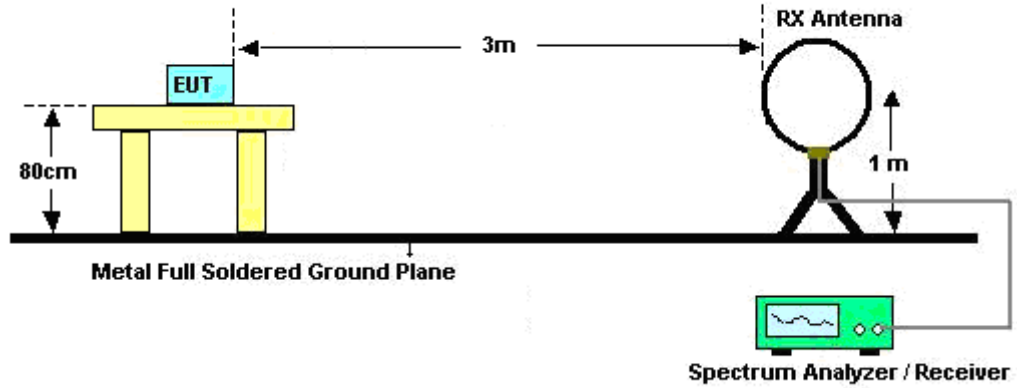
- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.



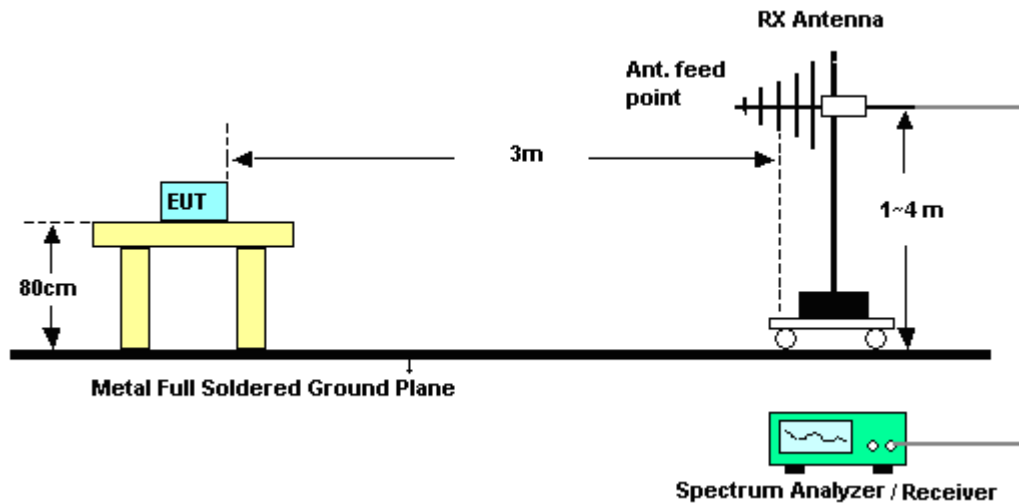
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup

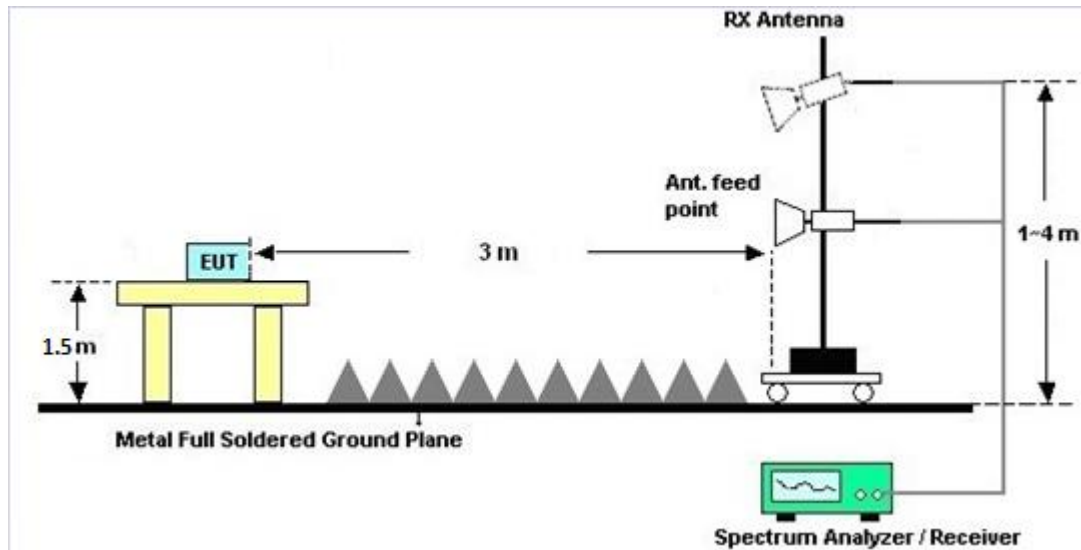
For radiated emissions below 30MHz



For radiated emissions from 30MHz to 1GHz



For radiated emissions above 1GHz



3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix C and D.

3.4.7 Duty Cycle

Please refer to Appendix E.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

For terminal test result, the testing follows FCC KDB 174176.

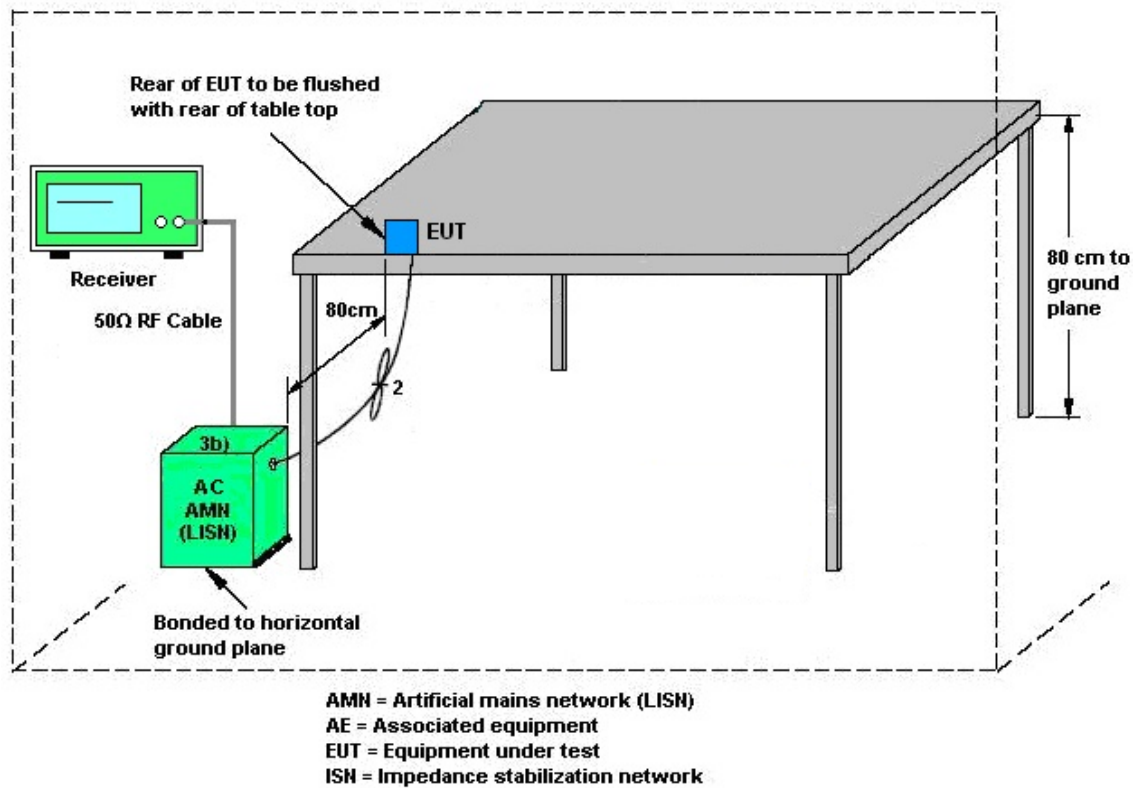
3.5.2 Measuring Instruments

See list of measuring equipment of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup



3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Automatically Discontinue Transmission

3.6.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.6.2 Measuring Instruments

See list of measuring equipment of this test report.

3.6.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	Testo	608-H2	41410069	N/A	Jun. 17, 2019	Nov. 14, 2019~ Dec. 02, 2019	Jun. 16, 2020	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	16I00054SNO 10	10MHz~6GHz	Dec. 19, 2018	Nov. 14, 2019~ Dec. 02, 2019	Dec. 18, 2019	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Jul. 15, 2019	Nov. 14, 2019~ Dec. 02, 2019	Jul. 14, 2020	Conducted (TH05-HY)
Switch Box & RF Cable	Burgeon	ETF-058	EC1208382	N/A	Mar. 27, 2019	Nov. 14, 2019~ Dec. 02, 2019	Mar. 26, 2020	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Nov. 28, 2019	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Nov. 15, 2019	Nov. 28, 2019	Nov. 14, 2020	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Mar. 19, 2019	Nov. 28, 2019	Mar. 18, 2020	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 20, 2019	Nov. 28, 2019	Nov. 19, 2020	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Nov. 28, 2019	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Dec. 31, 2018	Nov. 28, 2019	Dec. 30, 2019	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Dec. 31, 2018	Nov. 28, 2019	Dec. 30, 2019	Conduction (CO05-HY)
Bilog Antenna	TESEQ	CBL 6111D&0080 0N1D01N-06	37059&01	30MHz~1GHz	Oct. 12, 2019	Nov. 12, 2019~ Nov. 29, 2019	Oct. 11, 2020	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1328	1GHz ~ 18GHz	Nov. 14, 2019	Nov. 15, 2019~ Nov. 29, 2019	Nov. 13, 2020	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-02037	1GHz ~ 18GHz	Oct. 28, 2019	Nov. 12, 2019~ Nov. 15, 2019	Oct. 27, 2020	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170584	18GHz ~ 40GHz	Dec. 05, 2018	Nov. 12, 2019~ Nov. 29, 2019	Dec. 04, 2019	Radiation (03CH12-HY)
Preamplifier	COM-POWER	PA-103	161075	10MHz~1GHz	Mar. 25, 2019	Nov. 12, 2019~ Nov. 29, 2019	Mar. 24, 2020	Radiation (03CH12-HY)
Preamplifier	Agilent	8449B	3008A02375	1GHz~26.5GHz	May 27, 2019	Nov. 12, 2019~ Nov. 29, 2019	May 26, 2020	Radiation (03CH12-HY)
Preamplifier	Jet-Power	JPA0118-55- 303K	171000180005 4002	1GHz~18GHz	Aug. 06, 2019	Nov. 12, 2019~ Nov. 29, 2019	Aug. 05, 2020	Radiation (03CH12-HY)
Preamplifier	Jet-Power	JPA0010180 0-30-10P	16011180002	1GHz~18GHz	Aug. 01, 2019	Nov. 12, 2019~ Nov. 29, 2019	Jul. 31, 2020	Radiation (03CH12-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz ~ 40GHz	Dec. 06, 2018	Nov. 12, 2019~ Nov. 29, 2019	Dec. 05, 2019	Radiation (03CH12-HY)
Spectrum Analyzer	Keysight	N9010A	MY55370526	10Hz~44GHz	Mar. 19, 2019	Nov. 12, 2019~ Nov. 29, 2019	Mar. 18, 2020	Radiation (03CH12-HY)
Hygrometer	TECPEL	DTM-303B	TP161243	N/A	Jun. 17, 2019	Nov. 12, 2019~ Nov. 29, 2019	Jun. 16, 2020	Radiation (03CH12-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Filter	Wainwright	WLKS1200-12SS	SN1	1.2 GHz Lowpass	Mar. 22, 2019	Nov. 12, 2019~Nov. 29, 2019	Mar. 21, 2020	Radiation (03CH12-HY)
Filter	Wainwright	WHKX8-587 2.5-6750-18 000-40SS	SN2	6.75GHz High Pass	Mar. 19, 2019	Nov. 12, 2019~Nov. 29, 2019	Mar. 18, 2020	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30M~40GHz	Feb. 26, 2019	Nov. 12, 2019~Nov. 29, 2019	Feb. 25, 2020	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	800740/2	30M~40GHz	Feb. 26, 2019	Nov. 12, 2019~Nov. 29, 2019	Feb. 25, 2020	Radiation (03CH12-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Nov. 12, 2019~Nov. 29, 2019	N/A	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500 -B	N/A	1m~4m	N/A	Nov. 12, 2019~Nov. 29, 2019	N/A	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Nov. 12, 2019~Nov. 29, 2019	N/A	Radiation (03CH12-HY)
Software	Audix	E3 6.2009-8-24	RK-000989	N/A	N/A	Nov. 12, 2019~Nov. 29, 2019	N/A	Radiation (03CH12-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.2
---	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1
---	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.7
---	-----

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Derek Hsu	Temperature:	21~25	°C
Test Date:	2019/11/14~2019/12/02	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

Band IV single antenna												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	149	5745	17.08	-	22.78	-	16.28	-	0.5	Pass
11a	6Mbps	1	157	5785	17.08	-	22.83	-	16.28	-	0.5	Pass
11a	6Mbps	1	165	5825	16.98	-	22.93	-	16.28	-	0.5	Pass
HT20	MCS0	1	149	5745	18.03	-	22.93	-	17.53	-	0.5	Pass
HT20	MCS0	1	157	5785	18.18	-	22.83	-	17.08	-	0.5	Pass
HT20	MCS0	1	165	5825	18.03	-	22.88	-	17.48	-	0.5	Pass
HT40	MCS0	1	151	5755	36.76	-	40.82	-	35.69	-	0.5	Pass
HT40	MCS0	1	159	5795	36.76	-	40.91	-	35.69	-	0.5	Pass
VHT80	MCS0	1	155	5775	76.72	-	82.32	-	75.12	-	0.5	Pass

TEST RESULTS DATA
Average Power Table

Band IV single antenna												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	149	5745	13.00			30.00	-	2.15	-	Pass
11a	6Mbps	1	157	5785	12.80			30.00	-	2.15	-	Pass
11a	6Mbps	1	165	5825	12.40			30.00	-	2.15	-	Pass
HT20	MCS0	1	149	5745	12.90			30.00	-	2.15	-	Pass
HT20	MCS0	1	157	5785	12.40			30.00	-	2.15	-	Pass
HT20	MCS0	1	165	5825	12.00			30.00	-	2.15	-	Pass
HT40	MCS0	1	151	5755	12.50			30.00	-	2.15	-	Pass
HT40	MCS0	1	159	5795	12.30			30.00	-	2.15	-	Pass
VHT40	MCS0	1	151	5755	12.40			30.00	-	2.15	-	Pass
VHT40	MCS0	1	159	5795	12.10			30.00	-	2.15	-	Pass
VHT80	MCS0	1	155	5775	12.10			30.00	-	2.15	-	Pass

TEST RESULTS DATA
Power Spectral Density

Band IV single antenna														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	149	5745	2.22	-	1.65	-		30.00	-	2.15	-	Pass
11a	6Mbps	1	157	5785	2.22	-	1.43	-		30.00	-	2.15	-	Pass
11a	6Mbps	1	165	5825	2.22	-	1.28	-		30.00	-	2.15	-	Pass
HT20	MCS0	1	149	5745	2.22	-	1.50	-		30.00	-	2.15	-	Pass
HT20	MCS0	1	157	5785	2.22	-	1.39	-		30.00	-	2.15	-	Pass
HT20	MCS0	1	165	5825	2.22	-	1.33	-		30.00	-	2.15	-	Pass
HT40	MCS0	1	151	5755	2.22	-	-0.73	-		30.00	-	2.15	-	Pass
HT40	MCS0	1	159	5795	2.22	-	-1.65	-		30.00	-	2.15	-	Pass
VHT80	MCS0	1	155	5775	2.22	-	-4.23	-		30.00	-	2.15	-	Pass



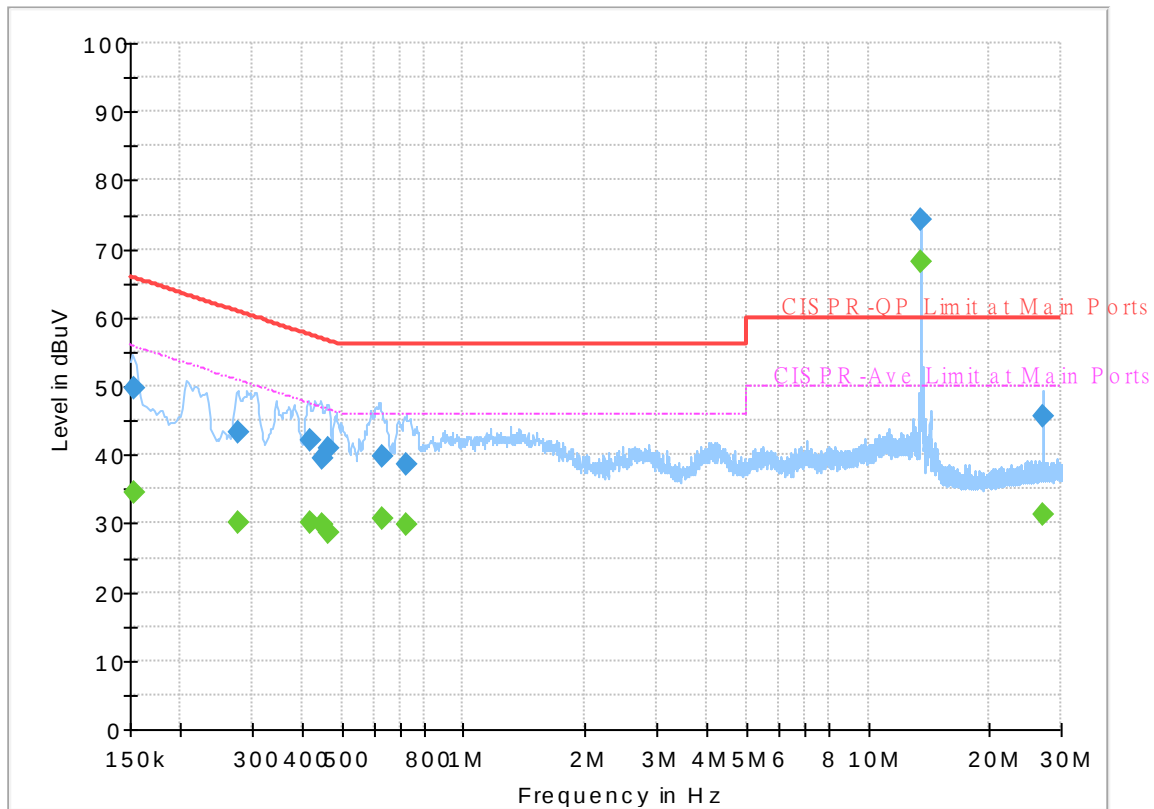
Appendix B. AC Conducted Emission Test Results

Test Engineer :	Jimmy Chang	Temperature :	24.9~26.1℃
		Relative Humidity :	48~55%

Original

Report NO : 832801-05
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

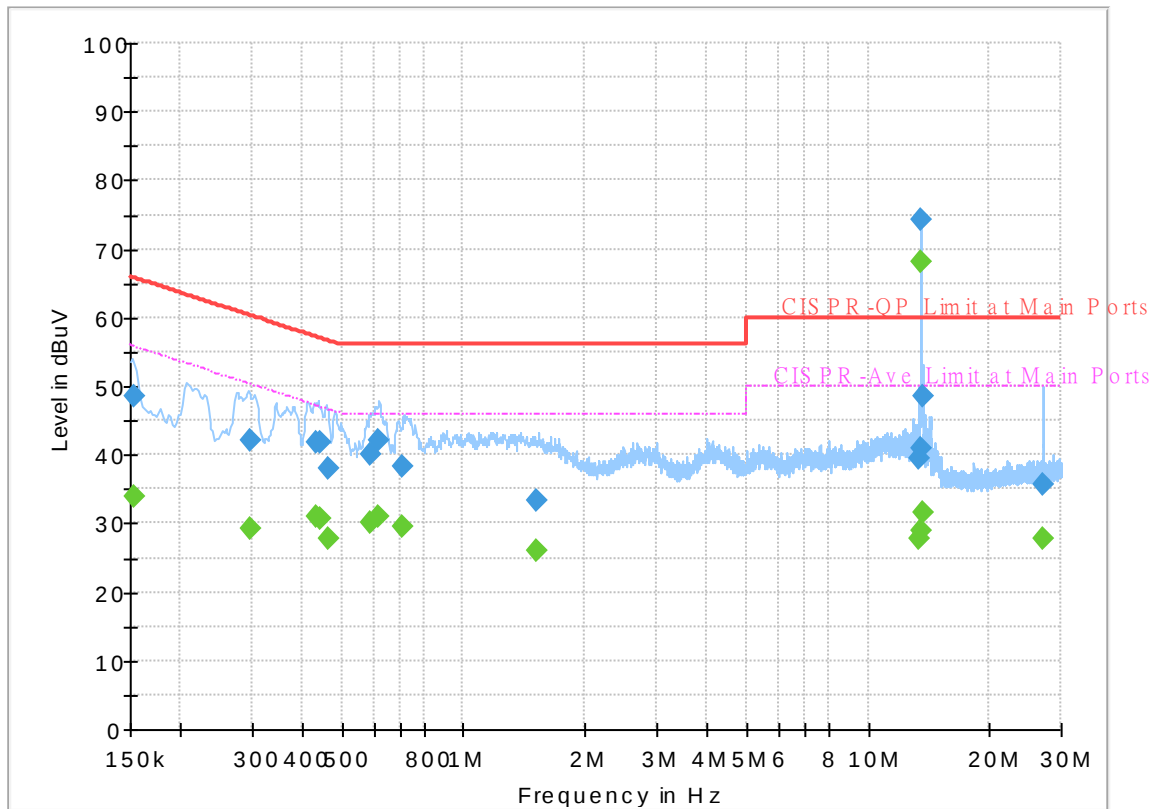


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.153038	---	34.50	55.83	21.33	L1	OFF	19.5
0.153038	49.60	---	65.83	16.23	L1	OFF	19.5
0.278250	---	30.10	50.87	20.77	L1	OFF	19.5
0.278250	43.17	---	60.87	17.70	L1	OFF	19.5
0.417480	---	30.00	47.50	17.50	L1	OFF	19.5
0.417480	42.11	---	57.50	15.39	L1	OFF	19.5
0.449250	---	29.97	46.89	16.92	L1	OFF	19.5
0.449250	39.57	---	56.89	17.32	L1	OFF	19.5
0.463380	---	28.70	46.63	17.93	L1	OFF	19.5
0.463380	41.03	---	56.63	15.60	L1	OFF	19.5
0.627000	---	30.73	46.00	15.27	L1	OFF	19.5
0.627000	39.73	---	56.00	16.27	L1	OFF	19.5
0.724470	---	29.72	46.00	16.28	L1	OFF	19.5
0.724470	38.50	---	56.00	17.50	L1	OFF	19.5
13.560000	---	68.03	50.00	-18.03	L1	OFF	20.0
13.560000	74.31	---	60.00	-14.31	L1	OFF	20.0
27.120750	---	31.41	50.00	18.59	L1	OFF	20.3
27.120750	45.71	---	60.00	14.29	L1	OFF	20.3

Report NO : 832801-05
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Neutral

Full Spectrum



Final_Result

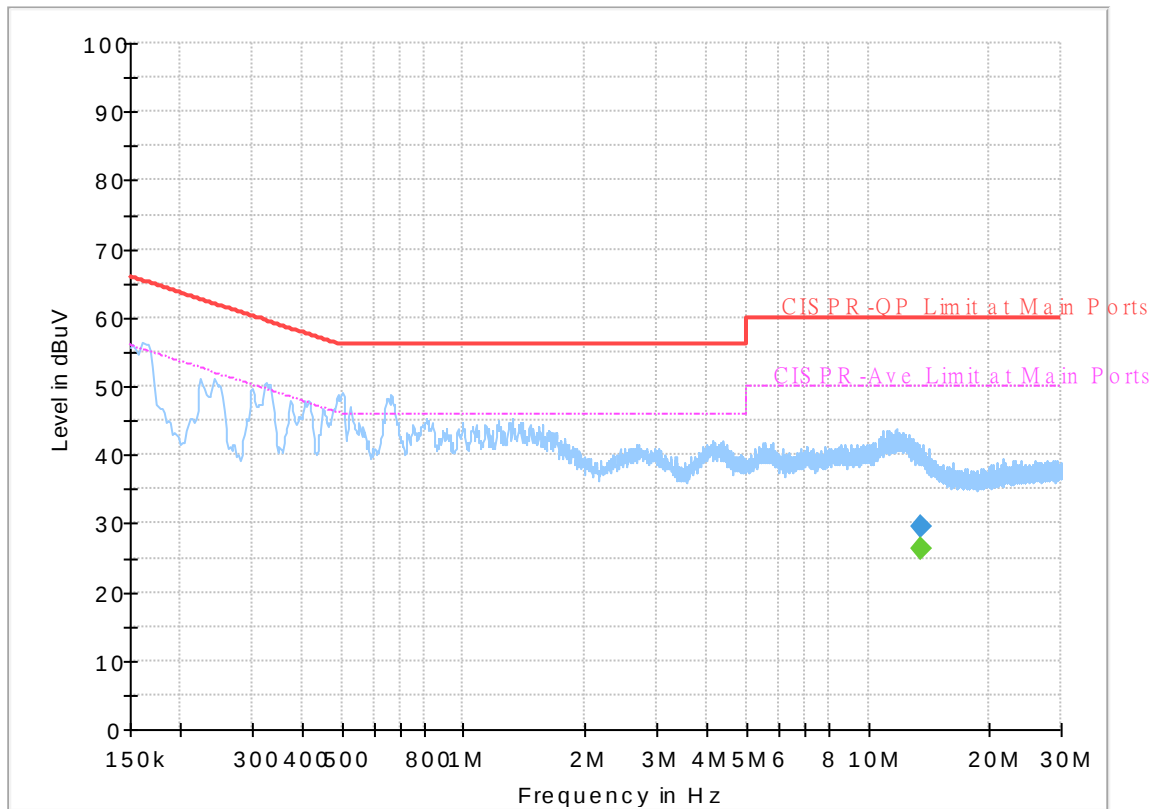
Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.153870	---	33.92	55.79	21.87	N	OFF	19.5
0.153870	48.61	---	65.79	17.18	N	OFF	19.5
0.298500	---	29.25	50.28	21.03	N	OFF	19.5
0.298500	42.00	---	60.28	18.28	N	OFF	19.5
0.430800	---	30.91	47.24	16.33	N	OFF	19.5
0.430800	41.72	---	57.24	15.52	N	OFF	19.5
0.442140	---	30.57	47.02	16.45	N	OFF	19.5
0.442140	41.80	---	57.02	15.22	N	OFF	19.5
0.465000	---	27.77	46.60	18.83	N	OFF	19.5
0.465000	37.99	---	56.60	18.61	N	OFF	19.5
0.589650	---	30.05	46.00	15.95	N	OFF	19.6
0.589650	40.07	---	56.00	15.93	N	OFF	19.6
0.613500	---	31.13	46.00	14.87	N	OFF	19.6
0.613500	42.02	---	56.00	13.98	N	OFF	19.6
0.708000	---	29.45	46.00	16.55	N	OFF	19.6
0.708000	38.25	---	56.00	17.75	N	OFF	19.6
1.522500	---	25.96	46.00	20.04	N	OFF	19.6
1.522500	33.38	---	56.00	22.62	N	OFF	19.6
13.426980	---	27.88	50.00	22.12	N	OFF	20.1
13.426980	39.45	---	60.00	20.55	N	OFF	20.1
13.479000	---	29.00	50.00	21.00	N	OFF	20.1

13.479000	40.96	---	60.00	19.04	N	OFF	20.1
13.560000	---	68.04	50.00	-18.04	N	OFF	20.1
13.560000	74.34	---	60.00	-14.34	N	OFF	20.1
13.636230	---	31.72	50.00	18.28	N	OFF	20.1
13.636230	48.41	---	60.00	11.59	N	OFF	20.1
27.114180	35.56	---	60.00	24.44	N	OFF	20.5
27.114180	---	27.77	50.00	22.23	N	OFF	20.5

Terminal

Report NO : 832801-05
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

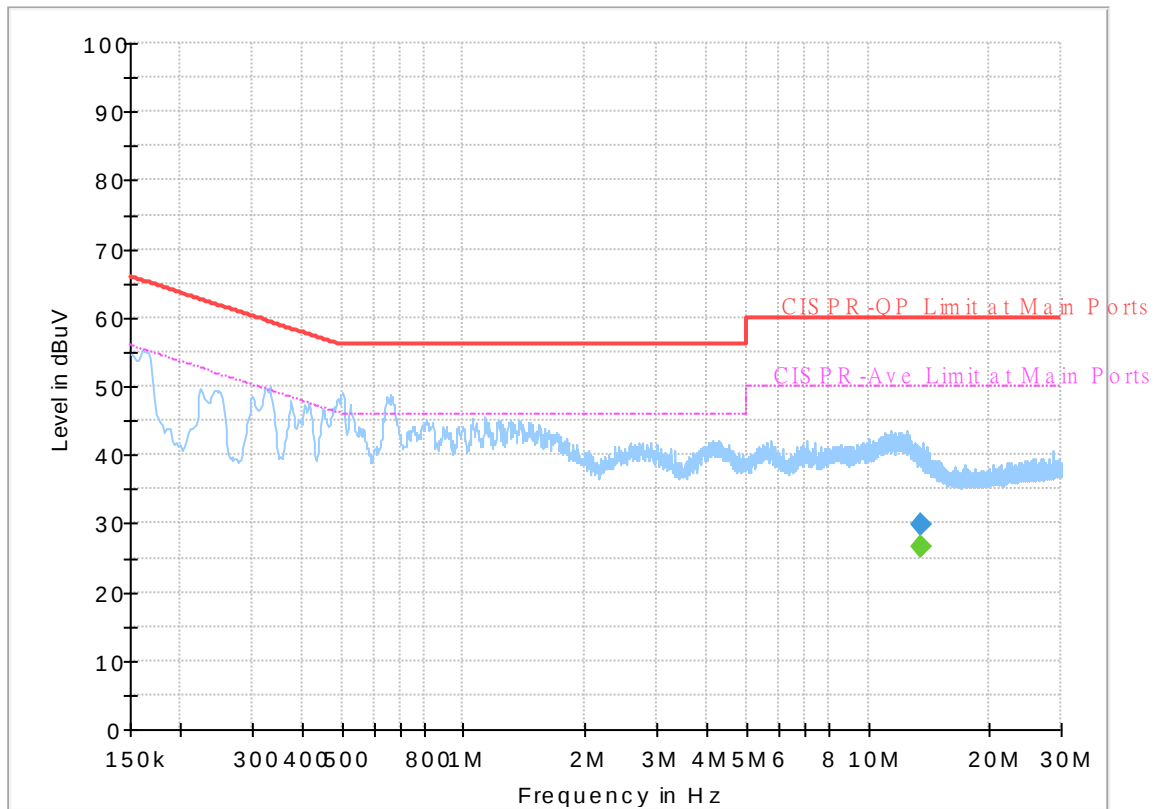


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
13.560000	---	26.39	50.00	23.61	L1	OFF	20.0
13.560000	29.59	---	60.00	30.41	L1	OFF	20.0

Report NO : 832801-05
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum



Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
13.560000	---	26.56	50.00	23.44	N	OFF	20.1
13.560000	29.77	---	60.00	30.23	N	OFF	20.1



Appendix C. Radiated Spurious Emission

Test Engineer :	Jack Cheng, Lance Chiang and Chuan Chu	Temperature :	19.2~26.8°C
		Relative Humidity :	53.5~69.0%

Band 4 - 5725~5850MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 149 5745MHz		5645.2	50.6	-17.6	68.2	41.98	31.62	10.45	33.45	400	163	P	H
		5676.8	51.35	-36.72	88.07	42.62	31.71	10.47	33.45	400	163	P	H
		5716.6	58.04	-51.81	109.85	49.14	31.87	10.49	33.46	400	163	P	H
		5724	61.28	-58.64	119.92	52.34	31.9	10.5	33.46	400	163	P	H
	*	5745	100.82	-	-	91.79	31.98	10.51	33.46	400	163	P	H
	*	5745	93.49	-	-	84.46	31.98	10.51	33.46	400	163	A	H
													H
													H
		5637.2	50.37	-17.83	68.2	41.72	31.65	10.45	33.45	111	63	P	V
		5697.2	54.21	-48.93	103.14	45.4	31.79	10.48	33.46	111	63	P	V
		5720	63.54	-47.26	110.8	54.62	31.88	10.5	33.46	111	63	P	V
		5725	68.29	-53.91	122.2	59.35	31.9	10.5	33.46	111	63	P	V
	*	5745	109.22	-	-	100.19	31.98	10.51	33.46	111	63	P	V
	*	5745	101.95	-	-	92.92	31.98	10.51	33.46	111	63	A	V
													V
													V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 157 5785MHz		5626.6	50.38	-17.82	68.2	41.7	31.69	10.44	33.45	300	174	P	H
		5668.6	50.08	-31.92	82	41.39	31.67	10.47	33.45	300	174	P	H
		5717.4	51.16	-58.91	110.07	42.26	31.87	10.49	33.46	300	174	P	H
		5719.8	51.18	-59.56	110.74	42.26	31.88	10.5	33.46	300	174	P	H
	*	5785	101.24	-	-	92.11	32.07	10.53	33.47	300	174	P	H
	*	5785	93.99	-	-	84.86	32.07	10.53	33.47	300	174	A	H
		5854.4	51.21	-60.96	112.17	41.89	32.21	10.59	33.48	300	174	P	H
		5859.6	50.45	-59.06	109.51	41.12	32.22	10.59	33.48	300	174	P	H
		5923.6	51.22	-18.01	69.23	41.67	32.39	10.65	33.49	300	174	P	H
		5942	51.73	-16.47	68.2	42.08	32.47	10.67	33.49	300	174	P	H
													H
													H
		5634	50.89	-17.31	68.2	42.23	31.66	10.45	33.45	110	20	P	V
		5694.8	51.17	-50.2	101.37	42.37	31.78	10.48	33.46	110	20	P	V
		5717	51.53	-58.43	109.96	42.63	31.87	10.49	33.46	110	20	P	V
		5722	51.11	-64.25	115.36	42.18	31.89	10.5	33.46	110	20	P	V
	*	5785	109.53	-	-	100.4	32.07	10.53	33.47	110	20	P	V
	*	5785	102	-	-	92.87	32.07	10.53	33.47	110	20	A	V
		5852.6	53.27	-63	116.27	43.95	32.21	10.59	33.48	110	20	P	V
		5864.6	51.87	-56.24	108.11	42.52	32.23	10.6	33.48	110	20	P	V
		5906.8	52.08	-29.55	81.63	42.6	32.33	10.64	33.49	110	20	P	V
		5947.8	51.09	-17.11	68.2	41.42	32.49	10.67	33.49	110	20	P	V
													V
													V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 165 5825MHz	*	5825	100.49	-	-	91.26	32.15	10.56	33.48	256	284	P	H
	*	5825	93.19	-	-	83.96	32.15	10.56	33.48	256	284	A	H
		5850.8	52.59	-67.79	120.38	43.28	32.2	10.59	33.48	256	284	P	H
		5862.2	54.56	-54.22	108.78	45.22	32.22	10.6	33.48	256	284	P	H
		5909.4	51.02	-28.69	79.71	41.53	32.34	10.64	33.49	256	284	P	H
		5947.2	51.95	-16.25	68.2	42.28	32.49	10.67	33.49	256	284	P	H
													H
													H
	*	5825	109.32	-	-	100.09	32.15	10.56	33.48	100	20	P	V
	*	5825	102.04	-	-	92.81	32.15	10.56	33.48	100	20	A	V
		5852.2	66.79	-50.39	117.18	57.48	32.2	10.59	33.48	100	20	P	V
		5856	63.39	-47.13	110.52	54.07	32.21	10.59	33.48	100	20	P	V
		5875.8	53.38	-51.23	104.61	44	32.25	10.61	33.48	100	20	P	V
		5941.6	52.11	-16.09	68.2	42.46	32.47	10.67	33.49	100	20	P	V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149 5745MHz		11490	48.31	-25.69	74	56.02	39.99	15.8	63.5	100	0	P	H
		17235	51.23	-16.97	68.2	52.13	40.81	19.96	61.67	400	0	P	H
													H
													H
		11490	49.85	-24.15	74	57.56	39.99	15.8	63.5	100	0	P	V
		17235	53.14	-15.06	68.2	54.04	40.81	19.96	61.67	100	0	P	V
													V
													V
802.11a CH 157 5785MHz		11570	48.56	-25.44	74	56.48	39.72	15.86	63.5	100	0	P	H
		17355	49.97	-18.23	68.2	49.96	41.39	20.12	61.5	100	0	P	H
													H
													H
		11570	49.23	-24.77	74	57.15	39.72	15.86	63.5	100	0	P	V
		17355	51.87	-16.33	68.2	51.86	41.39	20.12	61.5	100	0	P	V
													V
													V
802.11a CH 165 5825MHz		11650	46.53	-27.47	74	54.7	39.4	15.93	63.5	100	0	P	H
		17475	50.13	-18.07	68.2	49.18	42	20.28	61.33	100	0	P	H
													H
													H
		11650	47.93	-26.07	74	56.1	39.4	15.93	63.5	100	0	P	V
		17475	53.73	-14.47	68.2	52.78	42	20.28	61.33	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Band 4 5725~5850MHz****WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 149 5745MHz		5623.4	50.29	-17.91	68.2	41.59	31.71	10.44	33.45	398	162	P	H
		5692.2	50.81	-48.64	99.45	42.02	31.77	10.48	33.46	398	162	P	H
		5719.2	60.19	-50.39	110.58	51.27	31.88	10.5	33.46	398	162	P	H
		5725	58.15	-64.05	122.2	49.21	31.9	10.5	33.46	398	162	P	H
	*	5745	101.56	-	-	92.53	31.98	10.51	33.46	398	162	P	H
	*	5745	93.35	-	-	84.32	31.98	10.51	33.46	398	162	A	H
													H
													H
		5645.6	50.95	-17.25	68.2	42.32	31.62	10.46	33.45	108	57	P	V
		5697.2	53.23	-49.91	103.14	44.42	31.79	10.48	33.46	108	57	P	V
		5719.2	65.42	-45.16	110.58	56.5	31.88	10.5	33.46	108	57	P	V
		5721.6	64.21	-50.24	114.45	55.28	31.89	10.5	33.46	108	57	P	V
	*	5745	109.09	-	-	100.06	31.98	10.51	33.46	108	57	P	V
	*	5745	101.38	-	-	92.35	31.98	10.51	33.46	108	57	A	V
													V
													V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 157 5785MHz		5640.4	49.95	-18.25	68.2	41.31	31.64	10.45	33.45	300	20	P	H
		5653.8	51.73	-19.29	71.02	43.1	31.62	10.46	33.45	300	20	P	H
		5709.8	50.67	-57.28	107.95	41.8	31.84	10.49	33.46	300	20	P	H
		5720.4	49.57	-62.14	111.71	40.65	31.88	10.5	33.46	300	20	P	H
	*	5785	100.63	-	-	91.5	32.07	10.53	33.47	300	20	P	H
	*	5785	93.04	-	-	83.91	32.07	10.53	33.47	300	20	A	H
		5852	50.11	-67.53	117.64	40.8	32.2	10.59	33.48	300	20	P	H
		5873.6	50.49	-55.1	105.59	41.11	32.25	10.61	33.48	300	20	P	H
		5904.8	51.32	-31.79	83.11	41.86	32.32	10.63	33.49	300	20	P	H
		5934.2	50.91	-17.29	68.2	41.3	32.44	10.66	33.49	300	20	P	H
													H
													H
		5636	50.68	-17.52	68.2	42.02	31.66	10.45	33.45	100	56	P	V
		5692.6	51.4	-48.34	99.74	42.61	31.77	10.48	33.46	100	56	P	V
		5718.2	52.02	-58.28	110.3	43.11	31.87	10.5	33.46	100	56	P	V
		5721.8	52.42	-62.48	114.9	43.49	31.89	10.5	33.46	100	56	P	V
	*	5785	108.59	-	-	99.46	32.07	10.53	33.47	100	56	P	V
	*	5785	101.63	-	-	92.5	32.07	10.53	33.47	100	56	A	V
		5851	51.2	-68.72	119.92	41.89	32.2	10.59	33.48	100	56	P	V
		5873.2	52.44	-53.26	105.7	43.06	32.25	10.61	33.48	100	56	P	V
		5906.6	52.66	-29.12	81.78	43.18	32.33	10.64	33.49	100	56	P	V
		5926.8	51.57	-16.63	68.2	42	32.41	10.65	33.49	100	56	P	V
													V
													V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 165 5825MHz	*	5825	99.99	-	-	90.76	32.15	10.56	33.48	300	22	P	H
	*	5825	92.79	-	-	83.56	32.15	10.56	33.48	300	22	A	H
		5852	54.19	-63.45	117.64	44.88	32.2	10.59	33.48	300	22	P	H
		5856.8	53.32	-56.98	110.3	44	32.21	10.59	33.48	300	22	P	H
		5901.8	52.55	-32.78	85.33	43.1	32.31	10.63	33.49	300	22	P	H
		5935	51.4	-16.8	68.2	41.79	32.44	10.66	33.49	300	22	P	H
													H
													H
	*	5825	109.32	-	-	100.09	32.15	10.56	33.48	100	55	P	V
	*	5825	101.61	-	-	92.38	32.15	10.56	33.48	100	55	A	V
		5851.6	59.6	-58.95	118.55	50.29	32.2	10.59	33.48	100	55	P	V
		5857.2	57.94	-52.24	110.18	48.62	32.21	10.59	33.48	100	55	P	V
		5882.4	53.34	-46.36	99.7	43.95	32.26	10.61	33.48	100	55	P	V
		5943.8	51.68	-16.52	68.2	42.02	32.48	10.67	33.49	100	55	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 149 5745MHz		11490	47.66	-26.34	74	55.37	39.99	15.8	63.5	100	0	P	H
		17235	48.46	-19.74	68.2	49.36	40.81	19.96	61.67	100	0	P	H
													H
													H
		11490	49.5	-24.5	74	57.21	39.99	15.8	63.5	100	0	P	V
		17235	51.58	-16.62	68.2	52.48	40.81	19.96	61.67	100	0	P	V
													V
													V
802.11n HT20 CH 157 5785MHz		11570	47.39	-26.61	74	55.31	39.72	15.86	63.5	100	0	P	H
		17355	49.7	-18.5	68.2	49.69	41.39	20.12	61.5	100	0	P	H
													H
													H
		11570	49.29	-24.71	74	57.21	39.72	15.86	63.5	100	0	P	V
		17355	50.26	-17.94	68.2	50.25	41.39	20.12	61.5	100	0	P	V
													V
													V
802.11n HT20 CH 165 5825MHz		11650	47.22	-26.78	74	55.39	39.4	15.93	63.5	100	0	P	H
		17475	49.96	-18.24	68.2	49.01	42	20.28	61.33	100	0	P	H
													H
													H
		11650	47.22	-26.78	74	55.39	39.4	15.93	63.5	100	0	P	V
		17475	52.02	-16.18	68.2	51.07	42	20.28	61.33	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 151 5755MHz		5625.6	50.23	-17.97	68.2	41.54	31.7	10.44	33.45	334	169	P	H
		5698.8	53.97	-50.35	104.32	45.15	31.8	10.48	33.46	334	169	P	H
		5714	58.14	-50.98	109.12	49.25	31.86	10.49	33.46	334	169	P	H
		5721.8	61.06	-53.84	114.9	52.13	31.89	10.5	33.46	334	169	P	H
	*	5755	97.79	-	-	88.73	32.01	10.52	33.47	334	169	P	H
	*	5755	90.44	-	-	81.38	32.01	10.52	33.47	334	169	A	H
		5851	50.21	-69.71	119.92	40.9	32.2	10.59	33.48	334	169	P	H
		5866.6	52.06	-55.49	107.55	42.71	32.23	10.6	33.48	334	169	P	H
		5877.4	52.24	-51.18	103.42	42.86	32.25	10.61	33.48	334	169	P	H
		5948	51.24	-16.96	68.2	41.57	32.49	10.67	33.49	334	169	P	H
													H
													H
		5645.8	52.51	-15.69	68.2	43.88	31.62	10.46	33.45	100	62	P	V
		5698.8	59.93	-44.39	104.32	51.11	31.8	10.48	33.46	100	62	P	V
		5719.4	64.68	-45.95	110.63	55.76	31.88	10.5	33.46	100	62	P	V
		5721.4	67.48	-46.51	113.99	58.55	31.89	10.5	33.46	100	62	P	V
	*	5755	105.7	-	-	96.64	32.01	10.52	33.47	100	62	P	V
	*	5755	98.44	-	-	89.38	32.01	10.52	33.47	100	62	A	V
		5853.8	52.69	-60.85	113.54	43.37	32.21	10.59	33.48	100	62	P	V
		5861	52.22	-56.9	109.12	42.89	32.22	10.59	33.48	100	62	P	V
		5924	52.18	-16.76	68.94	42.62	32.4	10.65	33.49	100	62	P	V
		5941.8	52.16	-16.04	68.2	42.51	32.47	10.67	33.49	100	62	P	V
													V
													V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 159 5795MHz		5604.4	50.18	-18.02	68.2	41.41	31.78	10.43	33.44	300	26	P	H
		5669.2	50.88	-31.57	82.45	42.18	31.68	10.47	33.45	300	26	P	H
		5705.8	52.54	-54.29	106.83	43.69	31.82	10.49	33.46	300	26	P	H
		5721.6	50.63	-63.82	114.45	41.7	31.89	10.5	33.46	300	26	P	H
	*	5795	97.37	-	-	88.21	32.09	10.54	33.47	300	26	P	H
	*	5795	90.19	-	-	81.03	32.09	10.54	33.47	300	26	A	H
		5850.8	52.15	-68.23	120.38	42.84	32.2	10.59	33.48	300	26	P	H
		5873.2	51.14	-54.56	105.7	41.76	32.25	10.61	33.48	300	26	P	H
		5900.2	51.56	-34.95	86.51	42.12	32.3	10.63	33.49	300	26	P	H
		5932.4	50.61	-17.59	68.2	41.01	32.43	10.66	33.49	300	26	P	H
													H
													H
		5600	51.43	-16.77	68.2	42.64	31.8	10.43	33.44	100	65	P	V
		5677.8	53.41	-35.4	88.81	44.68	31.71	10.47	33.45	100	65	P	V
		5718.6	56.46	-53.95	110.41	47.55	31.87	10.5	33.46	100	65	P	V
		5722.4	55.5	-60.77	116.27	46.57	31.89	10.5	33.46	100	65	P	V
	*	5795	105.4	-	-	96.24	32.09	10.54	33.47	100	65	P	V
	*	5795	98.37	-	-	89.21	32.09	10.54	33.47	100	65	A	V
		5850.8	55.58	-64.8	120.38	46.27	32.2	10.59	33.48	100	65	P	V
		5857.6	55.51	-54.56	110.07	46.18	32.22	10.59	33.48	100	65	P	V
		5886.2	52.77	-44.11	96.88	43.36	32.27	10.62	33.48	100	65	P	V
		5931.8	51.09	-17.11	68.2	41.49	32.43	10.66	33.49	100	65	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Band 4 5725~5850MHz****WIFI 802.11n HT40 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 151 5755MHz		11510	46.86	-27.14	74	54.59	39.96	15.81	63.5	100	0	P	H
		17265	48.34	-19.86	68.2	49.07	40.9	20	61.63	100	0	P	H
													H
													H
		11510	47.87	-26.13	74	55.6	39.96	15.81	63.5	100	0	P	V
		17265	50.1	-18.1	68.2	50.83	40.9	20	61.63	100	0	P	V
													V
													V
802.11n HT40 CH 159 5795MHz		11590	47.22	-26.78	74	55.2	39.64	15.88	63.5	100	0	P	H
		17385	49.59	-18.61	68.2	49.29	41.6	20.16	61.46	100	0	P	H
													H
													H
		11590	48.02	-25.98	74	56	39.64	15.88	63.5	100	0	P	V
		17385	49.63	-18.57	68.2	49.33	41.6	20.16	61.46	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 155 5775MHz		5622	51.57	-16.63	68.2	42.87	31.71	10.44	33.45	378	173	P	H
		5678.6	56.34	-33.06	89.4	47.62	31.71	10.47	33.46	378	173	P	H
		5718.2	60.41	-49.89	110.3	51.5	31.87	10.5	33.46	378	173	P	H
		5723.4	60.47	-58.08	118.55	51.54	31.89	10.5	33.46	378	173	P	H
	*	5775	95.74	-	-	86.63	32.05	10.53	33.47	378	173	P	H
	*	5775	88.71	-	-	79.6	32.05	10.53	33.47	378	173	A	H
		5851.2	53.52	-65.94	119.46	44.21	32.2	10.59	33.48	378	173	P	H
		5860.6	52.45	-56.78	109.23	43.12	32.22	10.59	33.48	378	173	P	H
		5885.4	51.99	-45.49	97.48	42.58	32.27	10.62	33.48	378	173	P	H
		5941.4	52.16	-16.04	68.2	42.51	32.47	10.67	33.49	378	173	P	H
													H
													H
		5639.8	55.27	-12.93	68.2	46.63	31.64	10.45	33.45	100	58	P	V
		5688.6	66.29	-30.5	96.79	57.52	31.75	10.48	33.46	100	58	P	V
		5715.4	67.93	-41.58	109.51	59.04	31.86	10.49	33.46	100	58	P	V
		5721.6	69.26	-45.19	114.45	60.33	31.89	10.5	33.46	100	58	P	V
	*	5775	103.48	-	-	94.37	32.05	10.53	33.47	100	58	P	V
	*	5775	95.78	-	-	86.67	32.05	10.53	33.47	100	58	A	V
		5851	59.96	-59.96	119.92	50.65	32.2	10.59	33.48	100	58	P	V
		5855.4	57.89	-52.8	110.69	48.57	32.21	10.59	33.48	100	58	P	V
		5902.8	53.69	-30.9	84.59	44.24	32.31	10.63	33.49	100	58	P	V
		5933.8	51.98	-16.22	68.2	42.37	32.44	10.66	33.49	100	58	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Band 4 5725~5850MHz****WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 155 5775MHz		11550	47.11	-26.89	74	54.96	39.8	15.85	63.5	100	0	P	H
		17325	48.38	-19.82	68.2	48.68	41.17	20.07	61.54	100	0	P	H
													H
													H
		11550	47.52	-26.48	74	55.37	39.8	15.85	63.5	100	0	P	V
		17325	49.23	-18.97	68.2	49.53	41.17	20.07	61.54	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

WIFI 802.11ac VHT80 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac VHT80 LF		31.94	23.91	-16.09	40	29.9	23.36	0.86	30.21	-	-	P	H
		97.9	29.12	-14.38	43.5	42.43	15.65	1.47	30.43	-	-	P	H
		207.51	35.06	-8.44	43.5	48.35	15.02	2	30.31	100	0	P	H
		294.81	34.5	-11.5	46	43.22	19.03	2.4	30.15	-	-	P	H
		425.76	31.81	-14.19	46	36.03	22.74	2.97	29.93	-	-	P	H
		675.05	35.92	-10.08	46	35.32	26.37	3.78	29.55	-	-	P	H
													H
													H
													H
													H
													H
													H
		30	29.63	-10.37	40	34.66	24.31	0.84	30.18	-	-	P	V
		207.51	35.28	-8.22	43.5	48.57	15.02	2	30.31	100	0	P	V
		294.81	28.04	-17.96	46	36.76	19.03	2.4	30.15	-	-	P	V
		425.76	30.98	-15.02	46	35.2	22.74	2.97	29.93	-	-	P	V
		491.72	34.22	-11.78	46	37.04	23.73	3.25	29.8	-	-	P	V
		910.76	37.75	-8.25	46	33.18	29.15	4.53	29.11	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical

A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
 = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
 = 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
 = 55.45 (dBμV/m)
2. Over Limit(dB)
 = Level(dBμV/m) – Limit Line(dBμV/m)
 = 55.45(dBμV/m) – 74(dBμV/m)
 = -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
 = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
 = 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
 = 43.54 (dBμV/m)
2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)
 = 43.54(dBμV/m) – 54(dBμV/m)
 = -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots

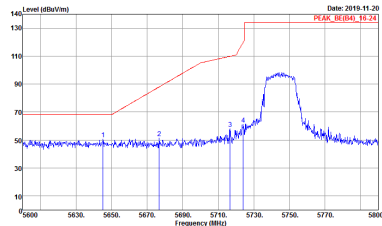
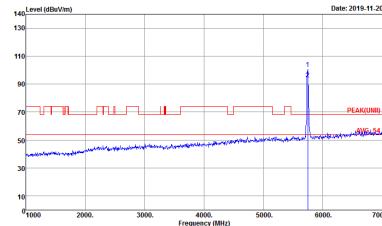
Test Engineer :	Jack Cheng, Lance Chiang and Chuan Chu	Temperature :	19.2~26.8°C
		Relative Humidity :	53.5~69.0%

Note symbol

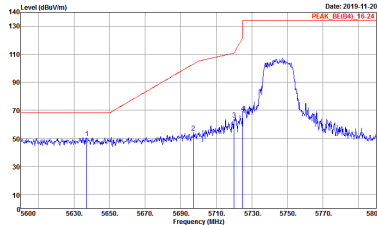
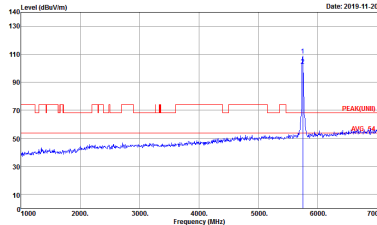
-L	Low channel location
-R	High channel location



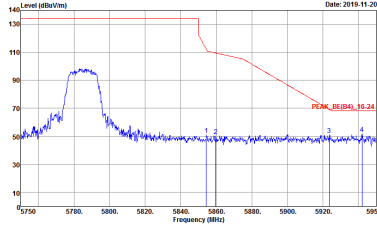
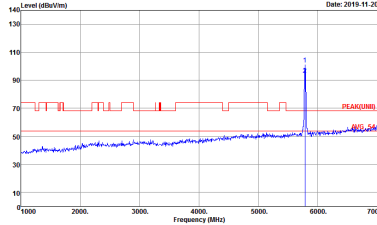
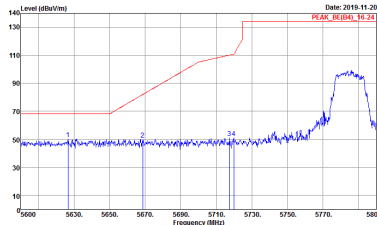
Band 4 - 5725~5850MHz
WIFI 802.11a (Band Edge @ 3m)

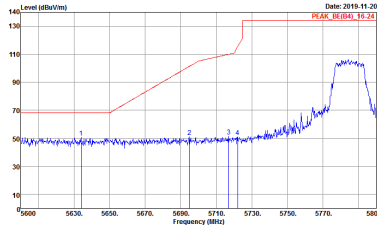
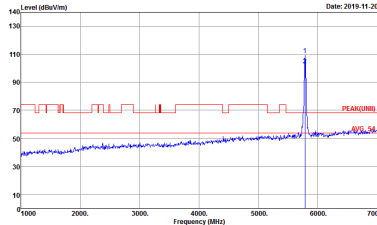
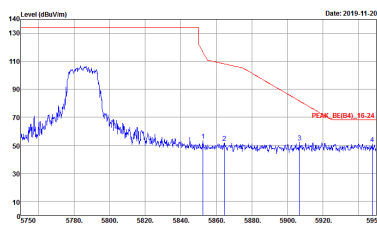
WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK (EIRP) 16-24 3m HORN_91200_1328 HORIZONTAL Detector : RBW:1000.0000Hz VBW:3000.0000Hz SWT:Auto Project : Peak Project : 832801-05	 Site : 03CH12-HY Condition : PEAK (EIRP) 16-24 3m HORN_91200_1328 HORIZONTAL Detector : RBW:1000.0000Hz VBW:3000.0000Hz SWT:Auto Project : Peak Project : 832801-05



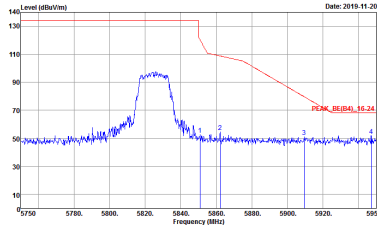
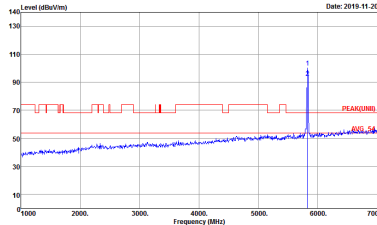
WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH12-HY Condition : (PEAK_RE(B4)) 16-24 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 832801-05	 Site : 03CH12-HY Condition : (PEAK_UNI(T)) 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 832801-05



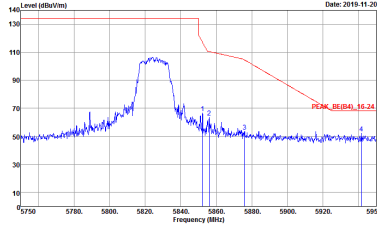
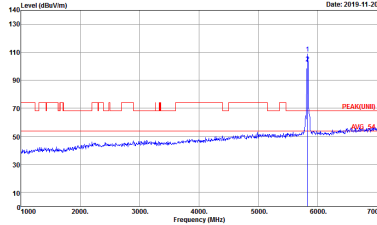
WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 832801-05	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 832801-05
Peak	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 832801-05	Left blank

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 VERTICAL Detector : RBW:3000.0000Hz VBW:3000.0000Hz SWT:Auto Project : 832801-05	 Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_9120D_1328 VERTICAL Detector : RBW:3000.0000Hz VBW:3000.0000Hz SWT:Auto Project : 832801-05
Peak	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 VERTICAL Detector : RBW:3000.0000Hz VBW:3000.0000Hz SWT:Auto Project : 832801-05	Left blank

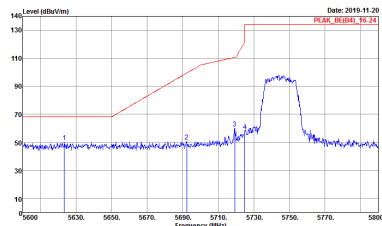
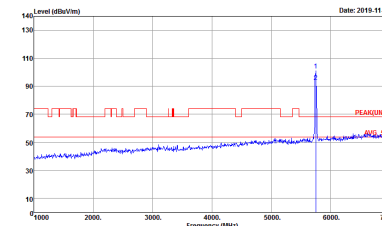


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_16(04)_16-24 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 832801-05	 Site : 03CH12-HY Condition : PEAK_16(04)_16-24 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 832801-05

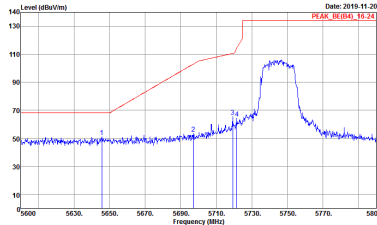
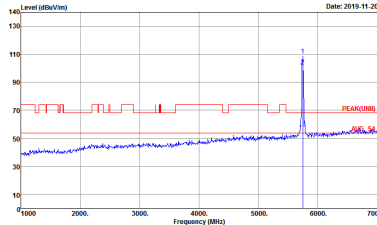


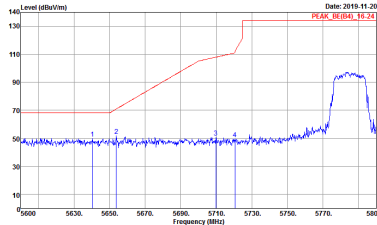
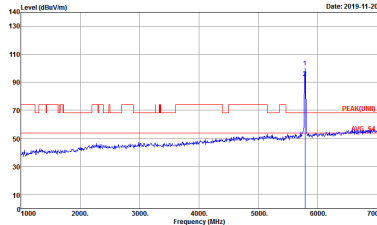
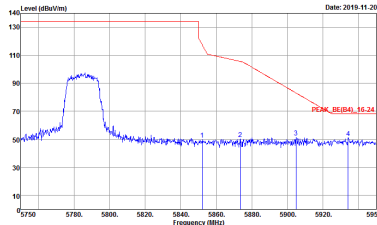
WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH12-HY Condition : (PEAK_BE(B4)_16-24 3m HORN_9120D_1328 VERTICAL RBW:3000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 832801-05	 Site : 03CH12-HY Condition : (PEAK_UND1) 3m HORN_9120D_1328 VERTICAL RBW:3000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 832801-05

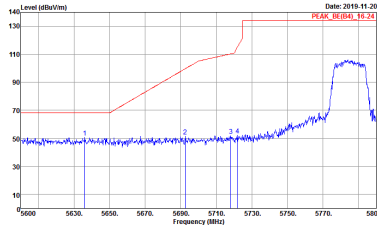
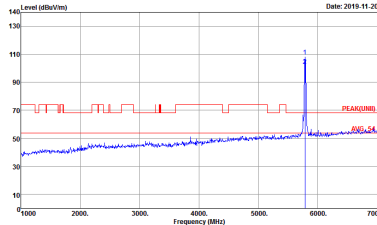
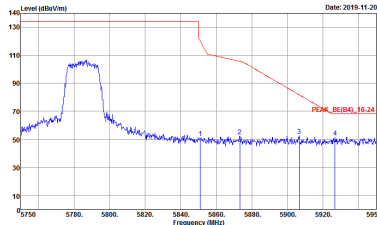
Band 4 5725~5850MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE(04)_16-24 3m HORN_9120D_1328 HORIZONTAL RBW:3000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 832801-05	 Site : 03CH12-HY Condition : PEAK(UN1) 3m HORN_9120D_1328 HORIZONTAL RBW:3000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 832801-05



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_RE(00)_16-24 3m HORN_9120D_1328 VERTICAL Detector : RBW:3000.0000Hz VBW:3000.0000Hz SWT:Auto Project : Peak Project : 832801-05	 Site : 03CH12-HY Condition : PEAK_RE(00)_16-24 3m HORN_9120D_1328 VERTICAL Detector : RBW:3000.0000Hz VBW:3000.0000Hz SWT:Auto Project : Peak Project : 832801-05

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL Detector : RBW:3000.000kHz VBW:3000.000kHz SWT:Auto Project : 832801-05	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL Detector : RBW:3000.000kHz VBW:3000.000kHz SWT:Auto Project : 832801-05
Peak	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL Detector : RBW:3000.000kHz VBW:3000.000kHz SWT:Auto Project : 832801-05	Left blank

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 VERTICAL Detector : RBW:3000.000kHz VBW:3000.000kHz SWT:Auto Project : 832801-05	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 VERTICAL Detector : RBW:3000.000kHz VBW:3000.000kHz SWT:Auto Project : 832801-05
	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 VERTICAL Detector : RBW:3000.000kHz VBW:3000.000kHz SWT:Auto Project : 832801-05	Left blank

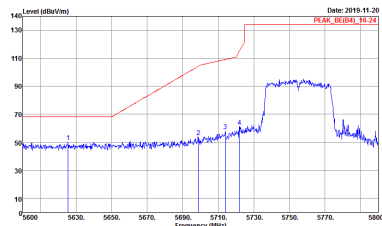
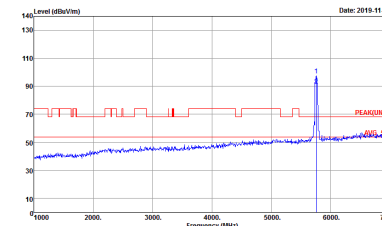
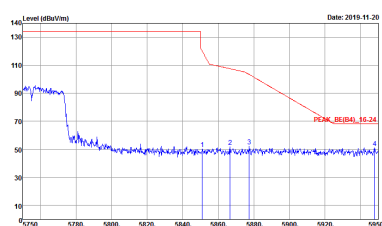


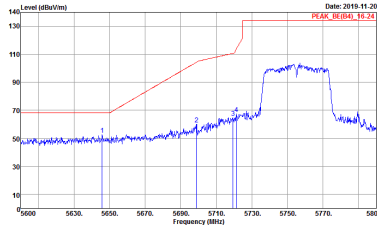
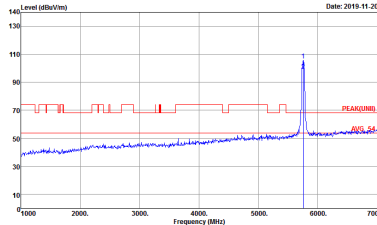
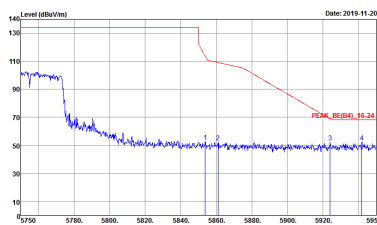
WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1	Horizontal	Fundamental
Peak	Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL Detector : RBW:3000.000kHz VBW:3000.000kHz SW1:Auto Detector : Peak Project : 832801-05	Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL Detector : RBW:3000.000kHz VBW:3000.000kHz SW1:Auto Detector : Peak Project : 832801-05
	Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL Detector : RBW:3000.000kHz VBW:3000.000kHz SW1:Auto Detector : Peak Project : 832801-05	Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL Detector : RBW:3000.000kHz VBW:3000.000kHz SW1:Auto Detector : Peak Project : 832801-05

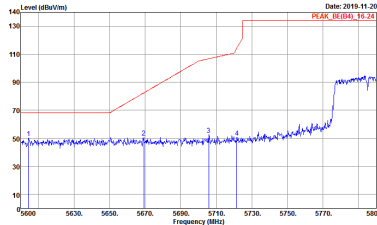
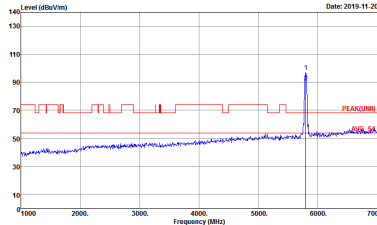
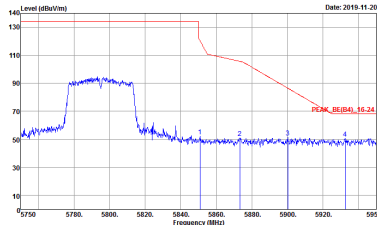


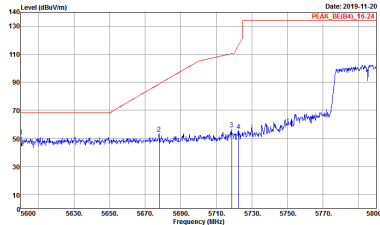
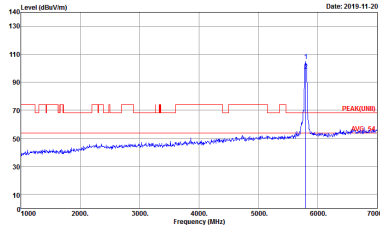
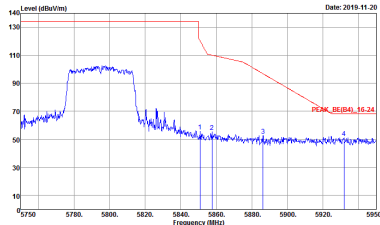
WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1	Vertical	Fundamental
Peak	Site : 03CH12-HY Condition : (PEAK_BE(B4)_16-24 3m HORN_9120D_1328 VERTICAL RBW:3000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 832801-05	Site : 03CH12-HY Condition : (PEAK_UND1) 3m HORN_9120D_1328 VERTICAL RBW:3000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 832801-05

Band 4 5725~5850MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 832801-05	 Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 832801-05
Peak	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 832801-05	Left blank

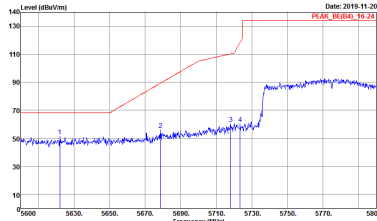
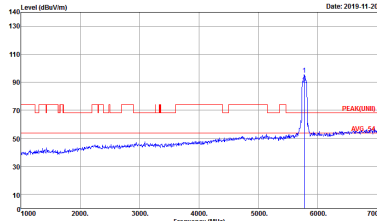
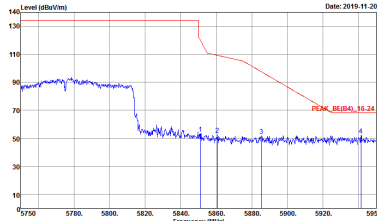
WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 VERTICAL Detector : RBW:3000.0000Hz VBW:3000.0000Hz SWT:Auto Project : Peak Project : 832801-05	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 VERTICAL Detector : RBW:3000.0000Hz VBW:3000.0000Hz SWT:Auto Project : Peak Project : 832801-05
Peak	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 VERTICAL Detector : RBW:3000.0000Hz VBW:3000.0000Hz SWT:Auto Project : Peak Project : 832801-05	Left blank

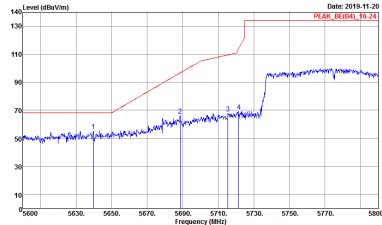
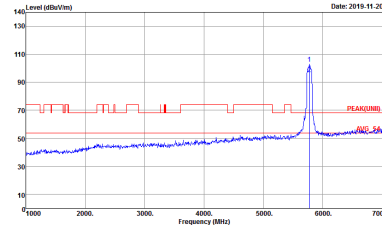
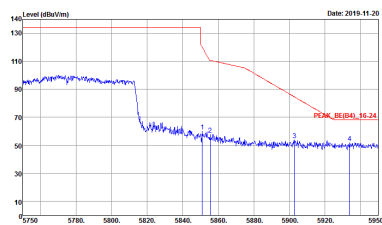
WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL Detector : RBW:3000.000kHz VBW:3000.000kHz SWT:Auto Project : 832801-05	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL Detector : RBW:3000.000kHz VBW:3000.000kHz SWT:Auto Project : 832801-05
Peak	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL Detector : RBW:3000.000kHz VBW:3000.000kHz SWT:Auto Project : 832801-05	Left blank

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 VERTICAL Detector : RBW:3000.000kHz VBW:3000.000kHz SWT:Auto Project : 832801-05	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 VERTICAL Detector : RBW:3000.000kHz VBW:3000.000kHz SWT:Auto Project : 832801-05
Peak	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 VERTICAL Detector : RBW:3000.000kHz VBW:3000.000kHz SWT:Auto Project : 832801-05	Left blank



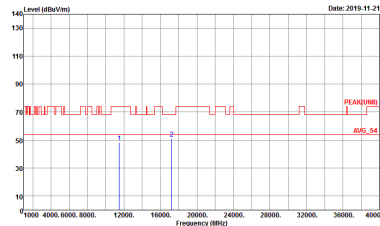
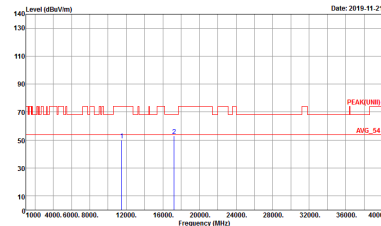
Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 832801-05	 Site : 03CH12-HY Condition : PEAK(UB) 3m HORN_9120D_1328 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 832801-05
Peak	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 832801-05	Left blank

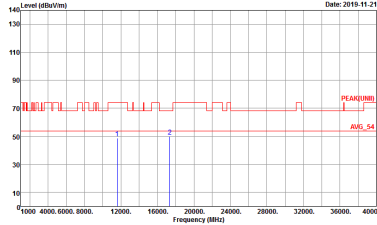
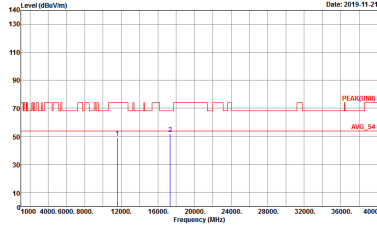
WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 VERTICAL Detector : RBW:3000.000kHz VBW:3000.000kHz SWT:Auto Project : 832801-05	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 VERTICAL Detector : RBW:3000.000kHz VBW:3000.000kHz SWT:Auto Project : 832801-05
Peak	 Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 VERTICAL Detector : RBW:3000.000kHz VBW:3000.000kHz SWT:Auto Project : 832801-05	Left blank



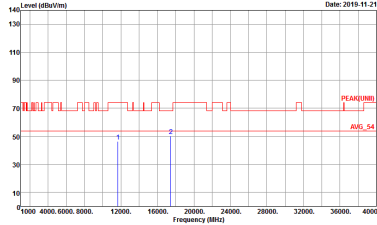
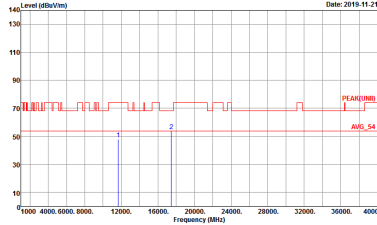
Band 4 - 5725~5850MHz
WIFI 802.11a (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH149 5745MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 832801-05	 Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 832801-05



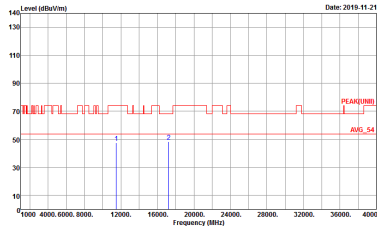
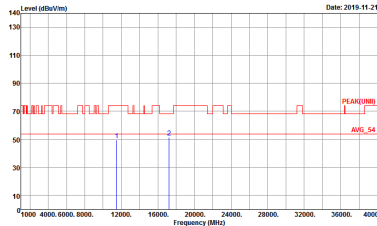
WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH157 5785MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH12-1HY Condition : (PEAK(UNIT)) 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 832801-05	 Site : 03CH12-1HY Condition : (PEAK(UNIT)) 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 832801-05



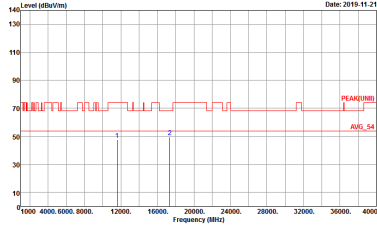
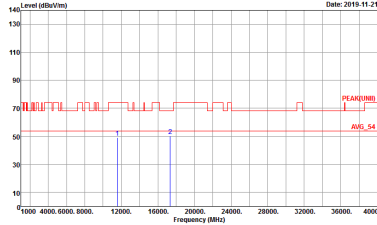
WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH165 5825MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH12-1HY Condition : (PEAK(UNIT)) 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 832801-05	 Site : 03CH12-1HY Condition : (PEAK(UNIT)) 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 832801-05



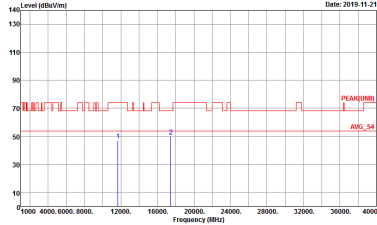
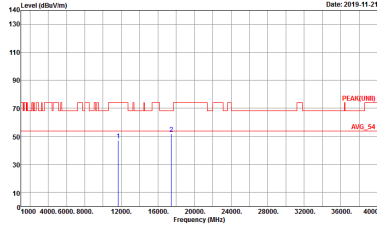
Band 4 5725~5850MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 832801-05	 Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 832801-05



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH12-1HY Condition : (PEAK(UNIT)) 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 832801-05	 Site : 03CH12-1HY Condition : (PEAK(UNIT)) 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 832801-05



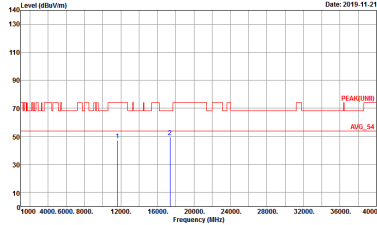
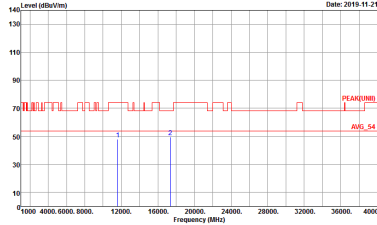
WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH12-1HY Condition : (PEAK(UNIT)) 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 832801-05	 Site : 03CH12-1HY Condition : (PEAK(UNIT)) 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 832801-05



Band 4 5725~5850MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

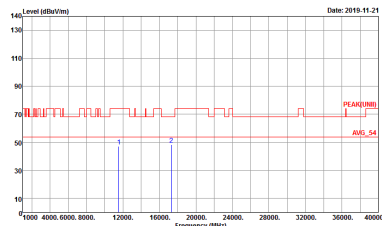
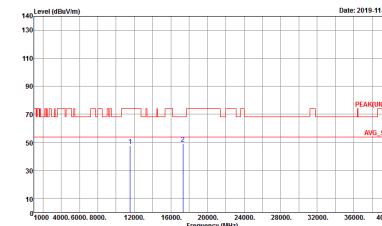
WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1	Horizontal	Vertical
Peak Avg.	Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 832801-05	Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 832801-05



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH12-1HY Condition : (PEAK(UNIT)) 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 832801-05	 Site : 03CH12-1HY Condition : (PEAK(UNIT)) 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 832801-05

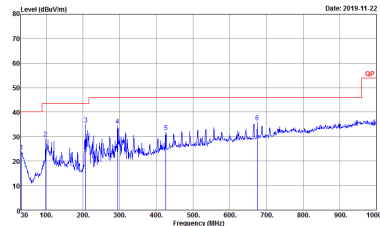
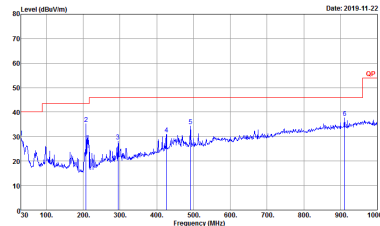


Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 832801-05	 Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 832801-05



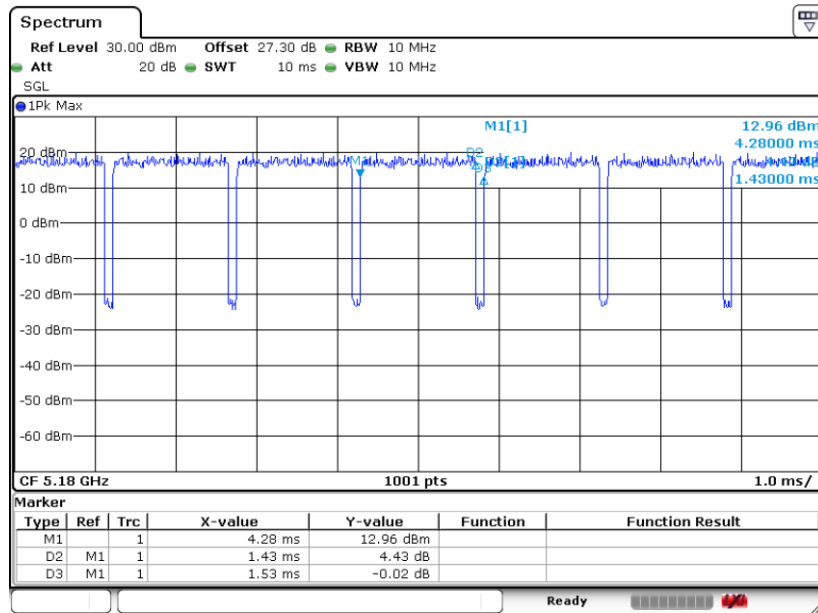
Emission below 1GHz
5GHz WIFI 802.11ac VHT80 (LF)

WIFI	5GHz 5725~5850MHz	
ANT	802.11ac VHT80 LF	
1	Horizontal	Vertical
QP / Peak	 Site : 03CH12-HY Condition : QP 3m BTL06_6111D_37059 HORIZONTAL Detector : Peak Project : 832801-05	 Site : 03CH12-HY Condition : QP 3m BTL06_6111D_37059 VERTICAL Detector : Peak Project : 832801-05

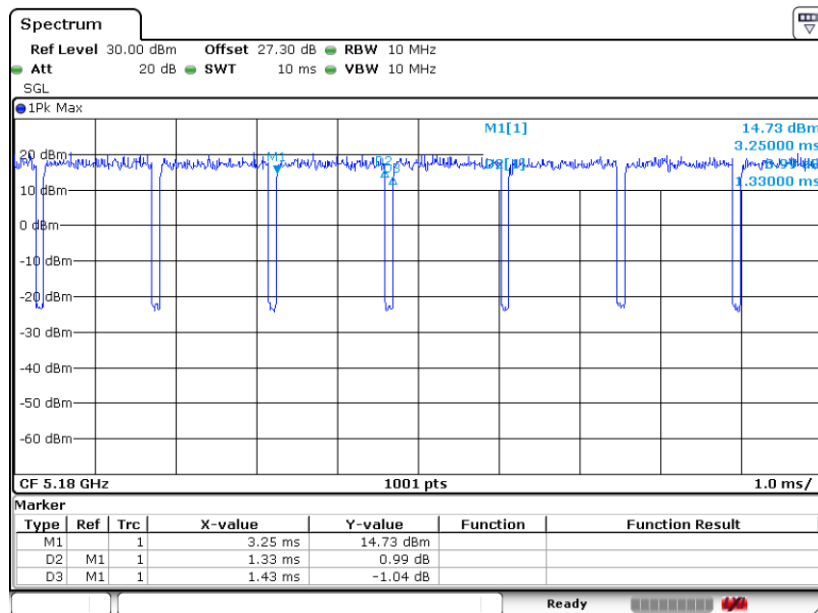


Appendix E. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor(dB)
802.11a	93.46	1430	0.70	1kHz	0.29
5GHz 802.11n HT20	93.01	1330	0.75	1kHz	0.31
5GHz 802.11n HT40	90.61	965	1.04	3kHz	0.43
5GHz 802.11ac VHT40	97.10	670	1.49	3kHz	0.13
5GHz 802.11ac VHT80	93.79	332	3.01	10kHz	0.28

802.11a


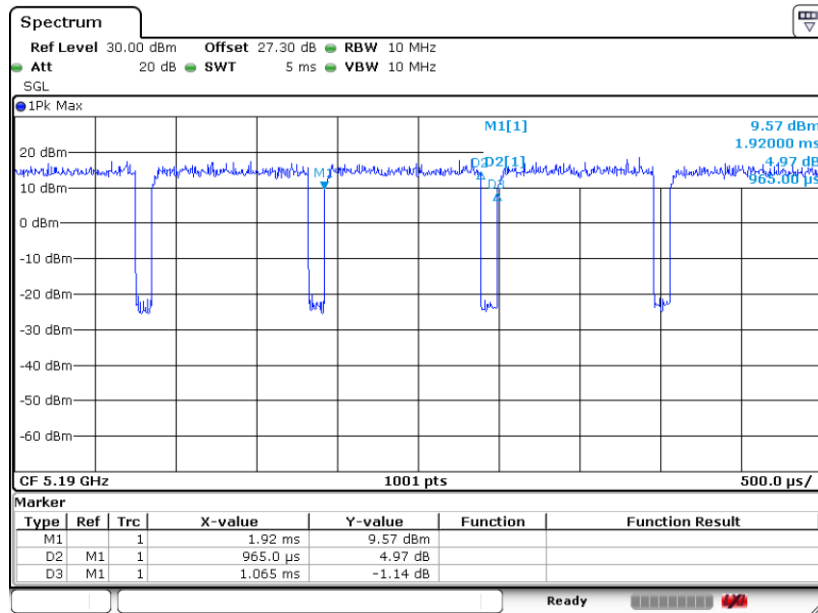
Date: 14.NOV.2019 18:52:39

802.11n HT20


Date: 14.NOV.2019 19:38:33

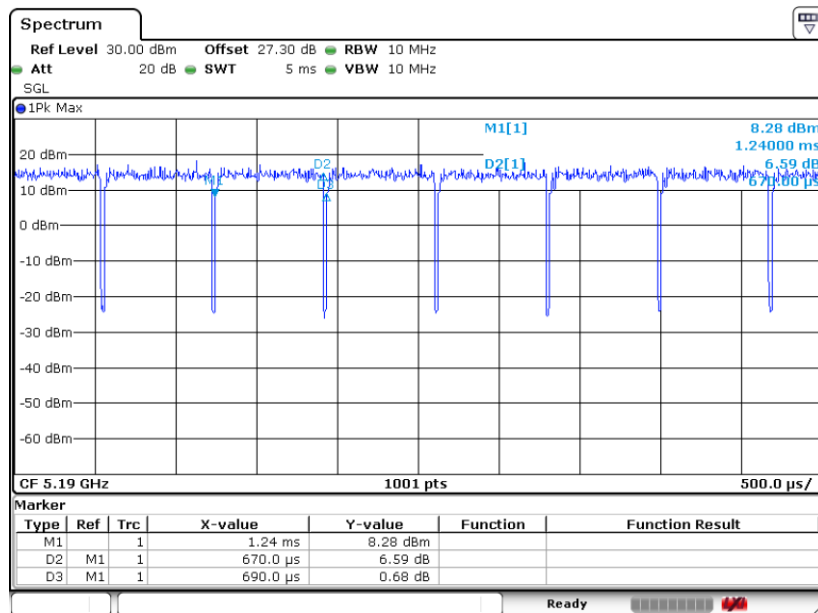


802.11n HT40



Date: 14.NOV.2019 20:02:29

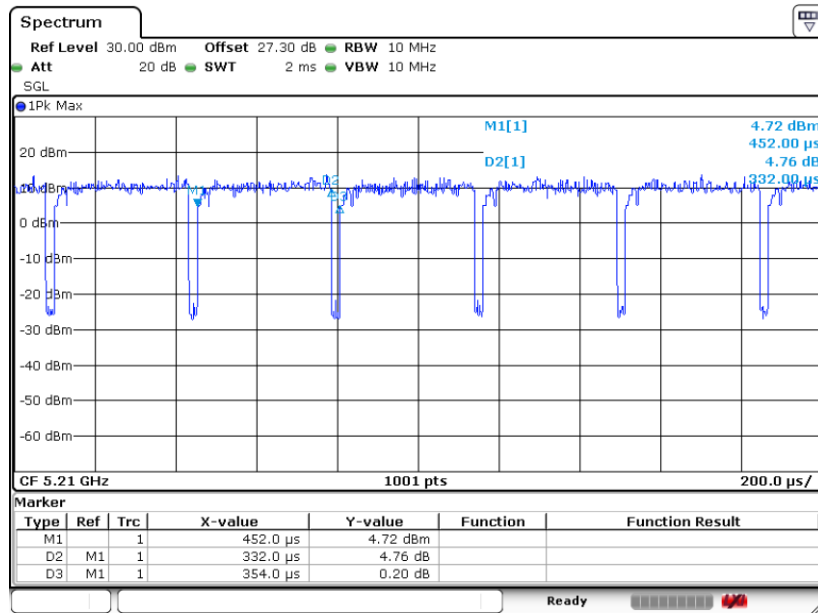
802.11ac VHT40



Date: 15.NOV.2019 19:37:08



802.11ac VHT80



Date: 15.NOV.2019 19:56:48