

FCC RF Test Report

APPLICANT : VeriFone, Inc.
EQUIPMENT : Point of Sale Terminal
BRAND NAME : Verifone or VERIFONE or Verifone
MODEL NAME : M425-A
FCC ID : B32M4250B
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DSS) Spread Spectrum Transmitter
TEST DATE(S) : Feb. 03, 2026

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	5
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	9
3 TEST RESULT	10
3.1 Radiated Band Edges and Spurious Emission Measurement	10
4 LIST OF MEASURING EQUIPMENT.....	14
5 MEASUREMENT UNCERTAINTY	15
APPENDIX A. RADIATED SPURIOUS EMISSION	
APPENDIX B. DUTY CYCLE PLOTS	
APPENDIX C. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR5D0906-01A	Rev. 01	Initial issue of report	Apr. 21, 2026



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.99 dB at 52.80 MHz

Note: This is a variant report, the main difference between Model M450-A and M425-A is as below: Model M450-A and M425-A are identical, except for enclosure shape, panel size and NFC Antenna. Use same main board, WiFi/BT module, antenna of WiFi/BT and NFC Chip IC. According to the change, only the related test cases were verified from original report FR5D0906A.

Conformity Assessment Condition:
1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"
Disclaimer:
The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

VeriFone, Inc.

1400 West Stanford Ranch Road Suite 150 Rocklin CA 95765 USA

1.2 Manufacturer

VeriFone, Inc.

1400 West Stanford Ranch Road Suite 150 Rocklin CA 95765 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Point of Sale Terminal
Brand Name	Verifone or VERIFONE or Verifone
Model Name	M425-A
FCC ID	B32M4250B
SN Code	Radiation: 713-022-177
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Antenna Type / Gain	IFA Antenna type with gain 1.1 dBi
Type of Modulation	Bluetooth BR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH05-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH05-KS	AUDIX	E3	210616

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2020+Cor.1-2023

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	27	2429	54	2456
	1	2403	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	23	2425	50	2452	77	2479
	24	2426	51	2453	78	2480
	25	2427	52	2454	-	-
	26	2428	53	2455	-	-


2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report, and the worst mode of radiated spurious emissions is Bluetooth 1Mbps mode, and recorded in this report.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Radiated Test Cases	Bluetooth BR 1Mbps GFSK		
	Mode 1: CH78_2480 MHz		
Remark:			
1. For radiated test cases, the worst mode data rate 1Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and no other significantly frequencies found in conducted spurious emission.			
2. For Radiated Test Cases, The tests were performed with Adaptor 1 and Earphone .			

2.3 Connection Diagram of Test System

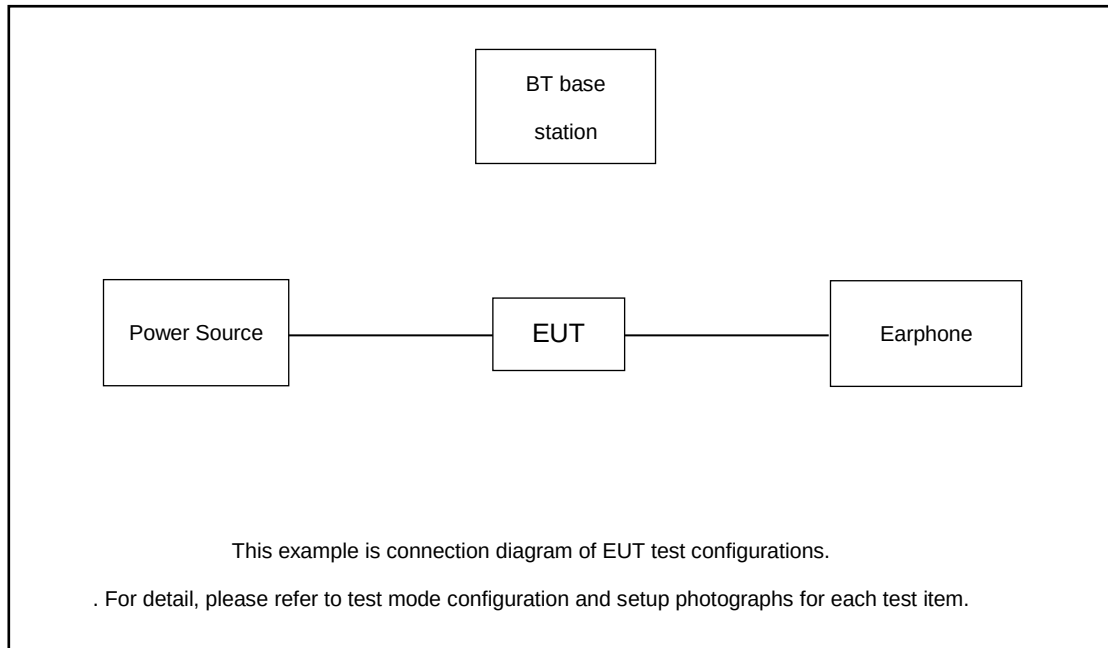

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Earphone	Lenovo	P121	N/A	N/A	Unshielded,1.2m

2.5 EUT Operation Test Setup

For Bluetooth function, the engineering test program was provided and enabled to make EUT connect with Bluetooth base station to continuous transmit.

3 Test Result

3.1 Radiated Band Edges and Spurious Emission Measurement

3.1.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2020 clause 6.3, 6.5 and 6.6.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
1. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
2. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1 \text{ GHz}$, RBW=1MHz for $f > 1\text{GHz}$; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.76dB) derived from $20\log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.1.4 Test Setup


For radiated emissions below 30MHz

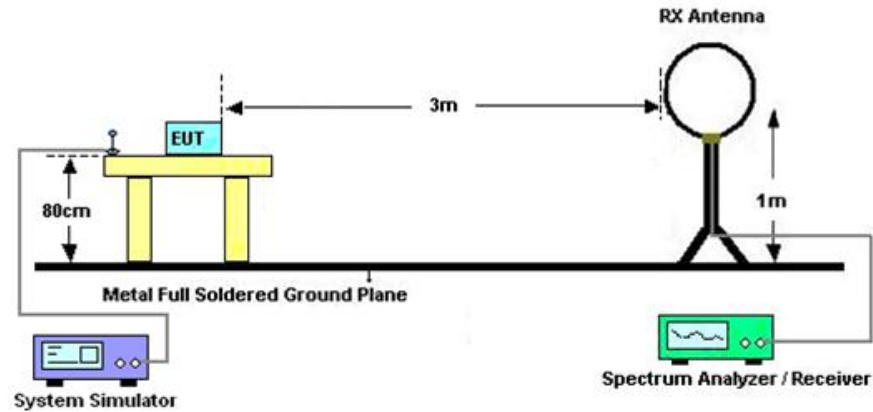

For radiated emissions from 30MHz to 1GHz

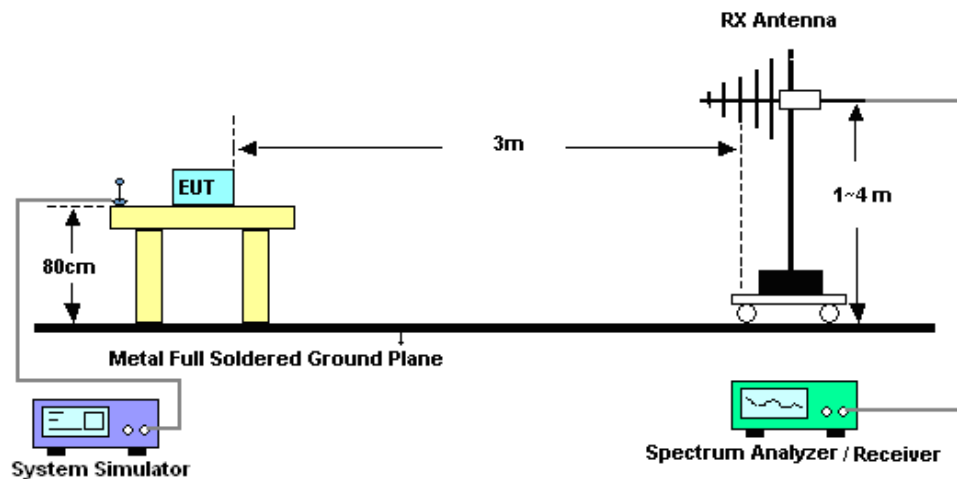

For radiated emissions above 1GHz

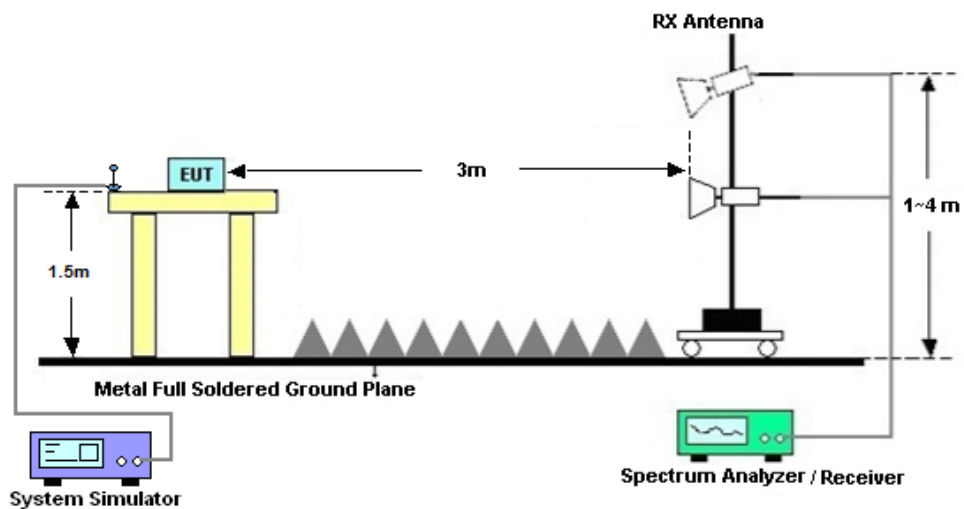



3.1.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.1.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix A.

3.1.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix A.

3.1.8 Duty cycle correction factor for average measurement

Please refer to Appendix B.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY57290151	3Hz~8.5GHz;Max 30dBm	Jul. 02, 2025	Feb. 03, 2026	Jul. 01, 2026	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY60242126	10Hz~44G,MAX 30dB	Oct. 10, 2025	Feb. 03, 2026	Oct. 10, 2026	Radiation (03CH05-KS)
Active loop antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Aug. 10, 2025	Feb. 03, 2026	Aug. 09, 2026	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	Mar. 24, 2025	Feb. 03, 2026	Mar. 23, 2026	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218642	1GHz~18GHz	Apr. 14, 2025	Feb. 03, 2026	Apr. 13, 2026	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Oct. 18, 2025	Feb. 03, 2026	Oct. 19, 2026	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	380827	9KHz~1GHz	Jul. 03, 2025	Feb. 03, 2026	Jul. 02, 2026	Radiation (03CH05-KS)
Amplifier	EM	EM18G40GA	060851	18~40GHz	Dec. 26, 2025	Feb. 03, 2026	Dec. 25, 2026	Radiation (03CH05-KS)
high gain Amplifier	EM	EM01G18GA	060843	1Ghz~18Ghz	Dec. 25, 2025	Feb. 03, 2026	Dec. 24, 2026	Radiation (03CH05-KS)
Amplifier	EM	EM01G18GA	060833	1Ghz~18Ghz	Dec. 25, 2025	Feb. 03, 2026	Dec. 24, 2026	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Feb. 03, 2026	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Feb. 03, 2026	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Feb. 03, 2026	NCR	Radiation (03CH05-KS)

NCR: No Calibration Required



5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.30 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.18 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.88 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.36 dB
---	---------

----- THE END -----



Appendix A. Radiated Spurious Emission

Test Engineer :	Jerry Xu	Relative Humidity :	41 ~ 42%
		Temperature :	22 ~ 23°C



Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	1	Bluetooth BR_GFSK	78	2480	1Mbps	-	-



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth BR_GFSK	78	2483.60	69.13	74.00	-4.87	H	PEAK	Pass	Band Edge
1	Bluetooth BR_GFSK	78	4960.00	51.65	74.00	-22.35	H	PEAK	Pass	Harmonic

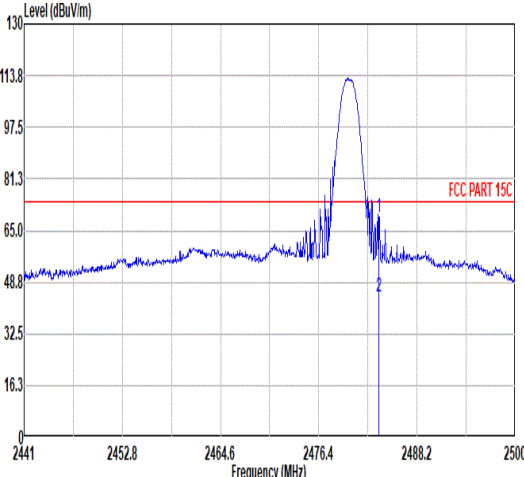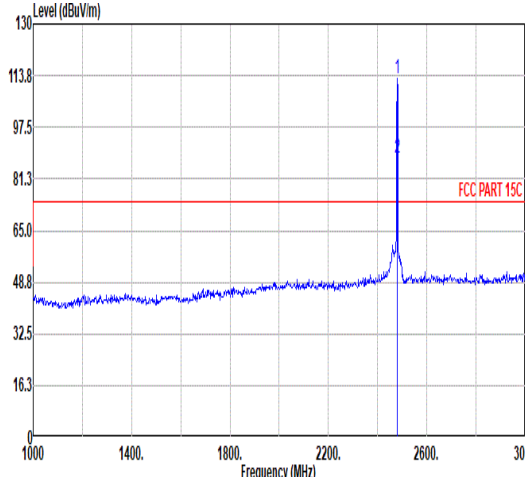

Mode	1																																																																																																																													
	Band Edge																																																																																																																													
	2400-2483.5 Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																													
ANT	1																																																																																																																													
Pol.	Horizontal						Fundamental																																																																																																																							
Peak																																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.60</td><td>69.13</td><td>74.00</td><td>-4.87</td><td>59.52</td><td>32.56</td><td>8.10</td><td>37.05</td><td>6.00</td><td>198</td><td>316</td><td>PEAK</td></tr><tr><td>2</td><td>2483.60</td><td>44.37</td><td>54.00</td><td>-9.63</td><td>34.76</td><td>32.56</td><td>8.10</td><td>37.05</td><td>6.00</td><td>198</td><td>316</td><td>AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.60	69.13	74.00	-4.87	59.52	32.56	8.10	37.05	6.00	198	316	PEAK	2	2483.60	44.37	54.00	-9.63	34.76	32.56	8.10	37.05	6.00	198	316	AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>112.78</td><td>-----</td><td>-----</td><td>103.13</td><td>32.60</td><td>8.10</td><td>37.05</td><td>6.00</td><td>198</td><td>316</td><td>PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>88.02</td><td>-----</td><td>-----</td><td>78.37</td><td>32.60</td><td>8.10</td><td>37.05</td><td>6.00</td><td>198</td><td>316</td><td>AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	112.78	-----	-----	103.13	32.60	8.10	37.05	6.00	198	316	PEAK	2	2480.00	88.02	-----	-----	78.37	32.60	8.10	37.05	6.00	198	316	AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2483.60	69.13	74.00	-4.87	59.52	32.56	8.10	37.05	6.00	198	316	PEAK																																																																																																																		
2	2483.60	44.37	54.00	-9.63	34.76	32.56	8.10	37.05	6.00	198	316	AVERAGE																																																																																																																		
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2480.00	112.78	-----	-----	103.13	32.60	8.10	37.05	6.00	198	316	PEAK																																																																																																																		
2	2480.00	88.02	-----	-----	78.37	32.60	8.10	37.05	6.00	198	316	AVERAGE																																																																																																																		

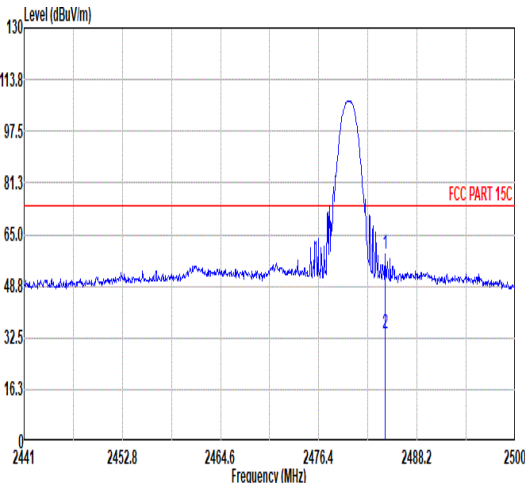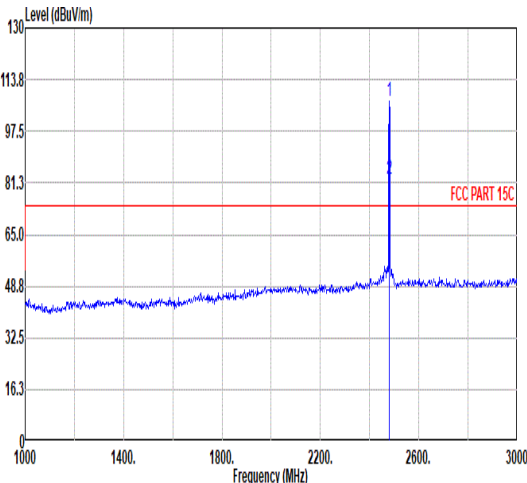

Mode	1																																																																			
	Band Edge																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																			
ANT	1																																																																			
Pol.	Vertical																																																																			
Peak																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.37</td><td>58.76</td><td>74.00</td><td>-15.24</td><td>49.15</td><td>32.56</td><td>8.10</td><td>37.05</td><td>6.00</td><td>184</td><td>0 PEAK</td></tr><tr><td>2</td><td>2484.37</td><td>34.00</td><td>54.00</td><td>-20.00</td><td>24.39</td><td>32.56</td><td>8.10</td><td>37.05</td><td>6.00</td><td>184</td><td>0 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2484.37	58.76	74.00	-15.24	49.15	32.56	8.10	37.05	6.00	184	0 PEAK	2	2484.37	34.00	54.00	-20.00	24.39	32.56	8.10	37.05	6.00	184	0 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																										
1	2484.37	58.76	74.00	-15.24	49.15	32.56	8.10	37.05	6.00	184	0 PEAK																																																									
2	2484.37	34.00	54.00	-20.00	24.39	32.56	8.10	37.05	6.00	184	0 AVERAGE																																																									
																																																																				
<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>107.02</td><td>-----</td><td>-----</td><td>97.37</td><td>32.60</td><td>8.10</td><td>37.05</td><td>6.00</td><td>184</td><td>0 PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>82.26</td><td>-----</td><td>-----</td><td>72.61</td><td>32.60</td><td>8.10</td><td>37.05</td><td>6.00</td><td>184</td><td>0 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2480.00	107.02	-----	-----	97.37	32.60	8.10	37.05	6.00	184	0 PEAK	2	2480.00	82.26	-----	-----	72.61	32.60	8.10	37.05	6.00	184	0 AVERAGE	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																										
1	2480.00	107.02	-----	-----	97.37	32.60	8.10	37.05	6.00	184	0 PEAK																																																									
2	2480.00	82.26	-----	-----	72.61	32.60	8.10	37.05	6.00	184	0 AVERAGE																																																									





Mode	1																																																																																																																																													
	Harmonic																																																																																																																																													
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																																													
ANT	1																																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																																							
Peak Avg	Level (dBuV/m) Frequency (MHz) FCC PART 15C FCC PART 15C (AVG)						Level (dBuV/m) Frequency (MHz) FCC PART 15C FCC PART 15C (AVG)																																																																																																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>51.65</td><td>74.00</td><td>-22.35</td><td>71.56</td><td>33.92</td><td>11.59</td><td>65.42</td><td>0.00</td><td>256</td><td>324</td><td>PEAK</td></tr><tr><td>2</td><td>4960.00</td><td>26.89</td><td>54.00</td><td>-27.11</td><td>46.80</td><td>33.92</td><td>11.59</td><td>65.42</td><td>0.00</td><td>256</td><td>324</td><td>Average</td></tr><tr><td>3</td><td>7440.00</td><td>43.63</td><td>74.00</td><td>-30.37</td><td>59.87</td><td>35.80</td><td>14.23</td><td>66.27</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	51.65	74.00	-22.35	71.56	33.92	11.59	65.42	0.00	256	324	PEAK	2	4960.00	26.89	54.00	-27.11	46.80	33.92	11.59	65.42	0.00	256	324	Average	3	7440.00	43.63	74.00	-30.37	59.87	35.80	14.23	66.27	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>46.87</td><td>74.00</td><td>-27.13</td><td>66.78</td><td>33.92</td><td>11.59</td><td>65.42</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>43.81</td><td>74.00</td><td>-30.19</td><td>60.05</td><td>35.80</td><td>14.23</td><td>66.27</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	46.87	74.00	-27.13	66.78	33.92	11.59	65.42	0.00	---	---	PEAK	2	7440.00	43.81	74.00	-30.19	60.05	35.80	14.23	66.27	0.00	---	---
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																				
1	4960.00	51.65	74.00	-22.35	71.56	33.92	11.59	65.42	0.00	256	324	PEAK																																																																																																																																		
2	4960.00	26.89	54.00	-27.11	46.80	33.92	11.59	65.42	0.00	256	324	Average																																																																																																																																		
3	7440.00	43.63	74.00	-30.37	59.87	35.80	14.23	66.27	0.00	---	---	PEAK																																																																																																																																		
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																				
1	4960.00	46.87	74.00	-27.13	66.78	33.92	11.59	65.42	0.00	---	---	PEAK																																																																																																																																		
2	7440.00	43.81	74.00	-30.19	60.05	35.80	14.23	66.27	0.00	---	---	PEAK																																																																																																																																		




Mode	1	
	18G-25G	
	2400-2483.5 Bluetooth BR_GFSK_CH78_2480MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	The plot shows the signal level in dBuV/m versus frequency in MHz for horizontal polarization. The y-axis ranges from 0 to 130 dBuV/m with major ticks every 16.3 dB. The x-axis ranges from 18000 to 25000 MHz with major ticks every 400 MHz. A blue line represents the measured signal, which is relatively flat around 48.8 dBuV/m. Two horizontal red lines indicate the FCC Part 15C limits: the upper line is at approximately 75 dBuV/m and the lower line is at approximately 50 dBuV/m. The text 'FCC PART 15C' and 'FCC PART 15C (AVG)' are labeled next to these lines.	The plot shows the signal level in dBuV/m versus frequency in MHz for vertical polarization. The y-axis ranges from 0 to 130 dBuV/m with major ticks every 16.3 dB. The x-axis ranges from 18000 to 25000 MHz with major ticks every 400 MHz. A blue line represents the measured signal, which is relatively flat around 48.8 dBuV/m. Two horizontal red lines indicate the FCC Part 15C limits: the upper line is at approximately 75 dBuV/m and the lower line is at approximately 50 dBuV/m. The text 'FCC PART 15C' and 'FCC PART 15C (AVG)' are labeled next to these lines.

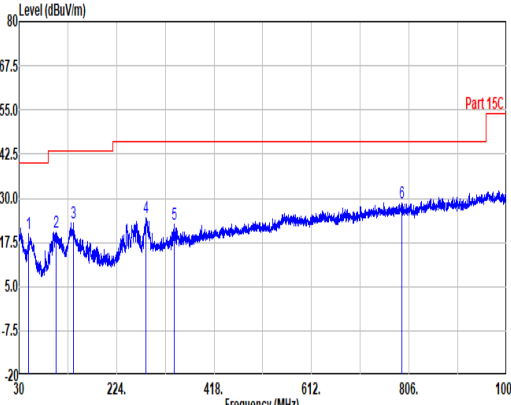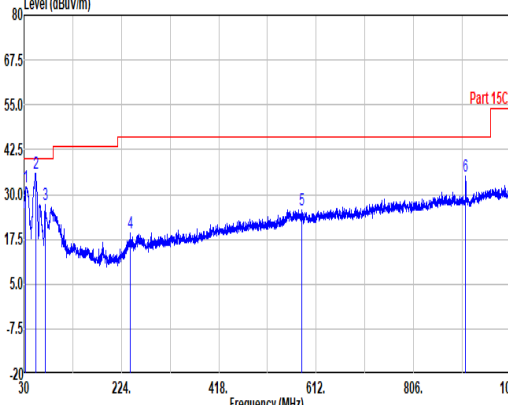


Mode	1																																																																																																													
	30M-1G																																																																																																													
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																													
ANT	1																																																																																																													
Pol.	Horizontal																																																																																																													
Peak																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>49.16</td><td>19.87</td><td>40.00</td><td>-20.13</td><td>36.42</td><td>14.82</td><td>0.73</td><td>32.10</td><td>0.00</td><td>--- Peak</td></tr><tr><td>2</td><td>103.96</td><td>20.50</td><td>43.50</td><td>-23.00</td><td>34.58</td><td>16.52</td><td>1.43</td><td>32.03</td><td>0.00</td><td>--- Peak</td></tr><tr><td>3</td><td>137.91</td><td>22.96</td><td>43.50</td><td>-20.54</td><td>35.88</td><td>17.48</td><td>1.63</td><td>32.03</td><td>0.00</td><td>--- Peak</td></tr><tr><td>4</td><td>282.93</td><td>24.57</td><td>46.00</td><td>-21.43</td><td>35.27</td><td>19.01</td><td>2.36</td><td>32.07</td><td>0.00</td><td>--- Peak</td></tr><tr><td>5</td><td>339.43</td><td>22.48</td><td>46.00</td><td>-23.52</td><td>31.99</td><td>20.01</td><td>2.59</td><td>32.11</td><td>0.00</td><td>--- Peak</td></tr><tr><td>6</td><td>791.21</td><td>28.85</td><td>46.00</td><td>-17.15</td><td>28.48</td><td>28.40</td><td>3.97</td><td>32.00</td><td>0.00</td><td>--- Peak</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	49.16	19.87	40.00	-20.13	36.42	14.82	0.73	32.10	0.00	--- Peak	2	103.96	20.50	43.50	-23.00	34.58	16.52	1.43	32.03	0.00	--- Peak	3	137.91	22.96	43.50	-20.54	35.88	17.48	1.63	32.03	0.00	--- Peak	4	282.93	24.57	46.00	-21.43	35.27	19.01	2.36	32.07	0.00	--- Peak	5	339.43	22.48	46.00	-23.52	31.99	20.01	2.59	32.11	0.00	--- Peak	6	791.21	28.85	46.00	-17.15	28.48	28.40	3.97	32.00	0.00	--- Peak
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																			
	1	49.16	19.87	40.00	-20.13	36.42	14.82	0.73	32.10	0.00	--- Peak																																																																																																			
	2	103.96	20.50	43.50	-23.00	34.58	16.52	1.43	32.03	0.00	--- Peak																																																																																																			
	3	137.91	22.96	43.50	-20.54	35.88	17.48	1.63	32.03	0.00	--- Peak																																																																																																			
	4	282.93	24.57	46.00	-21.43	35.27	19.01	2.36	32.07	0.00	--- Peak																																																																																																			
	5	339.43	22.48	46.00	-23.52	31.99	20.01	2.59	32.11	0.00	--- Peak																																																																																																			
6	791.21	28.85	46.00	-17.15	28.48	28.40	3.97	32.00	0.00	--- Peak																																																																																																				
Vertical																																																																																																														
																																																																																																														
<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>33.88</td><td>32.01</td><td>40.00</td><td>-7.99</td><td>40.50</td><td>23.04</td><td>0.52</td><td>32.05</td><td>0.00</td><td>--- Peak</td></tr><tr><td>2</td><td>52.80</td><td>36.01</td><td>40.00</td><td>-3.99</td><td>53.97</td><td>13.33</td><td>0.78</td><td>32.07</td><td>0.00</td><td>--- Peak</td></tr><tr><td>3</td><td>72.20</td><td>27.21</td><td>40.00</td><td>-12.79</td><td>45.80</td><td>12.44</td><td>1.05</td><td>32.08</td><td>0.00</td><td>--- Peak</td></tr><tr><td>4</td><td>242.19</td><td>19.31</td><td>46.00</td><td>-26.69</td><td>31.55</td><td>17.63</td><td>2.18</td><td>32.05</td><td>0.00</td><td>--- Peak</td></tr><tr><td>5</td><td>583.14</td><td>25.73</td><td>46.00</td><td>-20.27</td><td>28.87</td><td>25.75</td><td>3.40</td><td>32.29</td><td>0.00</td><td>--- Peak</td></tr><tr><td>6</td><td>909.55</td><td>35.20</td><td>46.00</td><td>-10.80</td><td>32.86</td><td>29.36</td><td>4.27</td><td>31.29</td><td>0.00</td><td>--- Peak</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	33.88	32.01	40.00	-7.99	40.50	23.04	0.52	32.05	0.00	--- Peak	2	52.80	36.01	40.00	-3.99	53.97	13.33	0.78	32.07	0.00	--- Peak	3	72.20	27.21	40.00	-12.79	45.80	12.44	1.05	32.08	0.00	--- Peak	4	242.19	19.31	46.00	-26.69	31.55	17.63	2.18	32.05	0.00	--- Peak	5	583.14	25.73	46.00	-20.27	28.87	25.75	3.40	32.29	0.00	--- Peak	6	909.55	35.20	46.00	-10.80	32.86	29.36	4.27	31.29	0.00	--- Peak	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																				
1	33.88	32.01	40.00	-7.99	40.50	23.04	0.52	32.05	0.00	--- Peak																																																																																																				
2	52.80	36.01	40.00	-3.99	53.97	13.33	0.78	32.07	0.00	--- Peak																																																																																																				
3	72.20	27.21	40.00	-12.79	45.80	12.44	1.05	32.08	0.00	--- Peak																																																																																																				
4	242.19	19.31	46.00	-26.69	31.55	17.63	2.18	32.05	0.00	--- Peak																																																																																																				
5	583.14	25.73	46.00	-20.27	28.87	25.75	3.40	32.29	0.00	--- Peak																																																																																																				
6	909.55	35.20	46.00	-10.80	32.86	29.36	4.27	31.29	0.00	--- Peak																																																																																																				

Appendix B. Duty Cycle Plots

DH5 on time (One Pulse) Plot on Channel 78

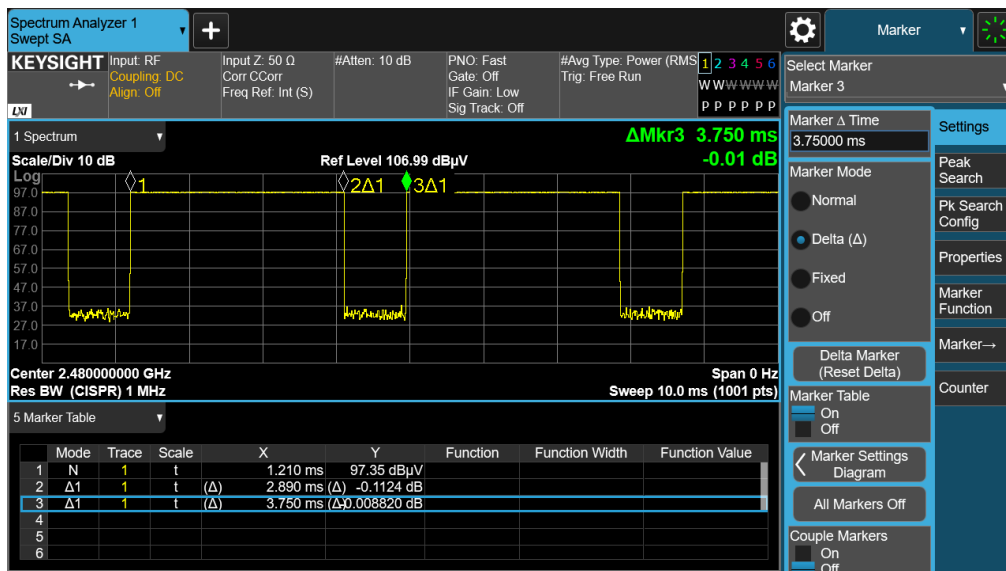

DH5 on time (Count Pulses) Plot on Channel 78

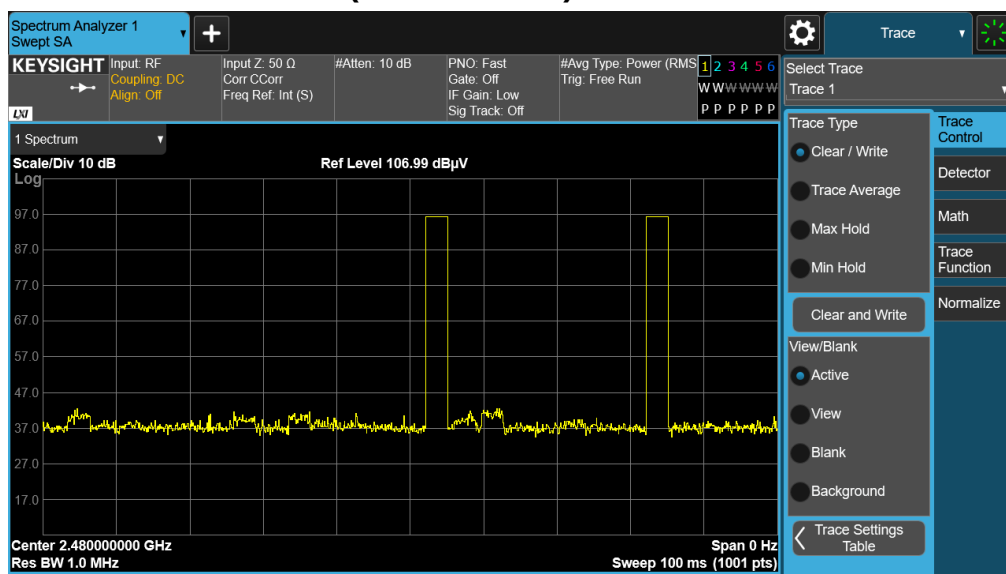

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.89 / 100 = 5.78 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.76 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.