

Antenna Product Specification

Entry Name	VB100
Frequency Channel	WCN: BT/2.4G/5G NFC: 13.56MHz
Supplier Name	Huizhou Speed Wireless Technology Co.,Ltd
Supplier Address	No. 138, Huize Avenue, Dongjiang High-tech Industrial Park, Zhongkai New District, Huizhou City

Prepared by	Signed by	Approved by Customer
RF Engineer	Shuai Deng	
ME Engineer	Jixiang Hu	
Reviewed by	Shuai Deng	
RF Manager	Weiwei Xu	
ME Manager	Jian Lin	
Project Manager	Lisha Tang	

Project:VB100	Author: Shuai Deng	File Name:
Date: 2025-9-17		
Language: English	Check: Shuai Deng	VB100 WCN Antenna Approval sheet
Document No.:		
Antenna Manufacturer: Huizhou Speed Wireless Technology Co.,Ltd		

1. Calibration certificate and darkroom

Calibration certificate
Instrument number: 100014
Calibration Unit: GRGTEST
Calibration date: 2024-12-28
Next calibration date: 2025-12-27
Calibrator: Zhaopeng Chen

2 Product Specification

2.1 S11 (Return Loss)

The S11 over the frequencies stated in Table 1 below shall be measured at the connector end of the cable for each antenna assembly. The S11 are measured with the antennas installed on platform. The S11 shall be 100% tested in production.

Test Parameter	2400MHz to 2500 MHz	5150 MHz to 5850 MHz
S11:	-5 dB Max	-5 dB Max

S-parameter test

2.2 Test environment

The radiation pattern and antenna gain shall be tested either with a conventional far field anechoic chamber or a near field anechoic chamber such as a Satimo SG24-L.

For a far field anechoic chamber, the gain measurements shall be made within an RF anechoic chamber with at least 3-meter separation from the receive antenna to the antenna under test (AUT). The RF anechoic chamber must be lined with absorptive material rated as a minimum frequency range from 400MHz to 10GHz. The notebook with the antenna assemblies installed shall be placed on a non-conductive structure at a sufficient height to be in the 'quiet zone' of the chamber. All test equipment including horn antennas, adapters, cables, network analyzers, and receivers shall be calibrated per manufacturer's minimum calibration requirements.

For a near field anechoic chamber, the AUT test must be place in the center (and within the admissible offset) of the probe array elements. The RF anechoic chamber must be lined with absorptive material rated as a minimum frequency range from 400MHz to 10GHz. The notebook with the antenna assemblies installed shall be placed on a non-conductive structure.

2.3 Antenna radiation measurement


In order to ensure compliance with network carrier specifications, it is required to measure a 3-D gain measurement for WCN Antenna.

Table below specifies the details of the 3-D gain measurement points

Theta Start: 0°	Phi Start: 0°
Theta Stop: 150°	Phi Stop: 330°
Theta increment: 30°	Phi Increment: 30°

The table above specifies the minimum 23 measurement points (x2 polarizations) for each measurement frequency.

The axis and AUT orientation for gain measurements are outlined in below Figures.

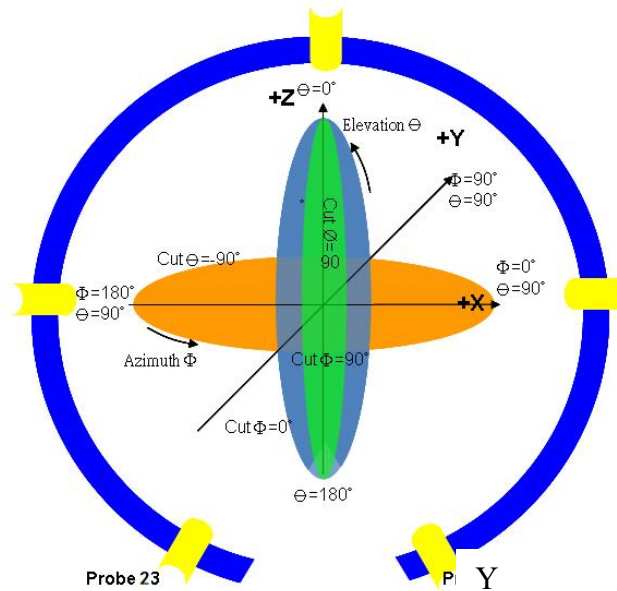

The axis definition

AUT orientation (Devices picture with X Y Z direction)

3 Antenna Performance Test

3.1 S11 of WCN Antenna (S11 picture)




3.2 Antenna Radiated Efficiency

Freq (MHz)	Peak Gain(dBi)	Average Gain(dB)
2400~2483.5MHz	0.69	0.6
5150~5250MHz	0.74	0.62
5250~5350MHz	0.87	0.66
5470~5725MHz	0.92	0.71
5725~5850MHz	0.88	0.73


3.3 Radiation Pattern

WCN antenna: 2400MHz (Pattern pic)

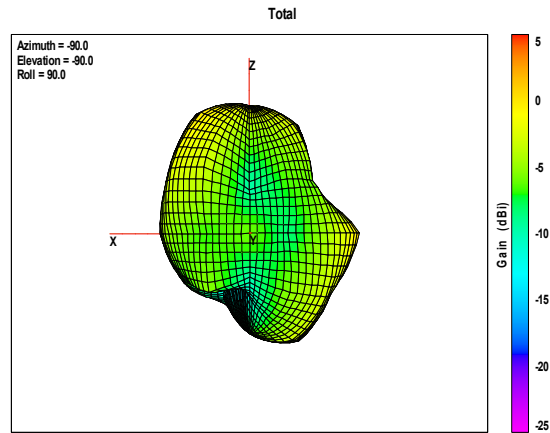


2400MHz		
Phi=0deg Peak (dBi)	0.53	210 deg
Phi=90deg Peak (dBi)	0.2	150 deg
Theta=90deg Peak(dBi)	0.13	240 deg

WCN antenna: 2480MHz (Pattern pic)

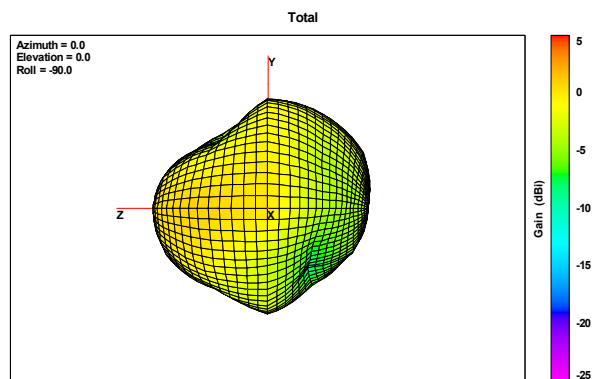


2480MHz		
Phi=0deg Peak (dBi)	0.31	210 deg
Phi=90deg Peak (dBi)	0.03	150 deg
Theta=90deg Peak(dBi)	0.16	240 deg

WCN antenna: 5150MHz (Pattern pic)

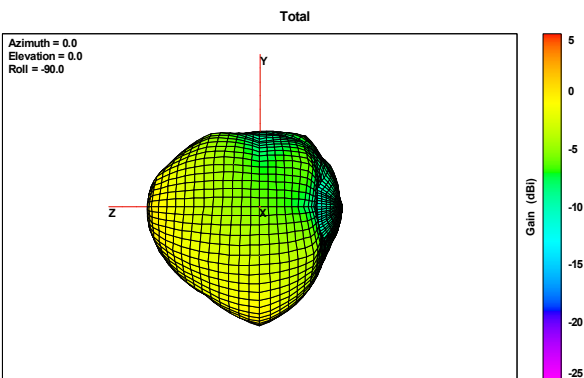


5150MHz		
Phi=0deg Peak (dBi)	0.33	210 deg
Phi=90deg Peak (dBi)	0.58	120 deg
Theta=90deg Peak(dBi)	0.6	90 deg

WCN antenna: 5500MHz(Pattern pic)

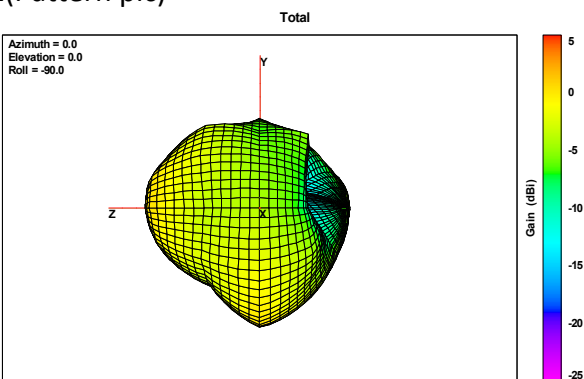

5500MHz		
Phi=0deg Peak (dBi)	0.36	210 deg
Phi=90deg Peak (dBi)	0.55	120 deg
Theta=90deg Peak(dBi)	0.49	90 deg

WCN antenna: 5850MHz (Pattern pic)

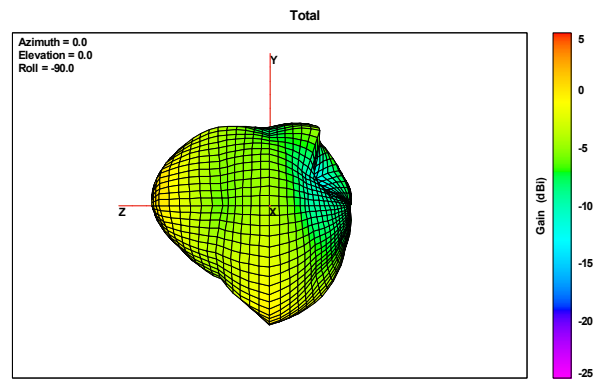

5850MHz		
Phi=0deg Peak (dBi)	0.44	210deg
Phi=90deg Peak (dBi)	0.37	120 deg
Theta=90deg Peak(dBi)	0.39	90deg

4 Mechanical description

4.1 WCN antenna Spec

Frequency Band : 2400-2500 MHz, 5150-5850 MHz

Antenna Type : Loop

4.2 NFC Antenna

NFC Frequency Band : 13.553 - 13.567 MHz

Modulation Type : ASK

Supported Card Type : Type A

NFC Antenna Type : Loop

NFC Antenna size : 60*15 mm

NFC Antenna location (picture) :