

Date: 2026-02-08

01_WCDMA II_RMC 12.2Kbps_Front_0mm_Ch9262


Communication System: UMTS-FDD; Frequency: 1852.400 MHz; Duty Cycle: 1:1
Medium: HSL_1900_260208 Medium parameters used: $f = 1852.400$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 40.1$
Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(8.21, 7.99, 8.14); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (60.0 mm x 320.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 4.31 W/kg; SAR (10g) = 2.24 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.01 dB
SAR (1g) = 4.63 W/kg; SAR (10g) = 2.36 W/kg
Smallest distance from peaks to all points 3 dB below = 7.3 mm
Ratio of SAR at M2 to SAR at M1 = 84.0 %

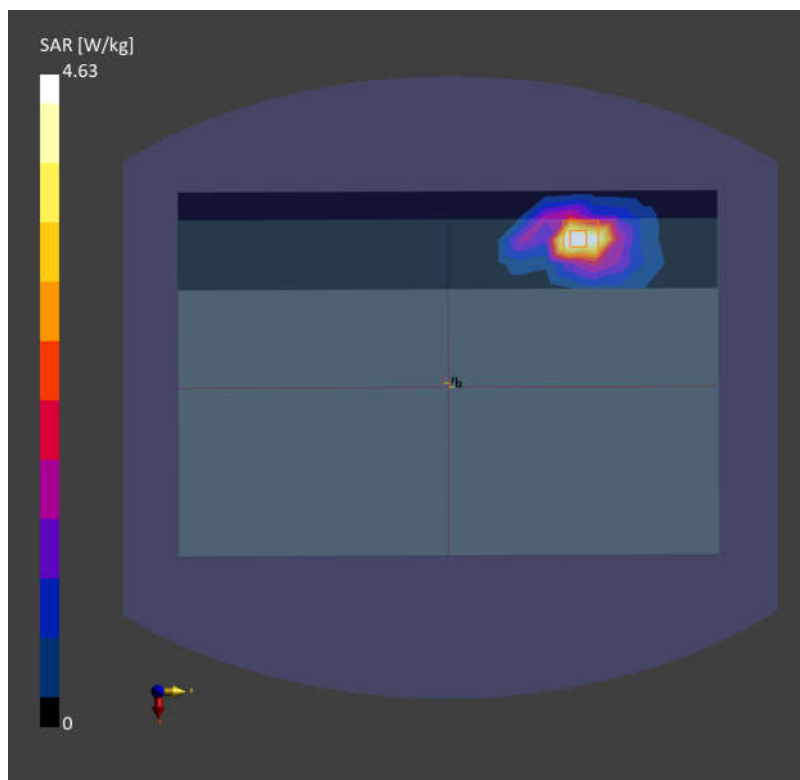

Date: 2026-02-05

02_WCDMA IV_RMC 12.2Kbps_Front_0mm_Ch1513

Communication System: UMTS-FDD; Frequency: 1752.600 MHz; Duty Cycle: 1:1

Medium: HSL_1750_260205 Medium parameters used: $f = 1752.600$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 40.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(8.4, 8.17, 8.33); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (60.0 mm x 320.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 3.31 W/kg; SAR (10g) = 1.79 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.06 dB

SAR (1g) = 3.77 W/kg; SAR (10g) = 1.93 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 77.3 %

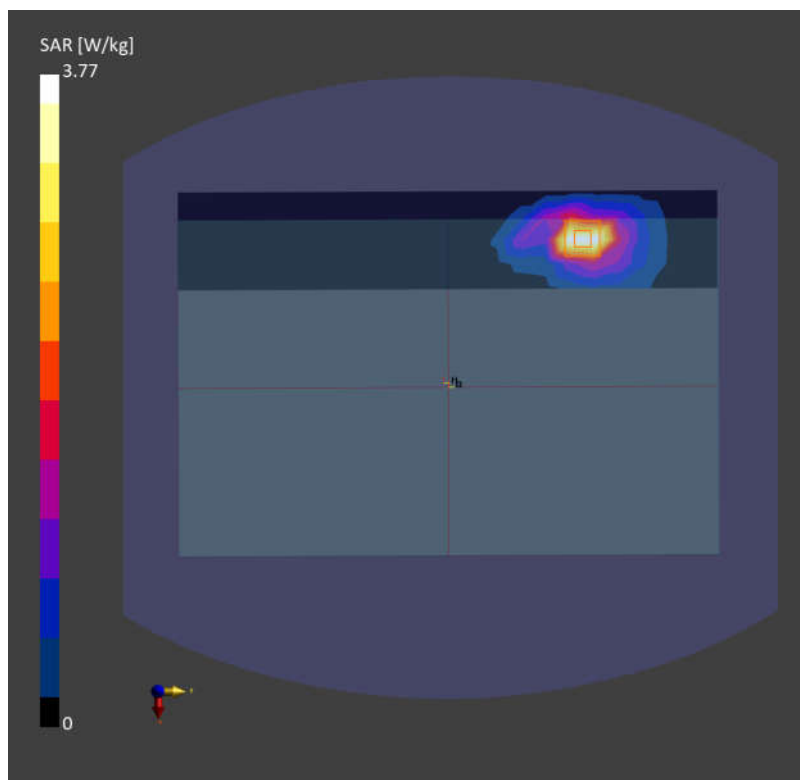

Date: 2026-02-03

03_WCDMA V_RMC 12.2Kbps_Front_0mm_Ch4182


Communication System: UMTS-FDD; Frequency: 836.400 MHz; Duty Cycle: 1:1
 Medium: HSL_835_260203 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 42.7$
 Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(10.17, 9.9, 10.08); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (60.0 mm x 330.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
 SAR (1g) = 2.04 W/kg; SAR (10g) = 1.25 W/kg;

Zoom Scan (35.4 mm x 35.4 mm x 30.0 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm
 Power Drift = -0.08 dB
 SAR (1g) = 2.25 W/kg; SAR (10g) = 1.21 W/kg
 Smallest distance from peaks to all points 3 dB below = 7.2 mm
 Ratio of SAR at M2 to SAR at M1 = 76.2 %

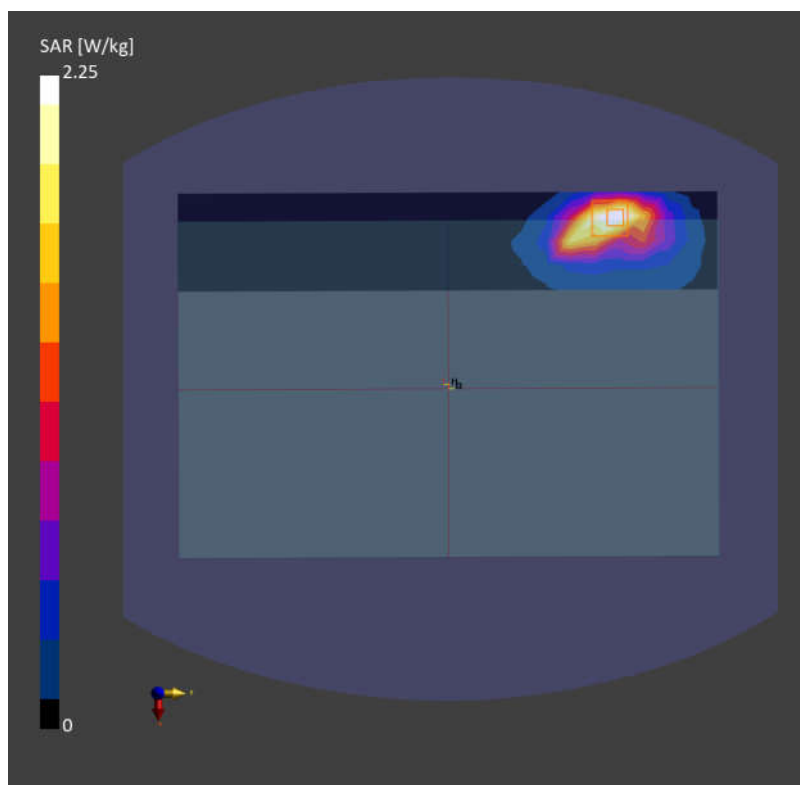

Date: 2026-02-10

04_LTE Band 7_20M_QPSK_1_49_Front_0mm_Ch20850

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 2510.000 MHz; Duty Cycle: 1:1

Medium: HSL_2600_260210 Medium parameters used: $f = 2510.000$ MHz; $\sigma = 1.83$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(7.49, 7.28, 7.42); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (60.0 mm x 320.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 6.24 W/kg; SAR (10g) = 3.04 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 6.50 W/kg; SAR (10g) = 3.05 W/kg

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 78.5 %

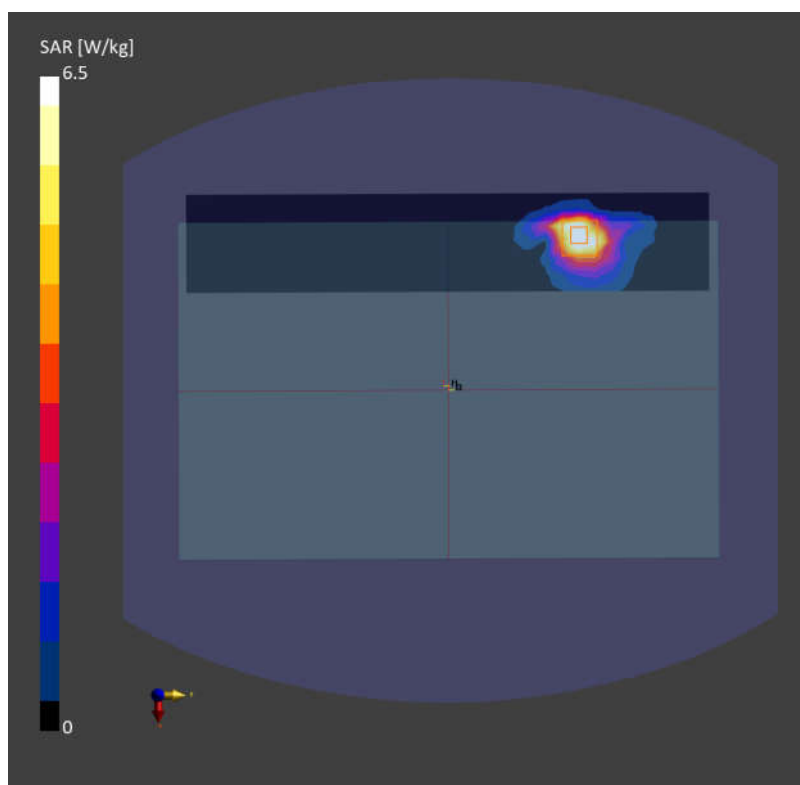

Date: 2026-02-02

05_LTE Band 12_10M_QPSK_1_0_Front_0mm_Ch23095

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 707.500 MHz; Duty Cycle: 1:1

Medium: HSL_750_260202 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.881$ S/m; $\epsilon_r = 43.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(10.37, 10.09, 10.28); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (60.0 mm x 330.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 2.59 W/kg; SAR (10g) = 1.54 W/kg;


Zoom Scan (35.4 mm x 35.4 mm x 30.0 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 2.51 W/kg; SAR (10g) = 1.27 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 65.1 %

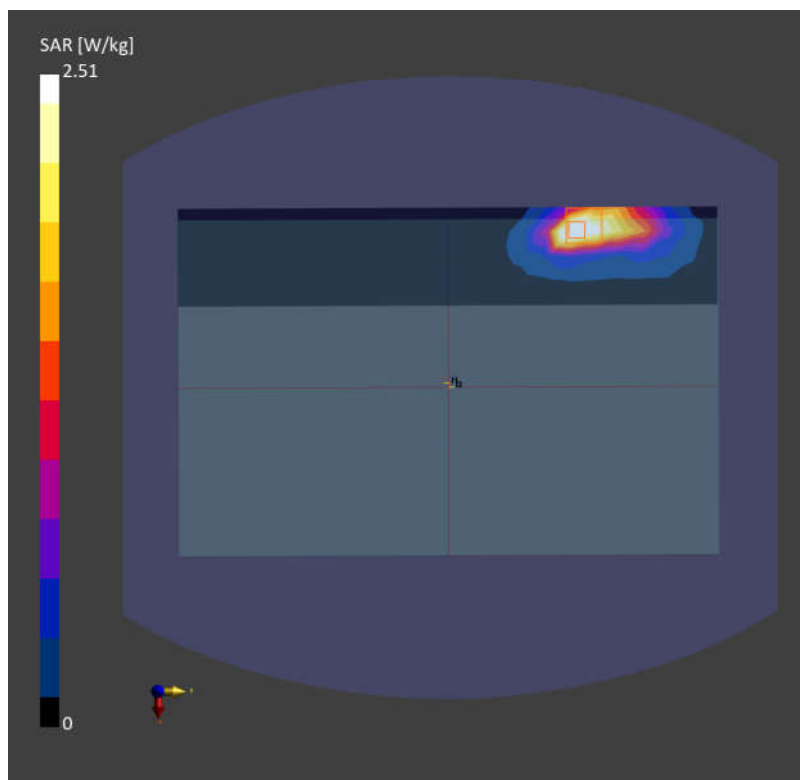

Date: 2026-02-02

06_LTE Band 13_10M_QPSK_1_0_Front_0mm_Ch23230

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 782.000 MHz; Duty Cycle: 1:1

Medium: HSL_750_260202 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 42.9$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(10.37, 10.09, 10.28); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (60.0 mm x 330.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.81 W/kg; SAR (10g) = 1.13 W/kg;


Zoom Scan (30.6 mm x 30.6 mm x 30.0 mm): Measurement Grid: 5.1 mm x 5.1 mm x 1.5 mm

Power Drift = -0.09 dB

SAR (1g) = 2.28 W/kg; SAR (10g) = 1.17 W/kg

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 64.4 %

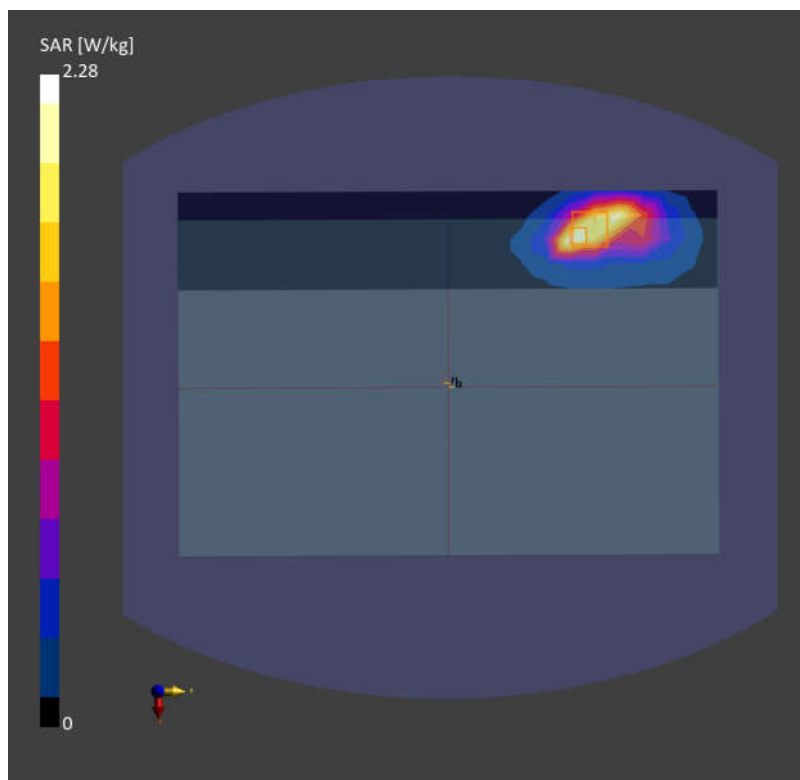

Date: 2026-02-02

07_LTE Band 14_10M_QPSK_1_0_Front_0mm_Ch23330

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 793.000 MHz; Duty Cycle: 1:1

Medium: HSL_750_260202 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 42.4$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(10.37, 10.09, 10.28); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (60.0 mm x 330.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.77 W/kg; SAR (10g) = 1.08 W/kg;


Zoom Scan (34.2 mm x 34.2 mm x 30.0 mm): Measurement Grid: 5.7 mm x 5.7 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 1.88 W/kg; SAR (10g) = 0.954 W/kg

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 63.6 %

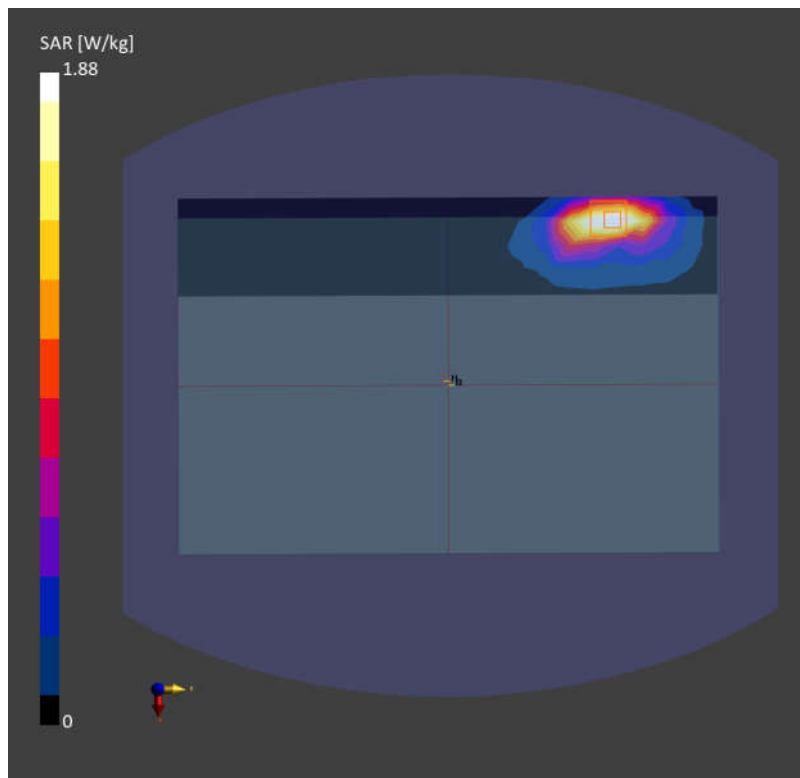

Date: 2026-02-08

08_LTE Band 25_20M_QPSK_1_0_Front_0mm_Ch26140

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 1860.000 MHz; Duty Cycle: 1:1

Medium: HSL_1900_260208 Medium parameters used: $f = 1860.000$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 40.1$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(8.21, 7.99, 8.14); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (65.0 mm x 320.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 3.58 W/kg; SAR (10g) = 1.84 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.05 dB

SAR (1g) = 4.03 W/kg; SAR (10g) = 1.97 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 78.9 %

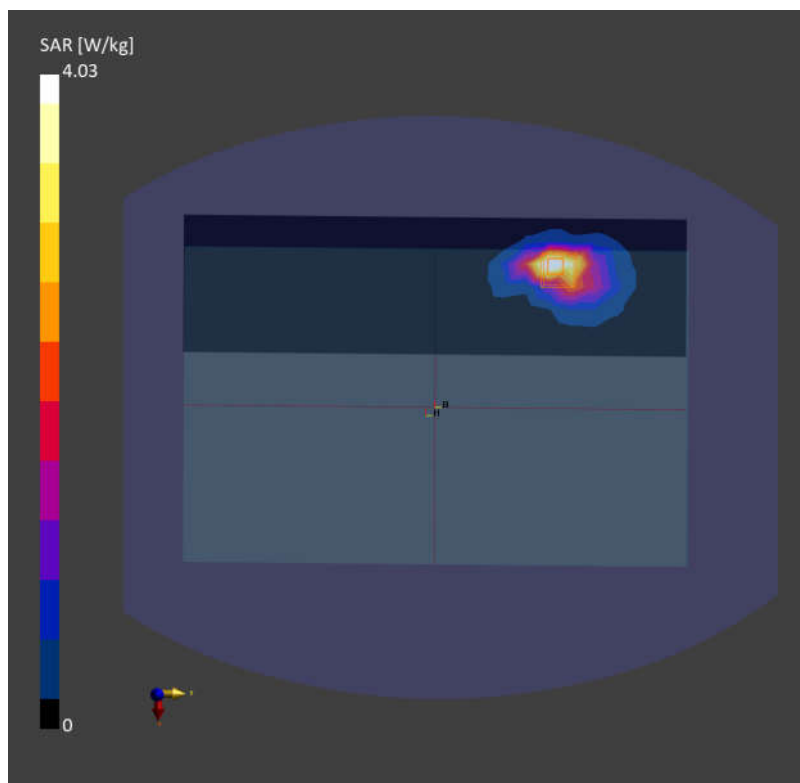

Date: 2026-02-03

09_LTE Band 26_15M_QPSK_1_0_Front_0mm_Ch26865

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 831.500 MHz; Duty Cycle: 1:1

Medium: HSL_835_260203 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(10.17, 9.9, 10.08); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10181-CAF

Area Scan (90.0 mm x 330.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 3.46 W/kg; SAR (10g) = 2.06 W/kg;


Zoom Scan (30.6 mm x 30.6 mm x 30.0 mm): Measurement Grid: 5.1 mm x 5.1 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 3.39 W/kg; SAR (10g) = 1.71 W/kg

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 66.1 %

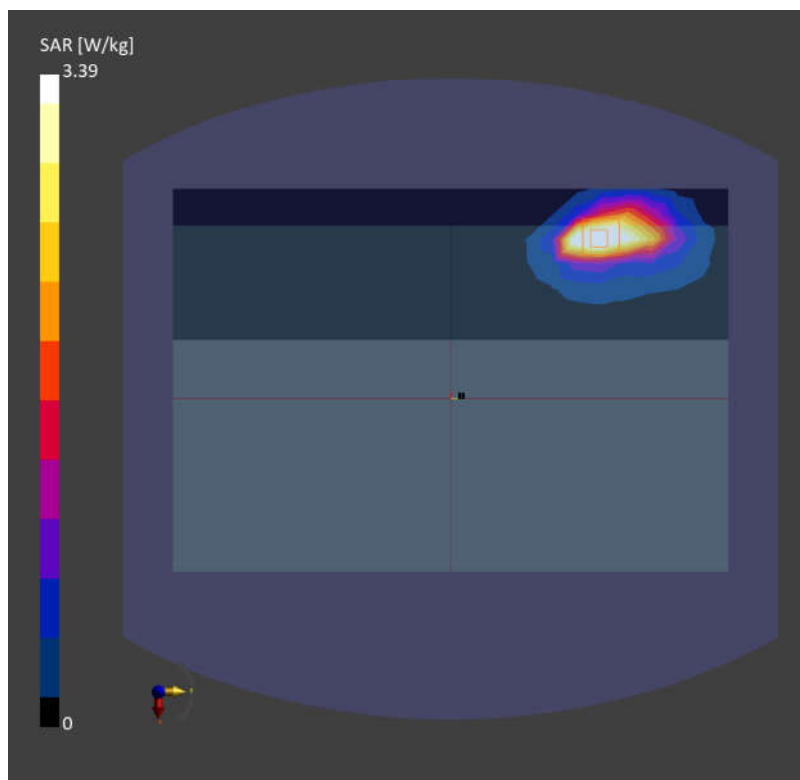

Date: 2026-02-05

10_LTE Band 66_20M_QPSK_1_0_Front_0mm_Ch132322

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 1745.000 MHz; Duty Cycle: 1:1

Medium: HSL_1750_260205 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 40.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(8.4, 8.17, 8.33); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (65.0 mm x 320.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 4.80 W/kg; SAR (10g) = 2.58 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.07 dB

SAR (1g) = 5.55 W/kg; SAR (10g) = 2.80 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 77.3 %

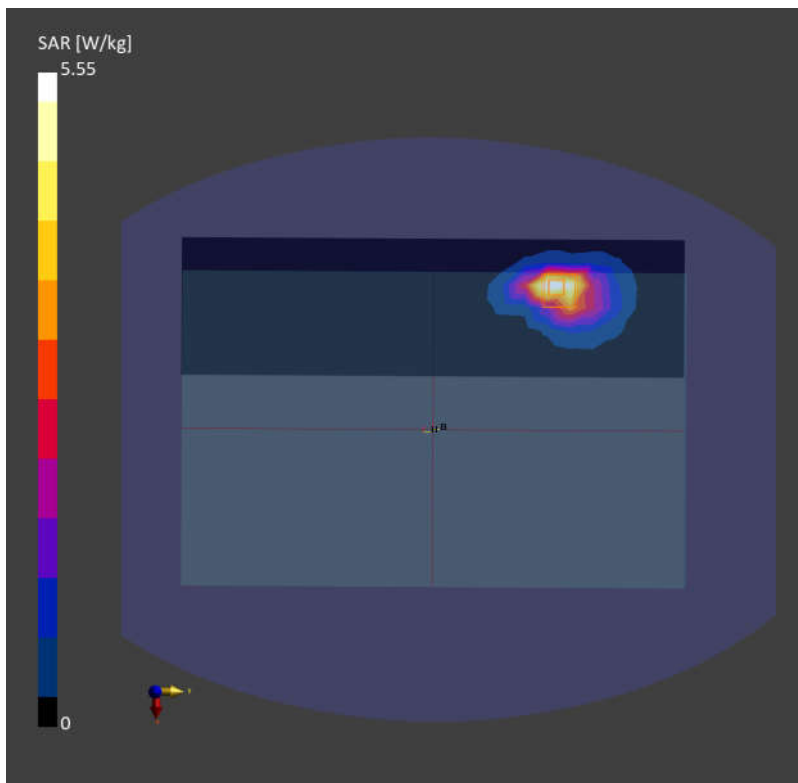

Date: 2026-02-02

11_LTE Band 71_20M_QPSK_1_0_Front_0mm_Ch133297

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 680.500 MHz; Duty Cycle: 1:1

Medium: HSL_750_260202 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.863$ S/m; $\epsilon_r = 43.0$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(10.37, 10.09, 10.28); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (70.0 mm x 320.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.76 W/kg; SAR (10g) = 1.02 W/kg;


Zoom Scan (33.0 mm x 33.0 mm x 30.0 mm): Measurement Grid: 5.5 mm x 5.5 mm x 1.5 mm

Power Drift = -0.09 dB

SAR (1g) = 1.72 W/kg; SAR (10g) = 0.853 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 65.1 %

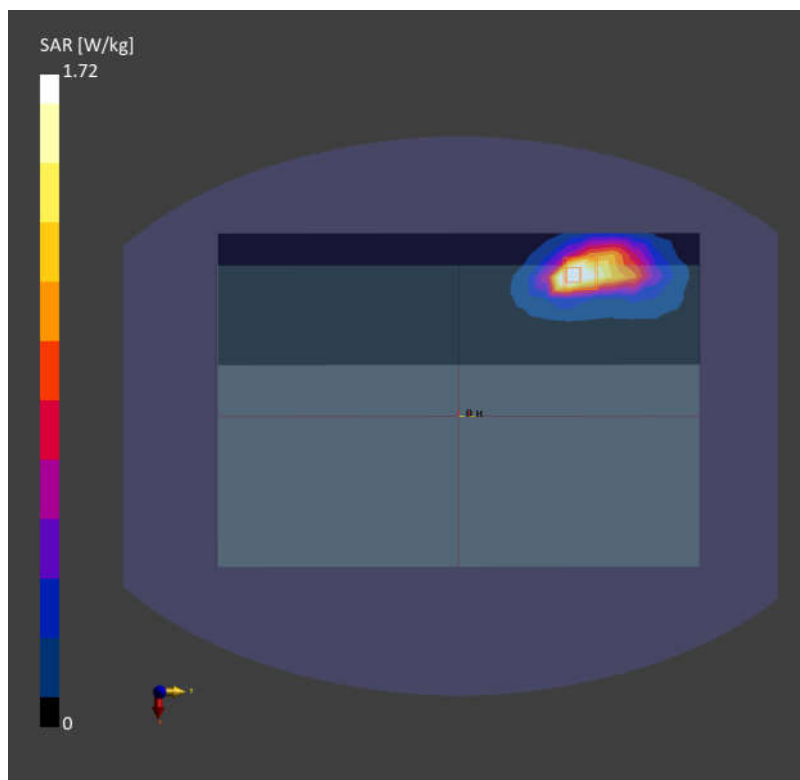

Date: 2026-02-10

12_LTE Band 41_20M_QPSK_1_0_Front_0mm_Ch40620

Communication System: LTE-TDD

AntennaCfg:SISO; Frequency: 2593.000 MHz; Duty Cycle: 1:1.59

Medium: HSL_2600_260210 Medium parameters used: $f = 2593.000$ MHz; $\sigma = 1.91$ S/m; $\epsilon_r = 38.5$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(7.49, 7.28, 7.42); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10172-CAH

Area Scan (80.0 mm x 320.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 2.66 W/kg; SAR (10g) = 1.29 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.09 dB

SAR (1g) = 2.73 W/kg; SAR (10g) = 1.28 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 77.0 %

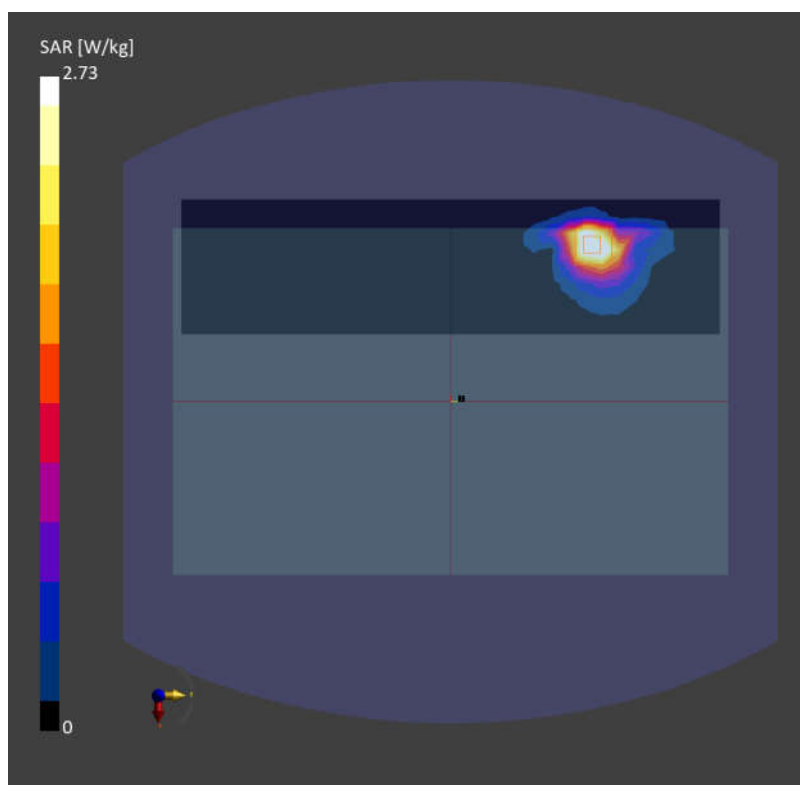

Date: 2026-02-07

13_WLAN2.4GHz_802.11b 1Mbps_Front_0mm_Ch11

Communication System: IEEE 802.11b WiFi 2.4 GHz

Frequency: 2462.000MHz; Duty Cycle: 1:1.014

Medium: HSL_2450_260207 Medium parameters used: $f = 2462.000$ MHz; $\sigma = 1.76$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(7.65, 7.44, 7.58); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10012-CAB

Area Scan (240.0 mm x 360.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.767 W/kg; SAR (10g) = 0.326 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.05 dB

SAR (1g) = 0.771 W/kg; SAR (10g) = 0.326 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 76.4 %

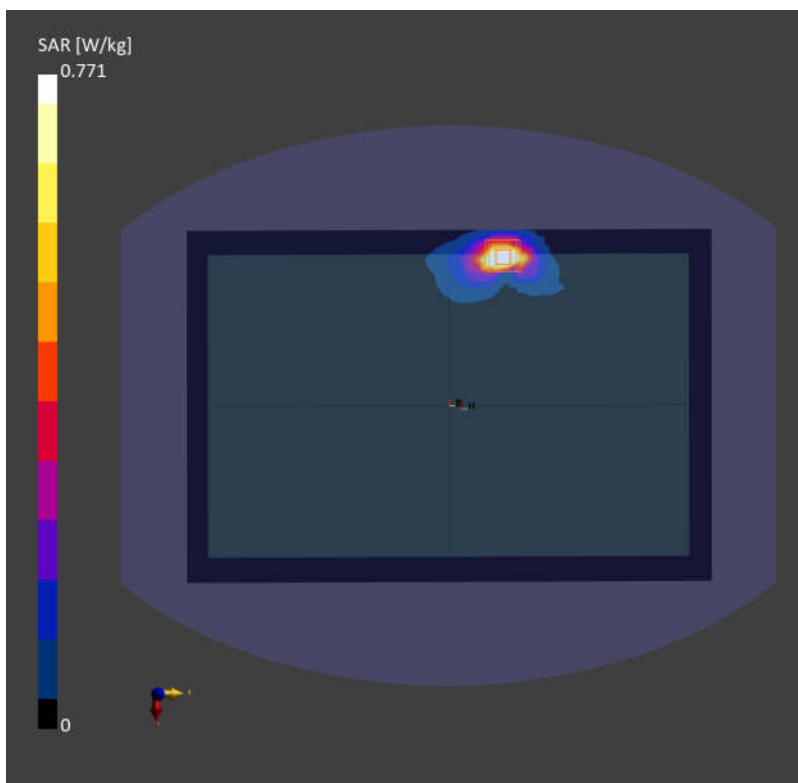

Date: 2026-02-11

14_WLAN5GHz_802.11a 6Mbps_Front_0mm_Ch44

Communication System: IEEE 802.11a/h WiFi 5 GHz

Frequency: 5220.000MHz; Duty Cycle: 1:1.018

Medium: HSL_5250_260211 Medium parameters used: $f = 5220.000$ MHz; $\sigma = 4.66$ S/m; $\epsilon_r = 36.4$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(5.9, 5.74, 5.85); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10062-CAE

Area Scan (240.0 mm x 360.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.514 W/kg; SAR (10g) = 0.187 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.01 dB

SAR (1g) = 0.702 W/kg; SAR (10g) = 0.227 W/kg

Smallest distance from peaks to all points 3 dB below = 5.9 mm

Ratio of SAR at M2 to SAR at M1 = 62.0 %

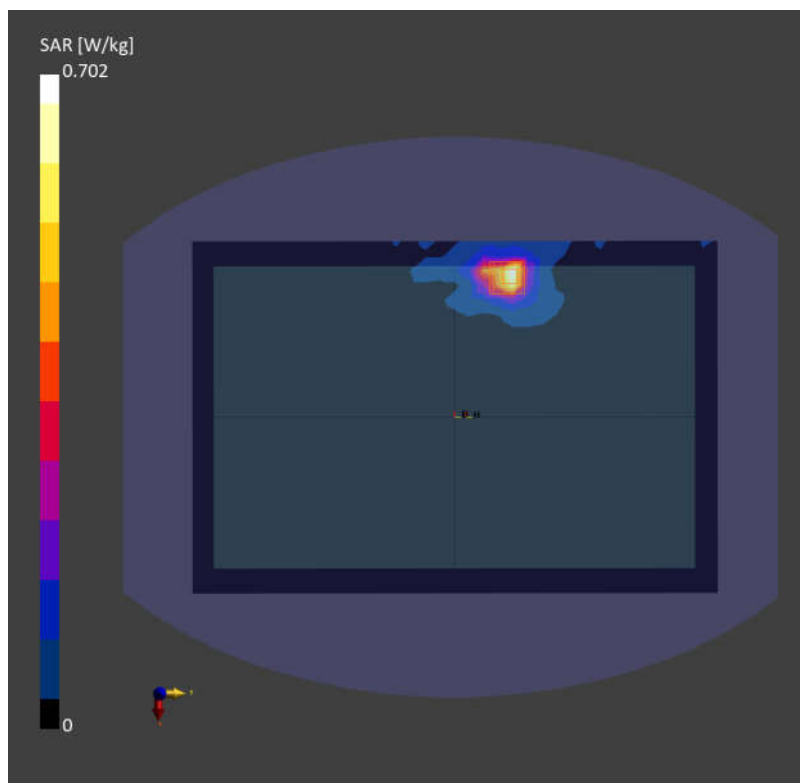

Date: 2026-02-11

15_WLAN5GHz_802.11a 6Mbps_Front_0mm_Ch64

Communication System: IEEE 802.11a/h WiFi 5 GHz

Frequency: 5320.000MHz; Duty Cycle: 1:1.018

Medium: HSL_5250_260211 Medium parameters used: $f = 5320.000$ MHz; $\sigma = 4.72$ S/m; $\epsilon_r = 36.3$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(5.9, 5.74, 5.85); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10062-CAE

Area Scan (240.0 mm x 360.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.514 W/kg; SAR (10g) = 0.188 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.04 dB

SAR (1g) = 0.714 W/kg; SAR (10g) = 0.228 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 61.0 %

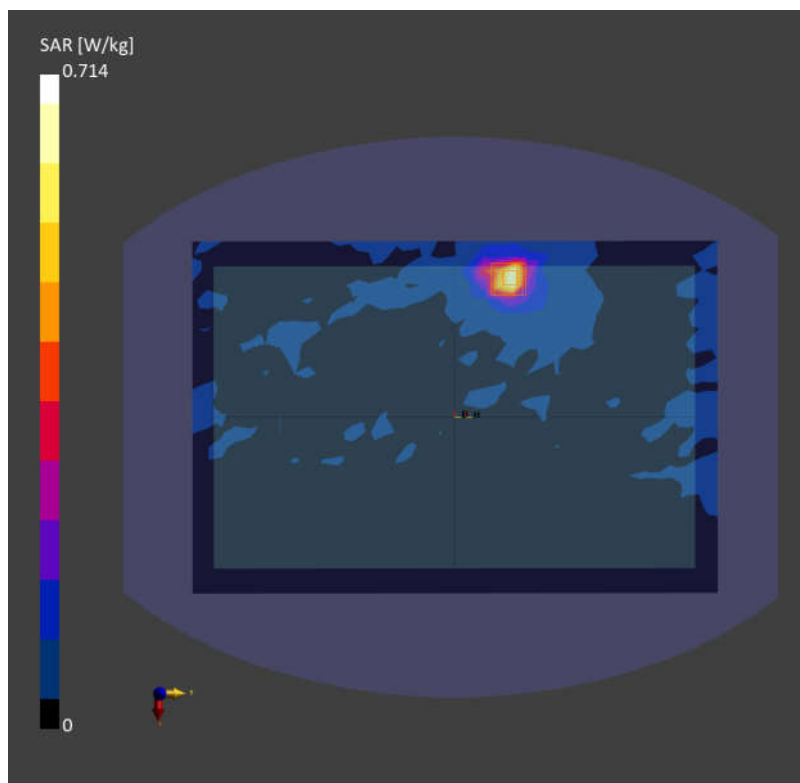

Date: 2026-02-11

16_WLAN5GHz_802.11a 6Mbps_Front_0mm_Ch100

Communication System: IEEE 802.11a/h WiFi 5 GHz

Frequency: 5500.000MHz; Duty Cycle: 1:1.018

Medium: HSL_5600_260211 Medium parameters used: $f = 5500.000$ MHz; $\sigma = 4.90$ S/m; $\epsilon_r = 36.0$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(5.45, 5.3, 5.4); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10062-CAE

Area Scan (240.0 mm x 360.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.571 W/kg; SAR (10g) = 0.212 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.01 dB

SAR (1g) = 0.801 W/kg; SAR (10g) = 0.276 W/kg

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 58.3 %

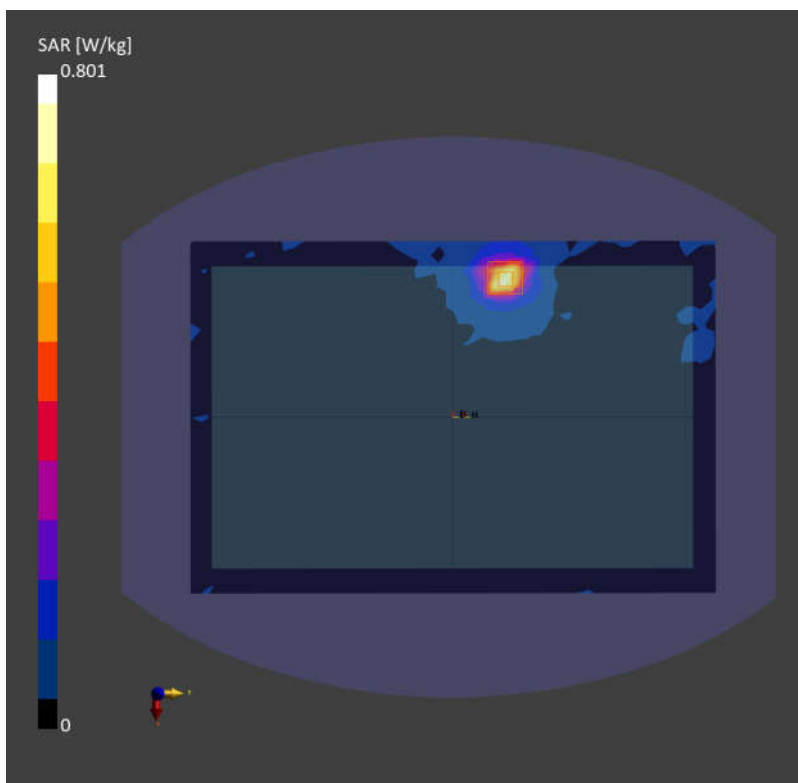

Date: 2026-02-11

17_WLAN5GHz_802.11n-HT20 MCS0_Front_0mm_Ch165

Communication System: IEEE 802.11n

Frequency: 5825.000 MHz; Duty Cycle: 1:1.026

Medium: HSL_5800_260211 Medium parameters used: $f = 5825.000$ MHz; $\sigma = 5.26$ S/m; $\epsilon_r = 35.4$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(5.31, 5.17, 5.27); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10591-AAD

Area Scan (240.0 mm x 360.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.268 W/kg; SAR (10g) = 0.102 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.08 dB

SAR (1g) = 0.364 W/kg; SAR (10g) = 0.144 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 54.5 %

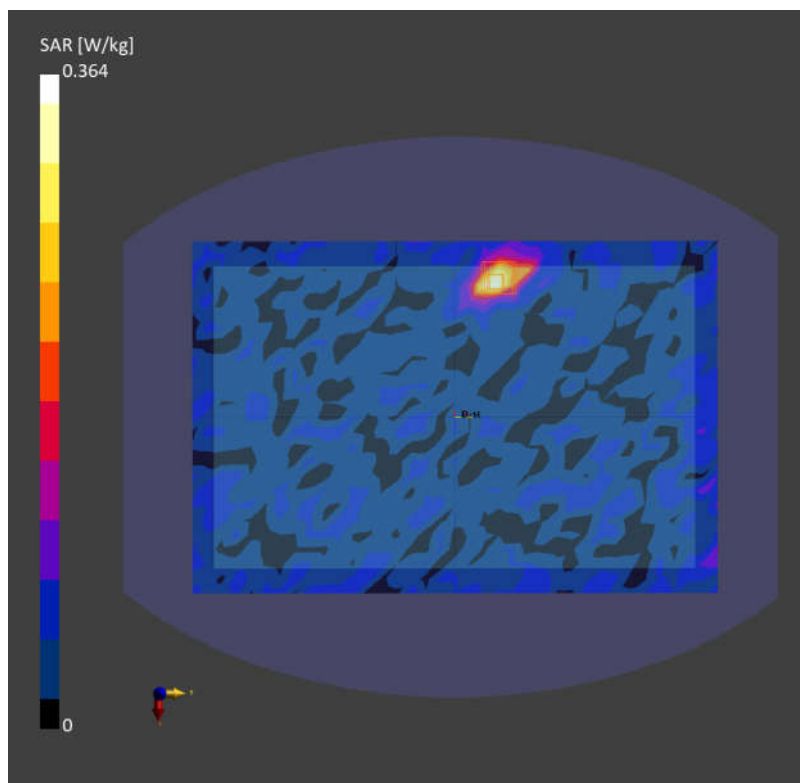

Date: 2026-02-07

18_Bluetooth_1Mbps_Front_0mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth

Frequency: 2441.000 MHz; Duty Cycle: 1:1.303

Medium: HSL_2450_260207 Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.71$ S/m; $\epsilon_r = 39.6$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(7.65, 7.44, 7.58); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (240.0 mm x 360.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.163 W/kg; SAR (10g) = 0.071 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.165 W/kg; SAR (10g) = 0.072 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 78.0 %

