

Date: 2026-01-18

01_WCDMA II_RMC 12.2Kbps_Front_0mm_Ch9262

Communication System: UMTS-FDD; Frequency: 1852.400 MHz; Duty Cycle: 1:1

Medium: HSL_1900_260118 Medium parameters used: $f = 1852.400$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 39.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(8.21, 7.99, 8.14); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (60.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 3.64 W/kg; SAR (10g) = 2.08 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 4.54 W/kg; SAR (10g) = 2.23 W/kg

Smallest distance from peaks to all points 3 dB below = 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 75.5 %

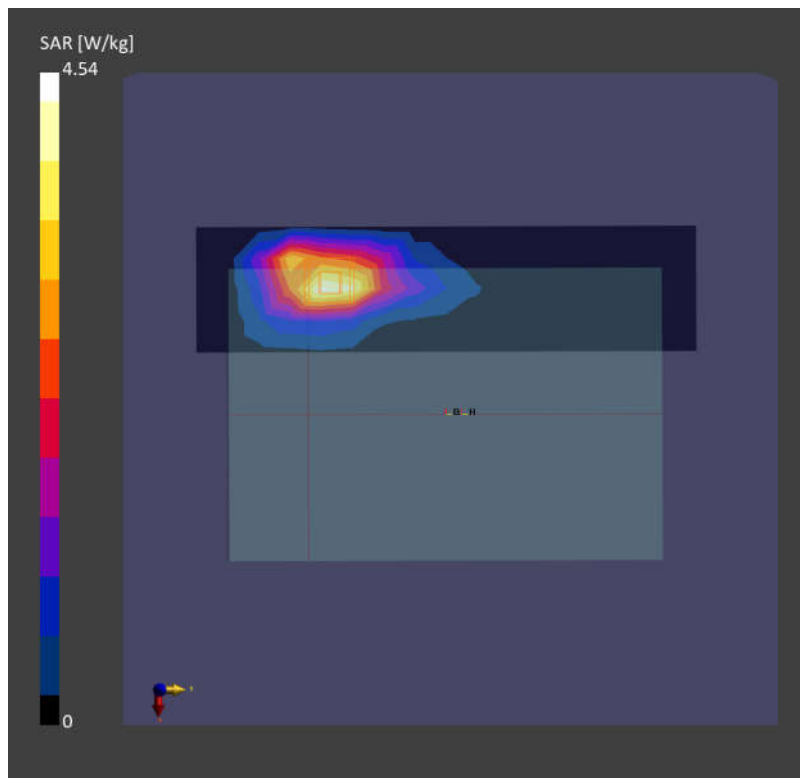

Date: 2026-01-18

02_WCDMA IV_RMC 12.2Kbps_Front_0mm_Ch1513

Communication System: UMTS-FDD; Frequency: 1752.600 MHz; Duty Cycle: 1:1

Medium: HSL_1750_260118 Medium parameters used: $f = 1752.600$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(8.4, 8.17, 8.33); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (60.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 3.68 W/kg; SAR (10g) = 2.19 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.19 dB

SAR (1g) = 4.25 W/kg; SAR (10g) = 2.23 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 76.6 %

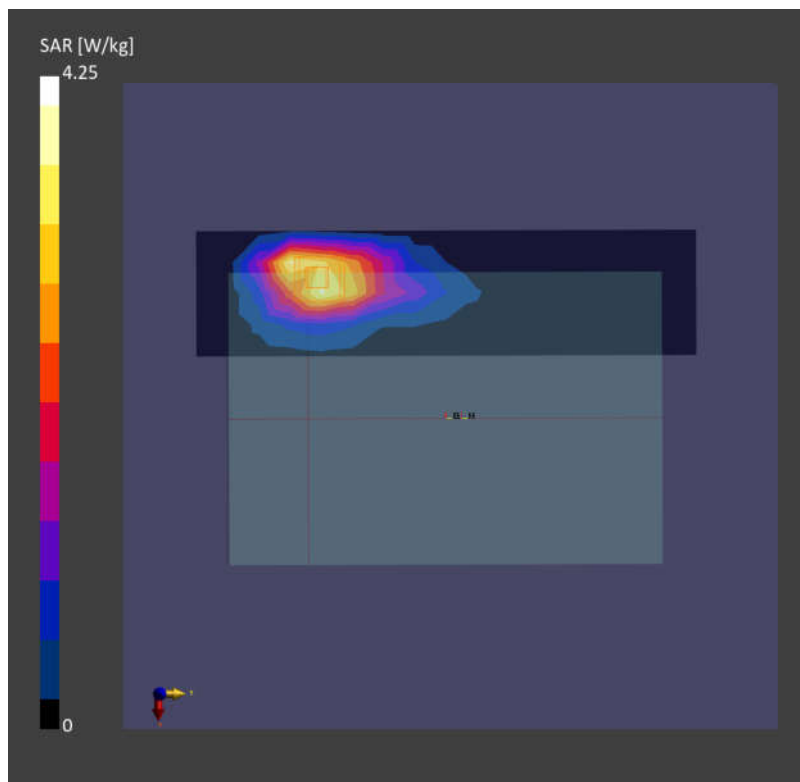

Date: 2026-01-18

03_WCDMA V_RMC 12.2Kbps_Front_0mm_Ch4182


Communication System: UMTS-FDD; Frequency: 836.400 MHz; Duty Cycle: 1:1
Medium: HSL_835_260118 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.927$ S/m; $\epsilon_r = 42.6$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(10.17, 9.9, 10.08); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (60.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 1.67 W/kg; SAR (10g) = 1.00 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.01 dB
SAR (1g) = 1.76 W/kg; SAR (10g) = 0.897 W/kg
Smallest distance from peaks to all points 3 dB below = 6.6 mm
Ratio of SAR at M2 to SAR at M1 = 77.0 %

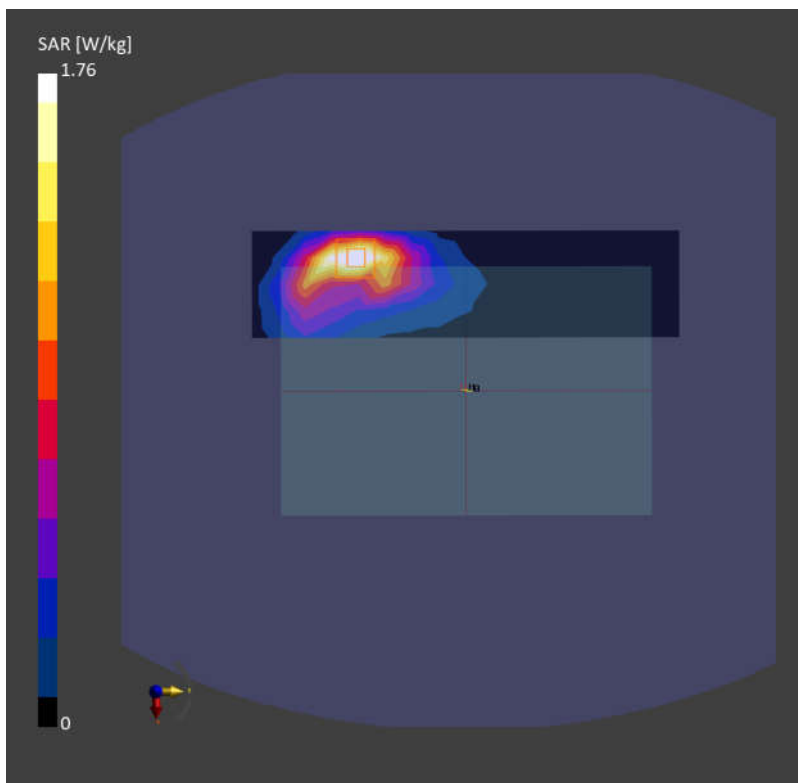

Date: 2026-01-18

04_LTE Band 7_20M_QPSK_1_49_Front_0mm_Ch20850

Communication System: LTE-FDD RBPosition:MidAntennaCfg:SISO;

Frequency: 2510.000 MHz; Duty Cycle: 1:1

Medium: HSL_2600_260118 Medium parameters used: $f = 2510.000$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(7.49, 7.28, 7.42); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (60.0 mm x 240.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 5.77 W/kg; SAR (10g) = 2.47 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 5.45 W/kg; SAR (10g) = 2.25 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 75.5 %

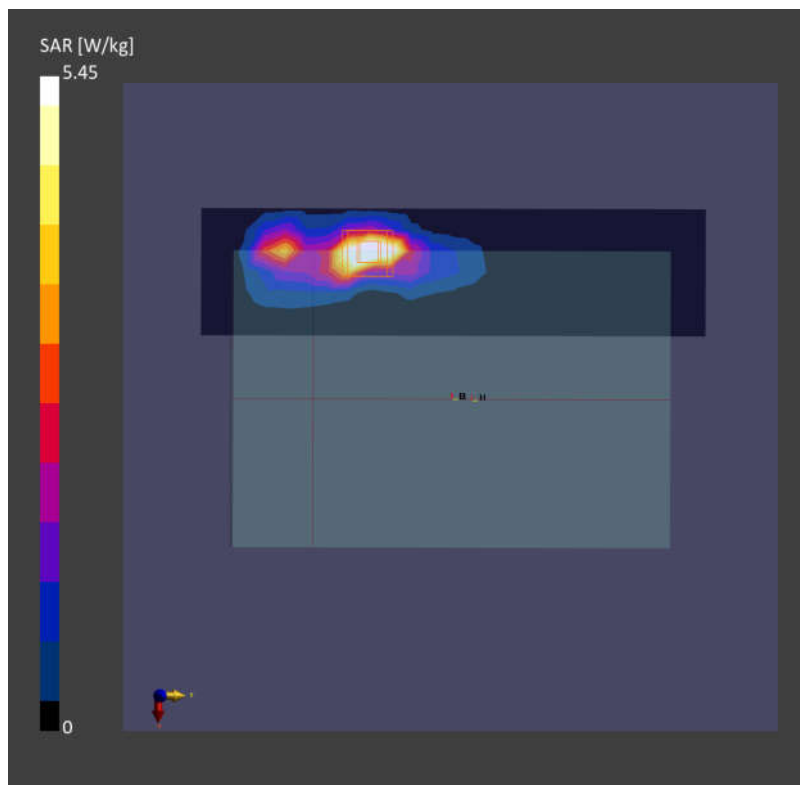

Date: 2026-01-18

05_LTE Band 12_10M_QPSK_1_0_Front_0mm_Ch23095

Communication System: LTE-FDD RBPosition:MidAntennaCfg:SISO;

Frequency: 707.500 MHz; Duty Cycle: 1:1

Medium: HSL_750_260118 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.879$ S/m; $\epsilon_r = 43.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(10.37, 10.09, 10.28); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (60.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.42 W/kg; SAR (10g) = 0.928 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 1.80 W/kg; SAR (10g) = 0.852 W/kg

Smallest distance from peaks to all points 3 dB below = 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 56.9 %

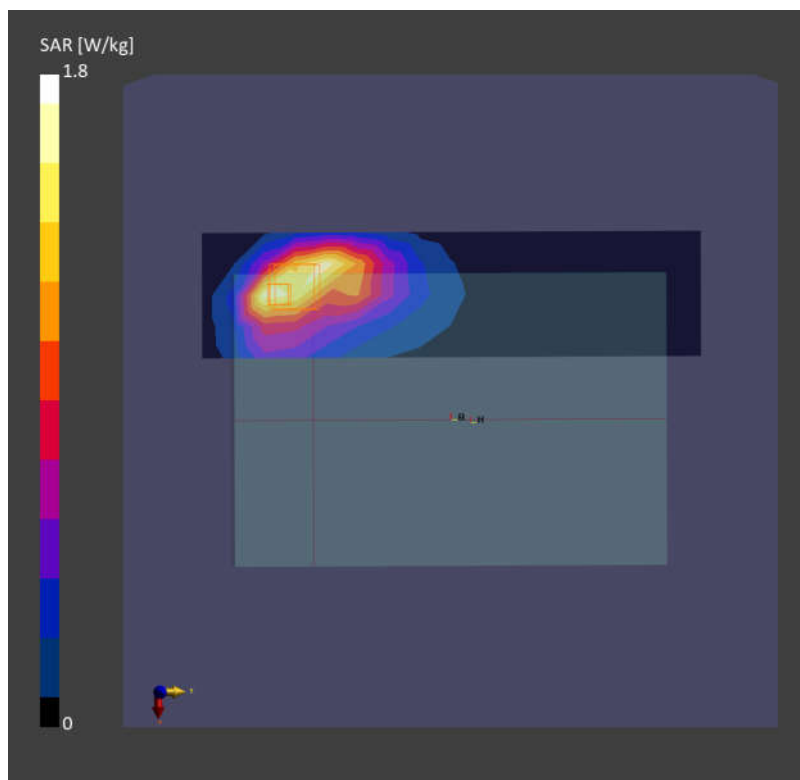

Date: 2026-01-18

06_LTE Band 13_10M_QPSK_1_49_Front_0mm_Ch23230


Communication System: LTE-FDD RBPosition:MidAntennaCfg:SISO;
Frequency: 782.000 MHz; Duty Cycle: 1:1
Medium: HSL_750_260118 Medium parameters used: $f=782.000$ MHz; $\sigma=0.906$ S/m; $\epsilon_r=42.7$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(10.37, 10.09, 10.28); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10179-CAH

Area Scan (180.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 1.36 W/kg; SAR (10g) = 0.853 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.09 dB
SAR (1g) = 1.62 W/kg; SAR (10g) = 0.776 W/kg
Smallest distance from peaks to all points 3 dB below = 6.9 mm
Ratio of SAR at M2 to SAR at M1 = 65.4 %

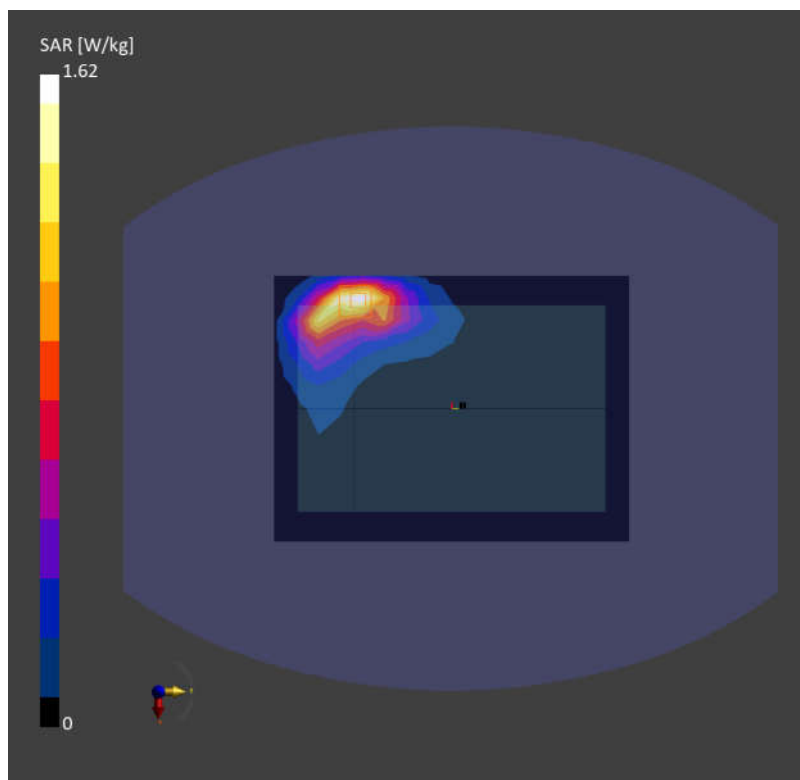

Date: 2026-01-18

07_LTE Band 14_10M_QPSK_1_0_Front_0mm_Ch23330

Communication System: LTE-FDD RBPosition:MidAntennaCfg:SISO;

Frequency: 793.000 MHz; Duty Cycle: 1:1

Medium: HSL_750_260118 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 42.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(10.37, 10.09, 10.28); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (180.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.29 W/kg; SAR (10g) = 0.803 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.06 dB

SAR (1g) = 1.47 W/kg; SAR (10g) = 0.699 W/kg

Smallest distance from peaks to all points 3 dB below = 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 65.7 %

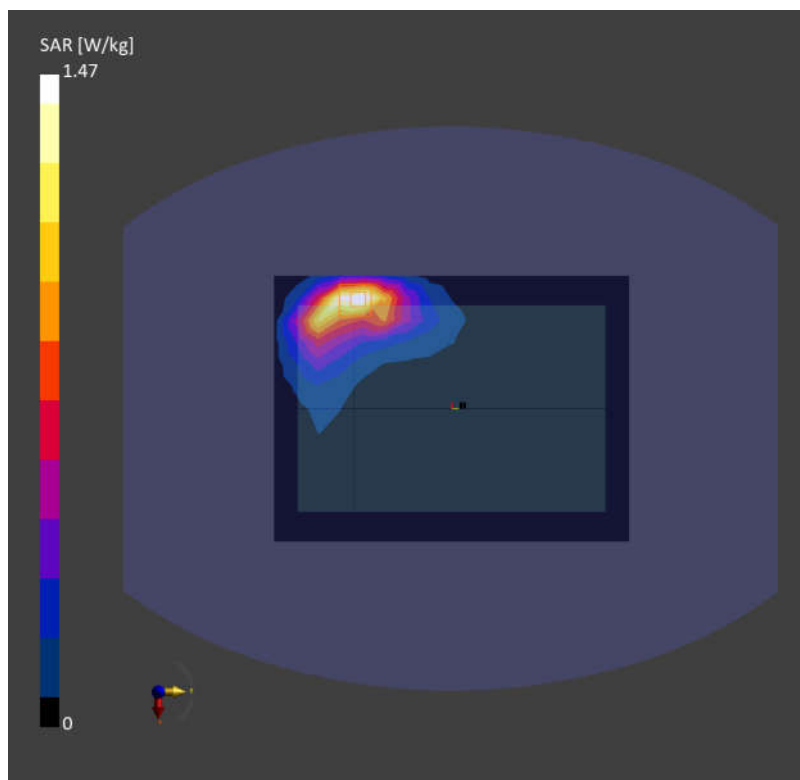

Date: 2026-01-18

08_LTE Band 25_20M_QPSK_1_0_Front_0mm_Ch26140

Communication System: LTE-FDD RBPosition:MidAntennaCfg:SISO;

Frequency: 1860.000 MHz; Duty Cycle: 1:1

Medium: HSL_1900_260118 Medium parameters used: $f = 1860.000$ MHz; $\sigma = 1.46$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(8.21, 7.99, 8.14); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (60.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 4.16 W/kg; SAR (10g) = 2.43 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 5.56 W/kg; SAR (10g) = 2.70 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 75.0 %

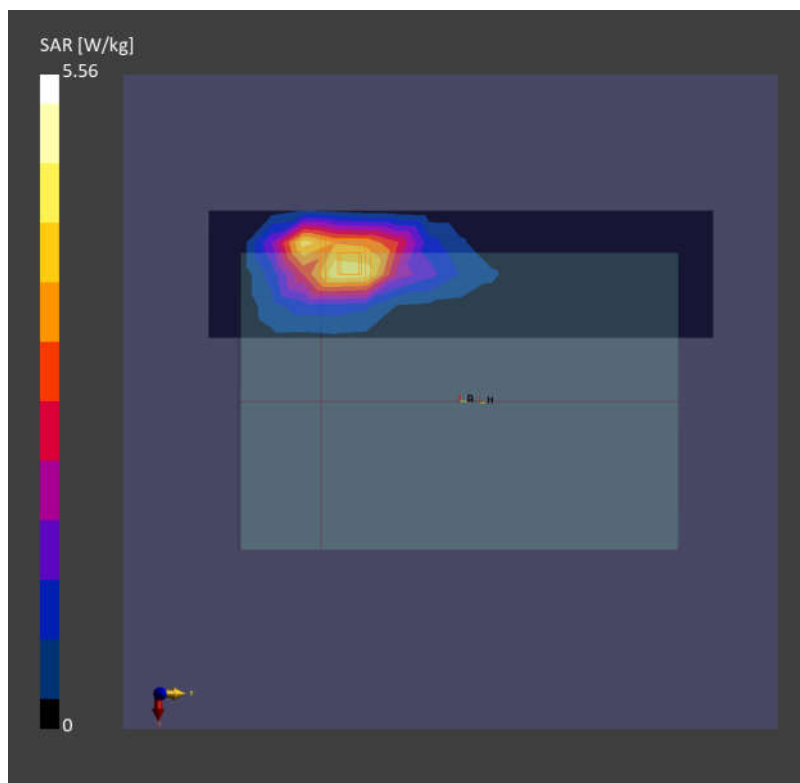

Date: 2026-01-18

09_LTE Band 26_15M_QPSK_1_37_Front_0mm_Ch26865

Communication System: LTE-FDD RBPosition:MidAntennaCfg:SISO;

Frequency: 831.500 MHz; Duty Cycle: 1:1

Medium: HSL_835_260118 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.915$ S/m; $\epsilon_r = 42.4$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(10.17, 9.9, 10.08); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10181-CAF

Area Scan (60.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.60 W/kg; SAR (10g) = 0.953 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 1.69 W/kg; SAR (10g) = 0.841 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 50.8 %

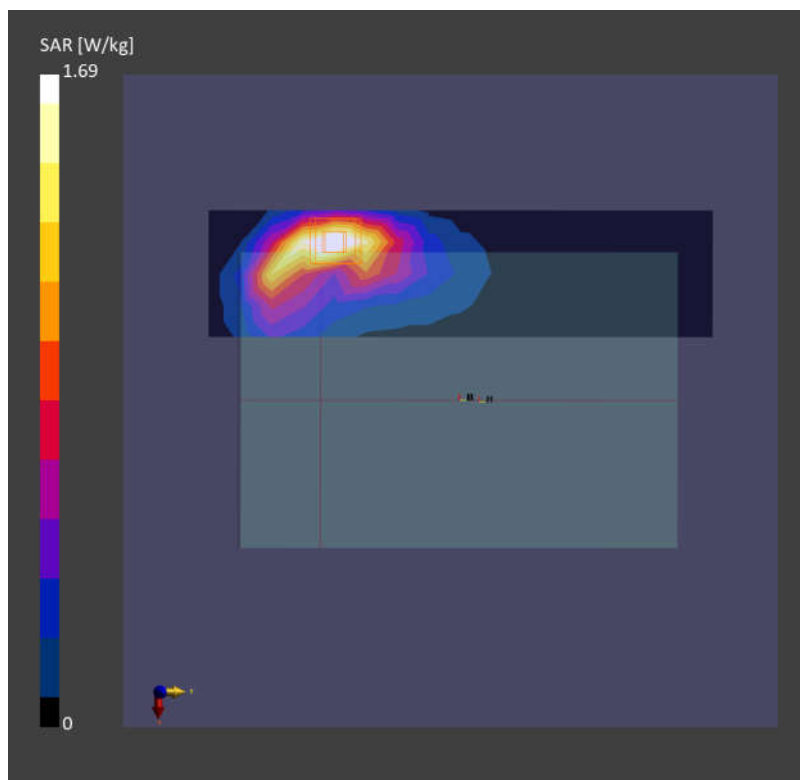

Date: 2026-01-18

10_LTE Band 66_20M_QPSK_1_49_Front_0mm_Ch132572

Communication System: LTE-FDD RBPosition:MidAntennaCfg:SISO;

Frequency: 1770.000 MHz; Duty Cycle: 1:1

Medium: HSL_1750_260118 Medium parameters used: $f = 1770.000$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(8.4, 8.17, 8.33); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (60.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 4.41 W/kg; SAR (10g) = 2.55 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.07 dB

SAR (1g) = 5.41 W/kg; SAR (10g) = 2.65 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 74.9 %

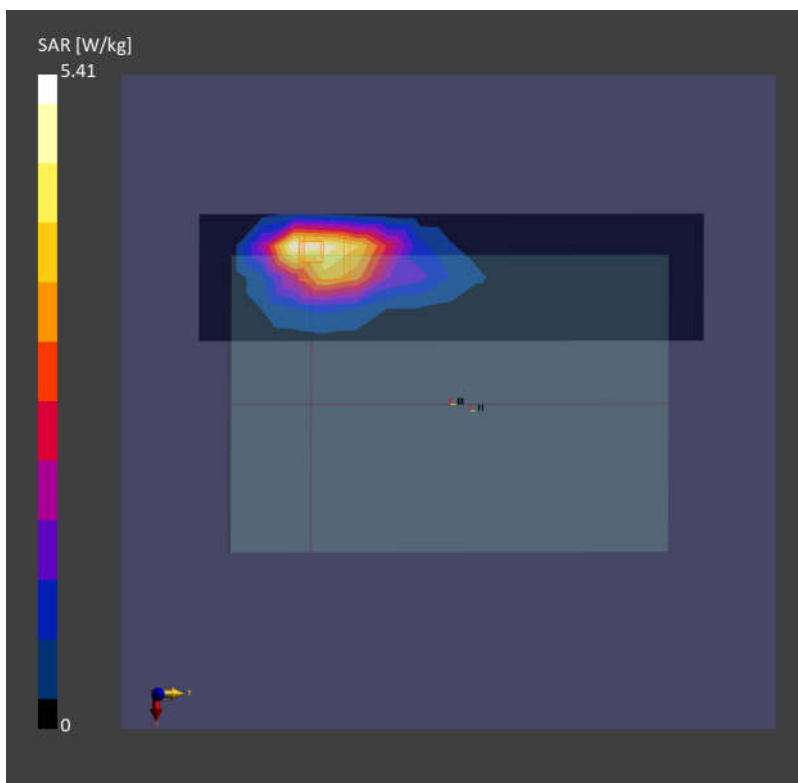

Date: 2026-01-18

11_LTE Band 71_20M_QPSK_1_0_Front_0mm_Ch133297

Communication System: LTE-FDD RBPosition:MidAntennaCfg:SISO;

Frequency: 680.500 MHz; Duty Cycle: 1:1

Medium: HSL_750_260118 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.862$ S/m; $\epsilon_r = 43.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(10.37, 10.09, 10.28); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (60.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.71 W/kg; SAR (10g) = 1.11 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 2.13 W/kg; SAR (10g) = 1.00 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 50.9 %

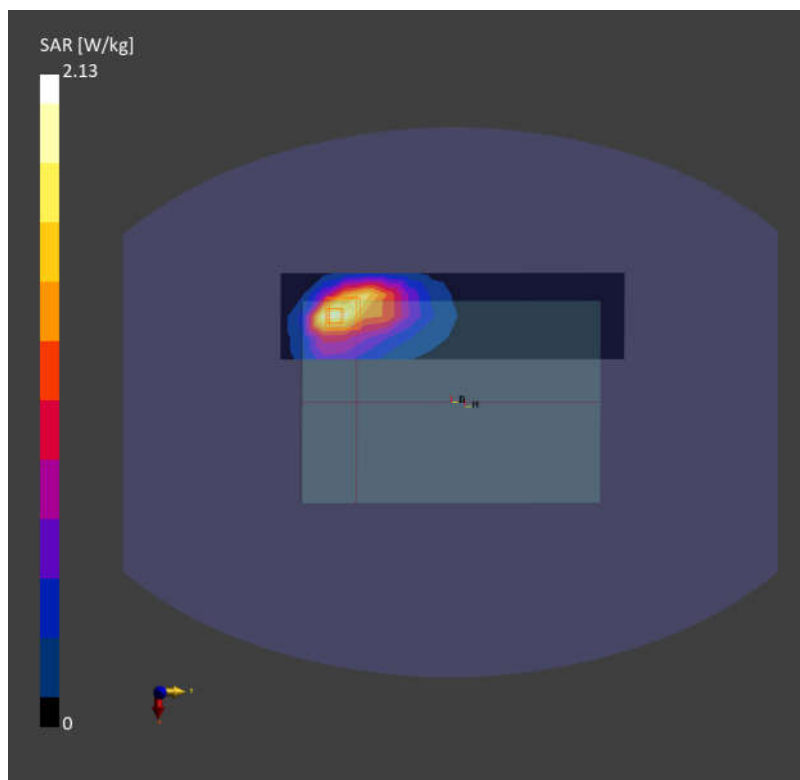

Date: 2026-01-18

12_LTE Band 41_20M_QPSK_1_0_Front_0mm_Ch40620

Communication System: LTE-TDD RBPosition:MidAntennaCfg:SISO;

Frequency: 2593.000 MHz; Duty Cycle: 1:1

Medium: HSL_2600_260118 Medium parameters used: $f = 2593.000$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 38.6$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(7.49, 7.28, 7.42); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10172-CAH

Area Scan (60.0 mm x 240.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 2.34 W/kg; SAR (10g) = 0.975 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 2.39 W/kg; SAR (10g) = 0.973 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 75.3 %

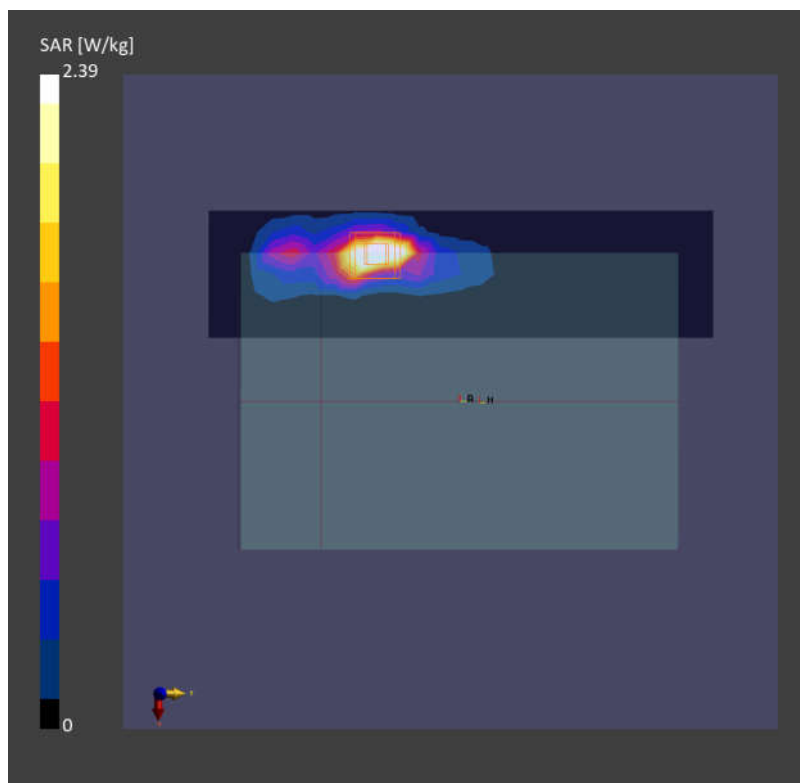

Date: 2026-01-19

13_WLAN2.4GHz_802.11b 1Mbps_Front_0mm_Ch1

Communication System: IEEE 802.11b WiFi 2.4 GHz

Frequency: 2412.000MHz; Duty Cycle: 1:1.01

Medium: HSL_2450_260119 Medium parameters used: $f = 2412.000$ MHz; $\sigma = 1.73$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(7.65, 7.44, 7.58); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10012-CAB

Area Scan (160.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.529 W/kg; SAR (10g) = 0.240 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.604 W/kg; SAR (10g) = 0.240 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 66.9 %

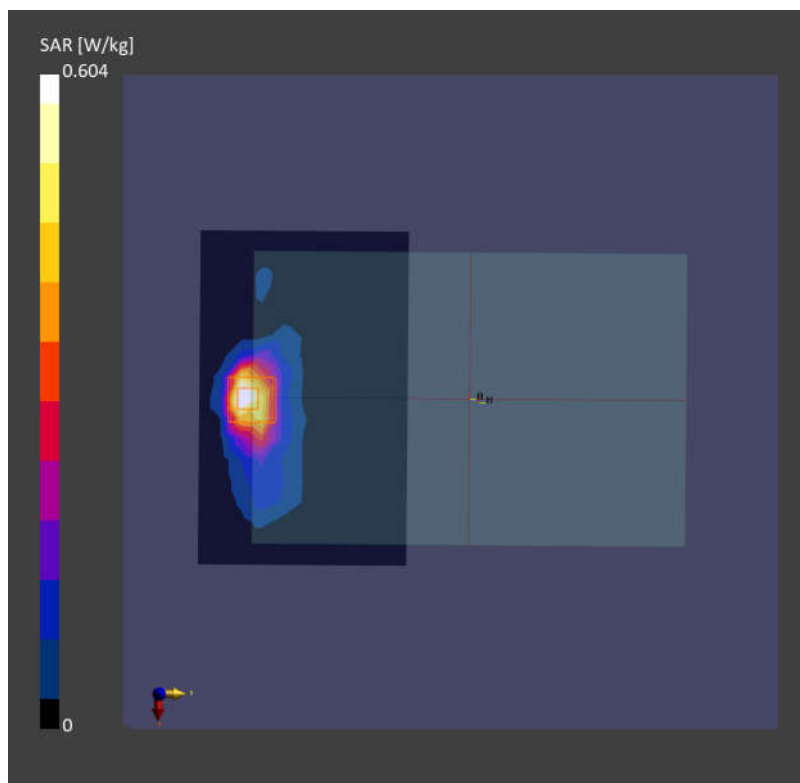

Date: 2026-01-19

14_WLAN5GHz_802.11a 6Mbps_Front_0mm_Ch36

Communication System: IEEE 802.11a/h WiFi 5 GHz;

Frequency: 5180.000MHz; Duty Cycle: 1:1

Medium: HSL_5250_260119 Medium parameters used: $f = 5180.000$ MHz; $\sigma = 4.63$ S/m; $\epsilon_r = 36.6$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(5.9, 5.74, 5.85); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10062-CAE

Area Scan (160.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.673 W/kg; SAR (10g) = 0.225 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.06 dB

SAR (1g) = 0.867 W/kg; SAR (10g) = 0.267 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 61.9 %

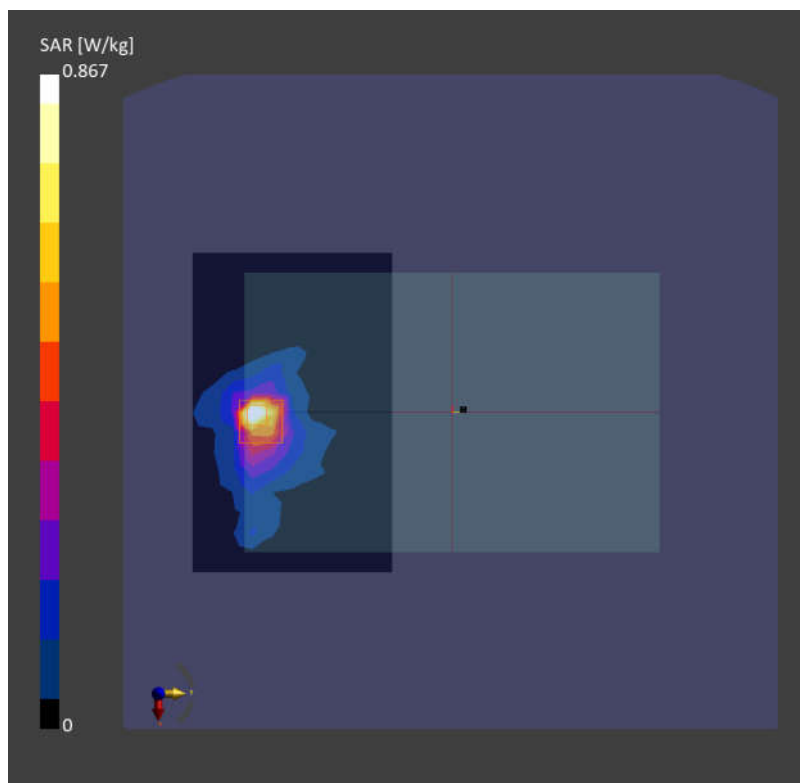

Date: 2026-01-19

15_WLAN5GHz_802.11a 6Mbps_Front_0mm_Ch60

Communication System: IEEE 802.11a WiFi 5 GHz

Frequency: 5300.000 MHz; Duty Cycle: 1:1

Medium: HSL_5250_260119 Medium parameters used: $f = 5300.000$ MHz; $\sigma = 4.69$ S/m; $\epsilon_r = 36.4$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(5.9, 5.74, 5.85); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10317-AAE

Area Scan (160.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.943 W/kg; SAR (10g) = 0.294 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 1.14 W/kg; SAR (10g) = 0.315 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 59.0 %

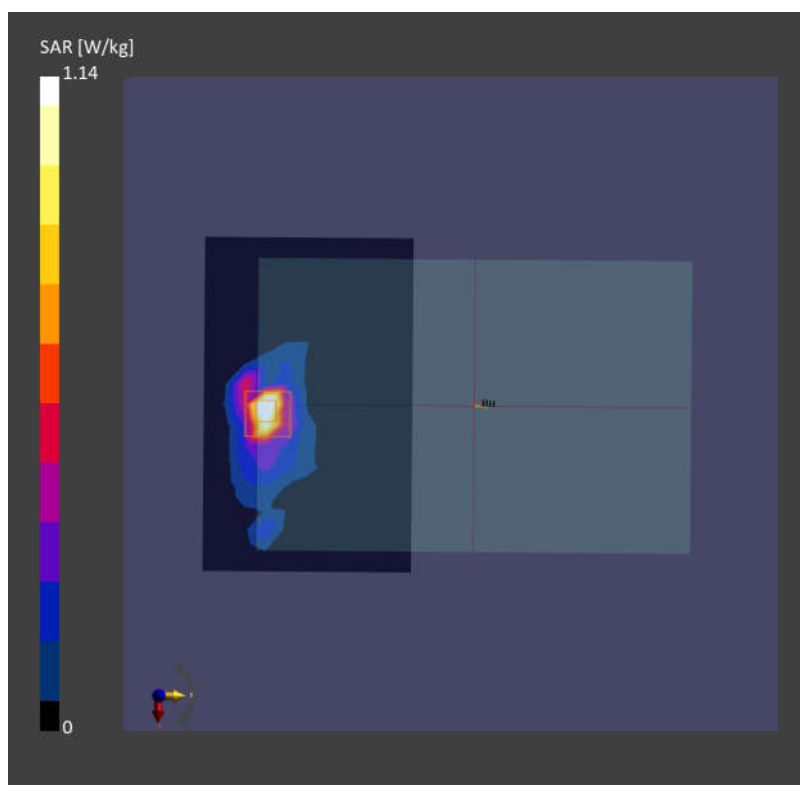

Date: 2026-01-19

16_WLAN5GHz_802.11a 6Mbps_Front_0mm_Ch100

Communication System: IEEE 802.11a/h WiFi 5 GHz;

Frequency: 5500.000MHz; Duty Cycle: 1:1

Medium: HSL_5600_260119 Medium parameters used: $f = 5500.000$ MHz; $\sigma = 4.97$ S/m; $\epsilon_r = 36.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(5.45, 5.3, 5.4); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10062-CAE

Area Scan (160.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.459 W/kg; SAR (10g) = 0.147 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.07 dB

SAR (1g) = 1.17 W/kg; SAR (10g) = 0.290 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 58.2 %

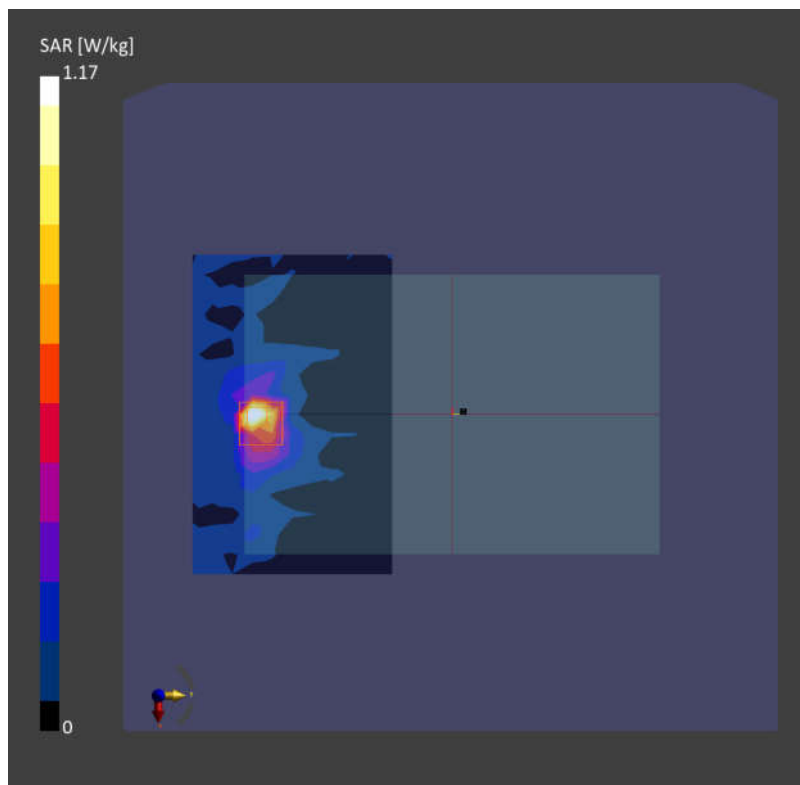

Date: 2026-01-19

17_WLAN5GHz_802.11a 6Mbps_Front_0mm_Ch165

Communication System: IEEE 802.11a/h WiFi 5 GHz

Frequency: 5825.000MHz; Duty Cycle: 1:1

Medium: HSL_5800_260119 Medium parameters used: $f = 5825.000$ MHz; $\sigma = 5.24$ S/m; $\epsilon_r = 35.6$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(5.31, 5.17, 5.27); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10062-CAE

Area Scan (160.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.908 W/kg; SAR (10g) = 0.275 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.03 dB

SAR (1g) = 1.21 W/kg; SAR (10g) = 0.341 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 55.5 %

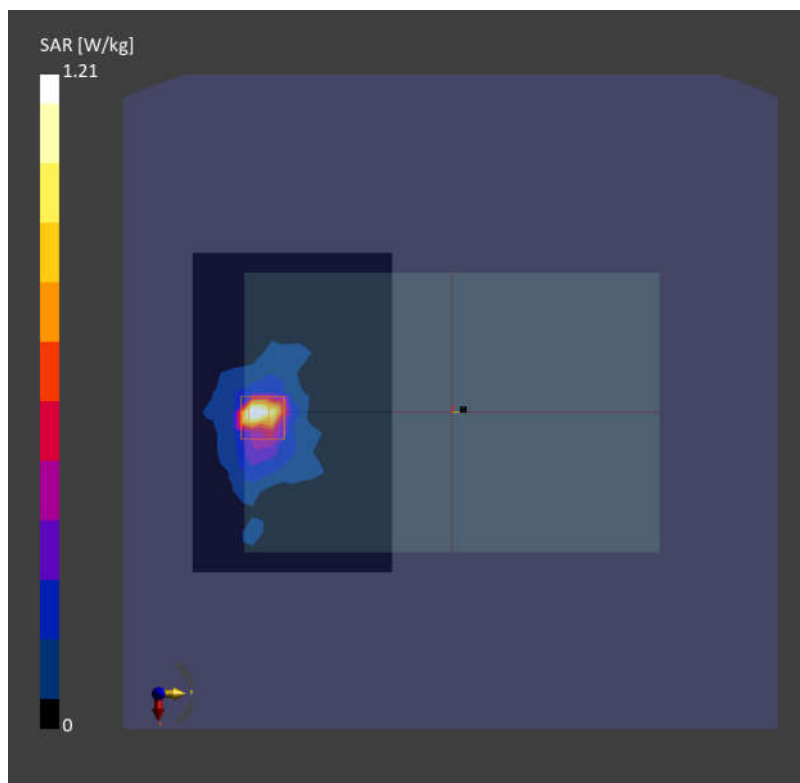

Date: 2026-01-19

18_Bluetooth_1Mbps_Front_0mm_Ch0

Communication System: IEEE 802.15.1 Bluetooth;

Frequency: 2402.000 MHz; Duty Cycle: 1:1.301

Medium: HSL_2450_260119 Medium parameters used: $f = 2402.000$ MHz; $\sigma = 1.71$ S/m; $\epsilon_r = 39.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(7.65, 7.44, 7.58); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (160.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.316 W/kg; SAR (10g) = 0.143 W/kg;

Zoom Scan (33.6 mm x 33.6 mm x 30.0 mm): Measurement Grid: 4.8 mm x 4.8 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.360 W/kg; SAR (10g) = 0.142 W/kg

Smallest distance from peaks to all points 3 dB below = 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 74.8 %

