

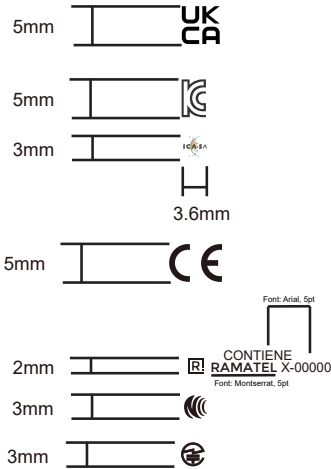


NOTES:

- 1.Surface Material:50# Mylar
- 2.Surface Material tolerance:0.050±0.005mm
- 3.Surface Material color:white
- 4.printing color is as color defined in artwork
- 5.Adhesive:Acrylic
- 6.Adhesive thickness:0.024+/-0.003mm
- 7.Adhesion to steel(180°磨钢粘着力):1.6±0.3 kg/25mm
- 8.Initial Tack (初期力):2↑ #/boll
- 9.Release Power(90°剥离力):5-25 g/25mm
- 10.Holding Power(持粘力测试法):8°↑ hr/kg/20mm²
- 11.Package Style: Sheet or reel
- 12.This part must comply with ROHs.




Size :20*20mm



scale:1:1

scale:2:1

Back of PCB-----Label

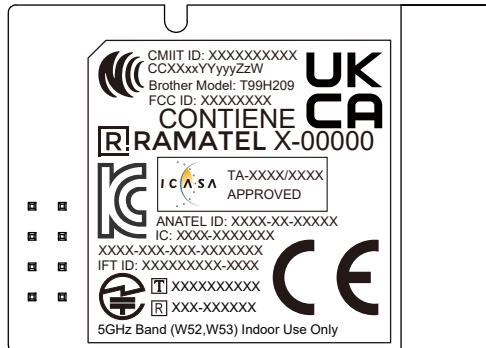

標籤製作黏貼方式 /T99H209.00/02/1 OF 7

MATERIAL(SPEC.)										SCALE 1:2	 Foxconn Industrial Internet 富士康工业互联网					
FINISH										SHEET						
Select	*	A	B	C	EPS	EPE	BAG	CTN	LABEL	USR	UNIT	PART NAME				
Dim. Tol.											mm	A4	MODEL	PART NO.	DESIGNED	
0~6	0.05	0.05	0.10						0.20	0.05			SIZE	T99H209.00	500.XXXXX.005	Zoey Wei
6~30	0.10	0.15	0.20	0.50	0.50	3.00			0.20	0.05						
30~120	0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25	0.10							
120~300	0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30	0.15							
300~450	0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50	0.20							
450~600	0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80	0.20				CUSTOMER MODEL	CUSTOMER PART NO.	APPROVED	
DRAFT TOLERANCE				±0.2'		CRITICAL DIM. MARK				*/@			Bailey Tan			