


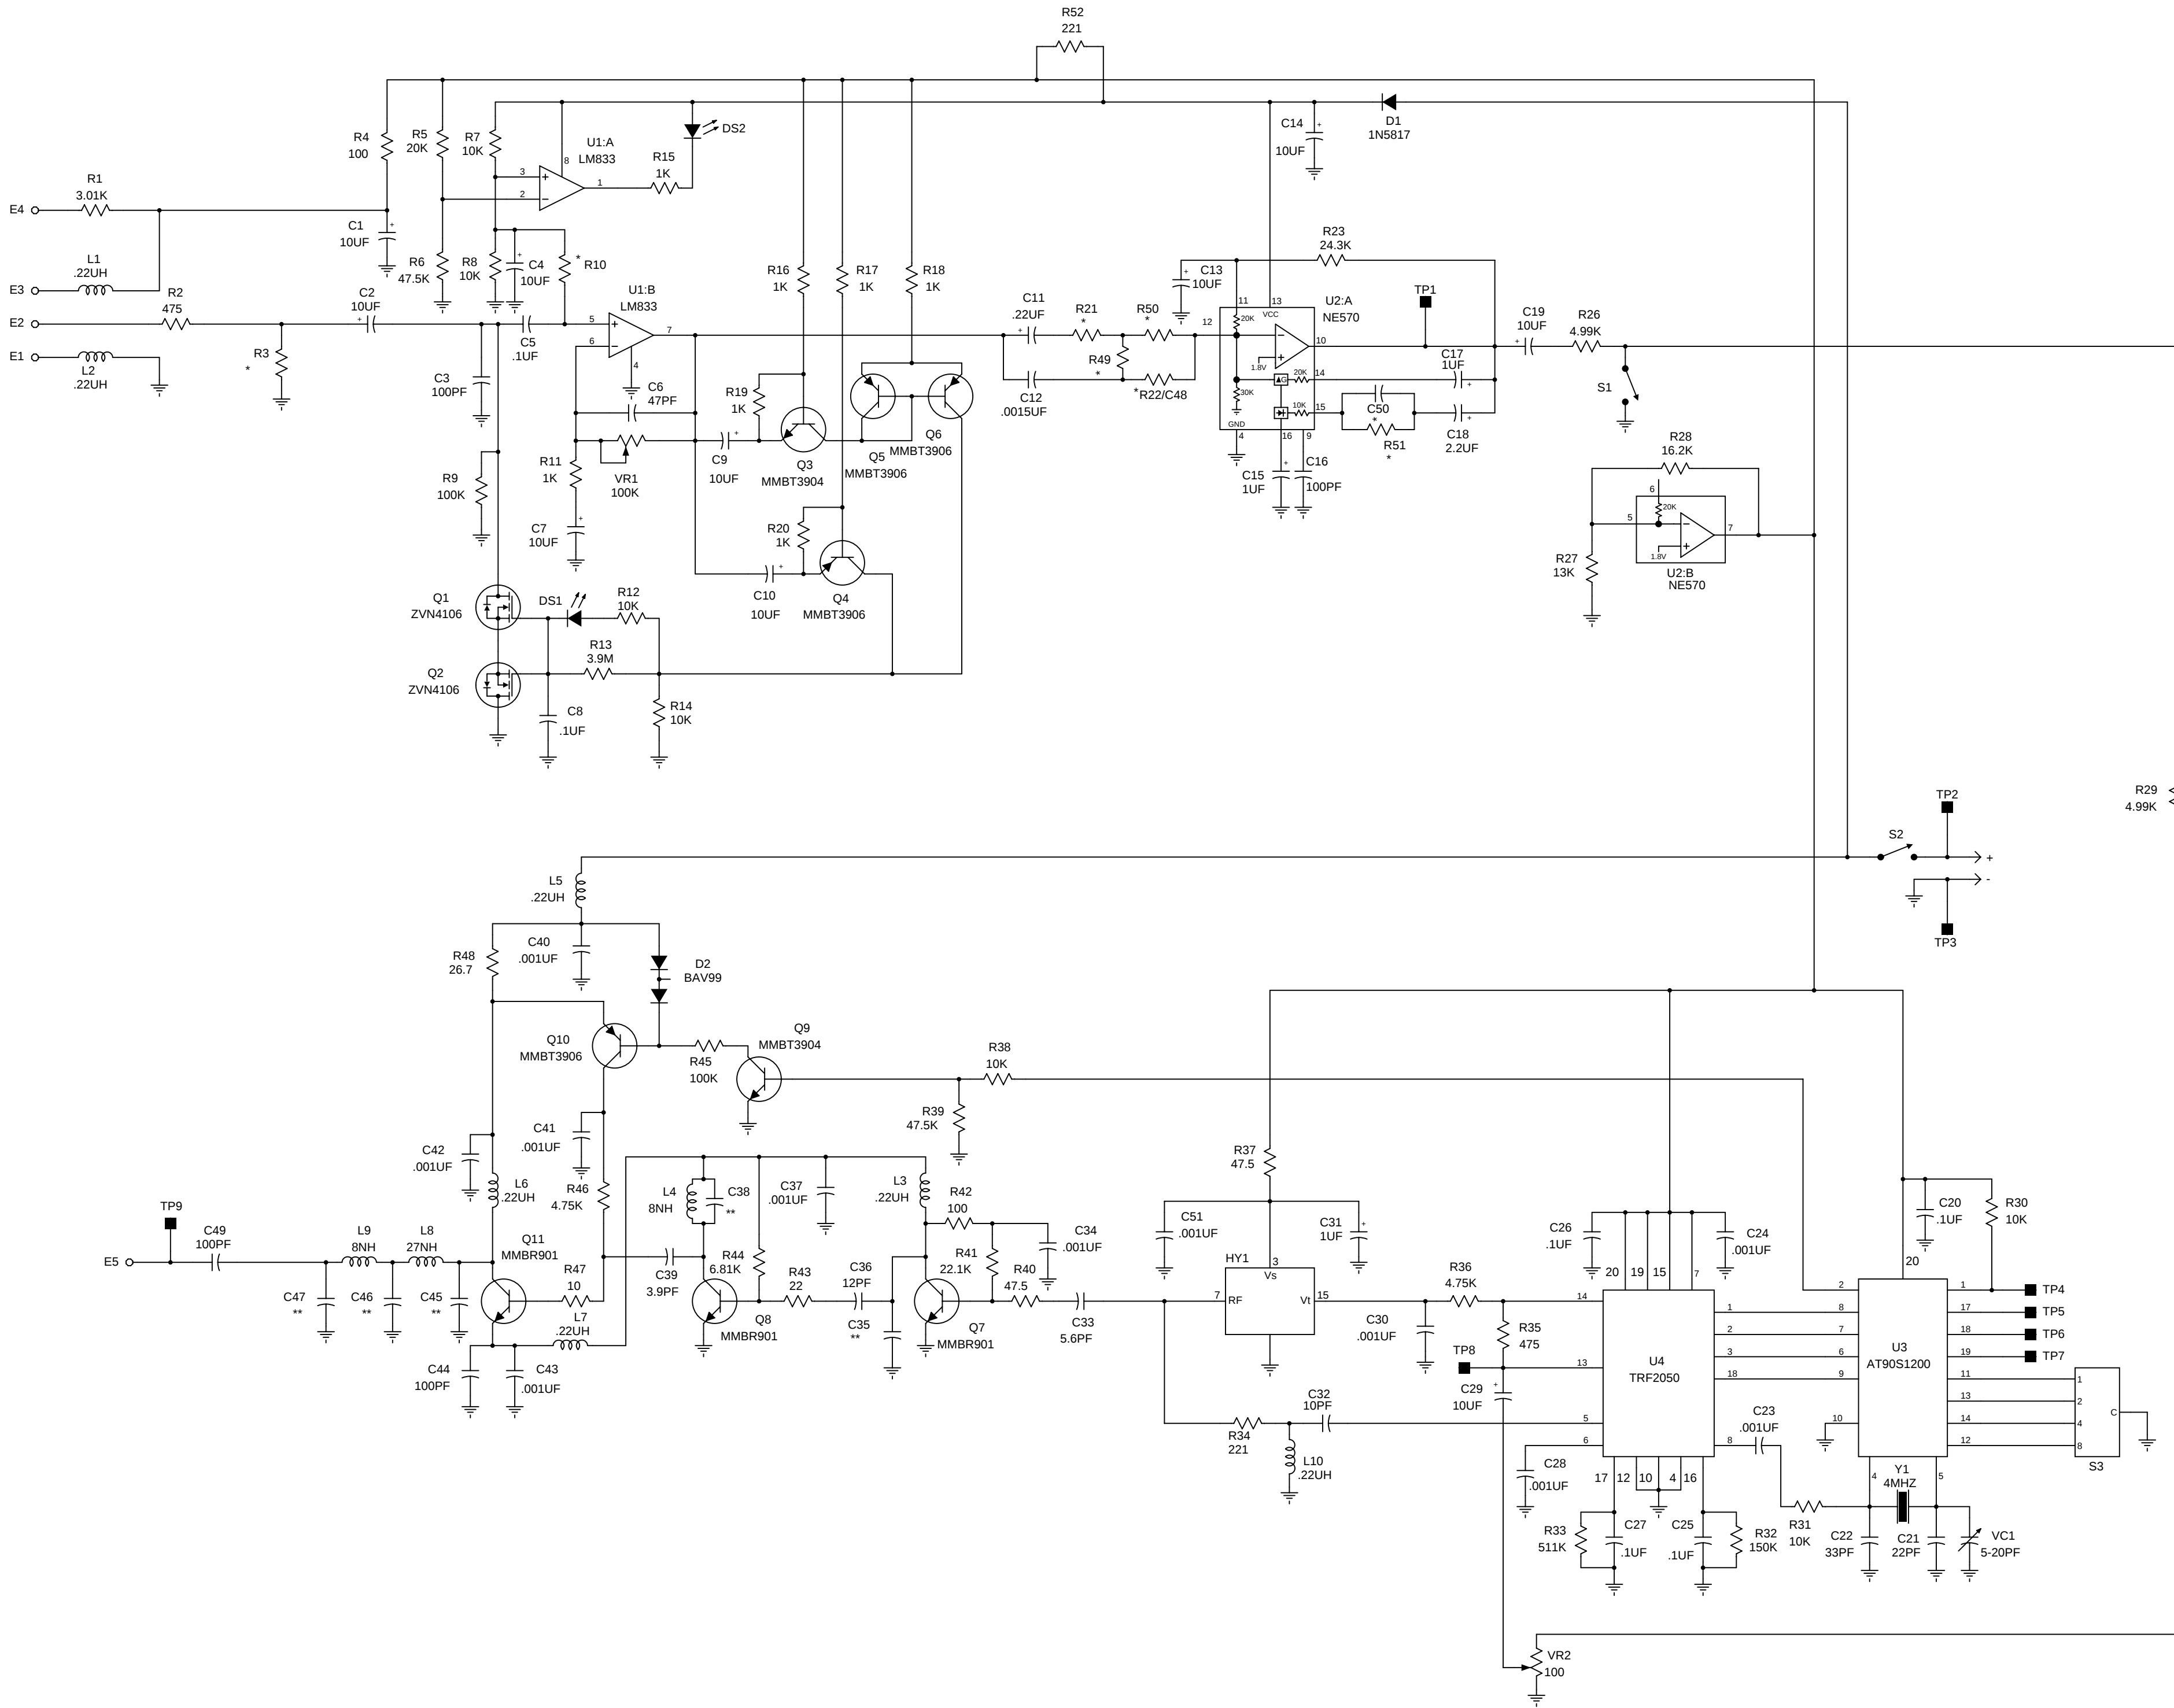

* MODEL TABULATION								
REFERENCE DESIGNATOR								
MODEL	C50	R3	R10	R21	R22/C48	R49	R50	R51
VOICE	NO PART	10K	47.5K	26.7K	6.65K	NO PART	0 OHM	0 OHM
GUITAR	.1UF	NO PART	200K	10K	.01UF	0 OHM	35.7K	30.1K

** FREQUENCY TABULATION						
US FREQ. RANGE	R.O.W. FREQ. RANGE	REFERENCE DESIGNATOR				
		C35	C38	C45	C46	C47
518-566MHz	512-566MHz	3.9PF	2.7PF	2.2PF	6.8PF	4.7PF
566-620MHz	566-620MHz	2.7PF	2.7PF	1.8PF	5.6PF	4.7PF
620-680MHz	620-680MHz	1.8PF	2.2PF	1.5PF	4.7PF	3.9PF
680-752MHz	680-752MHz	1.2PF	1.8PF	1.2PF	3.9PF	3.9PF
752-806MHz	752-825MHz	---	1.5PF	1.0PF	3.3PF	3.9PF

REFERENCE PCB 750503

NOTES:

QTY		DESCRIPTION		ITEM	PART NO	DESIGNATOR	
		UNSPECIFIED LIMITS OF TOLERANCE		DATE	7/6/99		TELEX[®] TELEX COMMUNICATIONS INC. Lincoln Nebraska U.S.A
		DECIMAL:	FRACTION:	DR BY	RB		
		.X = .050 IN	MACHINED	CHK BY	DDN 12/01/99		
		.XX = .030 IN	FINISH:	APPD.	RB 12/01/99		
		.XXX = .010 IN		PROD			
		ANGLES 1 : BENDS 2 +		MATERIAL:		TITLE	
		STRAIGHTNESS AND/OR FLATNESS .005 IN/1 IN.				NBPU 10 CHNL	
		CONCENTRICITY .010 TIR				SYNTHESIZED TRANSMITTER	
		UNMARKED ANGLES, BENDS AND INTERSECTIONS 90				SIZE D	
879230-ALL(TH)		CONCENTRICITY .010 TIR				CODE IDENT	DWG.NO.
879229-ALL(SMT)	NBPU	UNMARKED ANGLES, BENDS AND INTERSECTIONS 90				57010	770597
NEXT ASSY.	USED ON	THREADS- EXT. CLASS 2A INT. CLASS 2B				SCALE	SHEET
APPLICATIONS							