



M. Flom Associates, Inc. - Global Compliance Center

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

T R A N S M I T T E R C E R T I F I C A T I O N

of

FCC ID: B5DM518

MODEL: TR-800

to

FEDERAL COMMUNICATIONS COMMISSION

Rule Parts 74 H, 74.861, Confidentiality

DATE OF REPORT: January 29, 2003

ON THE BEHALF OF THE APPLICANT:

Telex Communications, Inc.

AT THE REQUEST OF:

P.O. 269063

Telex Communications, Inc.
8601 E. Cornhusker Highway
P.O. Box 5579
Lincoln, NE 68505-5579

Attention of:

Jim Andersen, Pro Audio Engineering
(402) 467-5321; FAX: -3279
email: jim.andersen@telex.com

SUPERVISED BY:

A handwritten signature in black ink, reading 'M. Flom P. Eng.', is positioned above the printed name of the supervisor.

Morton Flom, P. Eng.

THE APPLICANT HAS BEEN CAUTIONED AS TO THE FOLLOWING:

15.21 INFORMATION TO USER.

The users manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) SPECIAL ACCESSORIES.

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

TABLE OF CONTENTS

<u>RULE</u>	<u>DESCRIPTION</u>	<u>PAGE</u>
	Test Report	1
2.1033(c)	General Information Required	2
2.1033(c)(14)	Rule Summary	5
	Standard Test Conditions and Engineering Practices	6
2.1046(a)	Carrier Output Power (Conducted)	7
2.1046(a)	ERP Carrier Power (Radiated)	9
2.1051	Unwanted Emissions (Transmitter Conducted)	10
2.1053(a)	Field Strength of Spurious Radiation	13
2.1049(c)(1)	Emission Masks (Occupied Bandwidth)	17
2.1047(a)	Audio Frequency Response	25
2.1047(b)	Modulation Limiting	27
2.1055(a)(1)	Frequency Stability (Temperature Variation)	29
2.1055(b)(1)	Frequency Stability (Voltage Variation)	32
2.202(g)	Necessary Bandwidth and Emission Bandwidth	33

PAGE NO.

1 of 33.

Required information per ISO/IEC Guide 25-1990, paragraph 13.2:

a)

TEST REPORT

b) Laboratory: M. Flom Associates, Inc.
(FCC: 31040/SIT) 3356 N. San Marcos Place, Suite 107
(Canada: IC 2044) Chandler, AZ 85225

c) Report Number: d0310045

d) Client: Telex Communications, Inc.
8601 E. Cornhusker Highway
P.O. Box 5579
Lincoln, NE 68505-5579

e) Identification: TR-800
FCC ID: B5DM518
EUT Description: Wireless Intercom Beltpack

f) EUT Condition: Not required unless specified in individual tests.

g) Report Date: January 29, 2003
EUT Received: December 16, 2002

h, j, k): As indicated in individual tests.

i) Sampling method: No sampling procedure used.

l) Uncertainty: In accordance with MFA internal quality manual.

m) Supervised by:



Morton Flom, P. Eng.

n) Results: The results presented in this report relate only to the item tested.

o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

PAGE NO. 2 of 33.

LIST OF GENERAL INFORMATION REQUIRED FOR CERTIFICATIONIN ACCORDANCE WITH FCC RULES AND REGULATIONS,
VOLUME II, PART 2 AND TO

74 H, 74.861, Confidentiality

Sub-part 2.1033

(c)(1): NAME AND ADDRESS OF APPLICANT:Telex Communications, Inc.
8601 E. Cornhusker Highway
P.O. Box 5579
Lincoln, NE 68505-5579MANUFACTURER:

Telex Communications, Inc.

(c)(2): FCC ID: B5DM518MODEL NO: TR-800(c)(3): INSTRUCTION MANUAL(S):

PLEASE SEE ATTACHED EXHIBITS

(c)(4): TYPE OF EMISSION: 83K0F3E(c)(5): FREQUENCY RANGE, MHz: 470 to 608
614 to 746(c)(6): POWER RATING, Watts: 0.050
x Switchable ____ Variable ____ N/A(c)(7): MAXIMUM POWER RATING, Watts: 0.250DUT RESULTS: Passes x Fails ____

American Association for Laboratory Accreditation

SCHEM OF ACCREDITATION TO ISO/IEC 17025:2005

94 FLOOM ASSOCIATES, INC.
Electronic Testing Laboratory
100 North Sun Valley Place, Suite 100
Chandler, AZ 85225
March 2, 2006 Phone: 480-928-1320

ELECTRICAL (EMC)

Valid to: December 31, 2007

Certification Number: 1000-01

In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory to perform the following electromagnetics compatibility test(s):

Test	Standard(s)
RF Emissions	FCC Part 15 Channels B and C using ANSI C63.4-2005, CISPR 11; CISPR 15, CISPR 14, CISPR 22; EN 55011, EN 55011, EN 55011, EN 55022, EN 55011-1, EN 55011-2, EN 55011-3, EN 55011-4, EN 55011-5, EN 55011-6, EN 55011-7, EN 55011-8, EN 55011-9, EN 55011-10, EN 55011-11, EN 55011-12, EN 55011-13, EN 55011-14, EN 55011-15, EN 55011-16, EN 55011-17, EN 55011-18, EN 55011-19, EN 55011-20, EN 55011-21, EN 55011-22, EN 55011-23, EN 55011-24, EN 55011-25, EN 55011-26, EN 55011-27, EN 55011-28, EN 55011-29, EN 55011-30, EN 55011-31, EN 55011-32, EN 55011-33, EN 55011-34, EN 55011-35, EN 55011-36, EN 55011-37, EN 55011-38, EN 55011-39, EN 55011-40, EN 55011-41, EN 55011-42, EN 55011-43, EN 55011-44, EN 55011-45, EN 55011-46, EN 55011-47, EN 55011-48, EN 55011-49, EN 55011-50, EN 55011-51, EN 55011-52, EN 55011-53, EN 55011-54, EN 55011-55, EN 55011-56, EN 55011-57, EN 55011-58, EN 55011-59, EN 55011-60, EN 55011-61, EN 55011-62, EN 55011-63, EN 55011-64, EN 55011-65, EN 55011-66, EN 55011-67, EN 55011-68, EN 55011-69, EN 55011-70, EN 55011-71, EN 55011-72, EN 55011-73, EN 55011-74, EN 55011-75, EN 55011-76, EN 55011-77, EN 55011-78, EN 55011-79, EN 55011-80, EN 55011-81, EN 55011-82, EN 55011-83, EN 55011-84, EN 55011-85, EN 55011-86, EN 55011-87, EN 55011-88, EN 55011-89, EN 55011-90, EN 55011-91, EN 55011-92, EN 55011-93, EN 55011-94, EN 55011-95, EN 55011-96, EN 55011-97, EN 55011-98, EN 55011-99, EN 55011-100, EN 55011-101, EN 55011-102, EN 55011-103, EN 55011-104, EN 55011-105, EN 55011-106, EN 55011-107, EN 55011-108, EN 55011-109, EN 55011-110, EN 55011-111, EN 55011-112, EN 55011-113, EN 55011-114, EN 55011-115, EN 55011-116, EN 55011-117, EN 55011-118, EN 55011-119, EN 55011-120, EN 55011-121, EN 55011-122, EN 55011-123, EN 55011-124, EN 55011-125, EN 55011-126, EN 55011-127, EN 55011-128, EN 55011-129, EN 55011-130, EN 55011-131, EN 55011-132, EN 55011-133, EN 55011-134, EN 55011-135, EN 55011-136, EN 55011-137, EN 55011-138, EN 55011-139, EN 55011-140, EN 55011-141, EN 55011-142, EN 55011-143, EN 55011-144, EN 55011-145, EN 55011-146, EN 55011-147, EN 55011-148, EN 55011-149, EN 55011-150, EN 55011-151, EN 55011-152, EN 55011-153, EN 55011-154, EN 55011-155, EN 55011-156, EN 55011-157, EN 55011-158, EN 55011-159, EN 55011-160, EN 55011-161, EN 55011-162, EN 55011-163, EN 55011-164, EN 55011-165, EN 55011-166, EN 55011-167, EN 55011-168, EN 55011-169, EN 55011-170, EN 55011-171, EN 55011-172, EN 55011-173, EN 55011-174, EN 55011-175, EN 55011-176, EN 55011-177, EN 55011-178, EN 55011-179, EN 55011-180, EN 55011-181, EN 55011-182, EN 55011-183, EN 55011-184, EN 55011-185, EN 55011-186, EN 55011-187, EN 55011-188, EN 55011-189, EN 55011-190, EN 55011-191, EN 55011-192, EN 55011-193, EN 55011-194, EN 55011-195, EN 55011-196, EN 55011-197, EN 55011-198, EN 55011-199, EN 55011-200, EN 55011-201, EN 55011-202, EN 55011-203, EN 55011-204, EN 55011-205, EN 55011-206, EN 55011-207, EN 55011-208, EN 55011-209, EN 55011-210, EN 55011-211, EN 55011-212, EN 55011-213, EN 55011-214, EN 55011-215, EN 55011-216, EN 55011-217, EN 55011-218, EN 55011-219, EN 55011-220, EN 55011-221, EN 55011-222, EN 55011-223, EN 55011-224, EN 55011-225, EN 55011-226, EN 55011-227, EN 55011-228, EN 55011-229, EN 55011-230, EN 55011-231, EN 55011-232, EN 55011-233, EN 55011-234, EN 55011-235, EN 55011-236, EN 55011-237, EN 55011-238, EN 55011-239, EN 55011-240, EN 55011-241, EN 55011-242, EN 55011-243, EN 55011-244, EN 55011-245, EN 55011-246, EN 55011-247, EN 55011-248, EN 55011-249, EN 55011-250, EN 55011-251, EN 55011-252, EN 55011-253, EN 55011-254, EN 55011-255, EN 55011-256, EN 55011-257, EN 55011-258, EN 55011-259, EN 55011-260, EN 55011-261, EN 55011-262, EN 55011-263, EN 55011-264, EN 55011-265, EN 55011-266, EN 55011-267, EN 55011-268, EN 55011-269, EN 55011-270, EN 55011-271, EN 55011-272, EN 55011-273, EN 55011-274, EN 55011-275, EN 55011-276, EN 55011-277, EN 55011-278, EN 55011-279, EN 55011-280, EN 55011-281, EN 55011-282, EN 55011-283, EN 55011-284, EN 55011-285, EN 55011-286, EN 55011-287, EN 55011-288, EN 55011-289, EN 55011-290, EN 55011-291, EN 55011-292, EN 55011-293, EN 55011-294, EN 55011-295, EN 55011-296, EN 55011-297, EN 55011-298, EN 55011-299, EN 55011

Should this report contain any data for tests for which we are not accredited, or which have been undertaken by a subcontractor that is not A2LA accredited, such data would not covered by this laboratory's A2LA accreditation.

PAGE NO. 4 of 33.

Subpart 2.1033 (continued)

(c)(8): VOLTAGES & CURRENTS IN ALL ELEMENTS IN FINAL R. F. STAGE,
INCLUDING FINAL TRANSISTOR OR SOLID STATE DEVICE:

COLLECTOR CURRENT, A = per manual
COLLECTOR VOLTAGE, Vdc = per manual
SUPPLY VOLTAGE, Vdc = 9.0

(c)(9): TUNE-UP PROCEDURE:

PLEASE SEE ATTACHED EXHIBITS

(c)(10): CIRCUIT DIAGRAM/CIRCUIT DESCRIPTION:

Including description of circuitry & devices provided for
determining and stabilizing frequency, for suppression of
spurious radiation, for limiting modulation and limiting
power.

PLEASE SEE ATTACHED EXHIBITS

(c)(11): LABEL INFORMATION:

PLEASE SEE ATTACHED EXHIBITS

(c)(12): PHOTOGRAPHS:

PLEASE SEE ATTACHED EXHIBITS

(c)(13): DIGITAL MODULATION DESCRIPTION:

 ATTACHED EXHIBITS
 X N/A

(c)(14): TEST AND MEASUREMENT DATA:

FOLLOWS

PAGE NO.

5 of 33.

Sub-part

2.1033(c)(14):

TEST AND MEASUREMENT DATA

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1079, 2.1051, 2.1053, 2.1055, 2.1057 and the following individual Parts:

- _____ 21 - Domestic Public Fixed Radio Services
- _____ 22 - Public Mobile Services
- _____ 22 Subpart H - Cellular Radiotelephone Service
- _____ 22.901(d) - Alternative technologies and auxiliary services
- _____ 23 - International Fixed Public Radiocommunication services
- _____ 24 - Personal Communications Services
- x 74 Subpart H - Low Power Auxiliary Stations
- _____ 80 - Stations in the Maritime Services
- _____ 80 Subpart E - General Technical Standards
- _____ 80 Subpart F - Equipment Authorization for Compulsory Ships
- _____ 80 Subpart K - Private Coast Stations and Marine Utility Stations
- _____ 80 Subpart S - Compulsory Radiotelephone Installations for Small Passenger Boats
- _____ 80 Subpart T - Radiotelephone Installation Required for Vessels on the Great Lakes
- _____ 80 Subpart U - Radiotelephone Installations Required by the Bridge-to-Bridge Act
- _____ 80 Subpart V - Emergency Position Indicating Radiobeacons (EPIRB'S)
- _____ 80 Subpart W - Global Maritime Distress and Safety System (GMDSS)
- _____ 80 Subpart X - Voluntary Radio Installations
- _____ 87 - Aviation Services
- _____ 90 - Private Land Mobile Radio Services
- _____ 94 - Private Operational-Fixed Microwave Service
- _____ 95 Subpart A - General Mobile Radio Service (GMRS)
- _____ 95 Subpart C - Radio Control (R/C) Radio Service
- _____ 95 Subpart D - Citizens Band (CB) Radio Service
- _____ 95 Subpart E - Family Radio Service
- _____ 95 Subpart F - Interactive Video and Data Service (IVDS)
- _____ 97 - Amateur Radio Service
- _____ 101 - Fixed Microwave Services

PAGE NO.

6 of 33.

STANDARD TEST CONDITIONS
and
ENGINEERING PRACTICES

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-1992/2000 Draft, section 6.1.9, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst case measurements.

PAGE NO. 7 of 33.
NAME OF TEST: Carrier Output Power (Conducted)
SPECIFICATION: 47 CFR 2.1046(a)
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.1
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE


1. The EUT was connected to a resistive coaxial attenuator of normal load impedance, and the unmodulated output power was measured by means of an R. F. Power Meter.
2. Measurement accuracy is $\pm 3\%$.

MEASUREMENT RESULTS
(worst case)

FREQUENCY OF CARRIER, MHz = 479.0, 470.1, 487.9


POWER SETTING	R. F. POWER, WATTS
High	0.050

PERFORMED BY:


 Doug Noble, B.A.S. E.E.T.

TRANSMITTER POWER CONDUCTED MEASUREMENTS

TEST 1: R. F. POWER OUTPUT
TEST 2: FREQUENCY STABILITY

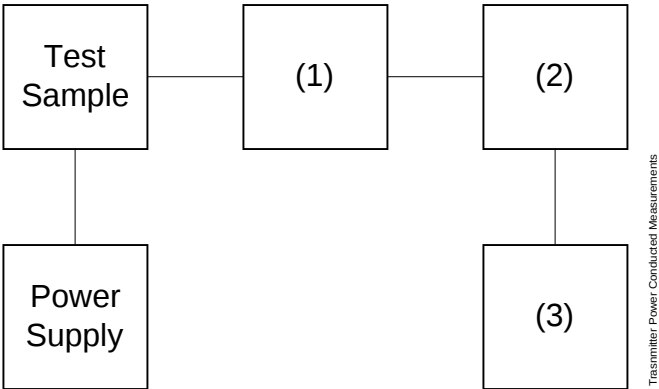

Asset	Description (as applicable)	s/n
(1)	<u>COAXIAL ATTENUATOR</u>	
i00122	Narda 766-10	7802
i00123	Narda 766-10	7802A
i00069	Bird 8329 (30 dB)	1006
i00113	Sierra 661A-3D	1059
(2)	<u>POWER METERS</u>	
i00014	HP 435A	1733A05836
i00039	HP 436A	2709A26776
i00020	HP 8901A POWER MODE	2105A01087
(3)	<u>FREQUENCY COUNTER</u>	
i00042	HP 5383A	1628A00959
i00019	HP 5334B	2704A00347
i00020	HP 8901A FREQUENCY MODE	2105A01087

PAGE NO. 9 of 33.


NAME OF TEST: ERP Carrier Power (Radiated)

SPECIFICATION: TIA/EIA 603A (Substitution Method)

2.2.17.1 Definition: The average radiated power of a licensed device is the equivalent power required, when delivered to a half-wave dipole or horn antenna, to produce at a distant point the same average received power as produced by the licensed device.

2.2.17.2 Method of Measurement:

a) Connect the equipment as illustrated. Place the transmitter to be tested on the turntable in the standard test site.

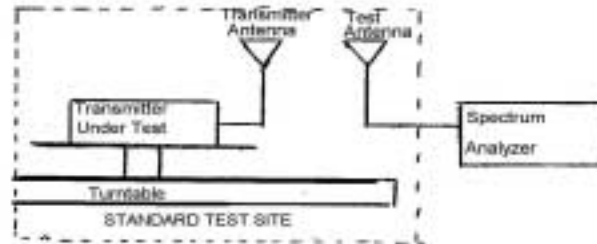

b) Raise and lower the test antenna from 1m to 6 m with the transmitter facing the antenna and record the highest received signal in dB as LVL.

c) Repeat step b) for seven additional readings at 45° interval positions of the turntable.

d) Replace the transmitter under test with a half-wave or horn vertically polarized antenna. The center of the antenna should be at the same location as the transmitter under test. Connect the antenna to a signal generator with a known output power and record the path loss in dB or LOSS.

e) Calculate the average radiated output power from the readings in step c) and d) by the following:

$$\text{average radiated power} = 10 \log_{10} \Sigma 10(\text{LVL} - \text{LOSS})/10 \text{ (dBm)}$$

	470.1 MHz		RESULTS 479 MHz		487.9 MHz	
	LVL, dbm	Path Loss, db	LVL, dbm	Path Loss, db	LVL, dbm	Path Loss, db
0°	11.4	-1.3	17.9	1.0	14.5	-0.9
45°	12.3	-1.3	18.5	1.0	17.3	-0.9
90°	13.6	-1.3	19.1	1.0	16.8	-0.9
135°	11.6	-1.3	19.3	1.0	16.8	-0.9
180°	13.6	-1.3	19.6	1.0	15.3	-0.9
225°	11.8	-1.3	17.9	1.0	15.7	-0.9
270°	12.9	-1.3	18.8	1.0	18.6	-0.9
315°	18.6	-1.3	20.0	1.0	17.8	-0.9
Av. Radiated Power:	470.1 MHz 14.7 dbm		479 MHz 17.89 dbm		487.9 MHz 17.5 dbm	


PAGE NO. 10 of 33.
NAME OF TEST: Unwanted Emissions (Transmitter Conducted)
SPECIFICATION: 47 CFR 2.1051
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.13
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The emissions were measured for the worst case as follows:
 - (a): within a band of frequencies defined by the carrier frequency plus and minus one channel.
 - (b): from the lowest frequency generated in the EUT and to at least the 10th harmonic of the carrier frequency, or 40 GHz, whichever is lower.
2. The magnitude of spurious emissions that are attenuated more than 20 dB below the permissible value need not be specified.
3. MEASUREMENT RESULTS: ATTACHED FOR WORST CASE


FREQUENCY OF CARRIER, MHz	= 479.0, 470.1, 487.9
SPECTRUM SEARCHED, GHz	= 0 to 10 x F _c
MAXIMUM RESPONSE, Hz	= 5620
ALL OTHER EMISSIONS	= ≥ 20 dB BELOW LIMIT

PERFORMED BY:


 Doug Noble, B.A.S. E.E.T.

TRANSMITTER SPURIOUS EMISSION

TEST A. OCCUPIED BANDWIDTH (IN-BAND SPURIOUS)
TEST B. OUT-OF-BAND SPURIOUS

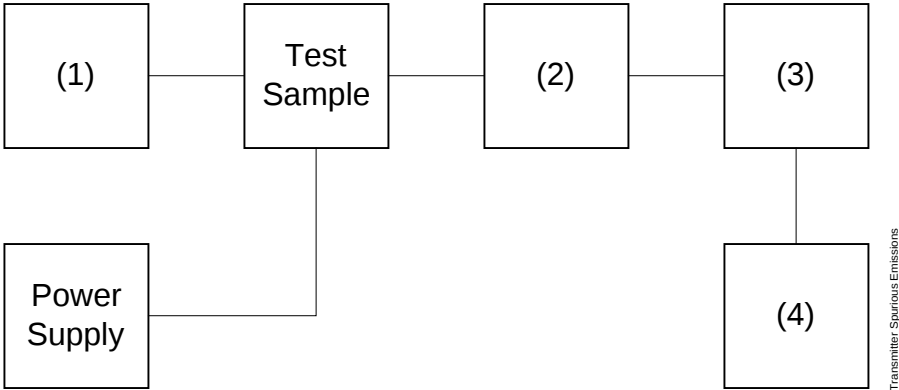

Asset Description (as applicable)	s/n
(1) <u>AUDIO OSCILLATOR/GENERATOR</u>	
i00010 HP 204D	1105A04683
i00017 HP 8903A	2216A01753
i00012 HP 3312A	1432A11250
(2) <u>COAXIAL ATTENUATOR</u>	
i00122 Narda 766-10	7802
i00123 Narda 766-10	7802A
i00069 Bird 8329 (30 dB)	1006
i00113 Sierra 661A-3D	1059
(3) <u>FILTERS; NOTCH, HP, LP, BP</u>	
i00126 Eagle TNF-1	100-250
i00125 Eagle TNF-1	50-60
i00124 Eagle TNF-1	250-850
(4) <u>SPECTRUM ANALYZER</u>	
i00048 HP 8566B	2511A01467
i00029 HP 8563E	3213A00104

PAGE NO. 12 of 33.
NAME OF TEST: Unwanted Emissions (Transmitter Conducted)

LIMIT(S), dBc $-(43+10 \times \text{LOG } P) = -30$ (0 Watts)
g0310074: 2003-Jan-14 Tue 13:20:00 STATE: 2:High Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
470.100000	940.118000	-60.5	-79.4	-47.5
479.000000	958.203600	-61.1	-80	-48.1
487.900000	975.791000	-60.8	-79.7	-47.8
470.100000	1410.275500	-61.3	-80.2	-48.3
479.000000	1437.084000	-61	-79.9	-48
487.900000	1463.865600	-61.2	-80.1	-48.2
470.100000	1880.219900	-60.7	-79.6	-47.7
479.000000	1915.981500	-60.7	-79.6	-47.7
487.900000	1951.661000	-60.6	-79.5	-47.6
470.100000	2350.527000	-58.3	-77.2	-45.3
479.000000	2395.040000	-59.2	-78.1	-46.2
487.900000	2439.710100	-58.9	-77.8	-45.9
470.100000	2820.623500	-61.9	-80.8	-48.9
479.000000	2874.073000	-62.4	-81.3	-49.4
487.900000	2927.286500	-62.7	-81.6	-49.7
470.100000	3290.881600	-62.6	-81.5	-49.6
479.000000	3352.975000	-62.8	-81.7	-49.8
487.900000	3415.259500	-61.8	-80.7	-48.8
470.100000	3760.856000	-63	-81.9	-50
479.000000	3832.155600	-62.4	-81.3	-49.4
487.900000	3902.994400	-62.6	-81.5	-49.6
470.100000	4230.688900	-63	-81.9	-50
479.000000	4311.249600	-63	-81.9	-50
487.900000	4391.264600	-62.2	-81.1	-49.2
470.100000	4701.059500	-61.5	-80.4	-48.5
479.000000	4789.875500	-61.7	-80.6	-48.7
487.900000	4878.852400	-62.8	-81.7	-49.8
470.100000	5171.309100	-62.5	-81.4	-49.5
479.000000	5269.241600	-62.5	-81.4	-49.5
487.900000	5366.998000	-61.9	-80.8	-48.9
470.100000	5641.101000	-62.7	-81.6	-49.7
479.000000	5747.968000	-62.6	-81.5	-49.6
487.900000	5854.917100	-55.6	-74.5	-42.6
470.100000	6111.451000	-55.3	-74.2	-42.3
479.000000	6227.162900	-56.4	-75.3	-43.4
487.900000	6342.474300	-55.9	-74.8	-42.9
470.100000	6581.477700	-55.8	-74.7	-42.8
479.000000	6706.244600	-56.7	-75.6	-43.7
487.900000	6830.669200	-56.1	-75	-43.1
470.100000	7051.251400	-56.1	-75	-43.1
479.000000	7184.971600	-56.6	-75.5	-43.6
487.900000	7318.624600	-57.3	-76.2	-44.3

PERFORMED BY:


Doug Noble, B.A.S. E.E.T.

PAGE NO. 13 of 33.

NAME OF TEST: Field Strength of Spurious Radiation

SPECIFICATION: 47 CFR 2.1053(a)


GUIDE: ANSI/TIA/EIA-603-1992/2001, Paragraph 1.2.12 and Table 16, 47 CFR 22.917

MEASUREMENT PROCEDURE

1.2.12.1 Definition: Radiated spurious emissions are emissions from the equipment when transmitting into a non-radiating load on a frequency or frequencies which are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communications desired.

1.2.12.2 Method of Measurement


- A) Connect the equipment as illustrated
- B) Adjust the spectrum analyzer for the following settings:
 - 1) Resolution Bandwidth 100 kHz (<1 GHz), 1 MHz (> 1GHz).
 - 2) Video Bandwidth ≥ 3 times Resolution Bandwidth, or 30 kHz (22.917)
 - 3) Sweep Speed ≤ 2000 Hz/second
 - 4) Detector Mode = Mean or Average Power
- C) Place the transmitter to be tested on the turntable in the standard test site. The transmitter is transmitting into a non-radiating load which is placed on the turntable. The RF cable to this load should be of minimum length.

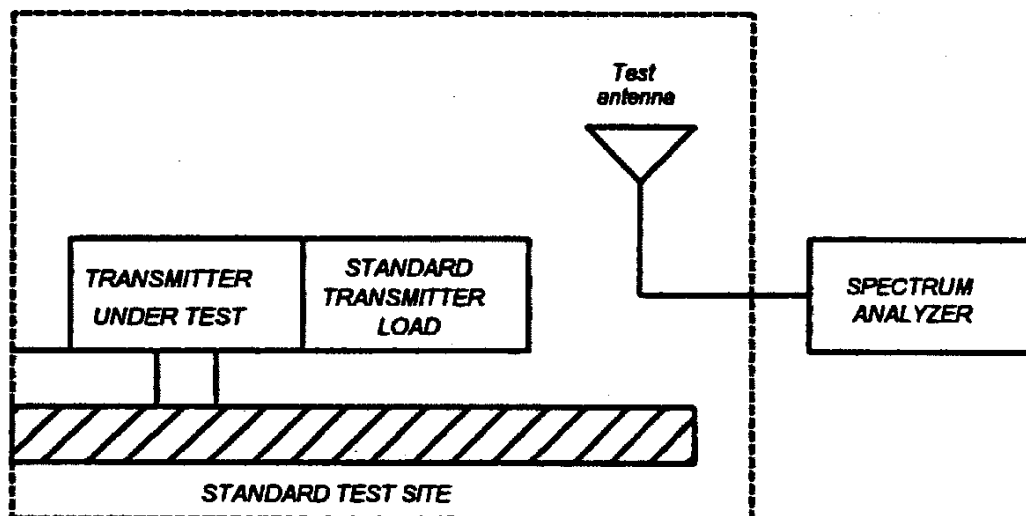

PAGE NO. 14 of 33.

NAME OF TEST: Field Strength of Spurious Radiation (Cont.)

- D) For each spurious measurement the test antenna should be adjusted to the correct length for the frequency involved. This length may be determined from a calibration ruler supplied with the equipment. Measurements shall be made from the lowest radio frequency generated in the equipment to the tenth harmonic of the carrier, except for the region close to the carrier equal to $\pm$ the test bandwidth (see section 1.3.4.4).
- E) For each spurious frequency, raise and lower the test antenna from 1 m to 4 m to obtain a maximum reading on the spectrum analyzer with the test antenna at horizontal polarity. Repeat this procedure to obtain the highest possible reading. Record this maximum reading.
- F) Repeat step E) for each spurious frequency with the test antenna polarized vertically.

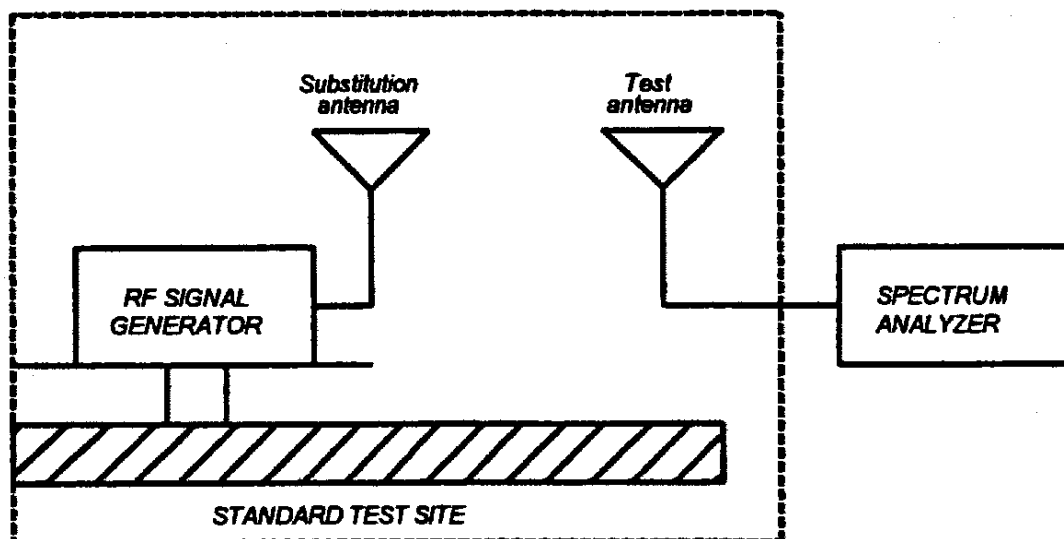

- G) Reconnect the equipment as illustrated.
- H) Keep the spectrum analyzer adjusted as in step B).
- I) Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter. At lower frequencies, where the substitution antenna is very long, this will be impossible to achieve when the antenna is polarized vertically. In such case the lower end of the antenna should be 0.3 m above the ground.

PAGE NO. 15 of 33.

NAME OF TEST: Field Strength of Spurious Radiation (Cont.)

- J) Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.
- K) Repeat step J) with both antennas vertically polarized for each spurious frequency.
- L) Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps J) and K) by the power loss in the cable between the generator and the antenna and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna.
- M) The levels recorded in step L) are absolute levels of radiated spurious emissions in dBm. The radiated spurious emissions in dB can be calculated by the following:

Radiated spurious emissions dB =
 $10\log_{10}(\text{TX power in watts}/0.001) - \text{the levels in step l})$

NOTE: It is permissible that other antennas provided can be referenced to a dipole.

Test Equipment:


Asset Description (as applicable)	s/n	Cycle	Last Cal
Per ANSI C63.4-1992/2000 Draft, 10.1.4			
TRANSDUCER			
i00088 EMC0 3109-B 25MHz-300MHz	2336	12 mo.	Sep-02
i00065 EMC0 3301-B Active Monopole	2635	12 mo.	Sep-02
i00089 Aprel 2001 200MHz-1GHz	001500	12 mo.	Sep-02
i00103 EMC0 3115 1GHz-18GHz	9208-3925	12 mo.	Sep-02
AMPLIFIER			
i00028 HP 8449A	2749A00121	12 mo.	Mar-02
SPECTRUM ANALYZER			
i00029 HP 8563E	3213A00104	12 mo.	Jan-02
i00033 HP 85462A	3625A00357	12 mo.	Jan-02
i00048 HP 8566B	2511AD1467	6 mo.	Jul-02
MICROPHONE, ANTENNA PORT, AND CABELING			
Microphone	<u>Y</u>	Cable Length	<u>1.0</u> Meters
Antenna Port Terminated	<u>N/A</u>	Load	<u>N/A</u> Antenna Gain <u>0</u> dBd
All Ports Terminated by Load	<u>Y</u>	Peripheral	<u>No</u>

PAGE NO. 16 of 33.

NAME OF TEST: Field Strength of Spurious Radiation
 g0310061: 2003-Jan-08 Wed 15:32:00
 STATE: 2:High Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	ERP, dBm	ERP, dbc
479.000000	958.006300	-46.6	≤ -61.8
479.000000	1437.033800	-56.7	≤ -61.8
479.000000	1916.000000	-54.4	≤ -61.8
479.000000	2395.000000	-51.6	≤ -61.8
479.000000	2874.000000	-44.6	≤ -61.8
479.000000	3353.000000	-59.6	≤ -61.8
479.000000	3832.000000	-58	≤ -61.8
479.000000	4311.000000	-57.7	≤ -61.8
479.000000	4790.000000	-58.3	≤ -61.8

SUPERVISED BY:


 Doug Noble, B.A.S. E.E.T.


PAGE NO. 17 of 33.
NAME OF TEST: Emission Masks (Occupied Bandwidth)
SPECIFICATION: 47 CFR 2.1049(c)(1)
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.11
TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page, with the Spectrum Analyzer connected.
2. For EUTs supporting audio modulation, the audio signal generator was adjusted to the frequency of maximum response and with output level set for $\pm 2.5/\pm 1.25$ kHz deviation (or 50% modulation). With level constant, the signal level was increased 16 dB.
3. For EUTs supporting digital modulation, the digital modulation mode was operated to its maximum extent.
4. The Occupied Bandwidth was measured with the Spectrum Analyzer controls set as shown on the test results.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO. 18 of 33.


NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0310065: 2003-Jan-13 Mon 13:34:00
STATE: 2:High Power

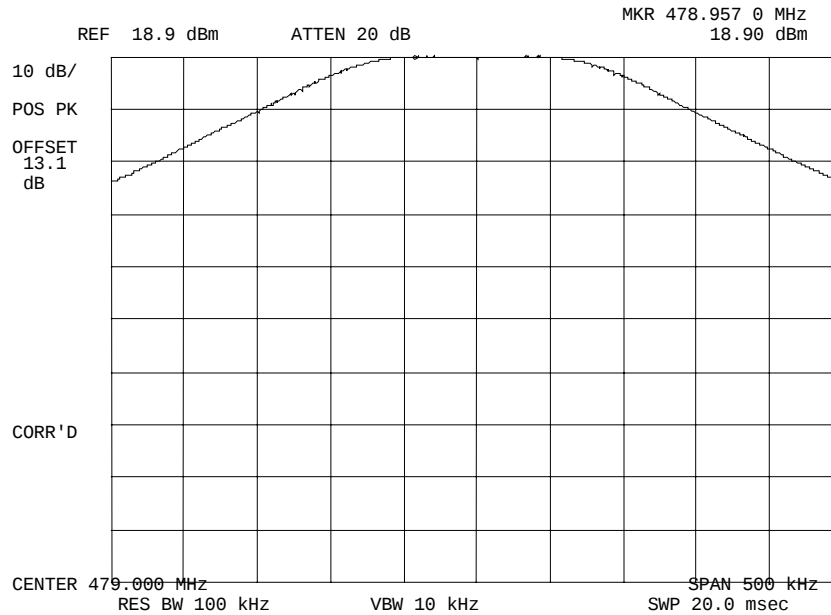

POWER:
MODULATION:

HIGH
NONE
REFERENCE LEVEL


PERFORMED BY:


Doug Noble, B.A.S. E.E.T.

PAGE NO. _____

19 of 33.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0310066: 2003-Jan-13 Mon 13:45:00
STATE: 2:High Power

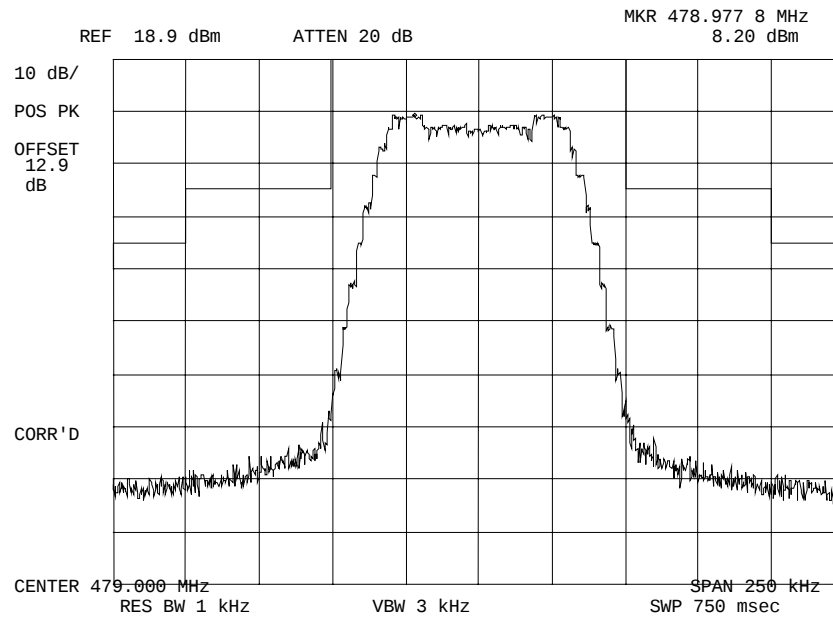

POWER:
MODULATION:


HIGH
VOICE: 2500 HZ @ 20 DB
ABOVE REFERENCE LEVEL
MASK: Wireless Mic, 74.861

PERFORMED BY:


Doug Noble, B.A.S. E.E.T.

PAGE NO. 20 of 33.


NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0310068: 2003-Jan-13 Mon 13:50:00
 STATE: 2:High Power

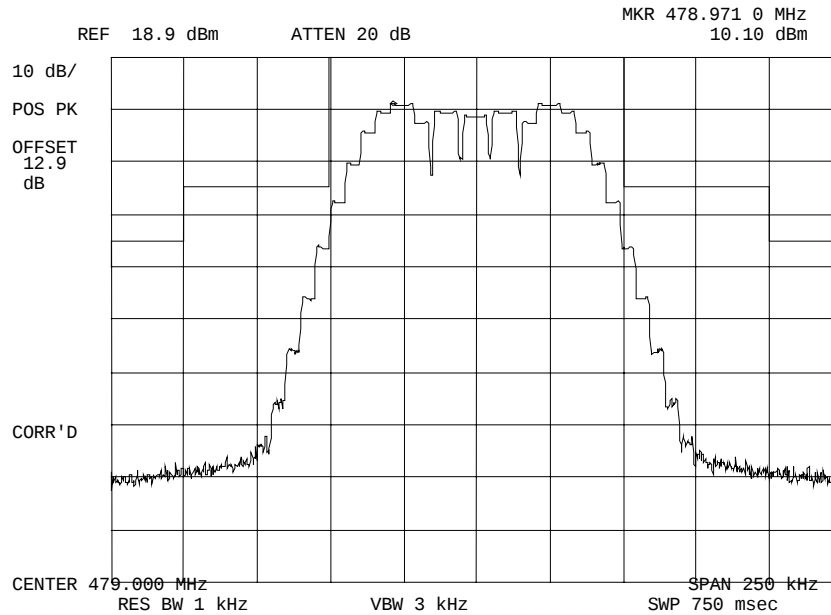

POWER:
MODULATION:

HIGH
 VOICE: 5000 HZ @ 20 DB
 ABOVE REFERENCE LEVEL
 MASK: Wireless Mic, 74.861


PERFORMED BY:


 Doug Noble, B.A.S. E.E.T.

PAGE NO.

21 of 33.


NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0310069: 2003-Jan-13 Mon 13:52:00
STATE: 2:High Power

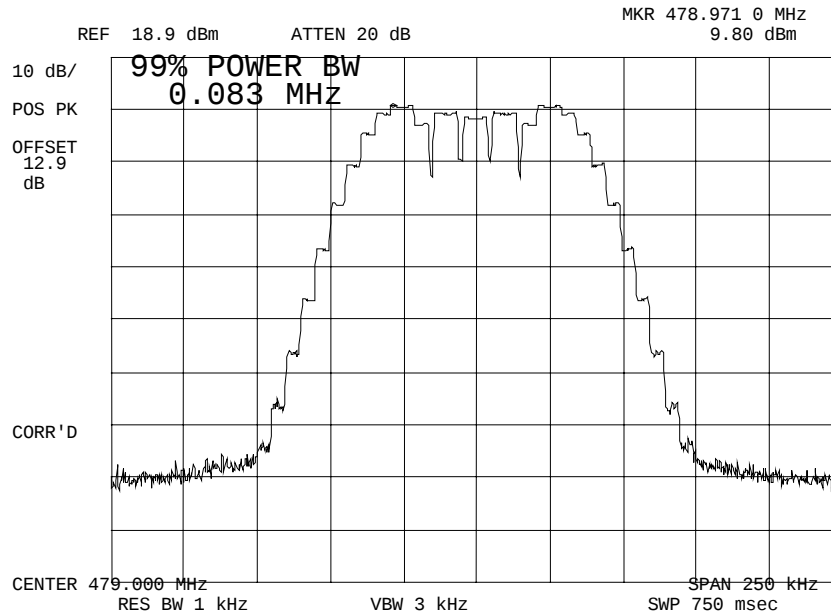

POWER:
MODULATION:

HIGH
VOICE: 5000 HZ @ 20 DB
ABOVE REFERENCE LEVEL
99 % POWER BANDWIDTH


PERFORMED BY:


Doug Noble, B.A.S. E.E.T.

PAGE NO.

22 of 33.


NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0310070: 2003-Jan-13 Mon 13:54:00
 STATE: 2:High Power

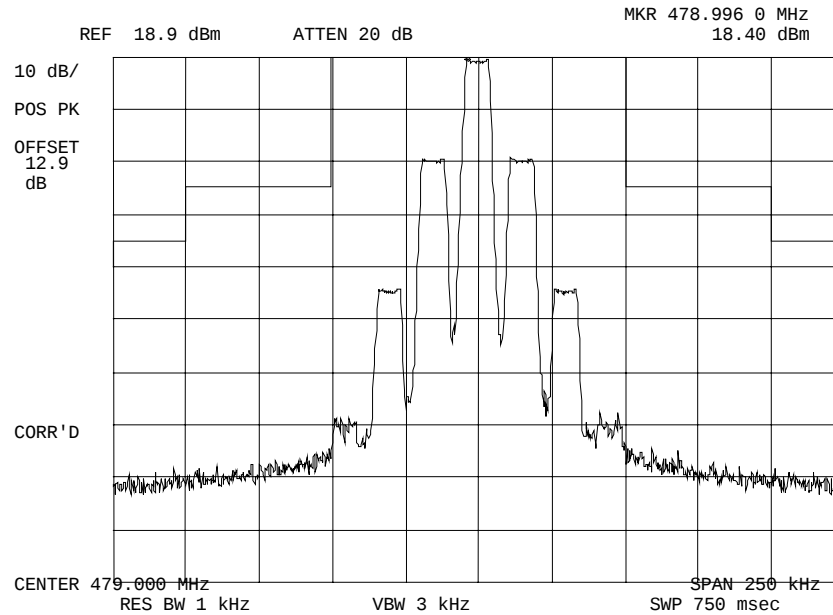

POWER:
MODULATION:

HIGH
VOICE: 15000 HZ @ 20 DB
ABOVE REFERENCE LEVEL
MASK: Wireless Mic, 74.861


PERFORMED BY:


 Doug Noble, B.A.S. E.E.T.

PAGE NO.

23 of 33.


NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0310071: 2003-Jan-13 Mon 13:57:00
STATE: 2:High Power

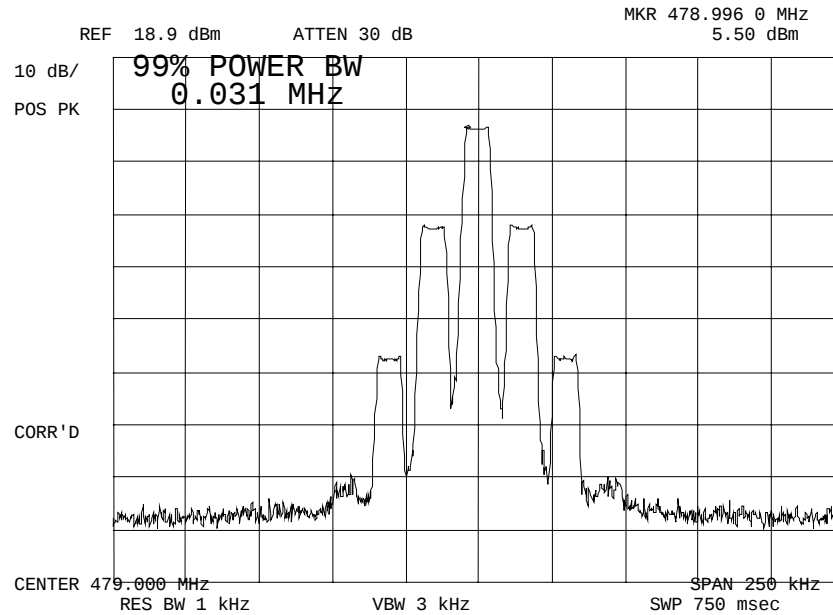

POWER:
MODULATION:

HIGH
VOICE: 15000 HZ @ 20 DB
ABOVE REFERENCE LEVEL
99 % POWER BANDWIDTH


PERFORMED BY:


Doug Noble, B.A.S. E.E.T.

PAGE NO.

24 of 33.


NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0310072: 2003-Jan-13 Mon 13:58:00
STATE: 2:High Power

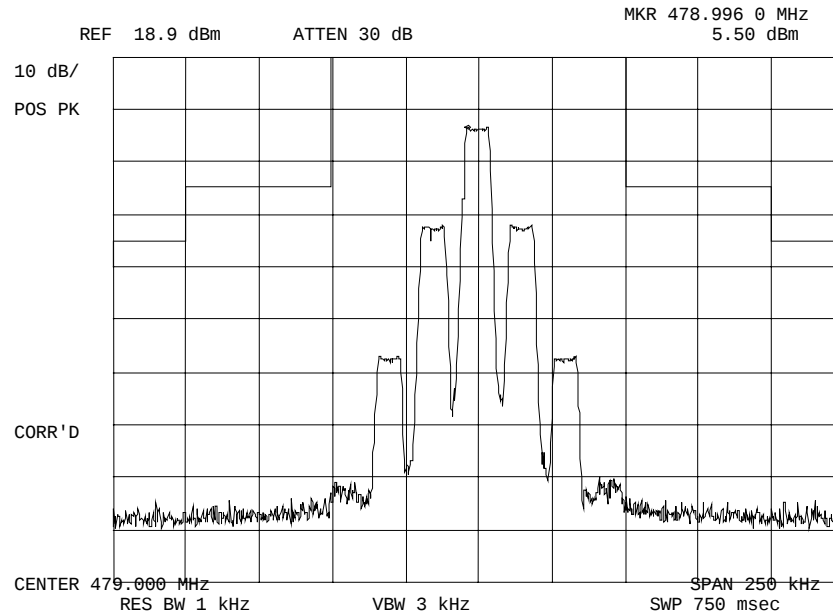

POWER:
MODULATION:

HIGH
VOICE: 15000 HZ @ 20 DB
ABOVE REFERENCE LEVEL
MASK: Wireless Mic, 74.861

PERFORMED BY:


Doug Noble, B.A.S. E.E.T.

PAGE NO. 25 of 33.
NAME OF TEST: Audio Frequency Response
SPECIFICATION: 47 CFR 2.1047(a)
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.6
TEST EQUIPMENT: As per previous page


MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page.
2. The audio signal generator was connected to the audio input circuit/microphone of the EUT.
3. The audio signal input was adjusted to obtain 20% modulation at 1 kHz, and this point was taken as the 0 dB reference level.
4. With input levels held constant and below limiting at all frequencies, the audio signal generator was varied from 100 Hz to 50 kHz.
5. The response in dB relative to 1 kHz was then measured, using the HP 8901A Modulation Analyzer.
6. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

26 of 33.

NAME OF TEST: Audio Frequency Response
 g0310048: 2003-Jan-13 Mon 12:45:00
 STATE: 0:General

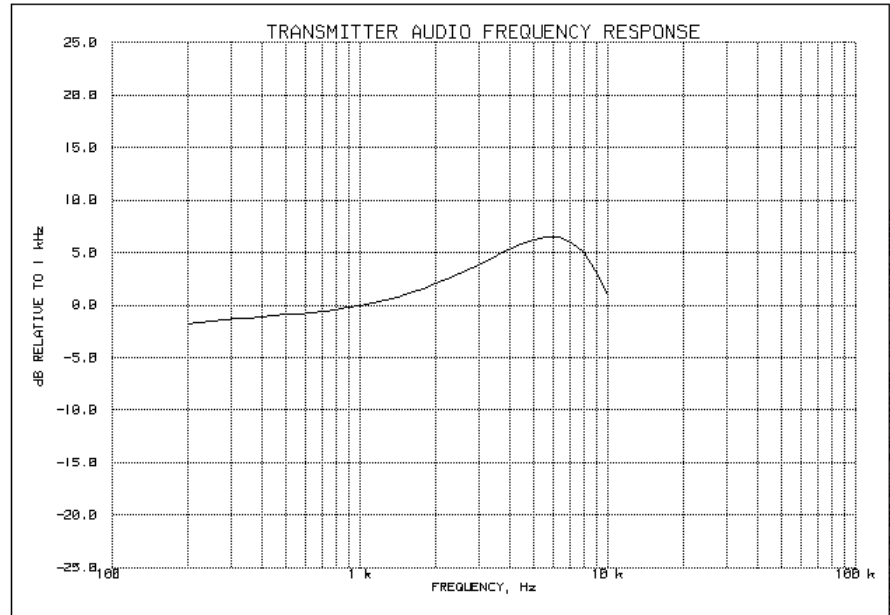


Frequency of Maximum Audio Response, Hz = 5620

Additional points:

FREQUENCY, Hz	LEVEL, dB
300	-1.4
20000	-19.71
30000	-35.71
50000	-58.10

PERFORMED BY:


 Doug Noble, B.A.S. E.E.T.

PAGE NO. 27 of 33.
NAME OF TEST: Modulation Limiting
SPECIFICATION: 47 CFR 2.1047(b)
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.3
TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE


1. The signal generator was connected to the input of the EUT as for "Frequency Response of the Modulating Circuit."
2. The modulation response was measured for each of three frequencies (one of which was the frequency of maximum response), and the input voltage was varied and was observed on an HP 8901A Modulation Analyzer.
3. The input level was varied from 30% modulation (± 1.5 kHz deviation) to at least 20 dB higher than the saturation point.
4. Measurements were performed for both negative and positive modulation and the respective results were recorded.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO.


28 of 33.

NAME OF TEST: Modulation Limiting
g0310050: 2003-Jan-13 Mon 12:55:00
STATE: 0:General


Positive
Peaks:

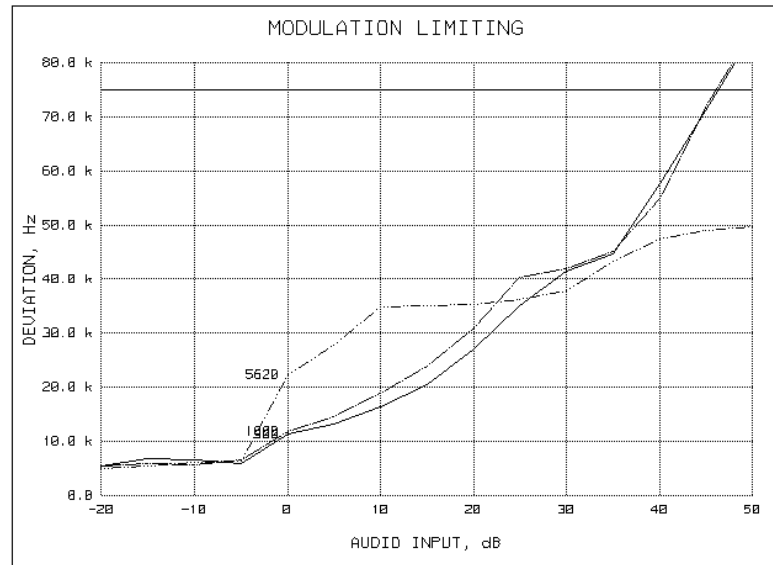

Negative
Peaks:

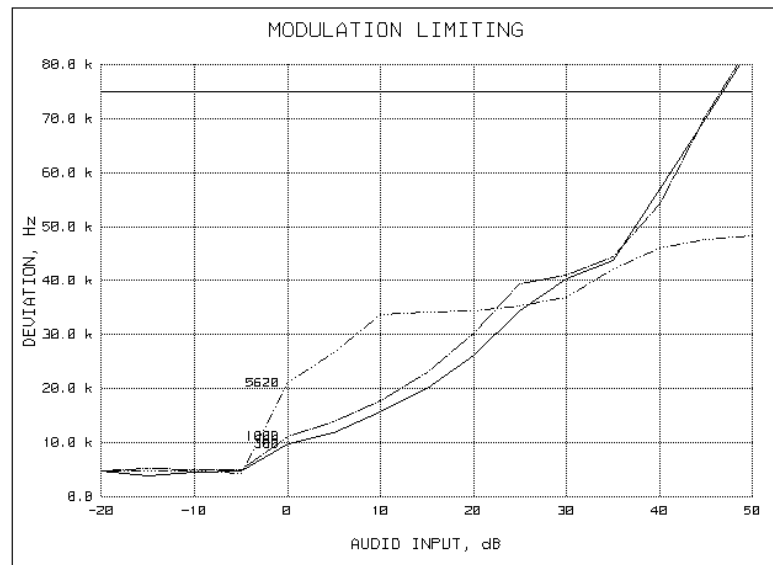

PERFORMED BY:


Doug Noble, B.A.S. E.E.T.

PAGE NO. 29 of 33.

NAME OF TEST: Frequency Stability (Temperature Variation)

SPECIFICATION: 47 CFR 2.1055(a)(1)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2

TEST CONDITIONS: As Indicated


TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page.
2. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The temperature tests were performed for the worst case.
5. MEASUREMENT RESULTS: ATTACHED

TRANSMITTER TEST SET-UP

- TEST A. OPERATIONAL STABILITY
- TEST B. CARRIER FREQUENCY STABILITY
- TEST C. OPERATIONAL PERFORMANCE STABILITY
- TEST D. HUMIDITY
- TEST E. VIBRATION
- TEST F. ENVIRONMENTAL TEMPERATURE
- TEST G. FREQUENCY STABILITY: TEMPERATURE VARIATION
- TEST H. FREQUENCY STABILITY: VOLTAGE VARIATION

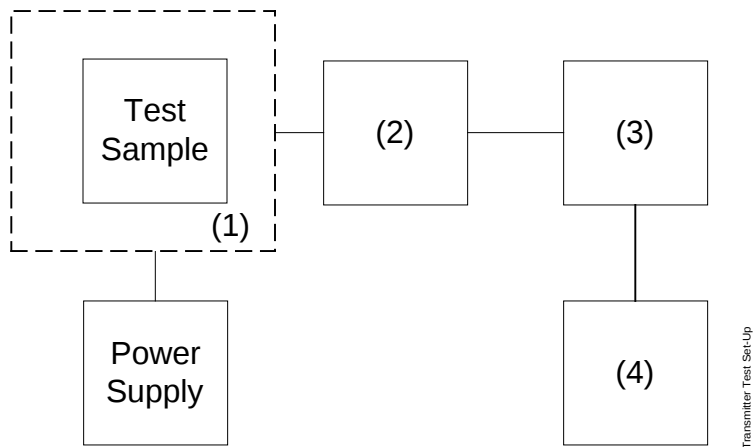


Asset	Description (as applicable)	s/n
(1)	<u>TEMPERATURE, HUMIDITY, VIBRATION</u>	
i00027	Tenney Temp. Chamber	9083-765-234
i00	Weber Humidity Chamber	
i00	L.A.B. RVH 18-100	
(2)	<u>COAXIAL ATTENUATOR</u>	
i00122	NARDA 766-10	7802
i00123	NARDA 766-10	7802A
i00113	SIERRA 661A-3D	1059
i00069	BIRD 8329 (30 dB)	10066
(3)	<u>R.F. POWER</u>	
i00014	HP 435A POWER METER	1733A05839
i00039	HP 436A POWER METER	2709A26776
i00020	HP 8901A POWER MODE	2105A01087
(4)	<u>FREQUENCY COUNTER</u>	
i00042	HP 5383A	1628A00959
i00019	HP 5334B	2704A00347
i00020	HP 8901A	2105A01087


PAGE NO.

31 of 33.

NAME OF TEST: Frequency Stability (Temperature Variation)
g0310051: 2003-Jan-14 Tue 13:18:02
STATE: 0:General

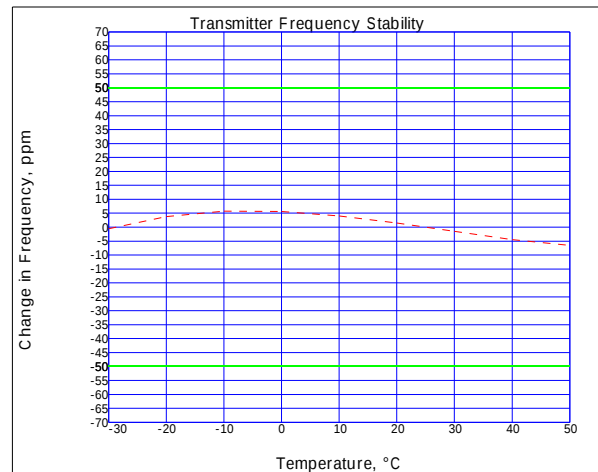

PERFORMED BY:


Doug Noble, B.A.S. E.E.T.

PAGE NO. 32 of 33.
NAME OF TEST: Frequency Stability (Voltage Variation)
SPECIFICATION: 47 CFR 2.1055(d)(1)
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2
TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE


1. The EUT was placed in a temperature chamber at 25±5°C and connected as for "Frequency Stability - Temperature Variation" test.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

RESULTS: Frequency Stability (Voltage Variation)
 g0310073: 2003-Jan-14 Tue 10:08:10
 STATE: 0:General

LIMIT, ppm = 50
 LIMIT, Hz = 23950
 BATTERY END POINT (Voltage) = 7.2

% of STV	Voltage	Frequency, MHz	Change, Hz	Change, ppm
85	7.65	478.999990	-10	-0.02
100	9	479.000000	0	0.00
115	10.35	479.000000	0	0.00
80	7.2	478.999990	-10	-0.02

PERFORMED BY:


 Doug Noble, B.A.S. E.E.T.

PAGE NO. 33 of 33.


NAME OF TEST: Necessary Bandwidth and Emission Bandwidth

SPECIFICATION: 47 CFR 2.202(g)

MODULATION = 83K0F3E

NECESSARY BANDWIDTH (B_N), kHz = 83, Measured

PERFORMED BY:


Doug Noble, B.A.S. E.E.T.

END OF TEST REPORT

TESTIMONIAL
AND
STATEMENT OF CERTIFICATION

THIS IS TO CERTIFY THAT:

1. THAT the application was prepared either by, or under the direct supervision of, the undersigned.
2. THAT the technical data supplied with the application was taken under my direction and supervision.
3. THAT the data was obtained on representative units, randomly selected.
4. THAT, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

CERTIFYING ENGINEER:


Morton Flom, P. Eng.