


THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HEREWITH IS PROPERTY OF AND BELONGS TO ACR ELECTRONICS, INC. FT LAUDERDALE, FL. IT IS FURNISHED IN CONFIDENCE SOLELY FOR INFORMATIONAL PURPOSES. IT IS NOT TO BE REPRODUCED, USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF ACR.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	RELEASED PER ECO 11393		

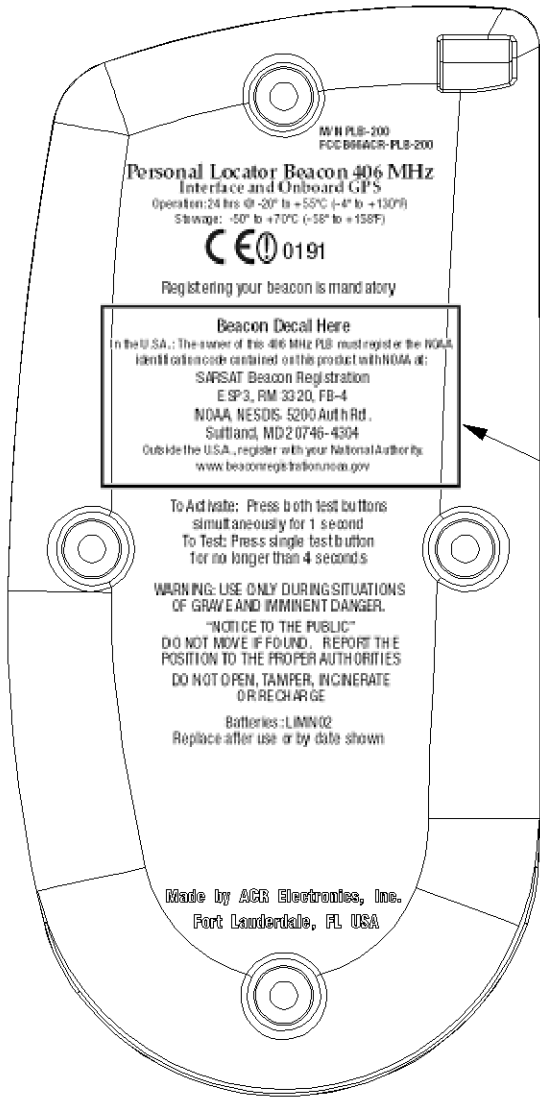

DASH No.	DESCRIPTION	PRODUCT No.	4 DIGIT CODE
-1	BACK CASE, PAD PRINTED, AQUAFIX I	PLB-201	2797.2
-2	BACK CASE, PAD PRINTED, AQUAFIX I/O	PLB-200	2797.4
-3	BACK CASE, PAD PRINTED, TERRAFIX I	PLB-201	2798.2
-4	BACK CASE, PAD PRINTED, TERRAFIX I/O	PLB-200	2798.4
-5	BACK CASE, PAD PRINTED, AEROFIX I	PLB-201	2799.2
-6	BACK CASE, PAD PRINTED, AEROFIX I/O	PLB-200	2799.4
-7	BACK CASE, PAD PRINTED, AQUAFIX 406	PLB-200	2797.1

1	--	--	--	--	--	--	8	A1-20-1194-1	PAD LABEL, BACK CASE, AQUAFIX 406, BLUE, PLB-200
--	1	--	--	--	--	--	7	A1-20-1196-2	PAD LABEL, BACK CASE, AEROFIX I/O, BLACK, PLB-200
--	--	1	--	--	--	--	6	A1-20-1196-1	PAD LABEL, BACK CASE, AEROFIX I, BLACK, PLB-201
--	--	--	1	--	--	--	5	A1-20-1195-2	PAD LABEL, BACK CASE, TERRAFIX I/O, GREEN, PLB-200
--	--	--	--	1	--	--	4	A1-20-1195-1	PAD LABEL, BACK CASE, TERRAFIX I, GREEN, PLB-201
--	--	--	--	--	1	--	3	A1-20-1194-3	PAD LABEL, BACK CASE, AQUAFIX I/O, BLUE, PLB-200
--	--	--	--	--	--	1	2	A1-20-1194-2	PAD LABEL, BACK CASE, AQUAFIX I, BLUE, PLB-201
1	1	1	1	1	1	1	1	A1-18-1919	BACK CASE
QTY.	QTY.	QTY.	QTY.	QTY.	QTY.	QTY.	ITEM NO.	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION
-7	-6	-5	-4	-3	-2	-1			

UNLESS OTHERWISE SPECIFIED:
ALL ANGLES ARE 90°
DIMENSIONS ARE IN INCHES
TOLERANCES ON

FRACTIONS	DECIMALS	ANGLES
±1/64	.X ± .030 .XX ± .010 .XXX ± .005	± 1/2 °

ANSI-B SOLIDWORKS

DRAWN J.Y.K.	07/02/04
CHECKED	
ENG.	
APVD.	

○ DENOTES REVISION CHANGE
⊕ DENOTES DIMENSION PLUS DRAFT ANGLE
⊖ DENOTES DIMENSION MINUS DRAFT ANGLE
ⓧ DENOTES REFERENCE NOTE OR DIMENSION
ⓧⓧ DENOTES CRITICAL INSPECTION DIMENSIONS

SIZE B	CODE IDENT. NO. 18560	DRAWING NO. A1-18-1974-	REV A
--------	-----------------------	-------------------------	-------

LIST OF MATERIALS OR PARTS LIST

ACR ELECTRONICS, INC
5757 RAVENSWOOD RD. FT. LAUDERDALE FL 33312

BACK CASE, PAD PRINTED, PLB-200/201

SCALE 1:1	SHEET 1 OF 1
-----------	--------------



A1-20-1195-2 Black

Replace after use or by date shown

Batteries: LiMNO2
OR RECHARGE

DO NOT OPEN, TAMPER, INCINERATE
POSITION TO THE PROPER AUTHORITIES

DO NOT MOVE IF FOUND. REPORT THE
"NOTICE TO THE PUBLIC"

WARNING: USE ONLY DURING SITUATIONS
OF GRAVE AND IMMINENT DANGER.

for no longer than 4 seconds

To Test: Press single test button
simultaneously for 1 second

To Activate: Press both test buttons

Beacon Decal Here

In the U.S.A.: The owner of this 406 MHz PLB must register the NOAA
identification code contained on this product with NOAA at:
SARSAT Beacon Registration
ESP3, RM 3320, FB-4
NOAA, NESDIS 5200 Auth Rd.
Suitland, MD 20746-4304
Outside the U.S.A., register with your National Authority:
www.beaconregistration.noaa.gov

Registering your beacon is mandatory

Personal Locator Beacon 406 MHz
Interface and Onboard GPS

Operation: 24 hrs @ -20° to +55°C (-4° to +130°F)
Stowage: -50° to +70°C (-58° to +158°F)

M/N PLB-200
FCC B66ACR-PLB-200

CE 0191

M/N PLB-201
FCC B66ACR-PLB-201

Personal Locator Beacon 406 MHz
GPS Interface

Operation: 24 hrs @ -20° to +55°C (-4° to +130°F)
Stowage: -50° to +70°C (-58° to +158°F)



Registering your beacon is mandatory

Beacon Decal Here

In the U.S.A.: The owner of this 406 MHz PLB must register the NOAA
identification code contained on this product with NOAA at:
SARSAT Beacon Registration
ESP3, RM 3320, FB-4
NOAA, NESDIS 5200 Auth Rd.
Suitland, MD 20746-4304
Outside the U.S.A., register with your National Authority.
www.beaconregistration.noaa.gov

To Activate: Press both test buttons
simultaneously for 1 second

To Test: Press single test button
for no longer than 4 seconds

WARNING: USE ONLY DURING SITUATIONS
OF GRAVE AND IMMINENT DANGER.

"NOTICE TO THE PUBLIC"

DO NOT MOVE IF FOUND. REPORT THE
POSITION TO THE PROPER AUTHORITIES

DO NOT OPEN, TAMPER, INCINERATE
OR RECHARGE

Batteries: LiMNO2
Replace after use or by date shown



A1-20-1195-1 Black



ACR