


**NOTES**

1. 6.50" MAX. ROLL DIA.
2. LABEL TO BE DIE CUT.
3. ACCEPTABLE CORNER RADIUS TO BE WITHIN .00/.12 RANGE TYP. UNLESS SPECIFIED.
4. LABEL MATERIAL AND ADHESIVE MUST BE UL LISTED TO UL969 AND CSA CERTIFIED TO C22.2 NO. 0.15 APPROVED FOR USE ON POLYPROPYLENE OXIDE PLASTIC, FR-4BS (ACETLONITRILE BUTADIENE STYRENE) PLASTIC & GALVANIZED STEEL.
- MAX. TEMP. 60°C. SUITABLE FOR EXPOSURE TO HIGH HUMIDITY OR OCCASIONAL EXPOSURE TO WATER.
5. EACH ROLL OF LABELS AND EACH CARTON OF LABELS MUST BE MARKED WITH THE MANUFACTURERS U.L. DESIGNATION FOR THIS LABEL.
6. LABEL MUST HAVE 1 MIL WHITE MYLAR OVERLAY.
7. LABEL MUST HAVE SILICONE RELEASE AGENT.



0.1

THE MINIMUM HEIGHT OF THE REGISTERED TRADEMARK SYMBOL ® SHALL BE 3/64 OF AN INCH, WHEN THE OVERALL DIAMETER OF THE UL MARK IS LESS THAN 3/8 OF AN INCH. THE TRADEMARK SYMBOL MAY BE OMITTED IF IT IS NOT LEGIBLE TO THE NAKED EYE.

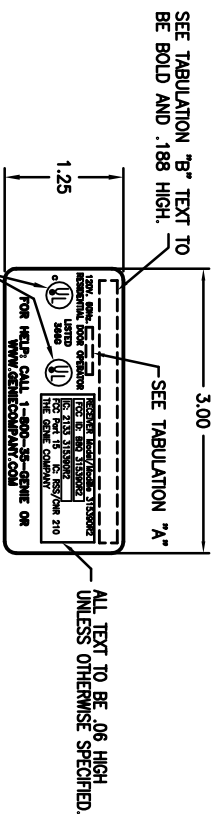

SEE TABULATION "A"

ALL TEXT TO BE .06 HIGH  
UNLESS OTHERWISE SPECIFIED.

| REVISIONS |     |                |      |          |
|-----------|-----|----------------|------|----------|
| EN        | REV | DESCRIPTION    | DATE | APPROVAL |
| 35770     | -   | ORIGINAL ISSUE |      |          |

|          |             |          |                      |
|----------|-------------|----------|----------------------|
|          |             |          |                      |
| 35597-B  | GENIE 2060L | 6 AMP.   | 1/2 H.P. MODEL 2060L |
| 35597-A  | GENIE 3060L | 6 AMP.   | 1/2 H.P. MODEL 3060L |
| PART NO. | MODEL       | TAB. "A" | TAB. "B"             |

[illegible]