


NOTES: (UNLESS OTHERWISE SPECIFIED)

1.
- BLACK GRAPHICS AND TYPE ON 2 MIL MYLAR WITH PRESSURE SENSITIVE PERMANENT ADHESIVE FOR USE ON ABS PLASTIC, 1 MIL CLEAR MYLAR OVERLAY.


2.
- COLOR PER ANSI Z535.1.

REVISIONS				
GCO	REV	DESCRIPTION	DATE	APPROVAL
00877	-	ORIGINAL ISSUE		

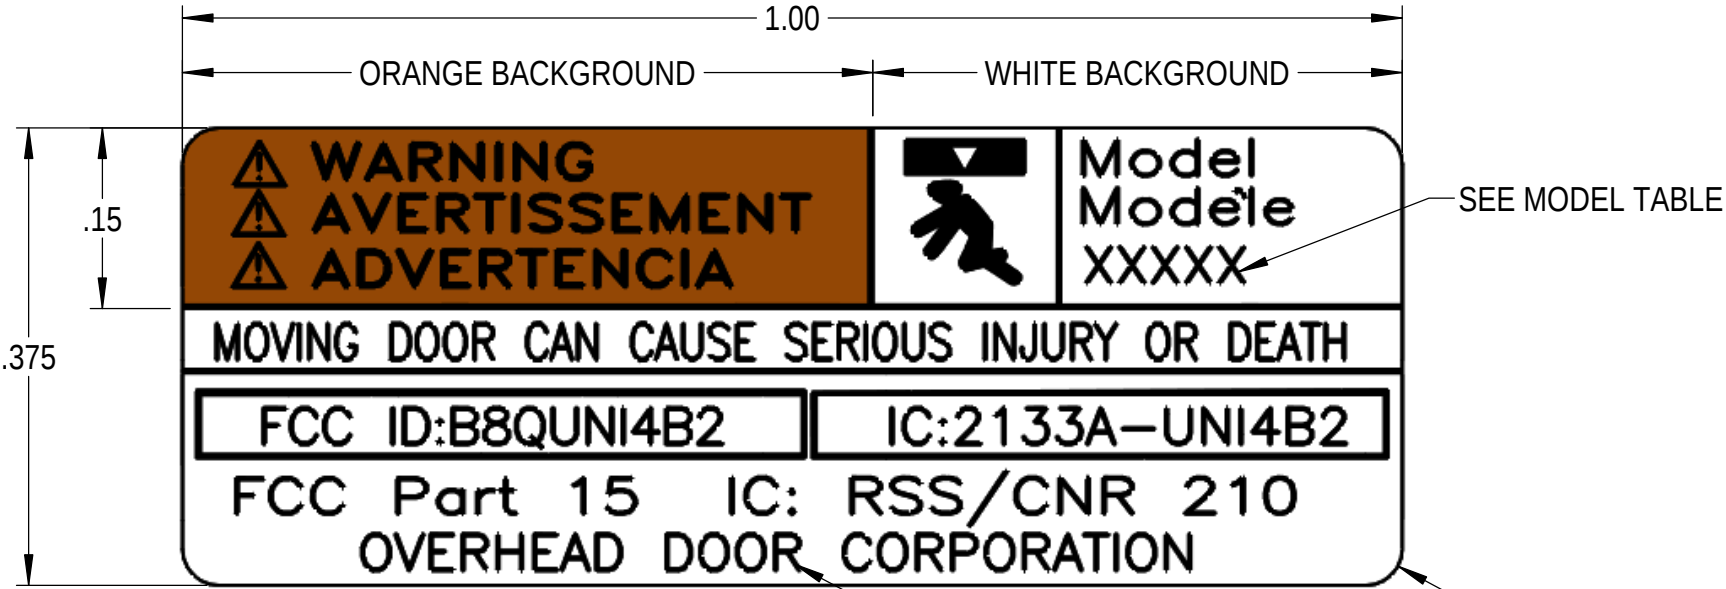


PRELIMINARY

MODEL TABLE		
PART NUMBER	MODEL NUMBER	CORP/COMPANY NAME
41806A	GU4TR2	THE GENIE COMPANY
41806B	OU4TR2	OVERHEAD DOOR CORPORATION
41806C	GU4TG2	THE GENIE COMPANY

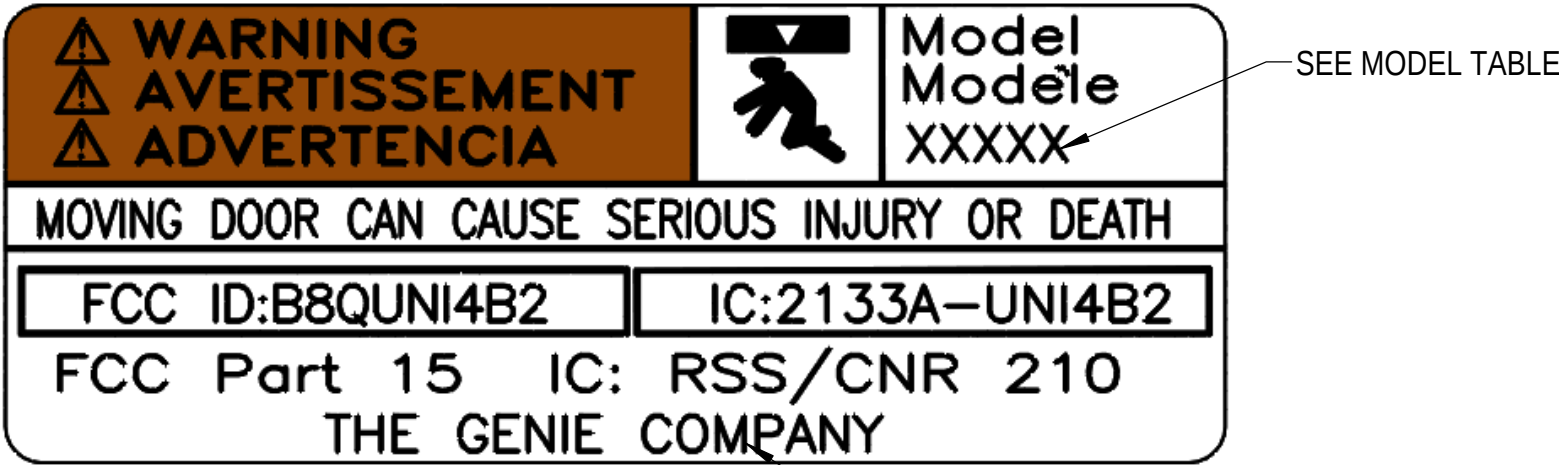


PLOTTED: 7/14/21








THE DRAWINGS AND ALL OTHER INFORMATION CONTAINED HEREIN ARE THE CONFIDENTIAL PROPRIETARY PROPERTY OF OVERHEAD DOOR CORPORATION, INCLUDING ITS AFFILIATED SUBSIDIARIES AND AFFILIATES. THIS DRAWING INFORMATION, IN WHOLE OR IN PART, MAY NOT BE COPIED IN ANY MANNER OR DISCLOSED TO ANYONE WITHOUT PRIOR WRITTEN CONSENT OF OVERHEAD DOOR CORPORATION. DISCLOSURE OF ANY DRAWING OR INFORMATION IS INTENDED NOT TO AND SHALL NOT OPERATE AS A LICENSE OR AUTHORIZATION TO USE IT FOR ANY PURPOSE WITHOUT SPECIFIC WRITTEN CONSENT OF OVERHEAD DOOR CORPORATION.	UNLESS OTHERWISE SPECIFIED		APPROVALS		 A SUBSIDIARY OF OVERHEAD DOOR CORPORATION MT. HOPE, OHIO		
	INTERPRET DIMS & TOLS PER ASME Y14.5M ALL DIMS ARE IN INCHES DO NOT SCALE DIMS AND SPECIFICATIONS CIRCLED WITH SYMBOL 'C' ARE CRITICAL TO QUALITY DESIGN FEATURES & MUST MEET APPLICABLE IN-PROCESS INSPECTION STANDARDS.	<u>TOLERANCES:</u> .X = ±.1 .XX = ±.01 .XXX = ±.005 ANGULAR = ±1 ° <u>HOLES:</u> < Ø.251 = ±.003 Ø.251-Ø.500 = ±.003 > Ø.500 = ±.003 ALL GEOMETRY GOVERNED BY 3D CAD DATABASE: 41806	DATE 7/14/21				
			DRAWN WDR				
			CHECKED				
			APPROVED				
			MATERIAL		DESCRIPTION LABEL, FCC/IC, UNIVERSAL REMOTE		
			FINISH				
					SIZE B	DWG NO. 41806	
					SCALE 8:1		SHEET 1 OF 1



ANY ONE FAILURE OF TESTS INDICATED BELOW IS A FAILURE OF THE ENTIRE UNIT.


1. TRANSMITTER MUST OPERATE ON EACH OF THE FOLLOWING FREQUENCIES (IN MHz) :303,310,315,318,372.5,390 AND 433.92
 2. EACH BUTTON MUST OPERATE ON ANY OF THE FREQUENCIES LISTED IN NOTE 1.
 3. MUST MEET 500 FEET OPEN FIELD RANGE SPECIFICATIONS AT ALL FREQUENCIES LISTED IN NOTE 1.
 4. VERIFY FIT IS VISUALLY ACCEPTABLE AND MEETS APPLICABLE GENIE PRINTS.
 5. COSMETICS/VISUAL APPEARANCE:
 - A. COLOR TO MATCH PANTONES SPECIFIED ON PRINT
 - B. NO MARKS, SCRATCHES OR IMPERFECTION OF ANY KIND AS JUDGED FROM A DISTANCE OF 18" UNDER FLUORESCENT LIGHTING.
 6. LABEL PLACEMENT:
 - A. CHECK FCC LABEL PER DRAWING.
 - B. FCC LABEL SHALL BE STRAIGHT AND CONSISTENT ON ALL UNITS.
 7. LOGO:
 - A. LOGO SHALL BE STRAIGHT AND CONSISTENT ON ALL UNITS.
 - B. LOGO SHALL BE READABLE.
 8. VERIFY UNIT IS BUILT TO PURCHASED REVISION.
 9. EACH UNIT MUST PASS FUNCTIONAL TESTS.
 10. EACH UNIT MUST NOT BREAK WHILE CHANGING BATTERY AND EASILY BE REASSEMBLED.
 11. PROGRAMMING INSTRUCTIONS ARE PROVIDED IN THE INSTRUCTION SHEET.
- 

REVISIONS				
ER	REV	DESCRIPTION	DATE	APPROVAL
504070	-	ORIGINAL ISSUE (WAS PRELIM REV 14)		
504282	A	ADDED PATENT STATEMENTS	7/12/19	J.W.

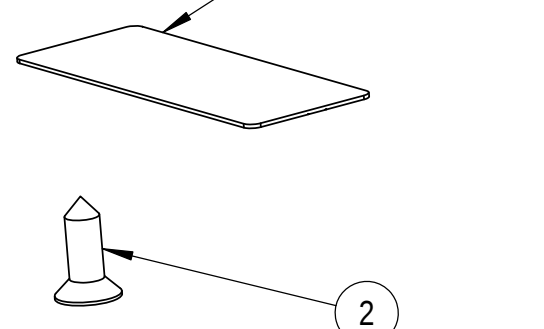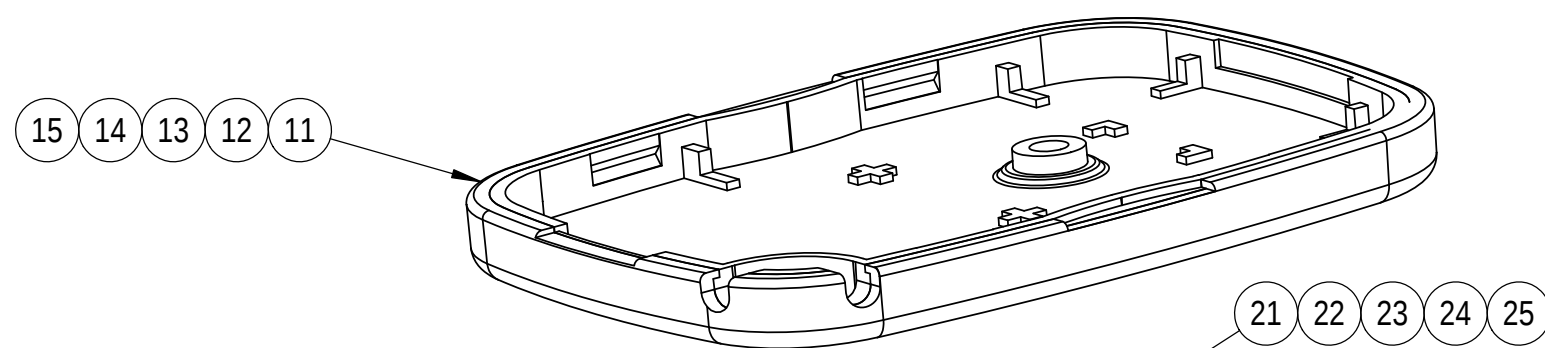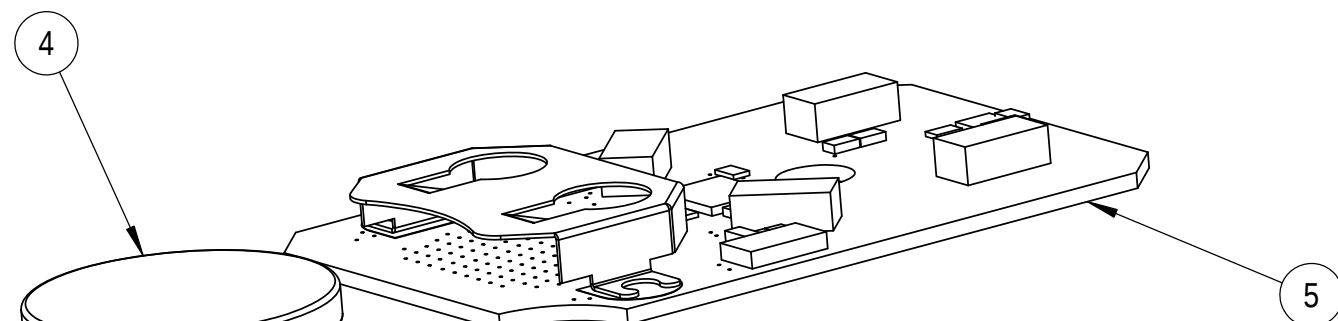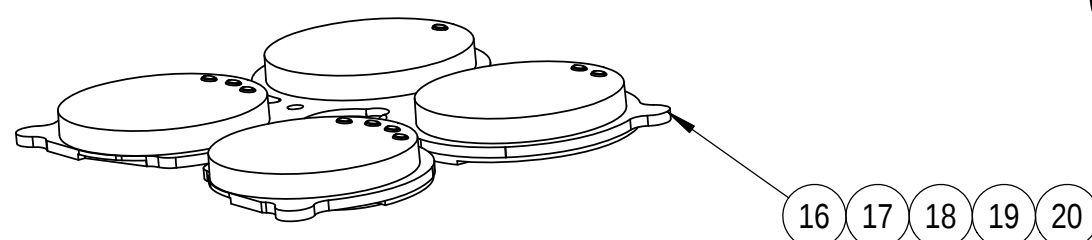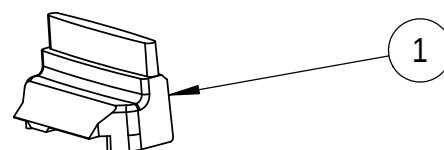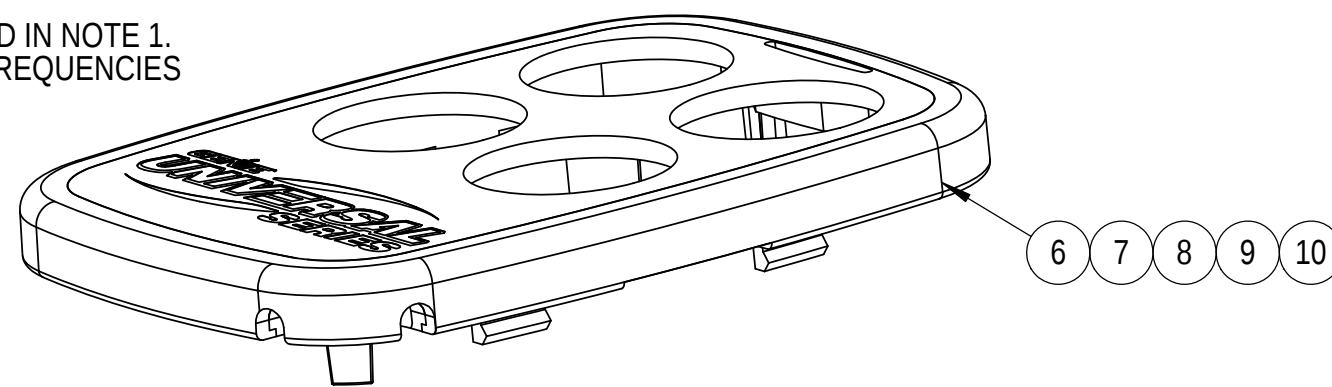

39877R: GENIE MODEL GU4T
39877T: GENIE MODEL GU4TR
39877U: GENIE MODEL GU4TB
39877V: GENIE MODEL GU4TG


39877S: OHD MODEL OU4T

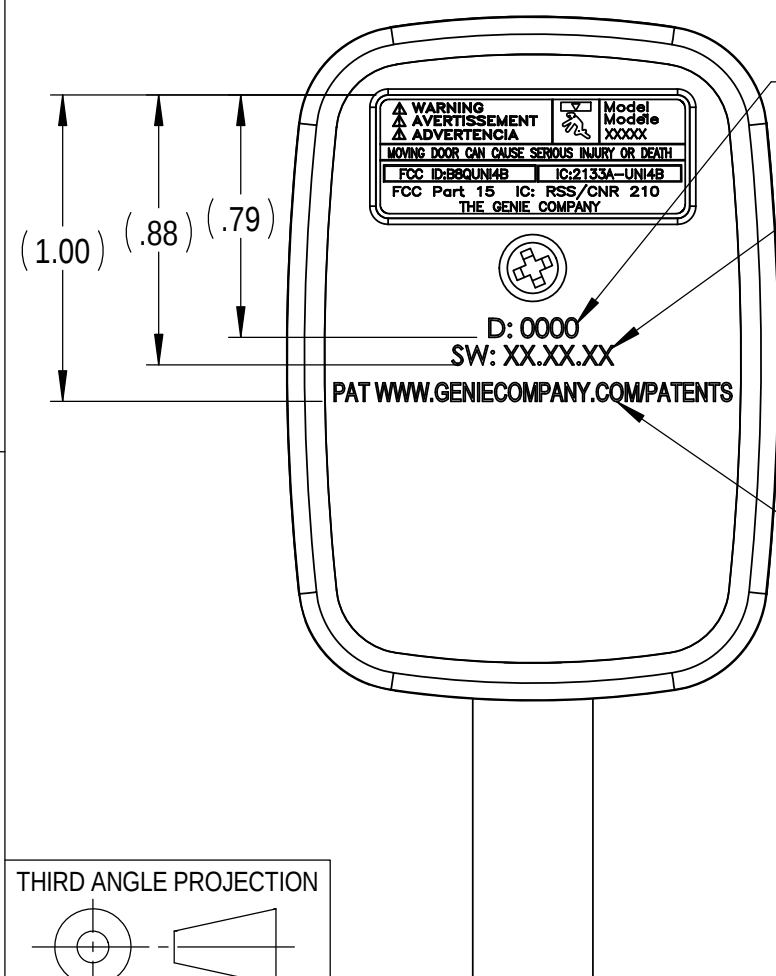

—DATE CODE: WEEK AND YEAR
FONT: CENTURY GOTHIC, 6 PT

—SOFTWARE REVISION —
LEVEL PER 40992A
FONT: CENTURY GOTHIC, 6 PT

—PATENT STATEMENT

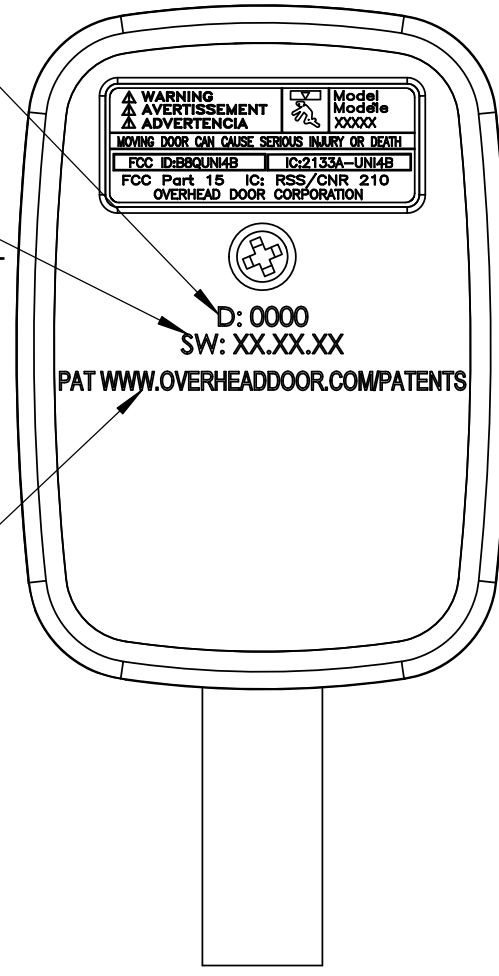

PLOTTED: 5/1/19

THE DRAWINGS AND ALL OTHER INFORMATION CONTAINED HEREIN ARE THE CONFIDENTIAL PROPRIETARY PROPERTY OF OVERHEAD DOOR CORPORATION, INCLUDING ITS AFFILIATED SUBSIDIARIES AND ASSOCIATES. THIS DRAWING INFORMATION, IN WHOLE OR IN PART, MAY NOT BE COPIED IN ANY MANNER OR DISCLOSED TO ANYONE WITHOUT PRIOR WRITTEN CONSENT OF OVERHEAD DOOR CORPORATION. DISCLOSURE OF ANY DRAWING OR INFORMATION IS INTENDED NOT TO AND SHALL NOT OPERATE AS A LICENSE OR AUTHORIZATION TO USE IT FOR ANY PURPOSE WITHOUT SPECIFIC WRITTEN CONSENT OF OVERHEAD DOOR CORPORATION.

UNLESS OTHERWISE
INTERPRET DIMS & TOLS
PER ASME Y14.5M

ALL DIMS ARE IN
MM


DO NOT SCALE

DIMS AND SPECIFICATIONS
CIRCLED WITH SYMBOL
'C' ARE CRITICAL TO
QUALITY DESIGN FEATURE
& MUST MEET APPLICABLE
IN-PROCESS INSPECTION
STANDARDS.


RWISE SPECIFIED	
<u>TOLERANCES:</u>	
.X = ± 20	
.XX = ± 12	
.XXX = ± 12	
ANGULAR = $\pm 1^\circ$	
<u>HOLES:</u>	
< $\varnothing 6.0$ = $\pm .07$	
$\varnothing 6.0$ - $\varnothing 12.0$ = $\pm .07$	
> $\varnothing 12.0$ = $\pm .07$	
ALL GEOMETRY GOVERNED BY 3	

APPROVALS		DATE
DRAWN	DANP	2/23/2018
CHECKED	DRU	3/27/19
APPROVED	DANP	3/28/19
MATERIAL		
FINISH		
3D CAD DATABASE: 39877		


		A SUBSIDIARY OF OVERHEAD DOOR CORPORATION MT. HOPE, OHIO	
DESCRIPTION XMTR ASSEMBLY, UNIVERSAL REMOTE			
SIZE C	DWG NO. 39877		
SCALE: 2:1		SHEET 1 OF 1	

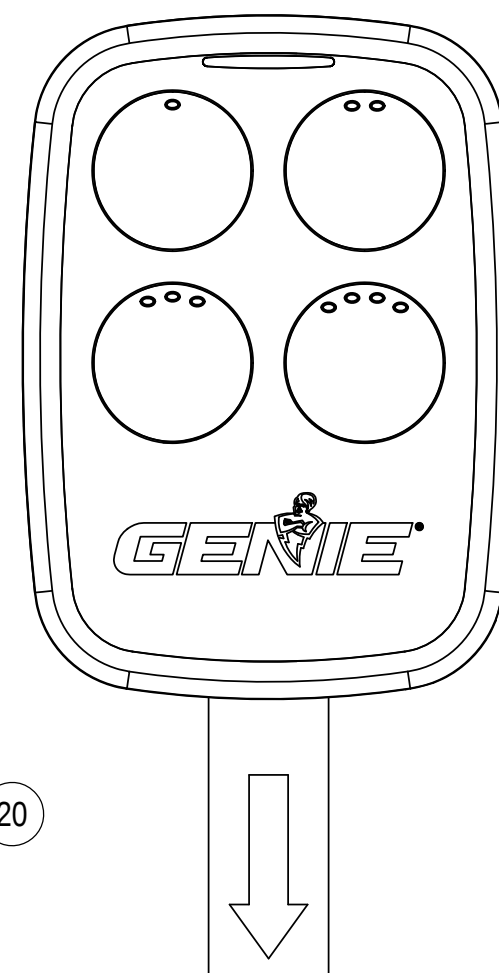

39877R

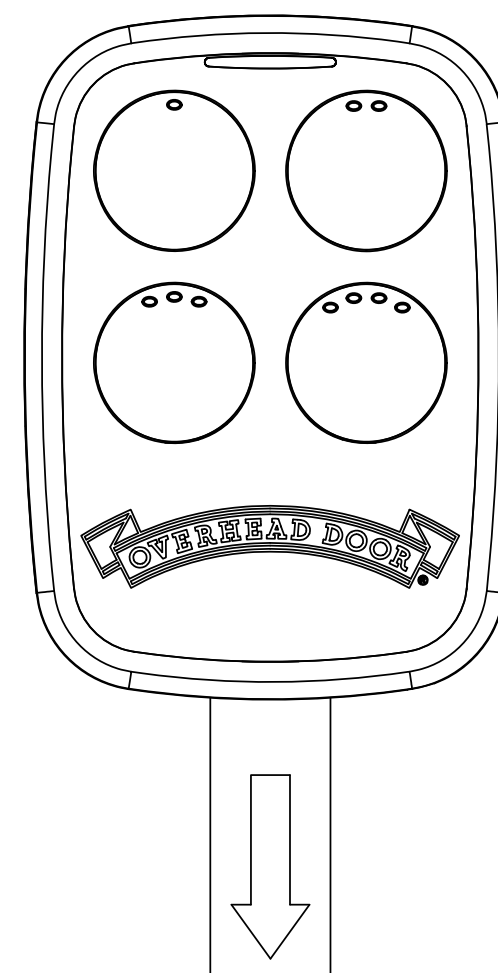

39877S

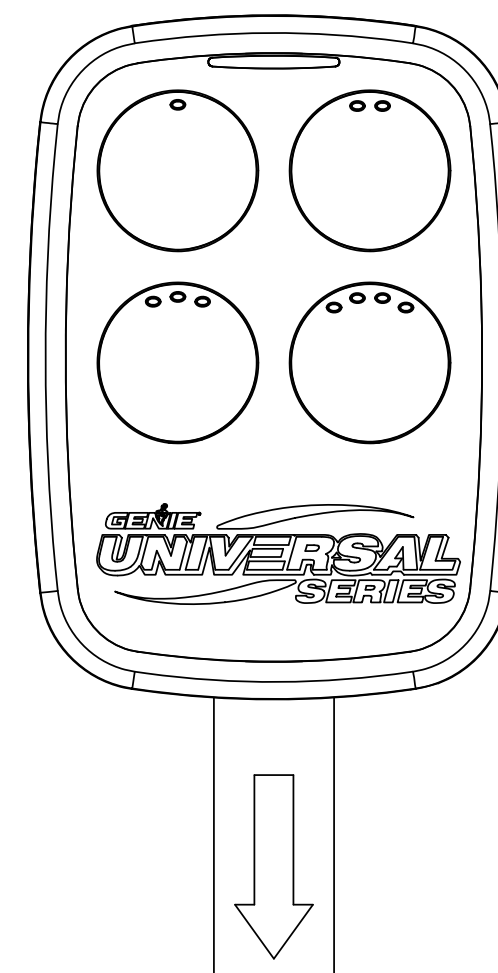

39877T
39877U
39877V

1	-	-	-	-	25	39883E	LABEL,FCC/IC, UNIV XMTR,GENIE GU4TG
-	1	-	-	-	24	39883D	LABEL,FCC/IC, UNIV XMTR,GENIE GU4TB
-	-	1	-	-	23	39883C	LABEL,FCC/IC, UNIV XMTR,GENIE GU4TR
-	-	-	1	-	22	39883B	LABEL,FCC/IC, UNIV XMTR,OH D OU4T
-	-	-	-	1	21	39883A	LABEL,FCC/IC, UNIV XMTR,GENIE GU4T
1	-	-	-	-	20	39874E	BUTTON TREE,XMTR,BLK/GRY
-	1	-	-	-	19	39874D	BUTTON TREE,XMTR,BLK/BLUE
-	-	1	-	-	18	39874C	BUTTON TREE,XMTR,BLK/RED
-	-	-	1	-	17	39874B	BUTTON TREE,XMTR,WHT/RED
-	-	-	-	1	16	39874A	BUTTON TREE,XMTR,WHT/GRY
1	-	-	-	-	15	39873E	HOUSING,XMTR,BOTTOM,BLK/GRY
-	1	-	-	-	14	39873D	HOUSING,XMTR,BOTTOM,BLK/BLUE
-	-	1	-	-	13	39873C	HOUSING,XMTR,BOTTOM,BLK/RED
-	-	-	1	-	12	39873B	HOUSING,XMTR,BOTTOM,WHT/RED
-	-	-	-	1	11	39873A	HOUSING,XMTR,BOTTOM,WHT/GRY
1	-	-	-	-	10	39872E	HOUSING,XMTR, TOP, GENIE UNIV, BLK/GRY
-	1	-	-	-	9	39872D	HOUSING,XMTR, TOP, GENIE UNIV, BLK/BLUE
-	-	1	-	-	8	39872C	HOUSING,XMTR, TOP, GENIE UNIV, BLK/RED
-	-	-	1	-	7	39872B	HOUSING,XMTR, TOP, OH D, WHT/RED
-	-	-	-	1	6	39872A	HOUSING,XMTR, TOP, GENIE, WHT/GRY
1	1	1	1	1	5	39899R	PCBA, UNIVERSAL XMTR
1	1	1	1	1	4	34472A	BATTERY, 3V, COIN CELL
1	1	1	1	1	3	39260A	PULL TAB, UNIVERSAL
1	1	1	1	1	2	39882A	SCREW, M2.2-0.8 x 6.5 LONG, FH, SELF-TAPPING
1	1	1	1	1	1	39875A	LIGHT PIPE, UNIVERSAL TRANSMITTER
-V/QTY.	-U/QTY.	-T/ QTY.	-S/QTY.	-R/QTY.	ITEM NO.	PART NO.	DESCRIPTION

BILL OF MATERIAL

UNLESS OTHERWISE SPECIFIED		APPROVALS		DATE				A SUBSIDIARY OF OVERHEAD DOOR CORPORATION MT. HOPE, OHIO	
INTERPRET DIMS & TOLS PER ASME Y14.5M ALL DIMS ARE IN MM DO NOT SCALE DIMS AND SPECIFICATIONS CIRCLED WITH SYMBOL 'C' ARE CRITICAL TO QUALITY DESIGN FEATURES & MUST MEET APPLICABLE IN-PROCESS INSPECTION STANDARDS.	<u>TOLERANCES:</u> .X = ±.20 .XX = ±.12 .XXX = ±.12 ANGULAR = ±1 ° <u>HOLES:</u> < Ø6.0 = ±.07 Ø6.0-Ø12.0 = ±.07 > Ø12.0= ±.07	DRAWN	DANP	2/23/2018		DESCRIPTION XMTR ASSEMBLY, UNIVERSAL REMOTE			
		CHECKED	DRU	3/27/19					
		APPROVED	DANP	3/28/19					
		MATERIAL							
	ALL GEOMETRY GOVERNED BY 3D CAD DATABASE: 39877		FINISH				SIZE	DWG NO.	
						C	39877		
						SCALE 2:1		SHEET 1 OF 1	