Regulatory WLAN Antenna Information (Template)

English Language Required for Intel Regulatory Review / Approval

(OEM/ODM or antenna vendor is required to complete this document with platform antenna information.

Remove Intel references and make this your own document)

Platform information					
Brand	**ODM**	**RMN**	**Intel platform** (ex: Yes, No or NA)	**Platform type** (ex: regular NB, convertible PC, AIO…etc)	***SAR minimum separation (mm)**
HP Inc.	Wistron	TPN-W168	YES	Regular NB	12.65

*******Please fill in exact product model name and make sure the model name is visible on product cover or any parts for end users recognize for authority inspection.**

Antenna information			
Vendor	**Type**	**Antenna Part number** (Main/Tx2)	**Antenna Part number** (Aux/Tx1)
WNC	PIFA	025.902I1.0001 (81EAB615.G56)	025.902I2.0001 (81EAB615.G57)

Peak gain w/ cable loss (dBi)*										
	2.4GHz 2400-2483.5 MHz	**5.2GHz** 5150-5250MHz	**5.3GHz** 5250-5350MHz	**5.6GHz** 5470-5725MHz	**5.8GHz** 5725-5850MHz	**5.9GHz** 5850-5895MHz	**6.2GHz** 5925-6425MHz	**6.5GHz** 6425-6525MHz	**6.7GHz** 6525-6875MHz	**7.0 GHz** 6875-7125MHz
Main	2.47	2.37	2.55	2.38	2.42	2.69	2.69	2.76	2.09	1.98
Aux	2.53	2.44	2.67	2.17	2.22	2.76	2.76	2.63	2.08	1.98

Module Information	
Model	**Form factor and suffixes**
AX211NGW	Intel Garfield Peak 2 AX211 Wi-Fi 6e +Bluetooth 5.2 M.2 2230 160MHz CNVi WW WLAN
BE201NGW	Intel Fillmore Peak 2 BE201 M.2 2230 Wi-Fi 7 +Bluetooth 5.4 non-vPro WW WLAN

Antenna Vendor Address
20 Park Avenue II, Hsinchu Science Park, Hsinchu, Taiwan, R.O.C.

Antenna manufacturer	Company name	WNC
	Address	No. 20, Yuanqu 2nd Rd., Baoshan Township, Hsinchu County 300092 , Taiwan (R.O.C.)
Test location	Company name	SGS
	Address	1F., No. 8, Aly. 15, Ln. 120, Sec. 1, Neihu Rd., Neihu Dist., Taipei City , Taiwan (R.O.C.)
Test Personnel	Name(Full name)	Willy.Lee
	E-mail	Willy.Lee@sgs.com
	Tel/Mobile	+886 2299 3279 #1690
Testing date		2024/10/09

Table of contents

1. Applicable test method
2. Test & System Description
    a. Test setup
    b. Equipment list
3. Setup photo

Section 1. Antenna Assembly Specifications

Section 2. Dimensioned Photos or Drawings of Antennas

Section 3. Radiation characteristics of antenna loaded in Host Platform

Section 4. Antenna Host Platform Location Information

Section 5. Antenna dimensional information for SAR evaluation

Section 6. Diagram Example of Co-Location Antenna Separation

1. **Applicable test methods**

ETS-Lindgren AMS-8500 system is 3D fully anechoic chamber, it is applied to the "Conical Cut test method", the detail description is described as below.

The Conical Cut method requires the ability of the Measurement Antenna to be physically rotated in the theta plane (overhead) of the EUT for implementations using a single Measurement Antenna, Eleven conical cuts are required to capture data at every 15 degrees from the EUT, with the top (0 degrees) and bottom (180 degrees) cuts not being measured. Typically, the EUT will remain affixed to a turntable during the entire measurement process. The Measurement Antenna will be positioned at a starting theta angle. The EUT will then be rotated around the full 360 degrees of phi rotation. The Measurement Antenna will then be positioned at the next theta angle, and the process repeated.

		θ -Axis	Φ -Axis
Passive	Step size	15º~165º step: 15º	0º~345º step: 15º
	N / M (Points)	12	24

2. **Test & System Description**
   a. Test setup

Typical Setup for ETS-Lindgren AMS-8500:

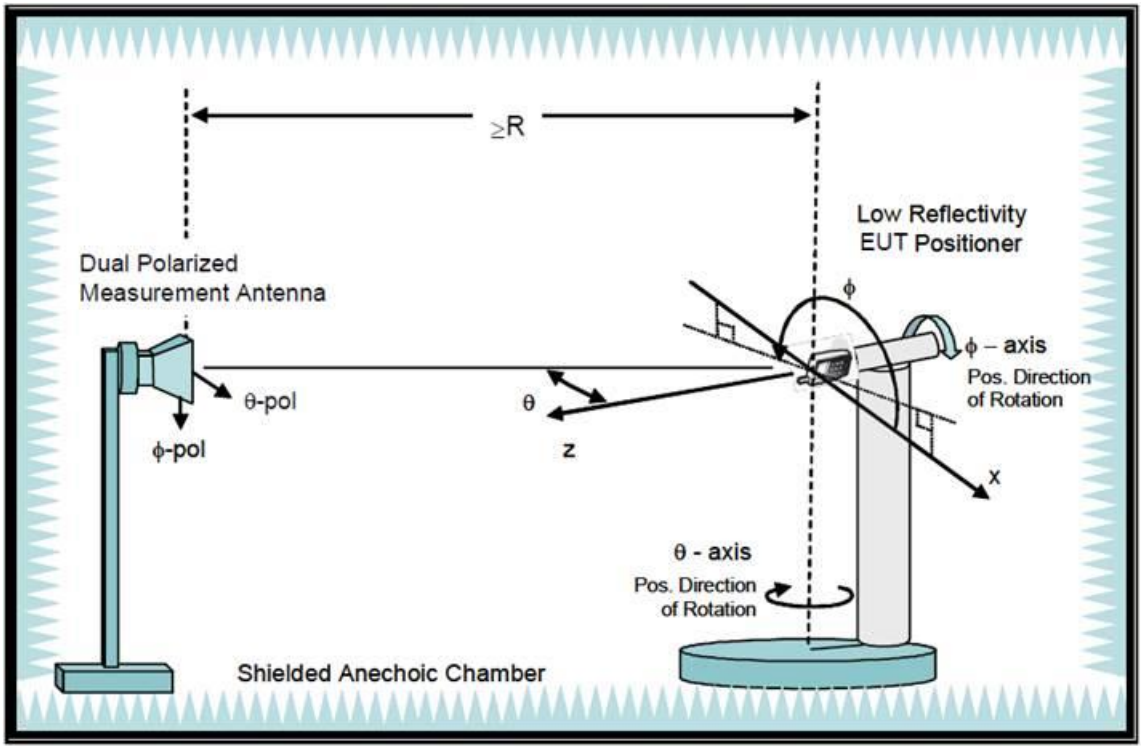

b. Equipment list

Equipment Description	Manufacturer	Identification no.	Current calibration date	Next calibration date
Network analyzer	Agilent	E5071C	2024/01/07	2025/01/06
Measurement software	ETS-Lindgren	EMQuest	N/A	N/A
Multi axis positioning system(MAPSTM)	ETS-Lindgren	EMCO 2115	N/A	N/A
Multi axis positioning system(MAPSTM)	ETS-Lindgren	EMCO 2110	N/A	N/A
MAPSTM controller	ETS-Lindgren	EMCO 2090	N/A	N/A
Fully anechoic test system	ETS-Lindgren	AMS-8500	2024/10/03	2025/10/02
Horn antenna	ETS-Lindgren	3164-10	2024/10/03	2025/10/02

Antenna Information

Section 1. Antenna Assembly Specifications

1A Antenna Part Number	1B Manufacturer	1C Antenna Type	1D Cable Assembly Part Number and Information	Freq Range MHz	1E * Peak Gain W/ Cable loss (dBi)	1F Peak Gain w/o Cable Loss (dBi)	1G Max VSWR	1H Cable Loss (dB)
P/N: 025.902I1.0001 (81EAB615.G56) Main Antenna (TX2)	Wistron NeWeb Corporation	PIFA	(P/N: 20632-001R-37) 50 ohm Coaxial length: 29cm diameter: 1.37mm	2400-2495	2.47	3.26	3	0.79
				5150-5250	2.37	3.60	3	1.23
				5250-5350	2.55	3.79	3	1.24
				5470-5725	2.38	3.65	3	1.27
				5725-5850	2.42	3.70	3	1.28
				5850-5895	2.69	3.98	3	1.29
				5925-6425	2.69	4.02	3	1.33
				6425-6525	2.76	4.13	3	1.37
				6525-6875	2.09	3.50	3	1.41
				6875-7125	1.98	3.43	3	1.45
P/N: 025.902I2.0001 (81EAB615.G57) Aux Antenna (TX1)	Wistron NeWeb Corporation	PIFA	(P/N: 20632-001R-37) 50 ohm Coaxial length: 36.4cm diameter: 1.37mm	2400-2495	2.53	3.52	3	0.99
				5150-5250	2.44	3.98	3	1.54
				5250-5350	2.67	4.22	3	1.55
				5470-5725	2.17	3.76	3	1.59
				5725-5850	2.22	3.83	3	1.61
				5850-5895	2.76	4.38	3	1.62
				5925-6425	2.76	4.43	3	1.67
				6425-6525	2.63	4.35	3	1.72
				6525-6875	2.08	3.85	3	1.77
				6875-7125	1.98	3.80	3	1.82

Section 3. Radiation characteristics of antenna loaded in Host Platform

Main Antenna

Max Antenna 2D Radiation Pattern 2400 – 2495 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
2400-2495	2.47

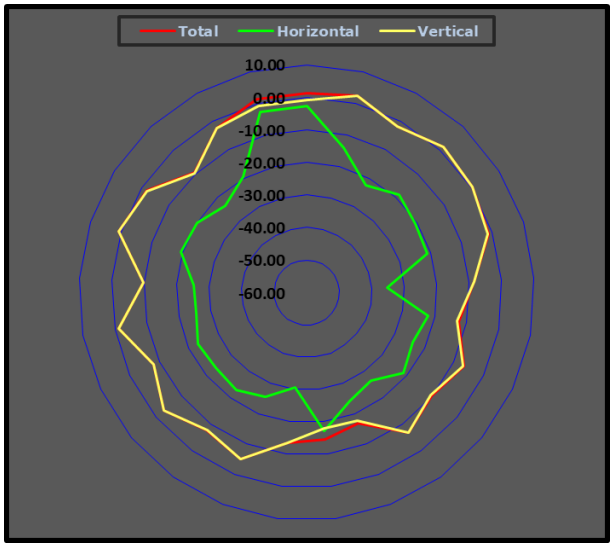

Max Antenna 2D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5150-5250	2.37

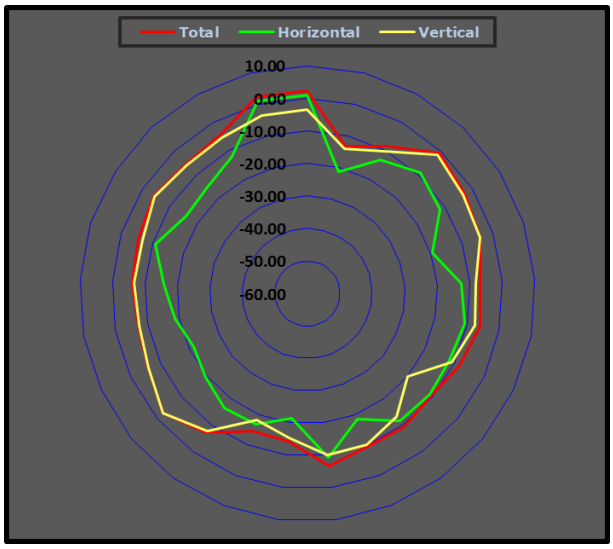

Max Antenna 2D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5250-5350	2.55

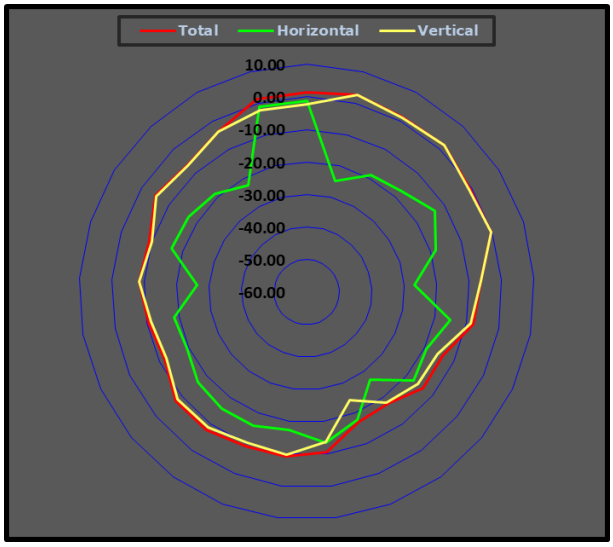

Max Antenna 2D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5470-5725	2.38

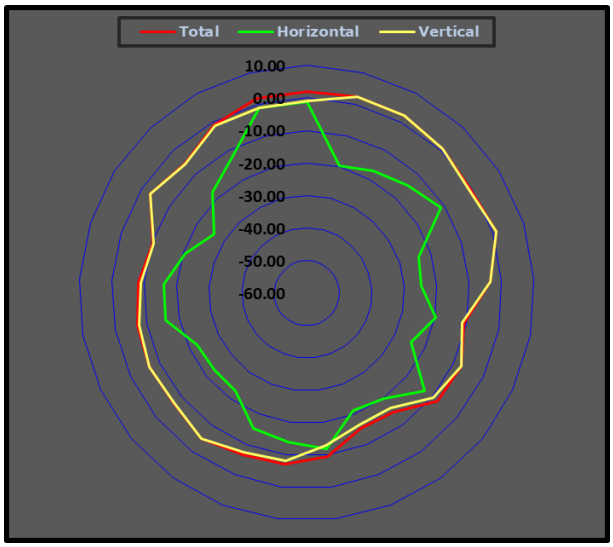

Max Antenna 2D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5725-5850	2.42

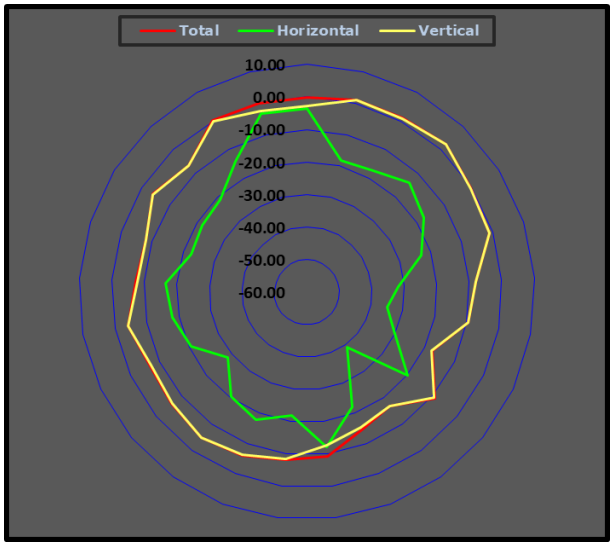

Max Antenna 2D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5850-5895	2.69

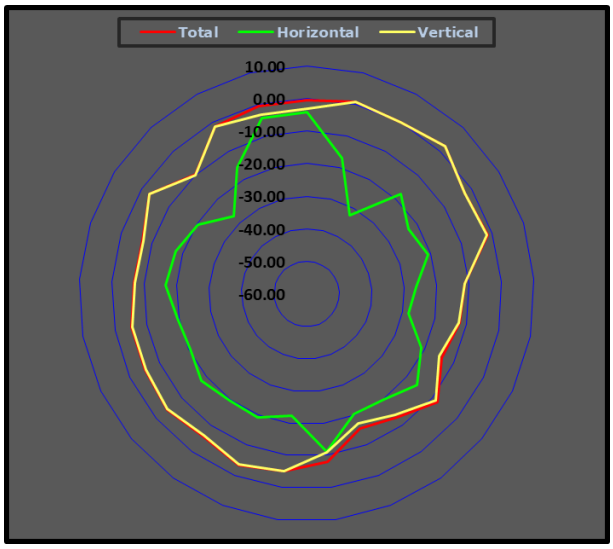

Max Antenna 2D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5925-6425	2.69

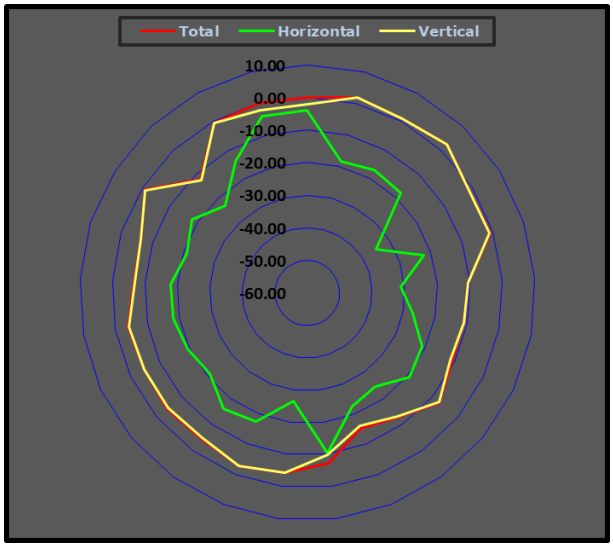

Max Antenna 2D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6425-6525	2.76

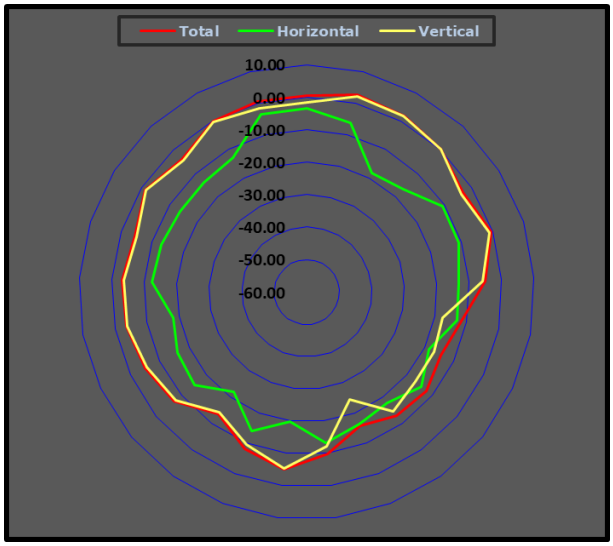

Max Antenna 2D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6525-6875	2.09

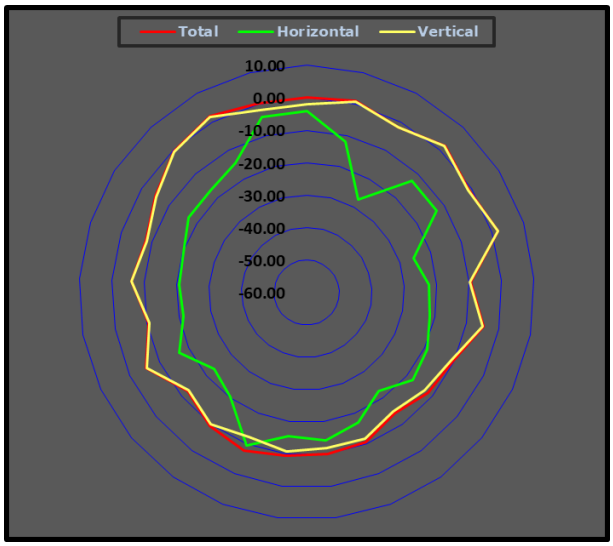

Max Antenna 2D Radiation Pattern 6875-7125 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6875-7125	1.98

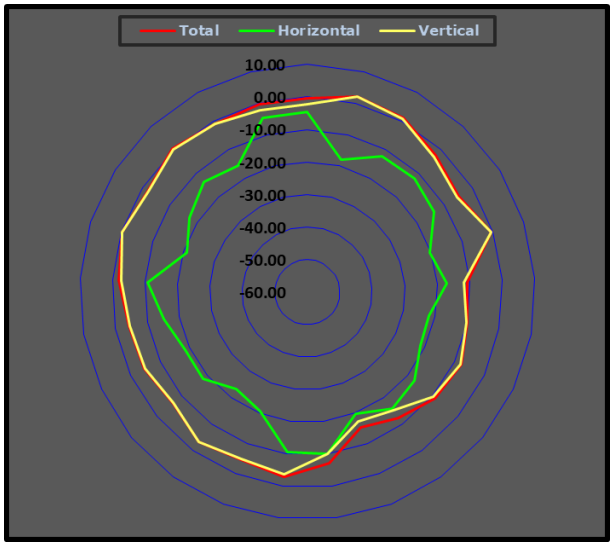

Auxiliary Antenna

Max Antenna 2D Radiation Pattern 2400 – 2495 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
2400-2483.5	2.53

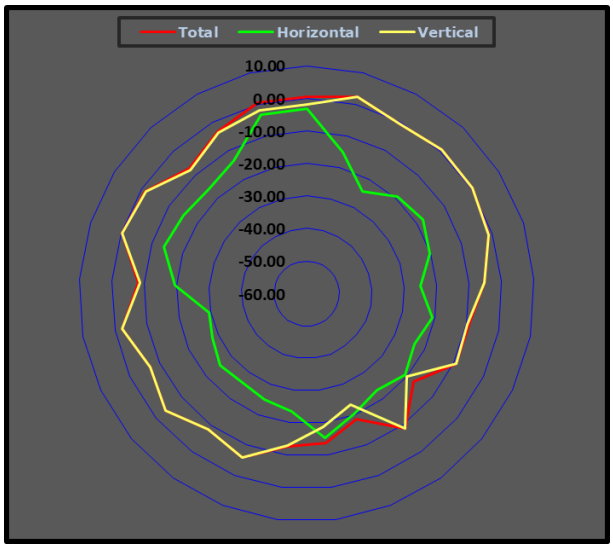

Max Antenna 2D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5150-5250	2.44

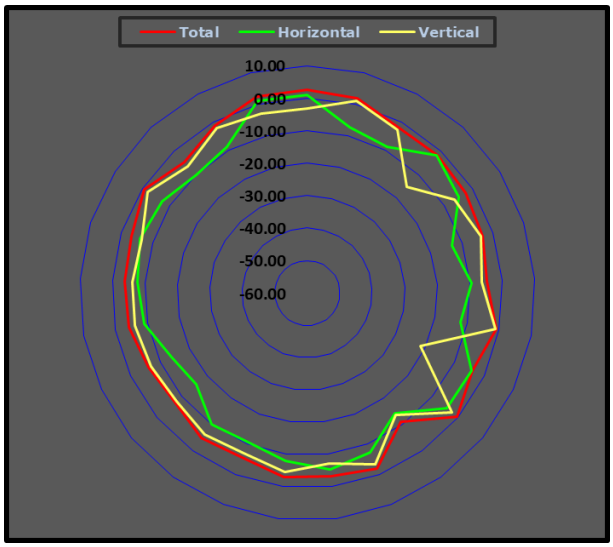

Max Antenna 2D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5250-5350	2.67

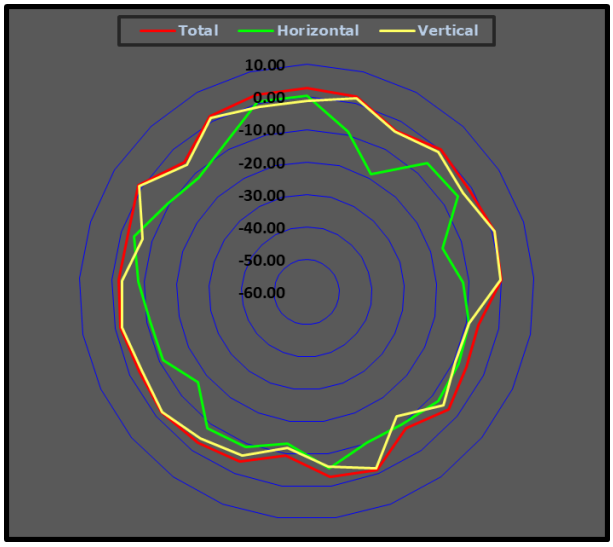

Max Antenna 2D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5470-5725	2.17

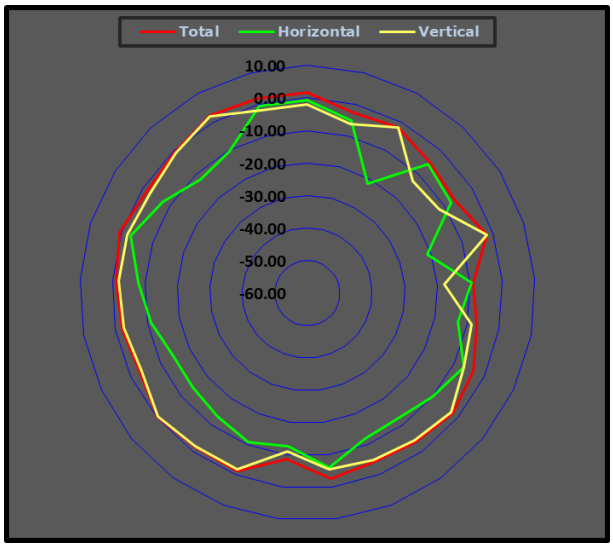

Max Antenna 2D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5725-5850	2.22

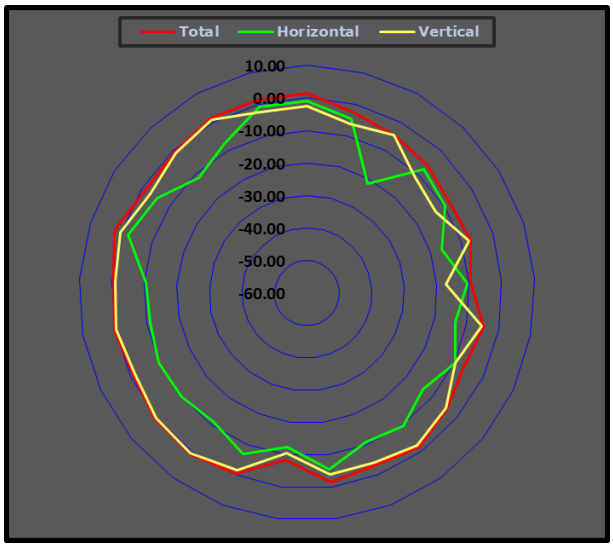

Max Antenna 2D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5850-5895	2.76

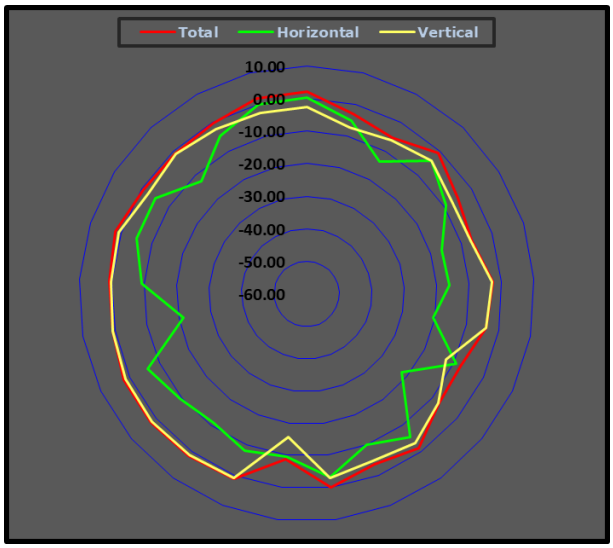

Max Antenna 2D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5925-6425	2.76

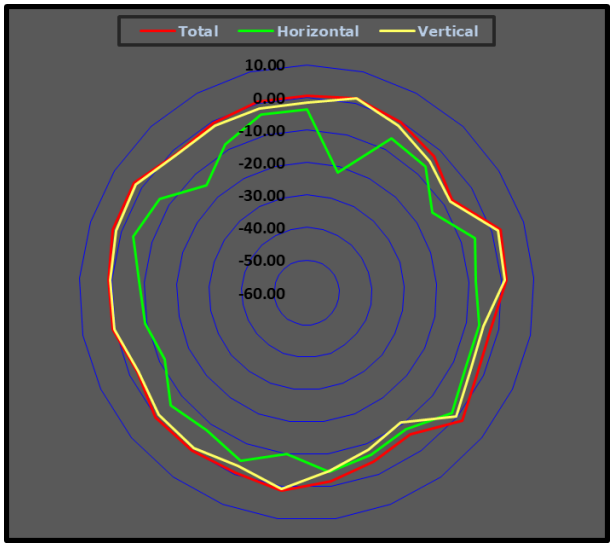

Max Antenna 2D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6425-6525	2.63

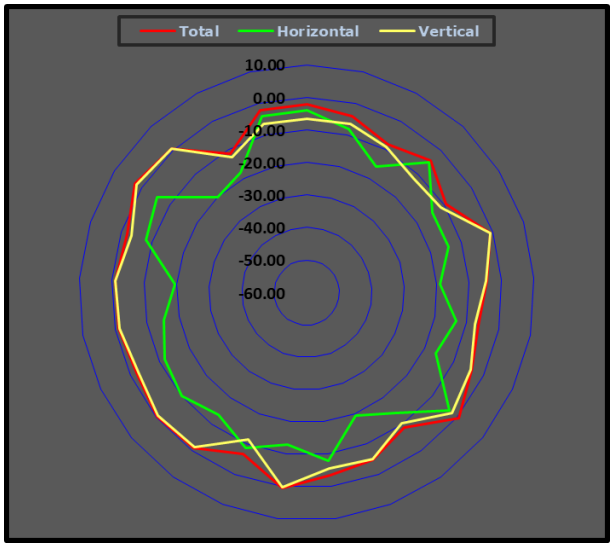

Max Antenna 2D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6525-6875	2.08

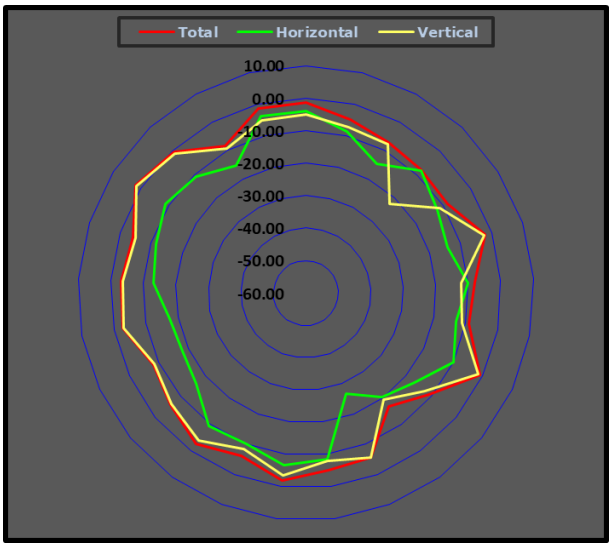

Max Antenna 2D Radiation Pattern 6875-7125 MHz
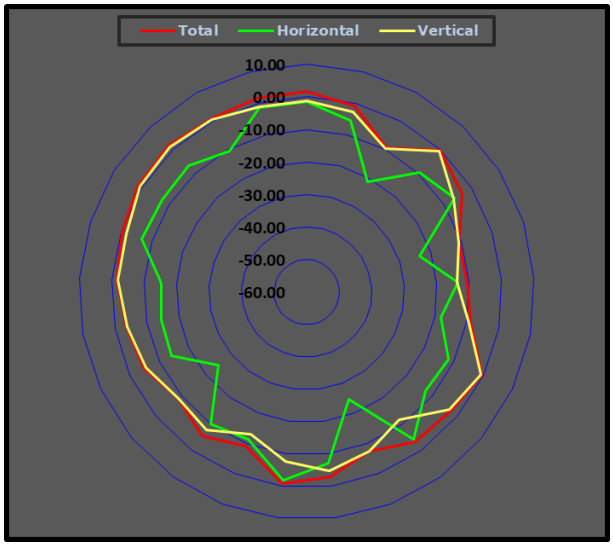
Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
6875-7125	1.98