

FCC RF Test Report


APPLICANT : Hewlett-Packard Co., Ltd.
EQUIPMENT : Tablet PC
BRAND NAME : HP
MODEL NAME : HSTNH-B17CM
MARKETING NAME : HP SLATE 10 HD
FCC ID : B94HHB17CM
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)
CLASSIFICATION : PCS Licensed Transmitter (PCB)

The product was received on Jun. 27, 2013 and testing was completed on Sep. 25, 2013. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI / TIA / EIA-603-C-2004 and shown to be compliant with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.

TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test	6
1.5 Modification of EUT	6
1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator	7
1.7 Testing Site	7
1.8 Applied Standards.....	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Test Mode.....	9
2.2 Connection Diagram of Test System	11
2.3 Support Unit used in test configuration and system.....	12
2.4 Measurement Results Explanation Example	12
3 TEST RESULT.....	13
3.1 Conducted Output Power Measurement.....	13
3.2 Peak-to-Average Ratio	16
3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement	26
3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	32
3.5 Band Edge Measurement.....	56
3.6 Conducted Spurious Emission Measurement.....	71
3.7 Field Strength of Spurious Radiation Measurement	90
3.8 Frequency Stability Measurement.....	112
4 LIST OF MEASURING EQUIPMENTS	117
5 UNCERTAINTY OF EVALUATION.....	118
APPENDIX A. SETUP PHOTOGRAPHS	

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG362701	Rev. 01	Initial issue of report	Oct. 21, 2013
FG362701	Rev. 02	Update report for revising SW version.	Nov. 22, 2013

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	§2.1046	RSS-132 (5.4) RSS-133 (6.4) RSS-139 (6.4)	Conducted Output Power	Reporting Only	PASS	-
3.2	§24.232(d) §27.50(d)(5)	RSS-132 (5.4) RSS-133(6.4) RSS-139 (6.4)	Peak-to-Average Ratio	< 13 dB	PASS	-
3.3	§22.913(a)(2)	RSS-132(5.4) SRSP-503(5.1.3)	Effective Radiated Power	< 7 Watts	PASS	-
3.3	§24.232(c)	RSS-133 (6.4) SRSP-510(5.1.2)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
3.3	§27.50(d)(4)	RSS-139 (6.4) SRSP-513(5.1.2)	Equivalent Isotropic Radiated Power	< 1 Watts	PASS	-
3.4	§2.1049 §22.917(a) §24.238(b) §27.53(g)	RSS-GEN(4.6.1) RSS-133(6.5) RSS-139 (6.5)	Occupied Bandwidth	Reporting Only	PASS	-
3.5	§2.1051 §22.917(a) §24.238(a) §27.53(g)	RSS-132 (5.5) RSS-133 (6.5) RSS-139 (6.5)	Band Edge Measurement	< 43+10log10(P[Watts])	PASS	-
3.6	§2.1051 §22.917(a) §24.238(a) §27.53(g)	RSS-132 (5.5) RSS-133 (6.5) RSS-139 (6.5)	Conducted Emission	< 43+10log10(P[Watts])	PASS	-
3.7	§2.1053 §22.917(a) §24.238(a) §27.53(g)	RSS-132 (5.5) RSS-133 (6.5) RSS-139 (6.5)	Field Strength of Spurious Radiation	< 43+10log10(P[Watts])	PASS	Under limit 13.57 dB at 9399.000 MHz
3.8	§2.1055 §22.355 §24.235 §27.54	RSS-132 (5.3) RSS-133 (6.3) RSS-139 (6.3)	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-

1 General Description

1.1 Applicant

Hewlett-Packard Co., Ltd.

1501 Page Mill Road Palo Alto, CA 94304 United States

1.2 Manufacturer

BYD Precision Manufacture Co., Ltd.

No.3001, Baohe Road, Baolong Industrial, Longgang, Shenzhen, 518116, P.R.China

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Tablet PC
Brand Name	HP
Model Name	HSTNH-B17CM
Marketing Name	HP SLATE 10 HD
FCC ID	B94HHB17CM
EUT supports Radios application	GPRS/EGPRS/WCDMA/HSPA/HSPA+(Downlink Only)/WLAN 802.11abgn / Bluetooth v3.0 + EDR
HW Version	DVT
SW Version	V1.00.09_20131114.155
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx Frequency	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV : 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz
Rx Frequency	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band IV : 2112.4 MHz ~ 2152.6 MHz WCDMA Band II : 1932.4 MHz ~ 1987.6 MHz
Maximum Output Power to Antenna	GSM850 : 32.94 dBm GSM1900 : 29.01 dBm WCDMA Band V : 23.76 dBm WCDMA Band IV : 22.67 dBm WCDMA Band II : 22.20 dBm
Antenna Type	Fixed Internal Antenna
Type of Modulation	GPRS: GMSK EDGE: GMSK / 8PSK WCDMA: QPSK (Uplink) HSDPA: QPSK (Uplink) HSUPA: QPSK (Uplink) HSPA+: 16QAM (Downlink Only)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (% , Hz, ppm)	Emission Designator
Part 22	GPRS850 GPRS class 8	GMSK	0.93	0.03 ppm	244KGXW
Part 22	GPRS850 EDGE class 8	8PSK	0.29	0.04 ppm	246KG7W
Part 22	WCDMA Band V RMC 12.2Kbps	QPSK	0.07	0.04 ppm	4M20F9W
Part 24	GPRS1900 GPRS class 8	GMSK	1.97	0.02 ppm	246KGXW
Part 24	GPRS1900 EDGE class 8	8PSK	0.76	0.02 ppm	250KG7W
Part 24	WCDMA Band II RMC 12.2Kbps	QPSK	0.49	0.02 ppm	4M20F9W
Part 27	WCDMA Band IV RMC 12.2Kbps	QPSK	0.28	0.03 ppm	4M22F9W

1.7 Testing Site

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.		
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	TH01-KS	03CH01-KS	149928/4086E-1

1.8 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ ANSI / TIA / EIA-603-C-2004
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r01
- ♦ IC RSS-132 Issue 3
- ♦ IC RSS-133 Issue 6
- ♦ IC RSS-139 Issue 2
- ♦ IC RSS-Gen Issue 3
- ♦ NOTICE 2012-DRS0126

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

Frequency range investigated for radiated emission is as follows:

1. 30 MHz to 9000 MHz for GPRS850 and WCDMA Band V.
2. 30 MHz to 18000 MHz for WCDMA Band IV.
3. 30 MHz to 19000 MHz for GPRS1900 and WCDMA Band II.

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	■ GPRS class 8 Link ■ EDGE class 8 Link	■ GPRS class 8 Link ■ EDGE class 8 Link
GSM 1900	■ GPRS class 8 Link ■ EDGE class 8 Link	■ GPRS class 8 Link ■ EDGE class 8 Link
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link


Note: The maximum power levels are GPRS class 8 mode for GMSK link, EDGE multi-slot class 8 mode for 8PSK link, RMC 12.2Kbps mode for WCDMA band V, RMC 12.2Kbps mode for WCDMA band IV, and RMC 12.2Kbps mode for WCDMA band II, only these modes were used for all tests.

The conducted power tables are as follows:

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880	1909.8
GPRS (GMSK, 1 Tx slot) – CS1	32.94	32.90	32.87	29.01	28.85	28.78
GPRS (GMSK, 2 Tx slots) – CS1	30.74	30.70	30.67	27.01	26.88	26.84
GPRS (GMSK, 3 Tx slots) – CS1	28.74	28.70	28.67	25.00	24.91	24.88
GPRS (GMSK, 4 Tx slots) – CS1	26.71	26.68	26.64	23.05	23.00	23.01
EDGE (8PSK, 1 Tx slot) – MCS5	25.89	25.67	25.60	25.25	25.54	25.69
EDGE (8PSK, 2 Tx slots) – MCS5	25.77	25.56	25.49	25.09	25.36	25.53
EDGE (8PSK, 3 Tx slots) – MCS5	24.28	24.00	24.05	23.60	23.90	24.06
EDGE (8PSK, 4 Tx slots) – MCS5	22.04	21.70	21.68	21.51	21.81	21.97

Conducted Power (*Unit: dBm)									
Band	WCDMA Band V			WCDMA Band II			WCDMA Band IV		
Tx Channel	4132	4182	4233	9262	9400	9538	1312	1413	1513
Rx Channel	4357	4407	4458	9662	9800	9938	1537	1638	1738
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6	1712.4	1732.6	1752.6
RMC 12.2k	23.76	23.57	23.26	22.67	22.25	22.09	22.20	22.16	22.15
HSDPA Subtest-1	23.64	23.46	23.07	22.66	22.18	22.06	22.19	22.12	22.11
HSDPA Subtest-2	23.44	23.25	22.84	22.59	22.20	22.04	22.13	22.09	22.00
HSDPA Subtest-3	22.93	22.73	23.35	21.95	21.67	21.59	21.60	21.55	21.50
HSDPA Subtest-4	22.90	22.71	22.31	22.05	21.72	21.56	21.59	21.57	21.56
HSUPA Subtest-1	22.58	22.37	22.11	22.36	22.02	21.69	22.03	21.49	22.07
HSUPA Subtest-2	21.04	21.07	20.85	20.48	20.08	19.82	20.26	20.21	20.28
HSUPA Subtest-3	21.53	21.22	21.11	20.96	20.32	20.10	20.68	20.42	20.14
HSUPA Subtest-4	21.03	20.83	20.73	20.28	20.07	19.86	20.00	20.04	20.06
HSUPA Subtest-5	23.11	22.91	22.55	22.32	22.05	21.70	21.98	22.02	22.00

2.2 Connection Diagram of Test System

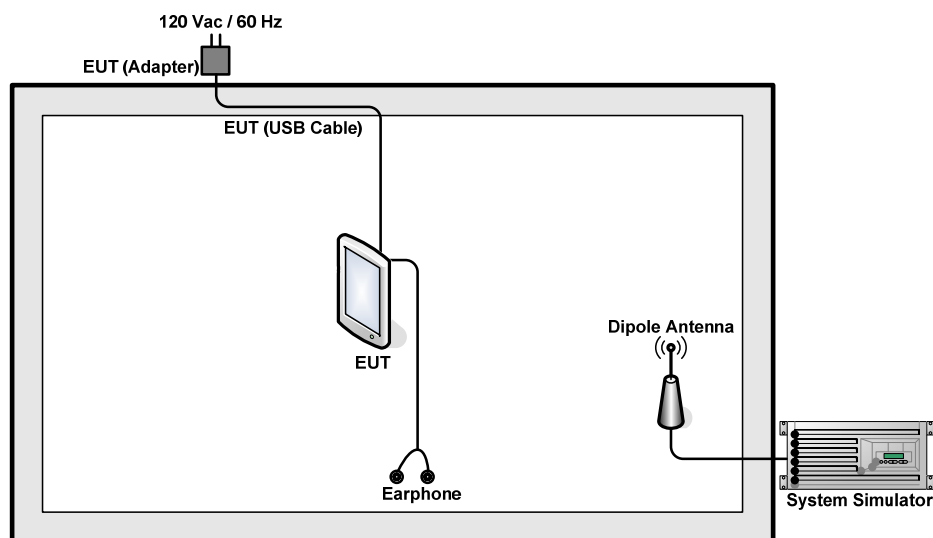

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU200	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GWINSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
3.	Earphone	Lenovo	SH100	N/A	N/A	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.8dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.8 + 10 = 14.8 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for GSM and WCDMA modes.

3.1.4 Test Setup

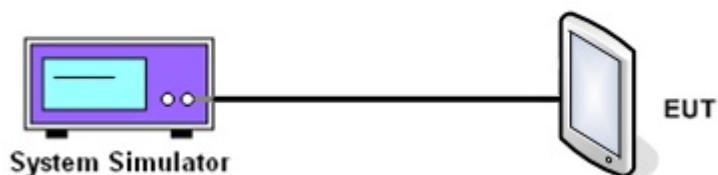

3.1.5 Test Result of Conducted Output Power

Cellular Band									
Modes	GSM850 (GPRS class 8)			GSM850 (EDGE class 8)			WCDMA Band V (RMC 12.2Kbps)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8	826.4	836.4	846.6
Conducted Power (dBm)	32.94	32.90	32.87	25.89	25.67	25.60	23.76	23.57	23.26
Conducted Power (Watts)	1.97	1.95	1.94	0.39	0.37	0.36	0.24	0.23	0.21

PCS Band									
Modes	GSM1900 (GPRS class 8)			GSM1900 (EDGE class 8)			WCDMA Band II (RMC 12.2Kbps)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8	1852.4	1880	1907.6
Conducted Power (dBm)	29.01	28.85	28.78	25.25	25.54	25.69	22.67	22.25	22.09
Conducted Power (Watts)	0.80	0.77	0.76	0.33	0.36	0.37	0.18	0.17	0.16

AWS Band			
Modes	WCDMA Band IV (RMC 12.2Kbps)		
Channel	1312(Low)	1413 (Mid)	1513 (High)
Frequency (MHz)	1712.4	1732.6	1752.6
Conducted Power (dBm)	22.20	22.16	22.15
Conducted Power (Watts)	0.17	0.16	0.16

Note: Maximum burst average power for GSM, and maximum average power for WCDMA.

3.2 Peak-to-Average Ratio

3.2.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and System Simulator via power divider.
2. For GSM/EGPRS operating modes:
 - a. Set EUT in maximum power output.
 - b. Set the RBW = 1MHz, VBW = 3MHz, Peak detector in spectrum analyzer for first trace.
 - c. Set the RBW = 1MHz, VBW = 3MHz, RMS detector in spectrum analyzer for second trace.
 - d. The wanted burst signal is triggered by spectrum analyzer, and measured respectively the peak level and Mean level without burst-off time, after system simulator synchronized with the spectrum analyzer.
3. For UMTS operating modes:
 - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
 - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.

3.2.4 Test Setup

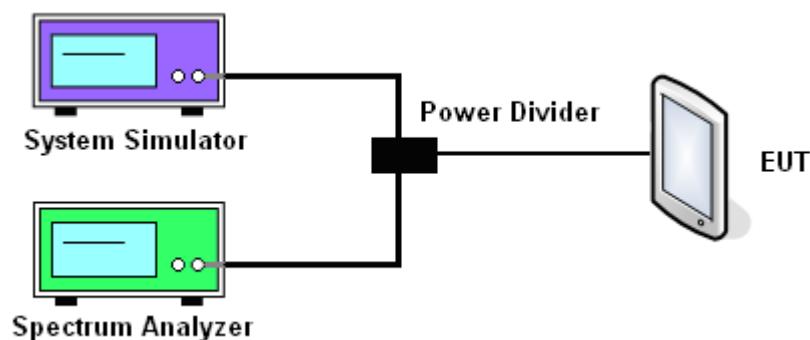

3.2.5 Test Result of Peak-to-Average Ratio

PCS Band									
Modes	GSM1900 (GPRS class 8)			GSM1900 (EDGE class 8)			WCDMA Band II (RMC 12.2Kbps)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8	1852.4	1880	1907.6
Peak-to-Average Ratio (dB)	0.25	0.26	0.27	3.12	3.20	3.27	3.45	3.57	3.57


AWS Band			
Modes	WCDMA Band IV (RMC 12.2Kbps)		
Channel	1312(Low)	1413 (Mid)	1513 (High)
Frequency (MHz)	1712.4	1732.6	1752.6
Peak-to-Average Ratio (dB)	2.96	2.76	2.96




3.2.6 Test Result (Plots) of Peak-to-Average Ratio

Band :	GSM 1900	Test Mode :	GPRS class 8 Link (GMSK)
--------	----------	-------------	--------------------------

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

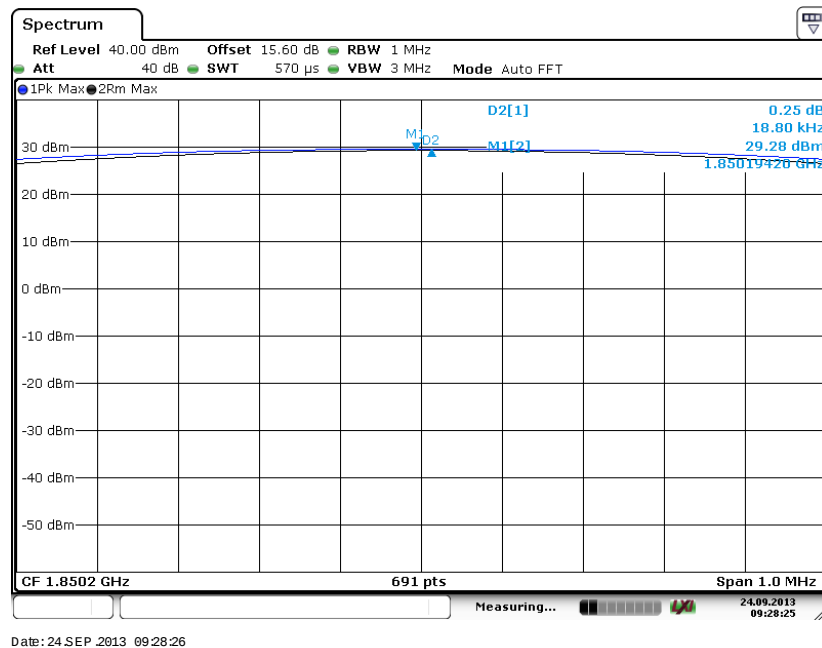


Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

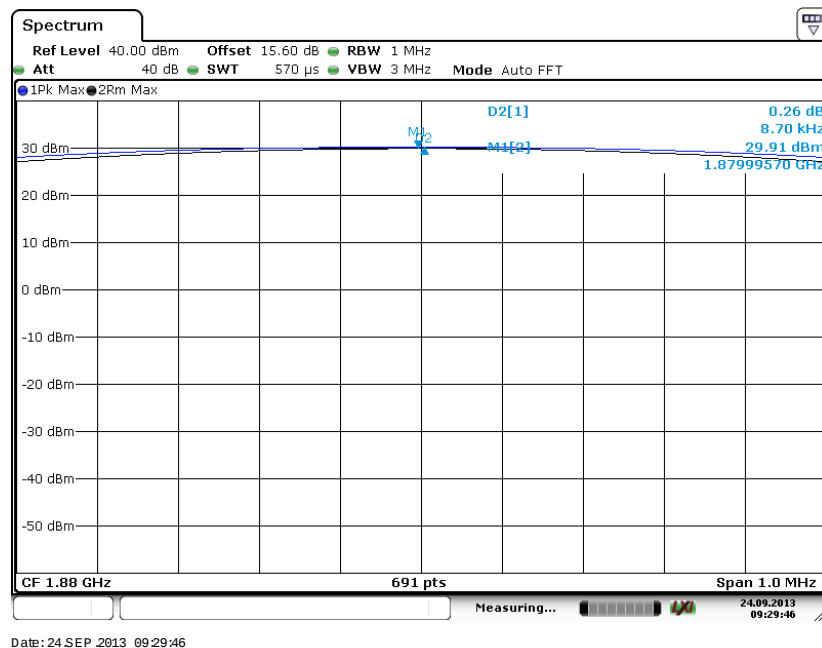



Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

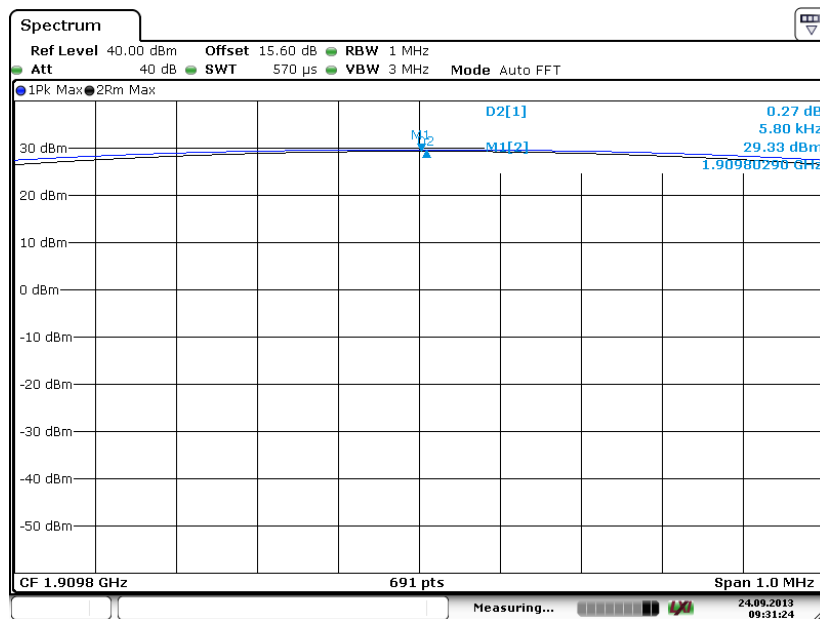


Date: 24 SEP 2013 09:31:24




Band :	GSM 1900	Test Mode :	EDGE class 8 Link (8PSK)
--------	----------	-------------	--------------------------

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

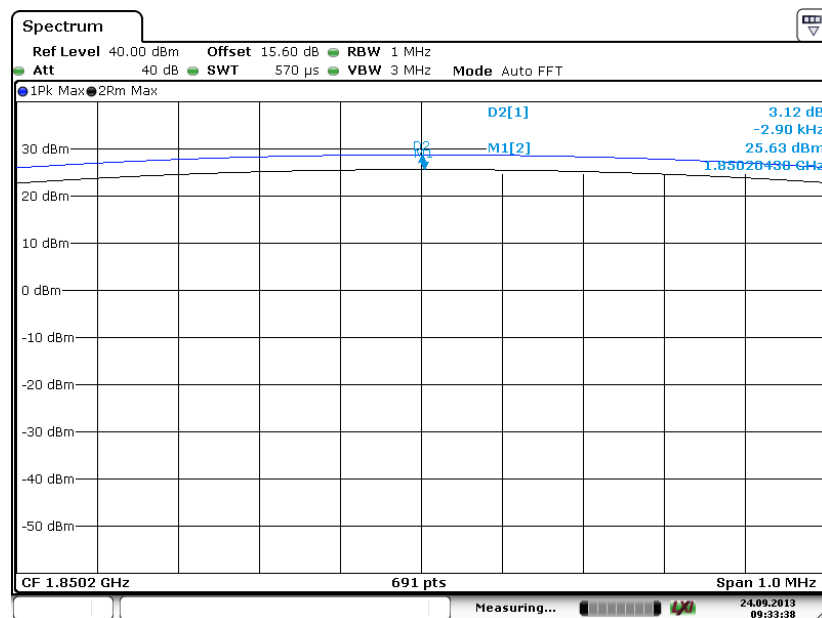

Date: 24 SEP 2013 09:33:39


Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

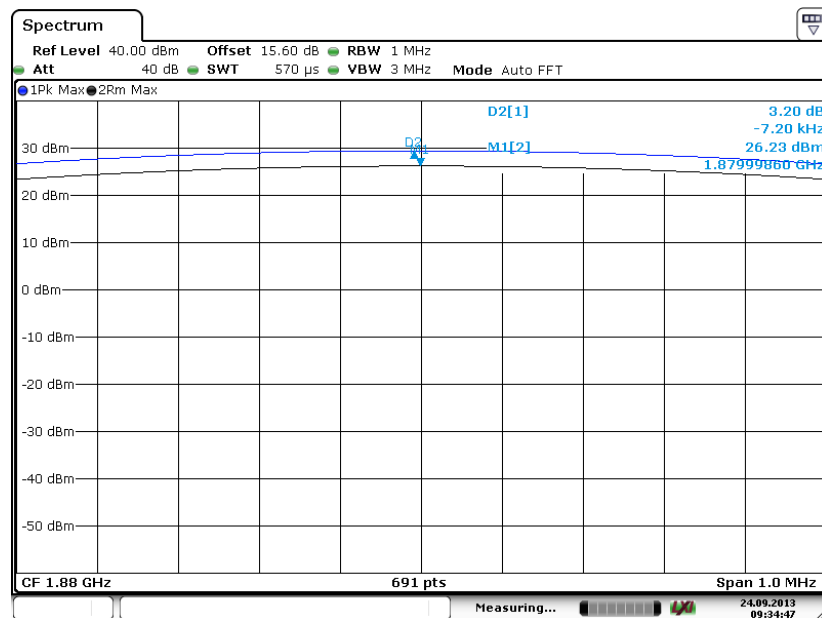

Date: 24 SEP 2013 09:34:48



Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

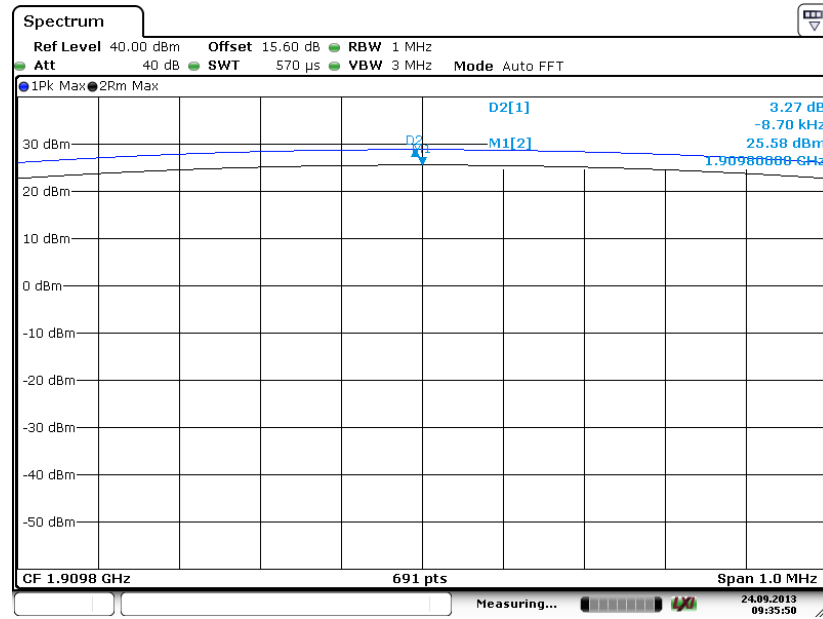


Date: 24 SEP 2013 09:35:51




Band :	WCDMA Band IV	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	---------------	-------------	--------------------------

Peak-to-Average Ratio on Channel 1312 (1712.4 MHz)

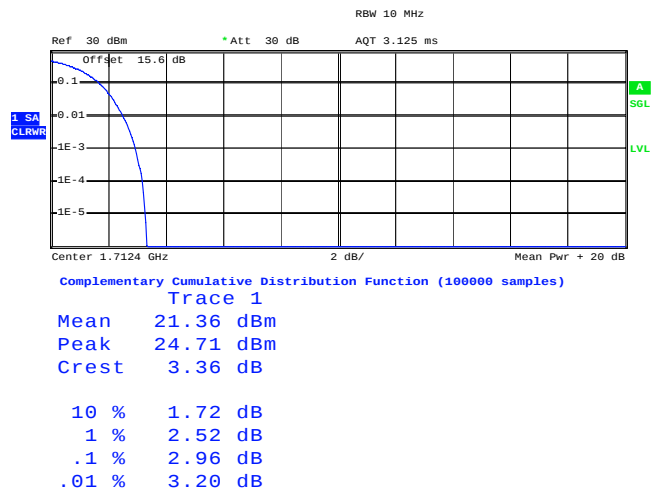


Date: 19.SEP.2013 23:57:17

Peak-to-Average Ratio on Channel 1413 (1732.6 MHz)

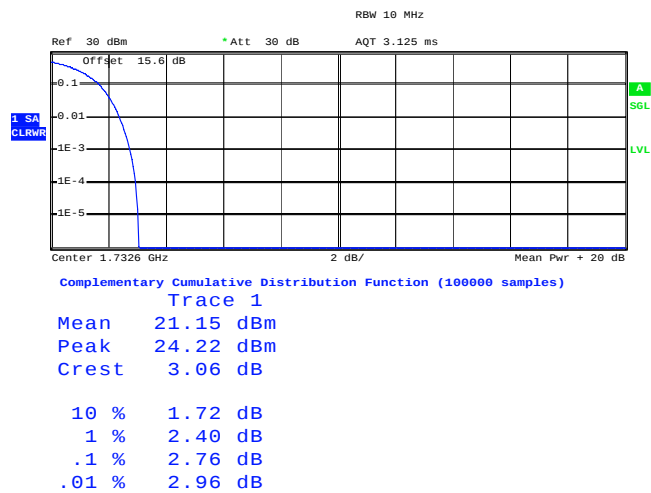

Date: 19.SEP.2013 23:57:44


Peak-to-Average Ratio on Channel 1513 (1752.6 MHz)

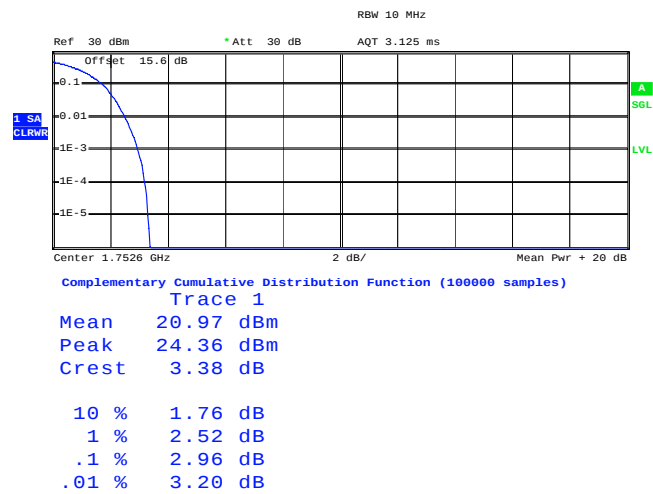

Date: 19.SEP.2013 23:58:14


Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
---------------	---------------	--------------------	--------------------------

Peak-to-Average Ratio on Channel 9262 (1852.4 MHz)

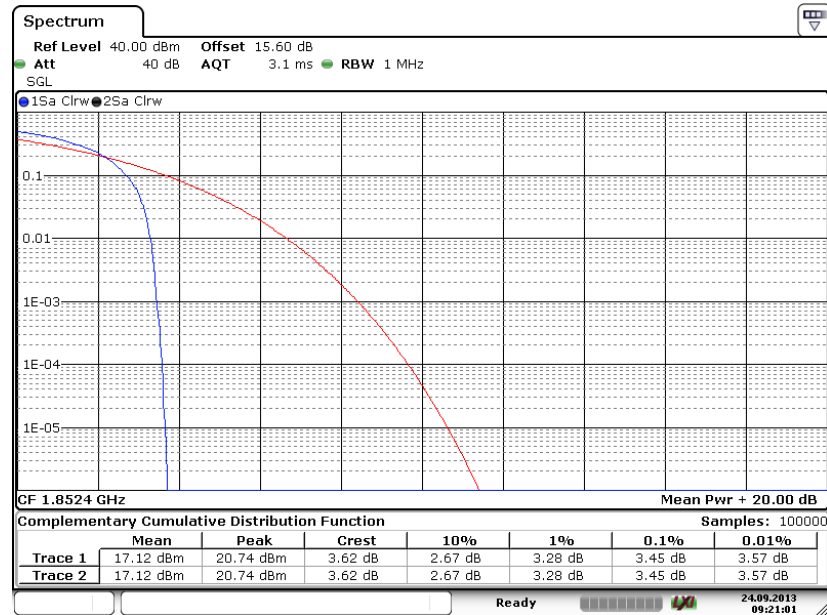

Date: 24 SEP 2013 09:21:02


Peak-to-Average Ratio on Channel 9400 (1880.0 MHz)

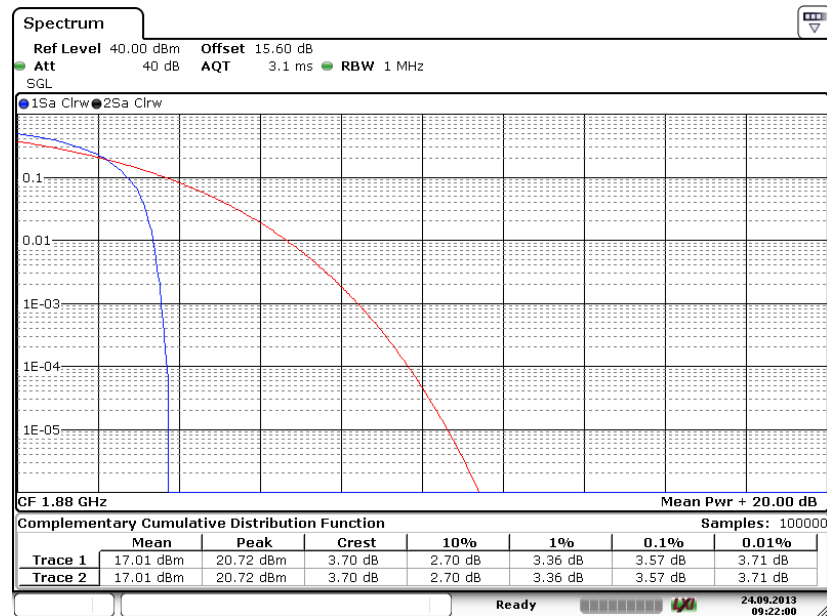

Date: 24 SEP 2013 09:22:00



Peak-to-Average Ratio on Channel 9538 (1907.6 MHz)

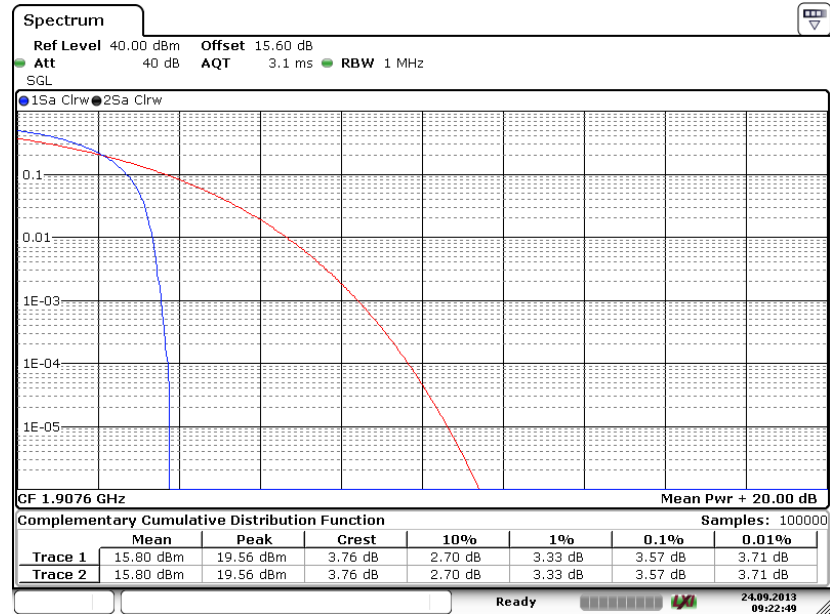

Date: 24 SEP 2013 09:22:49

3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

3.3.1 Description of the ERP/EIRP Measurement

The substitution method, in ANSI / TIA / EIA-603-C-2004, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r01. The ERP of mobile transmitters must not exceed 7 Watts (Cellular Band) and the EIRP of mobile transmitters are limited to 2 Watts (PCS Band) and 1 Watts (AWS Band).


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. The EUT was placed on an non-conductive rotating platform with 0.8 meter height in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RBW= 1MHz, VBW= 3MHz for GSM, RBW= 100 kHz, VBW= 300 kHz, used channel power option with bandwidth=5MHz for WCDMA, and RMS detector settings per section 4.0 of KDB 971168 D01.
2. During the measurement, the EUT was enforced in maximum power and linked with a base station. The highest emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
3. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-C. The EUT was replaced by dipole antenna (substitution antenna) at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, $EIRP = LVL + \text{Correction factor}$ and $ERP = EIRP - 2.15$.

3.3.4 Test Setup

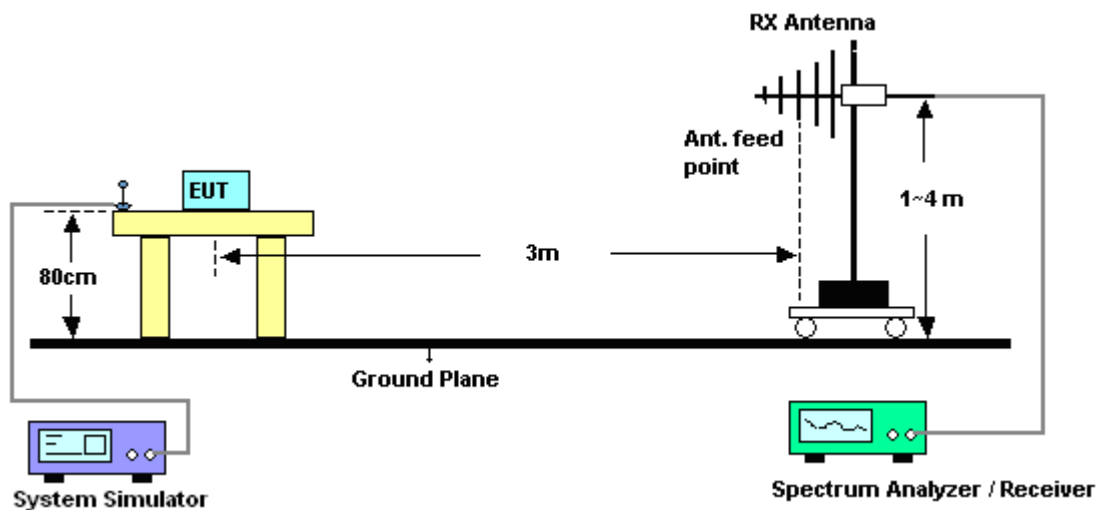

3.3.5 Test Result of ERP

GSM850 (GPRS class 8) Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	1.24	29.11	28.2	0.66
836.4	1.42	29.2	28.47	0.70
848.8	2.45	29.4	29.7	0.93
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-5.48	33.23	25.6	0.36
836.4	-4.47	33	26.38	0.43
848.8	-4.02	32.95	26.78	0.48

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

GSM850 (EDGE class 8) Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-4.71	29.11	22.25	0.17
836.4	-3.44	29.2	23.61	0.23
848.8	-2.57	29.4	24.68	0.29
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-10.97	33.23	20.11	0.10
836.4	-9.25	33	21.6	0.14
848.8	-9.50	32.95	21.3	0.13

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

WCDMA Band V (RMC 12.2Kbps) Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
826.4	-8.56	29.11	18.4	0.07
836.4	-8.45	29.2	18.6	0.07
846.6	-9.56	29.4	17.69	0.06
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
826.4	-18.53	33.23	12.55	0.02
836.4	-19.37	33	11.48	0.01
846.6	-18.36	32.95	12.44	0.02

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

3.3.6 Test Result of EIRP

GSM1900 (GPRS class 8) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-9.81	42.76	32.95	1.97
1880.0	-9.63	42.32	32.69	1.86
1909.8	-11.93	41.95	30.02	1.00
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-15.83	42.13	26.30	0.43
1880.0	-16.08	42.79	26.71	0.47
1909.8	-18.30	42.83	24.53	0.28

* EIRP = LVL (dBm) + Correction Factor (dB)

GSM1900 (EDGE class 8) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-13.93	42.76	28.83	0.76
1880.0	-13.86	42.32	28.46	0.70
1909.8	-15.82	41.95	26.13	0.41
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-19.60	42.13	22.53	0.18
1880.0	-18.14	42.79	24.65	0.29
1909.8	-21.80	42.83	21.03	0.13

* EIRP = LVL (dBm) + Correction Factor (dB)

WCDMA Band IV (RMC 12.2Kbps) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1712.40	-17.13	39.98	22.85	0.19
1732.60	-16.19	40.73	24.54	0.28
1752.60	-17.69	40.83	23.14	0.21
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1712.40	-22.92	41.22	18.30	0.07
1732.60	-22.39	41.41	19.02	0.08
1752.60	-22.81	41.68	18.87	0.08

* EIRP = LVL (dBm) + Correction Factor (dB)

WCDMA Band II (RMC 12.2Kbps) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1852.4	-15.88	42.76	26.88	0.49
1880.0	-17.33	42.32	24.99	0.32
1907.6	-19.62	41.95	22.33	0.17
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1852.4	-21.50	42.13	20.63	0.12
1880.0	-20.97	42.79	21.82	0.15
1907.6	-22.28	42.83	20.55	0.11

* EIRP = LVL (dBm) + Correction Factor (dB)

3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The 99% occupied bandwidth were measured, set RBW= 1% of span, VBW= 3*RBW, sample detector, trace maximum hold.
4. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3*RBW, peak detector, trace maximum hold.

3.4.4 Test Setup

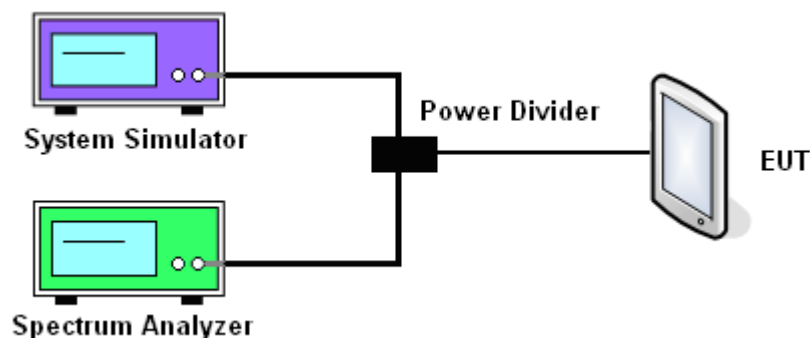

3.4.5 Test Result of 99% Occupied Bandwidth and 26dB Bandwidth

Cellular Band						
Modes	GSM850 (GPRS class 8)			GSM850 (EDGE class 8)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8
99% OBW (kHz)	244.00	244.00	238.00	246.00	246.00	242.00
26dB BW (kHz)	304.00	306.00	314.00	308.00	304.00	294.00

PCS Band						
Modes	GSM1900 (GPRS class 8)			GSM1900 (EDGE class 8)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8
99% OBW (kHz)	240.00	246.00	238.00	246.00	248.00	250.00
26dB BW (kHz)	312.00	318.00	312.00	302.00	312.00	316.00

Cellular Band			
Modes	WCDMA Band V (RMC 12.2Kbps)		
Channel	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	826.4	836.4	846.6
99% OBW (MHz)	4.20	4.20	4.20
26dB BW (MHz)	4.74	4.72	4.74


AWS Band			
Modes	WCDMA Band IV (RMC 12.2Kbps)		
Channel	1312(Low)	1413 (Mid)	1513 (High)
Frequency (MHz)	1712.4	1732.6	1752.6
99% OBW (MHz)	4.22	4.20	4.18
26dB BW (MHz)	4.72	4.72	4.72

PCS Band			
Modes	WCDMA Band II (RMC 12.2Kbps)		
Channel	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1852.4	1880	1907.6
99% OBW (MHz)	4.20	4.18	4.20
26dB BW (MHz)	4.74	4.72	4.74

3.4.6 Test Result (Plots) of Occupied Bandwidth and 26dB Bandwidth


Band :	GSM 850	Test Mode :	GPRS class 8 Link (GMSK)
--------	---------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

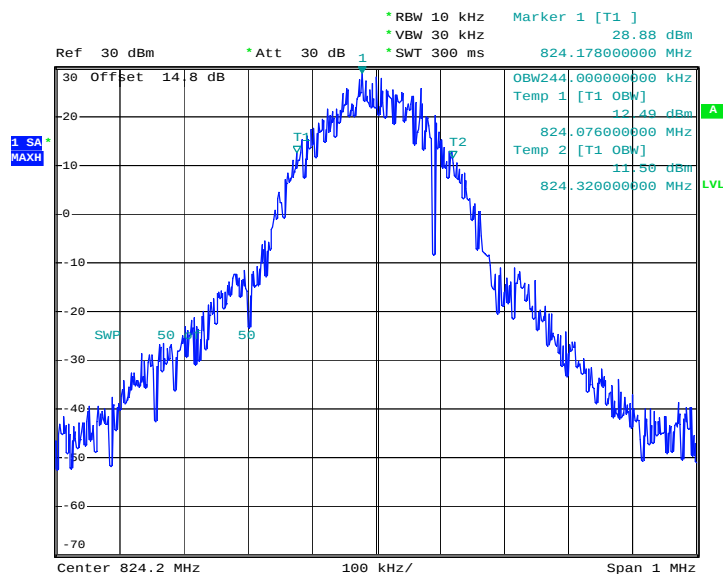


Date: 19.SEP.2013 09:42:51


26dB Bandwidth Plot on Channel 128 (824.2 MHz)

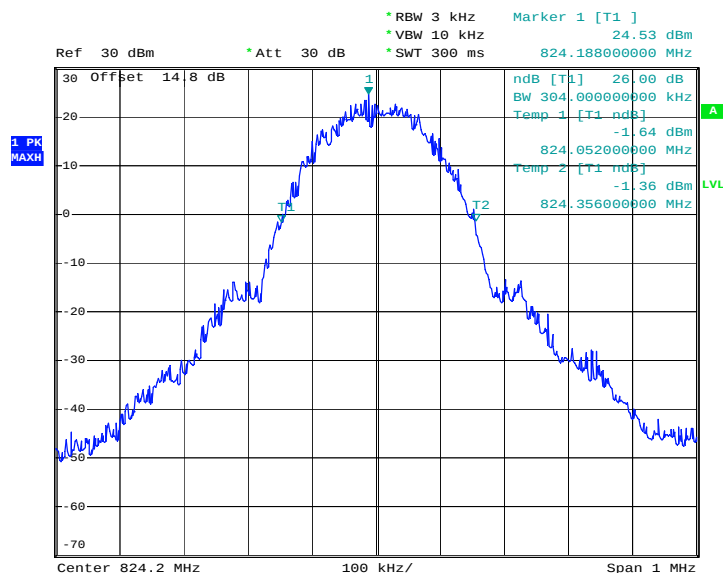

Date: 19.SEP.2013 19:47:42

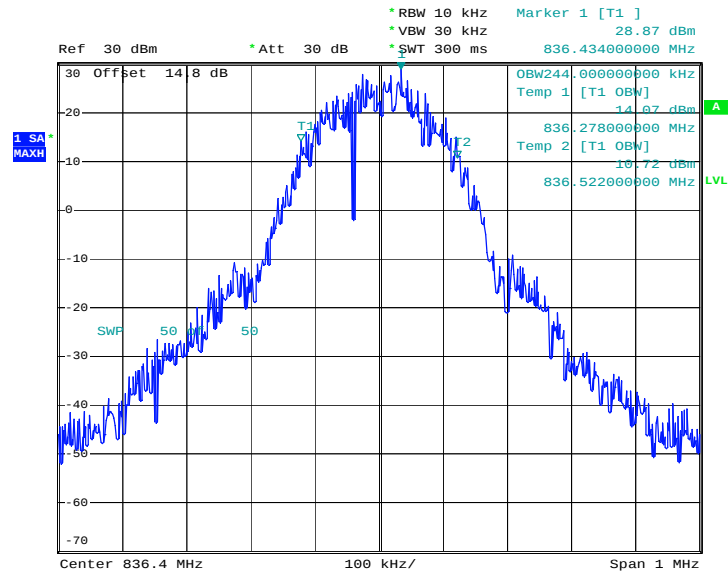99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)


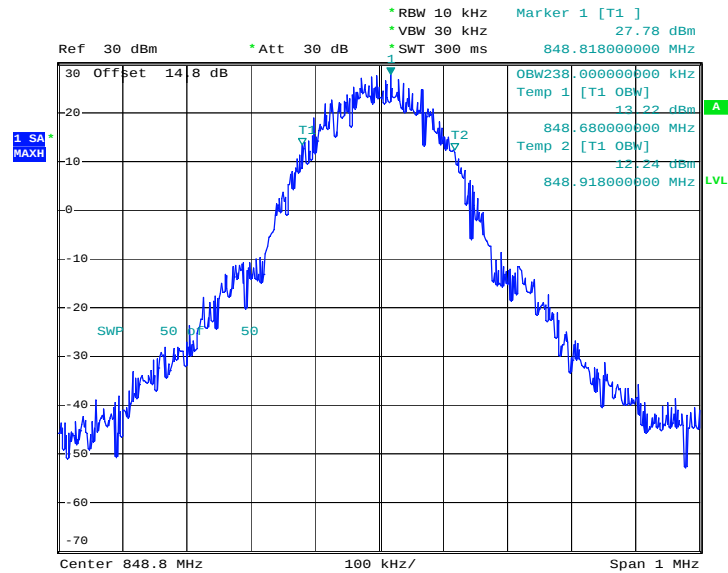
Date: 19.SEP.2013 09:51:32

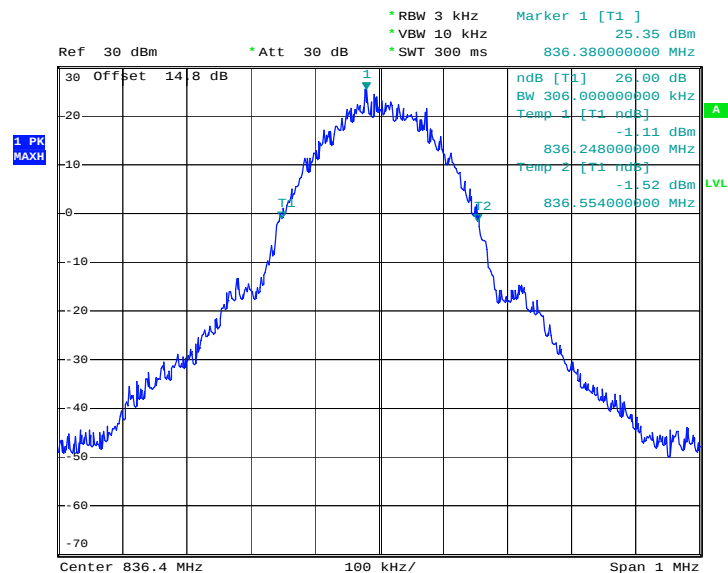26dB Bandwidth Plot on Channel 189 (836.4 MHz)


Date: 19.SEP.2013 09:40:48




99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)




Date: 19.SEP.2013 09:43:30

26dB Bandwidth Plot on Channel 251 (848.8 MHz)

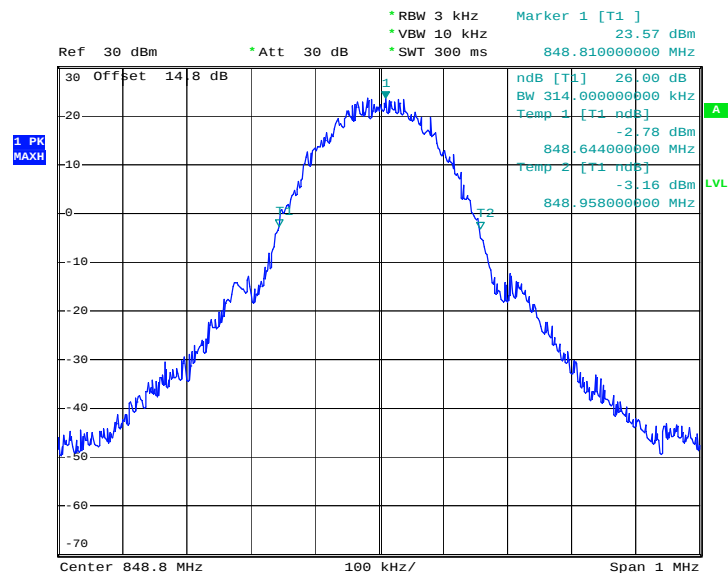


Date: 19.SEP.2013 09:41:14

Band :	GSM 850	Test Mode :	EDGE class 8 Link (8PSK)
---------------	---------	--------------------	--------------------------

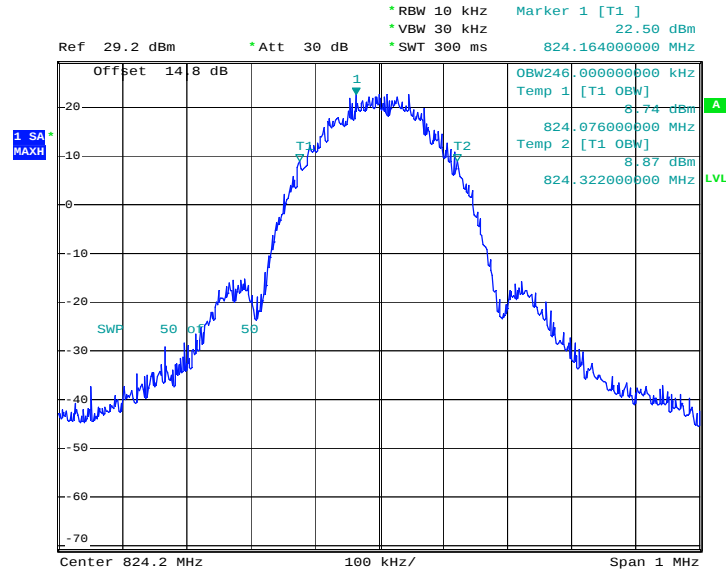
99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)


Date: 19.SEP.2013 11:41:41

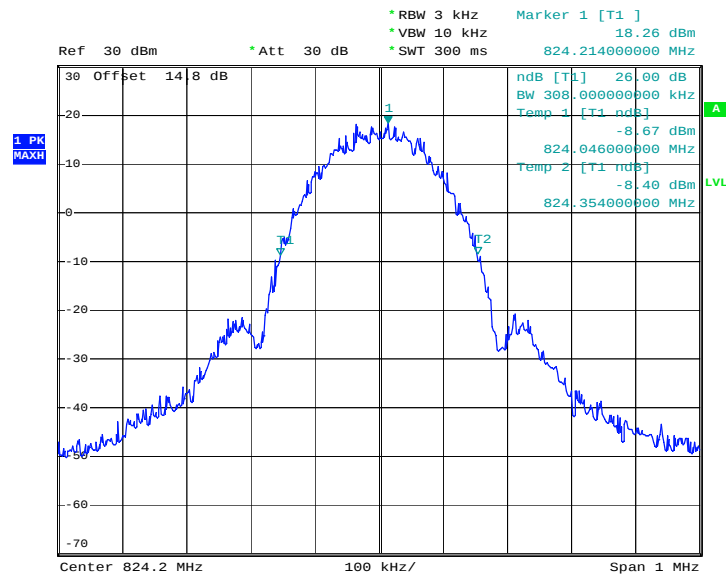26dB Bandwidth Plot on Channel 128 (824.2 MHz)


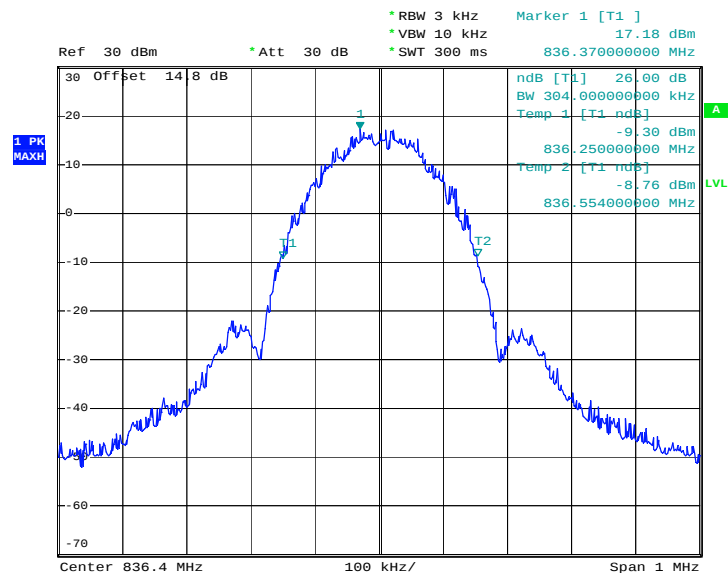
Date: 19.SEP.2013 10:20:45

99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

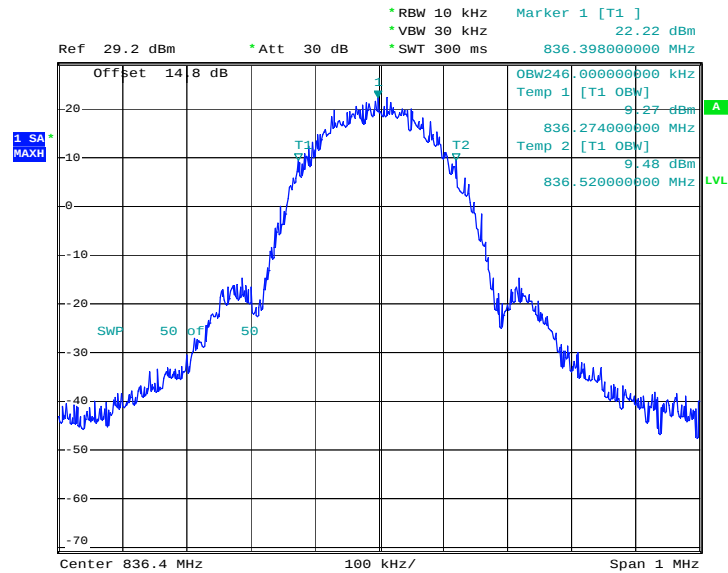

Date: 19.SEP.2013 11:43:03


26dB Bandwidth Plot on Channel 189 (836.4 MHz)



Date: 19.SEP.2013 09:59:37




99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

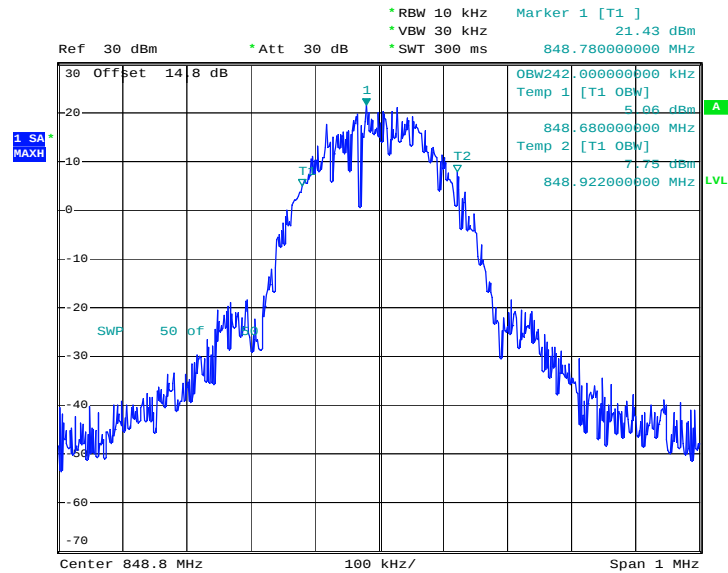

Date: 19.SEP.2013 10:15:52

26dB Bandwidth Plot on Channel 251 (848.8 MHz)

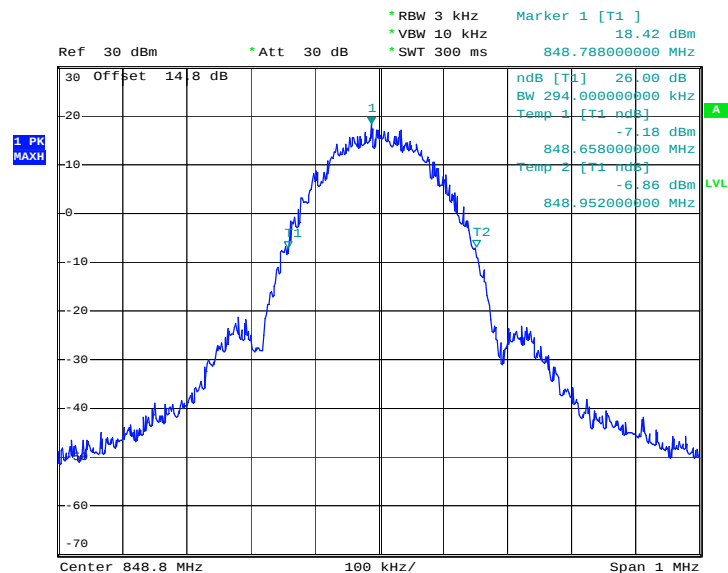


Date: 19.SEP.2013 10:00:03




Band :	GSM 1900	Test Mode :	GPRS class 8 Link (GMSK)
--------	----------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

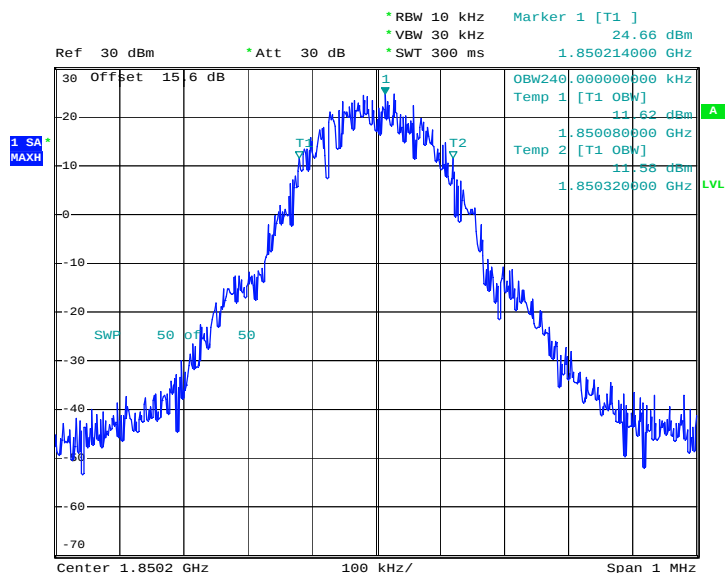

Date: 19.SEP.2013 11:01:59


26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

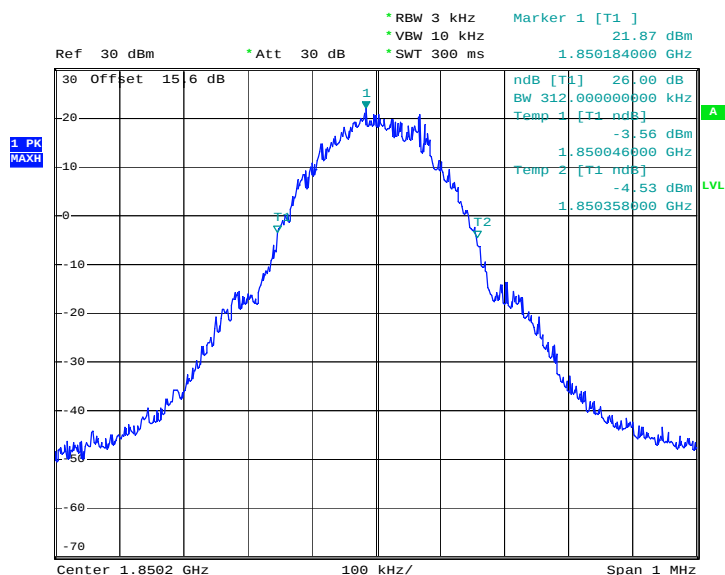

Date: 19.SEP.2013 10:59:31




99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

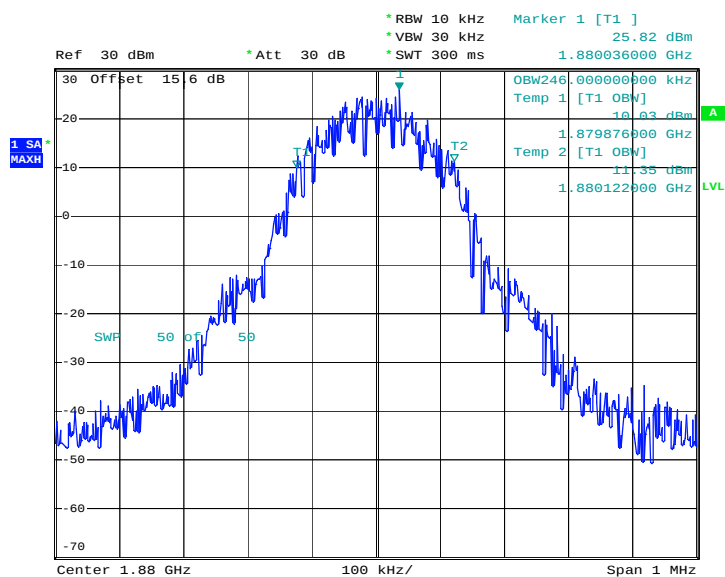


Date: 19.SEP.2013 11:02:18

26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

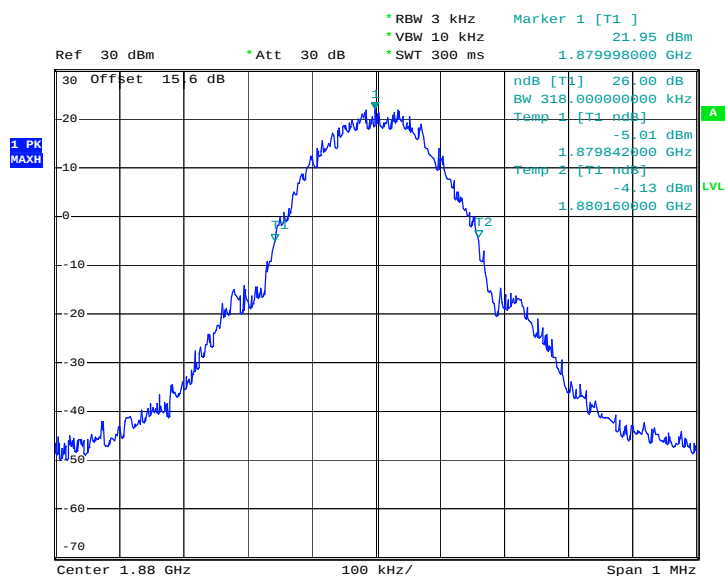


Date: 19.SEP.2013 10:59:56

99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

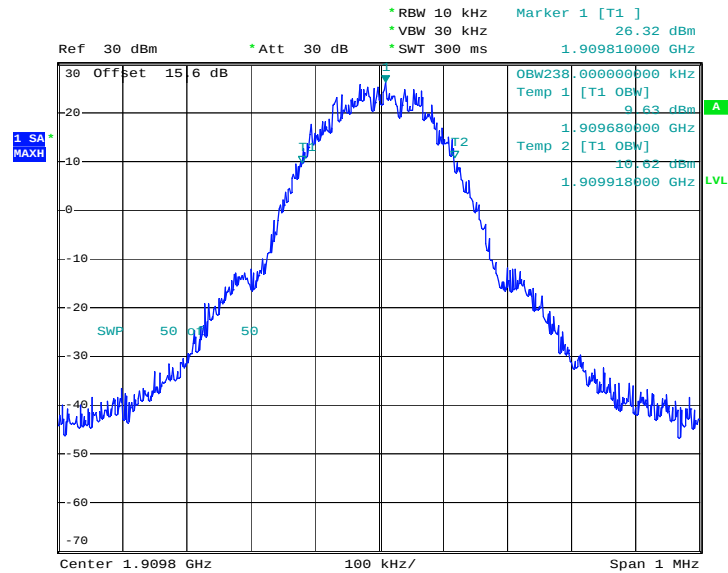


Date: 19.SEP.2013 11:12:07

26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

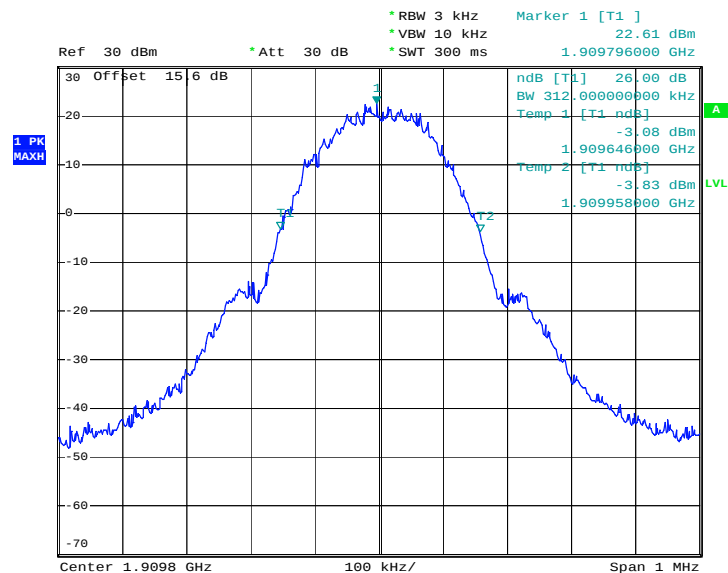


Date: 19.SEP.2013 11:08:50

Band :	GSM 1900	Test Mode :	EDGE class 8 Link (8PSK)
---------------	-----------------	--------------------	---------------------------------

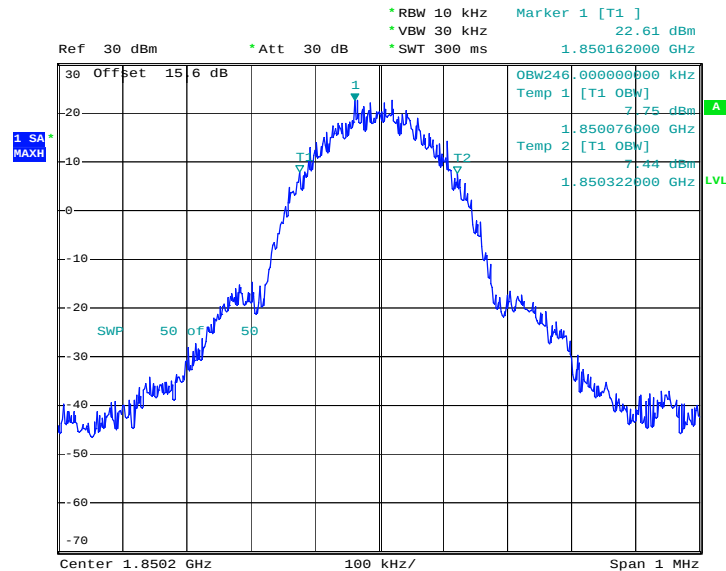
99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)


Date: 19.SEP.2013 11:31:14

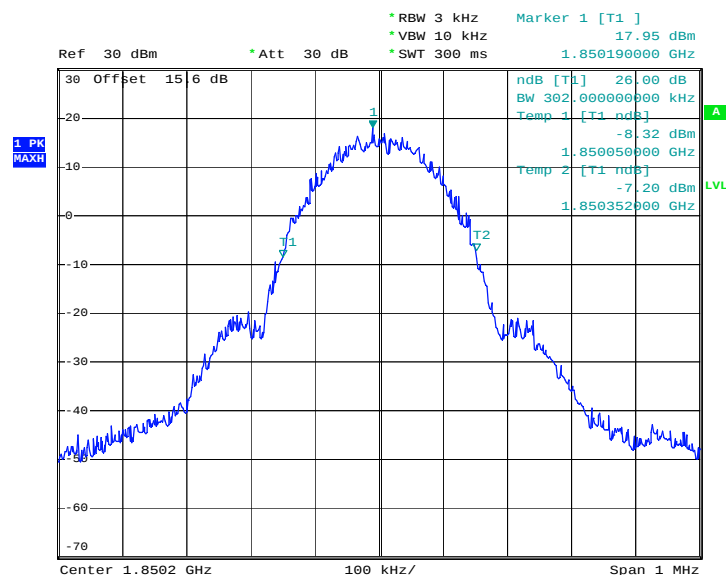26dB Bandwidth Plot on Channel 512 (1850.2 MHz)


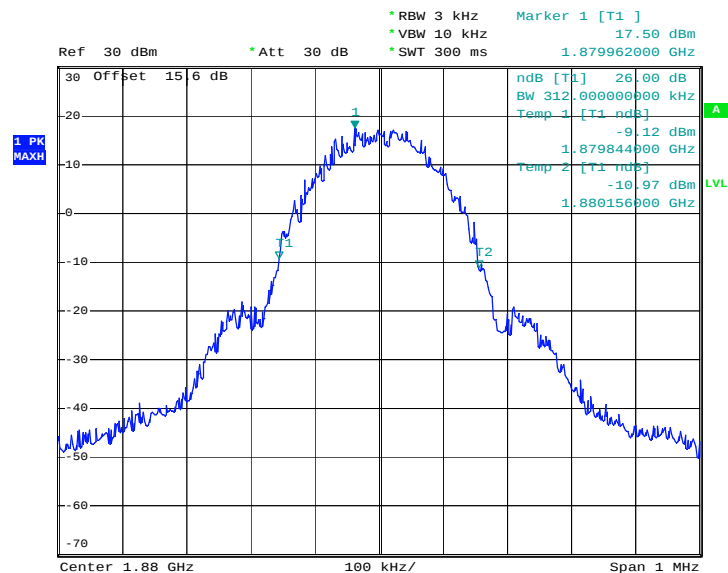
Date: 19.SEP.2013 11:20:58

99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

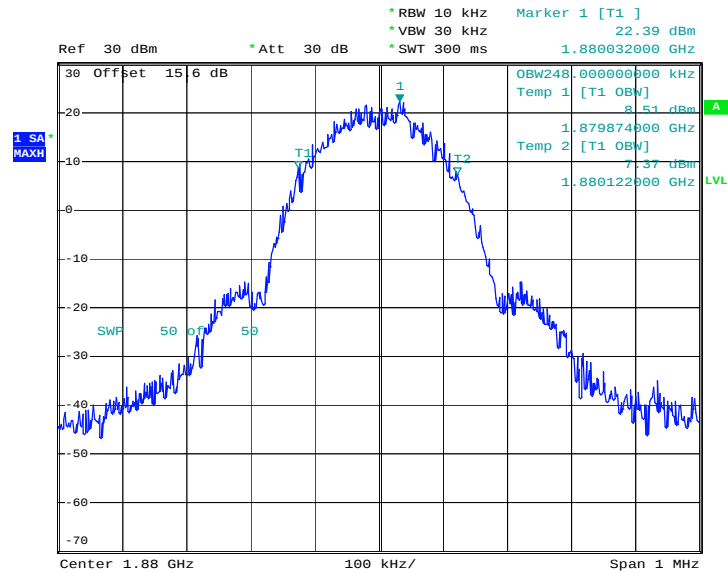


Date: 19.SEP.2013 11:32:24


26dB Bandwidth Plot on Channel 661 (1880.0 MHz)



Date: 19.SEP.2013 11:21:24

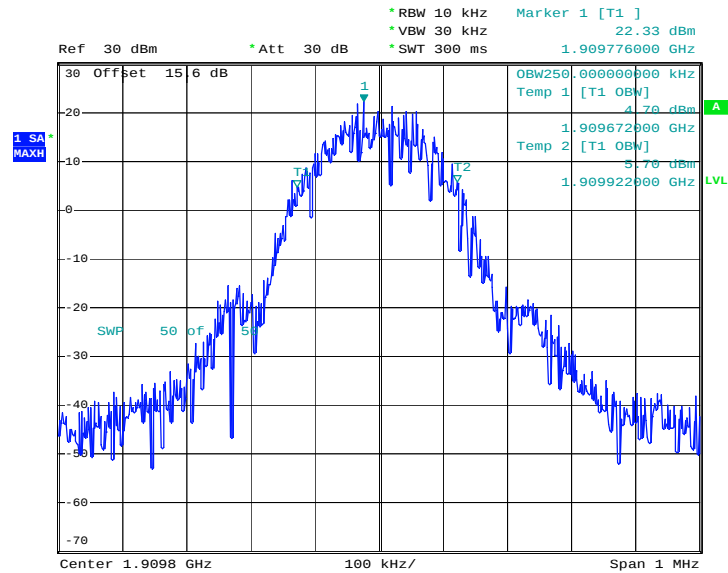99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)


Date: 19.SEP.2013 11:24:05

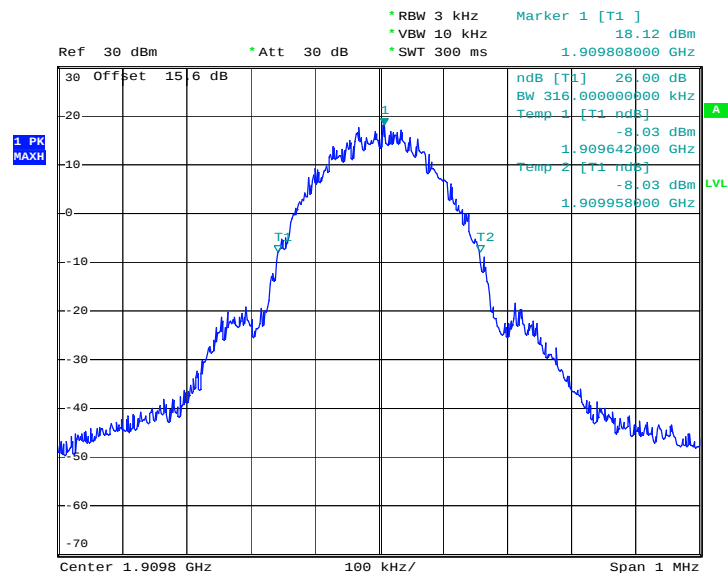
26dB Bandwidth Plot on Channel 810 (1909.8 MHz)


Date: 19.SEP.2013 11:21:50




Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	--------------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 4132 (826.4 MHz)

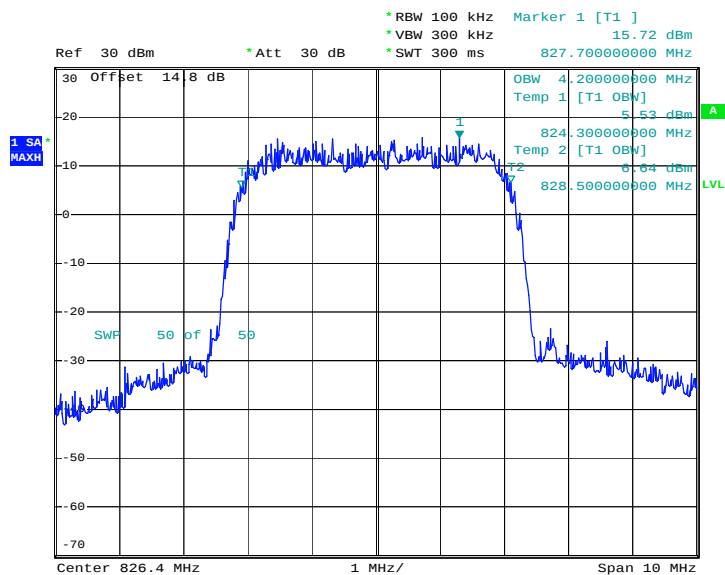

Date: 19.SEP.2013 10:41:05


26dB Bandwidth Plot on Channel 4132 (826.4 MHz)

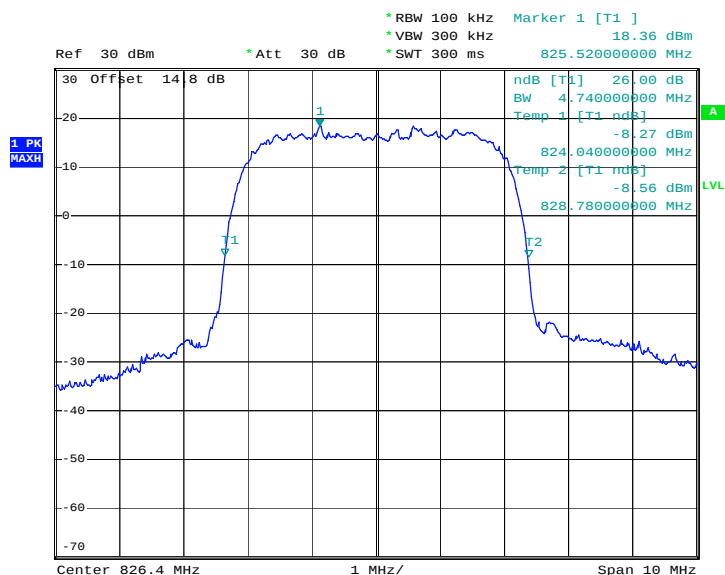

Date: 19.SEP.2013 10:38:35




99% Occupied Bandwidth Plot on Channel 4182 (836.4 MHz)

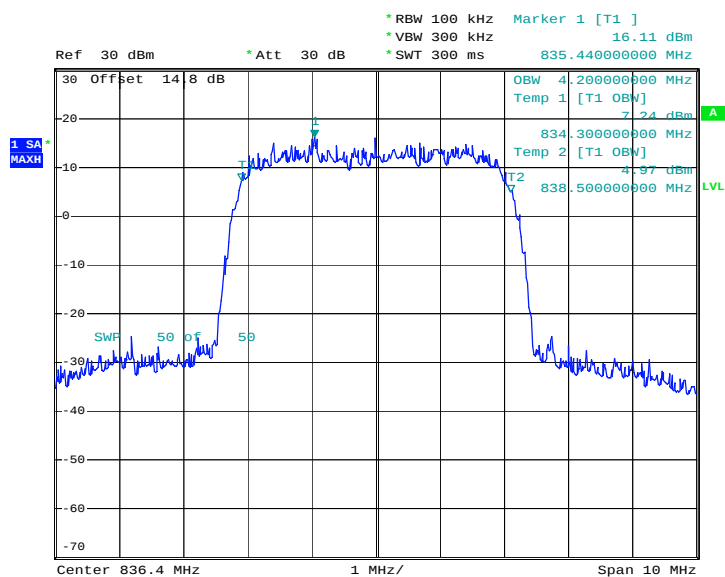

Date: 19.SEP.2013 10:41:25


26dB Bandwidth Plot on Channel 4182 (836.4 MHz)

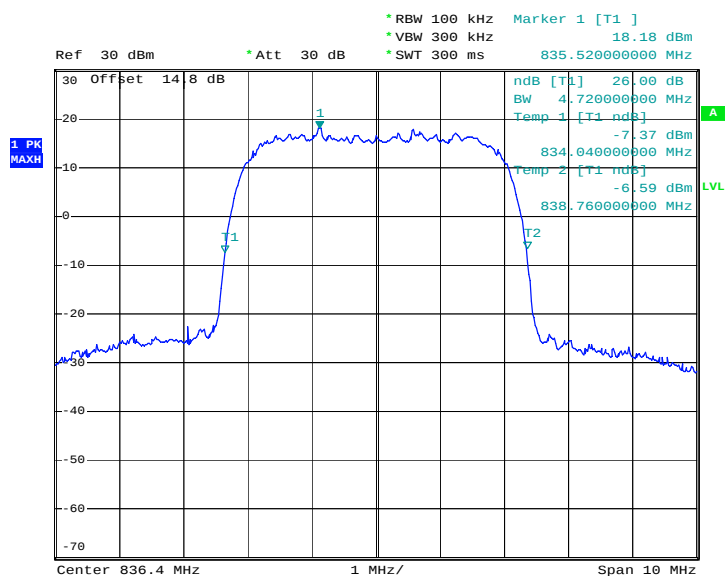

Date: 19.SEP.2013 10:39:01




99% Occupied Bandwidth Plot on Channel 4233 (846.6 MHz)

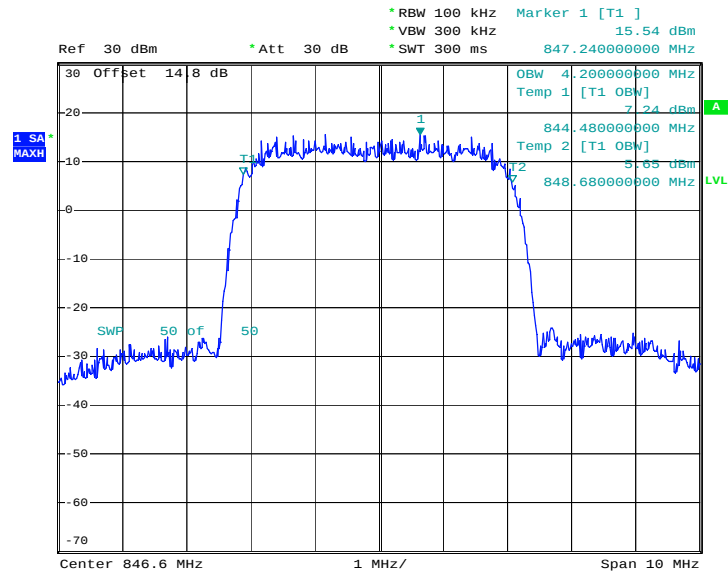


Date: 19.SEP.2013 10:41:45

26dB Bandwidth Plot on Channel 4233 (846.6 MHz)

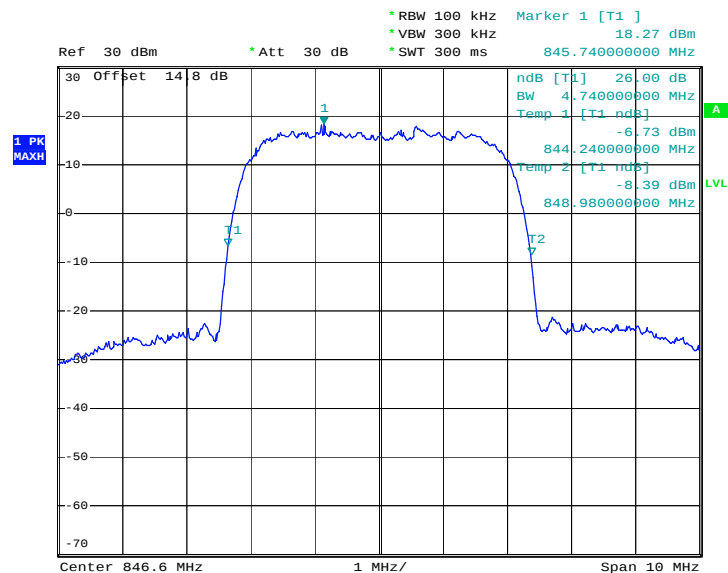


Date: 19.SEP.2013 10:39:27


Band :	WCDMA Band IV	Test Mode :	RMC 12.2Kbps Link (QPSK)
---------------	---------------	--------------------	--------------------------

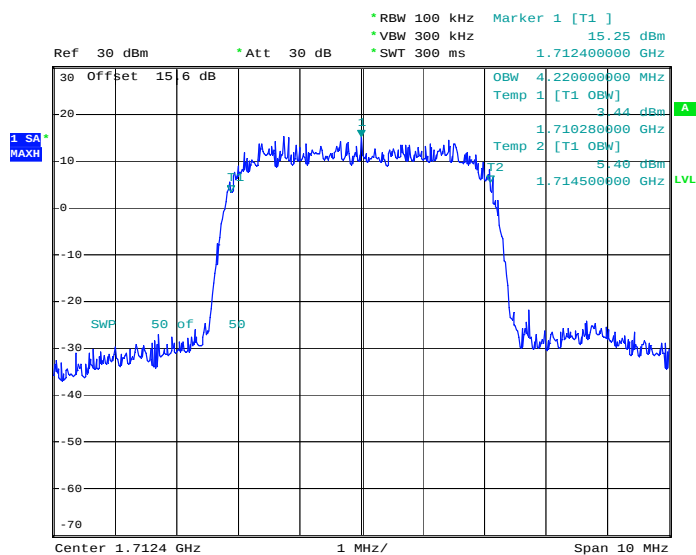99% Occupied Bandwidth Plot on Channel 1312 (1712.4 MHz)


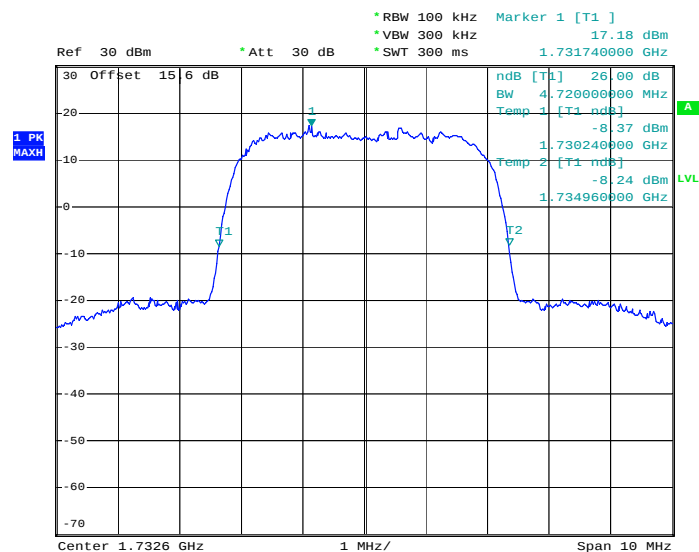
Date: 19.SEP.2013 23:53:00

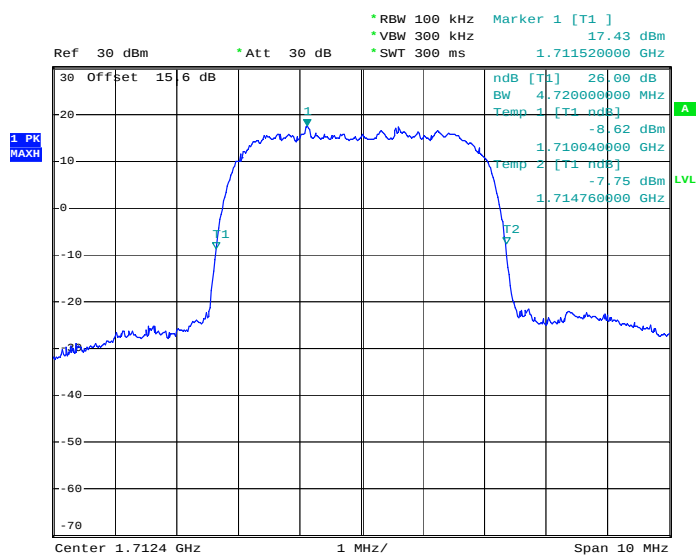26dB Bandwidth Plot on Channel 1312 (1712.4 MHz)


Date: 19.SEP.2013 23:50:29

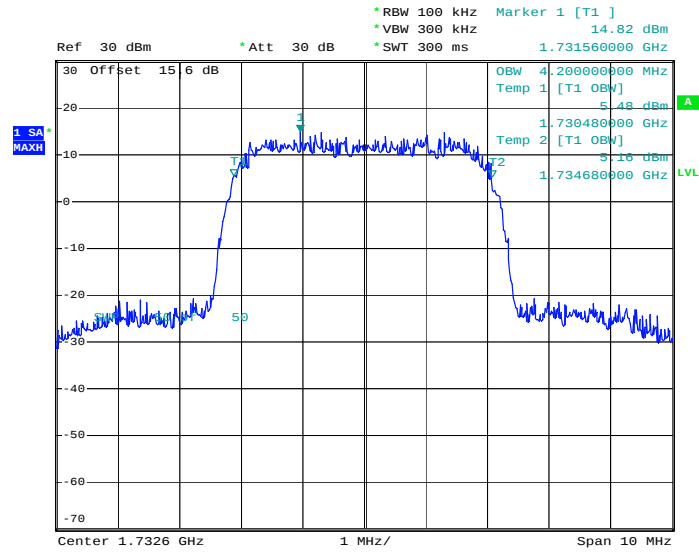
99% Occupied Bandwidth Plot on Channel 1413 (1732.6 MHz)


Date: 19.SEP.2013 23:53:21

26dB Bandwidth Plot on Channel 1413 (1732.6 MHz)


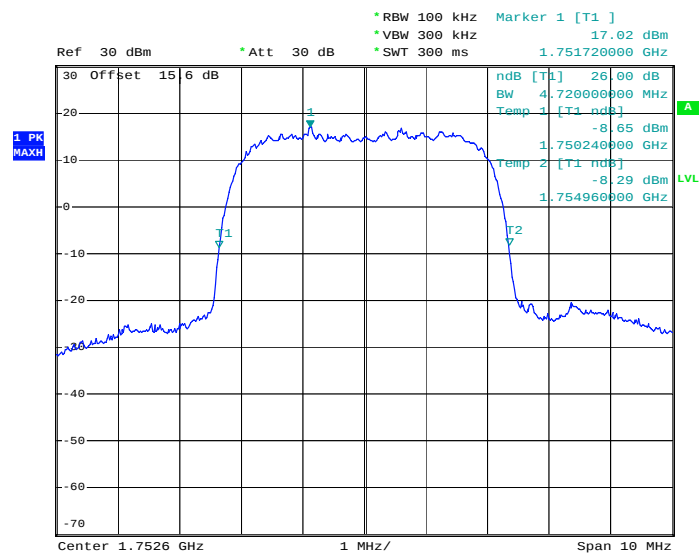
Date: 19.SEP.2013 23:50:55

99% Occupied Bandwidth Plot on Channel 1513 (1752.6 MHz)

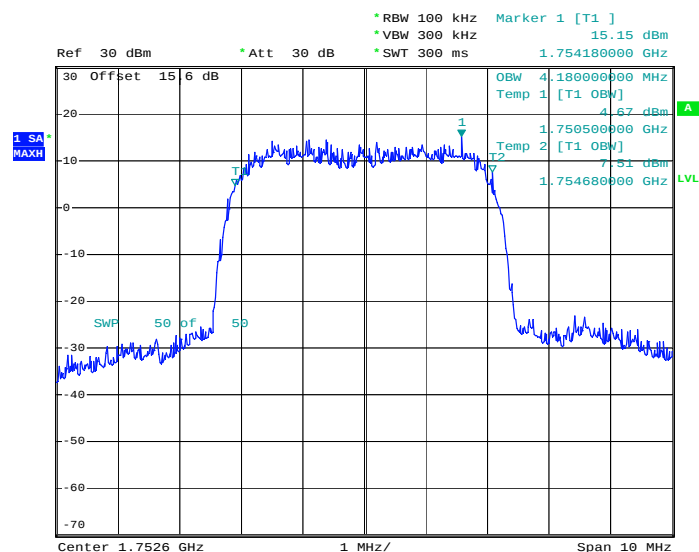

Date: 19.SEP.2013 23:53:41

26dB Bandwidth Plot on Channel 1513 (1752.6 MHz)




Date: 19.SEP.2013 23:51:21




Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	---------------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 9262 (1852.4 MHz)

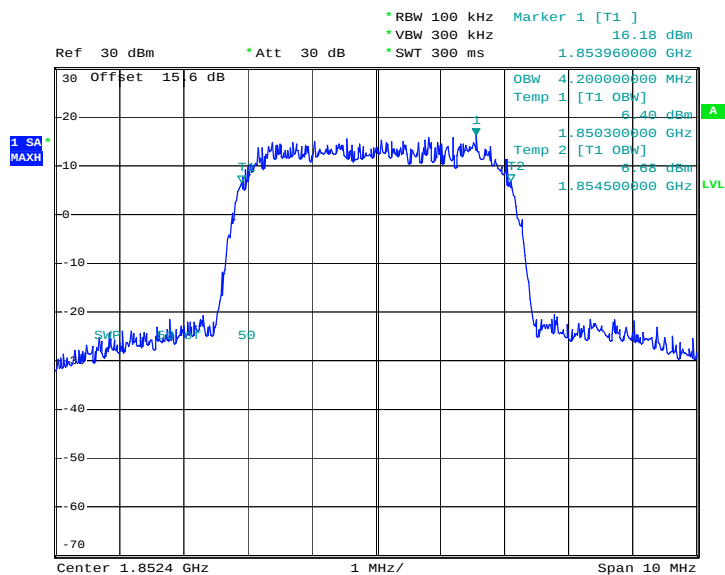


Date: 19.SEP.2013 10:51:21

26dB Bandwidth Plot on Channel 9262 (1852.4 MHz)

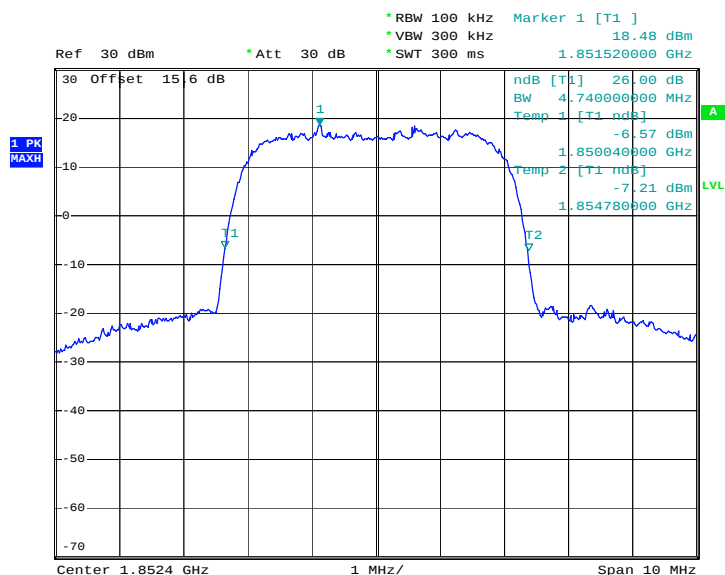


Date: 19.SEP.2013 10:48:52

99% Occupied Bandwidth Plot on Channel 9400 (1880.0 MHz)

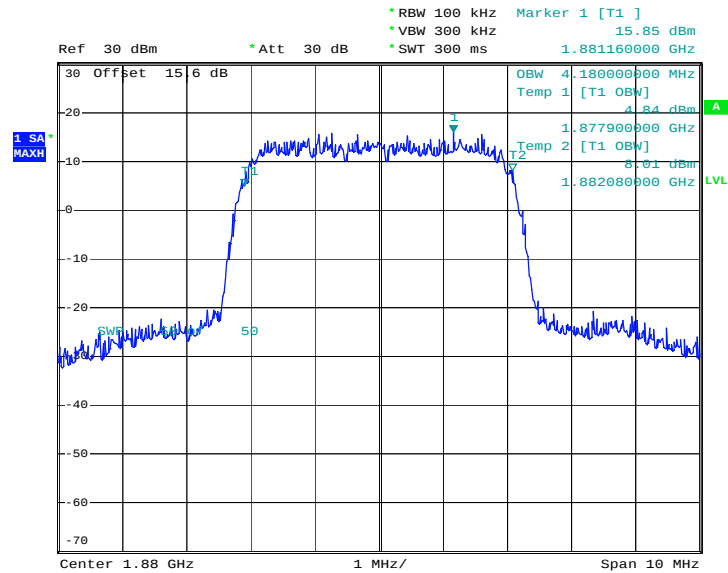


Date: 19.SEP.2013 10:51:41


26dB Bandwidth Plot on Channel 9400 (1880.0 MHz)

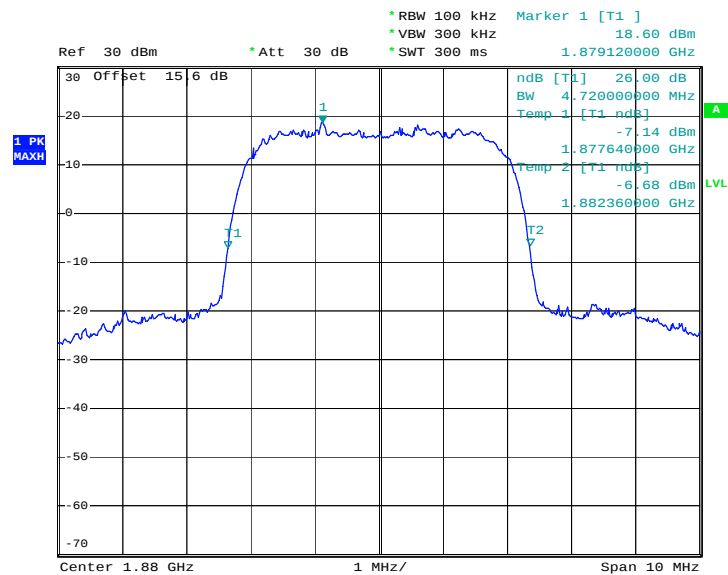

Date: 19.SEP.2013 10:49:18

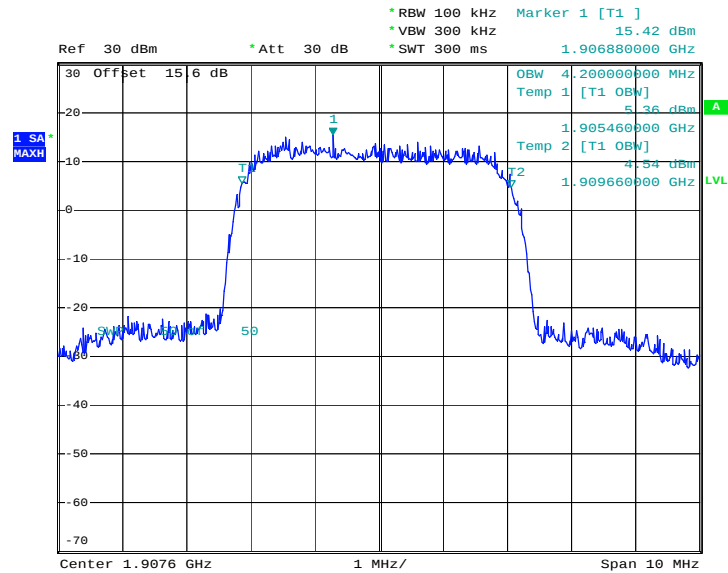99% Occupied Bandwidth Plot on Channel 9538 (1907.6 MHz)


Date: 19.SEP.2013 10:52:01

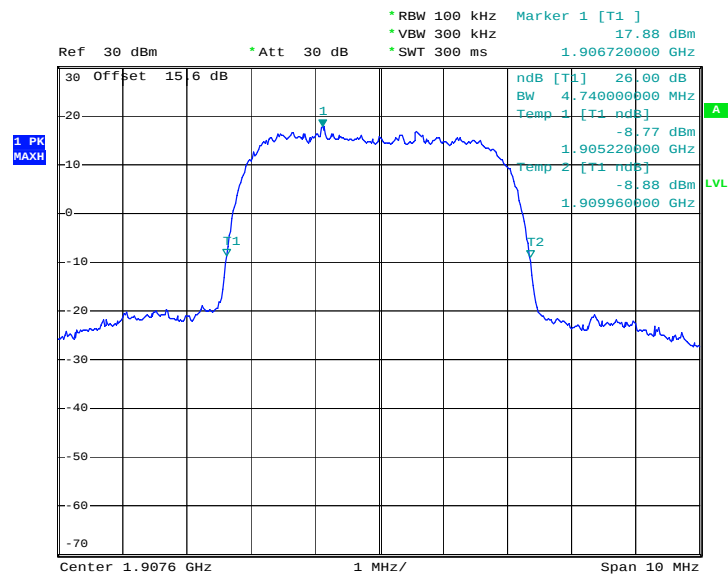26dB Bandwidth Plot on Channel 9538 (1907.6 MHz)


Date: 19.SEP.2013 10:49:44

3.5 Band Edge Measurement

3.5.1 Description of Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures


1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The band edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100.
4. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
5. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$

$$= -13\text{dBm}.$$


3.5.4 Test Setup

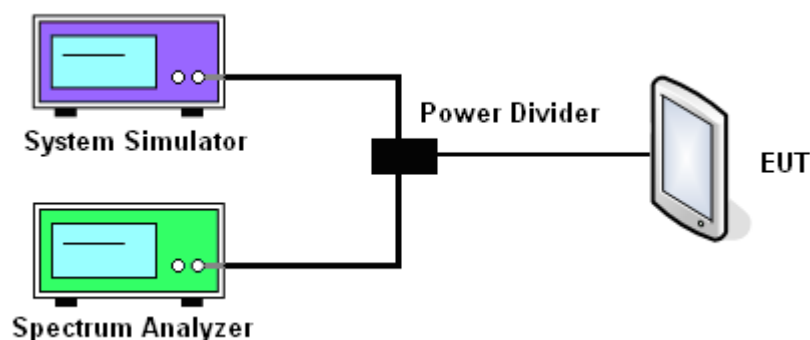

3.5.5 Test Result (Plots) of Conducted Band Edge

Band :	GSM850	Test Mode :	GPRS class 8 Link (GMSK)
Correction Factor :	0.20dB	Maximum 26dB Bandwidth :	0.314MHz
Band Edge :	-17.31dBm	Measurement Value :	-17.51dBm

Lower Band Edge Plot on Channel 128 (824.2 MHz)

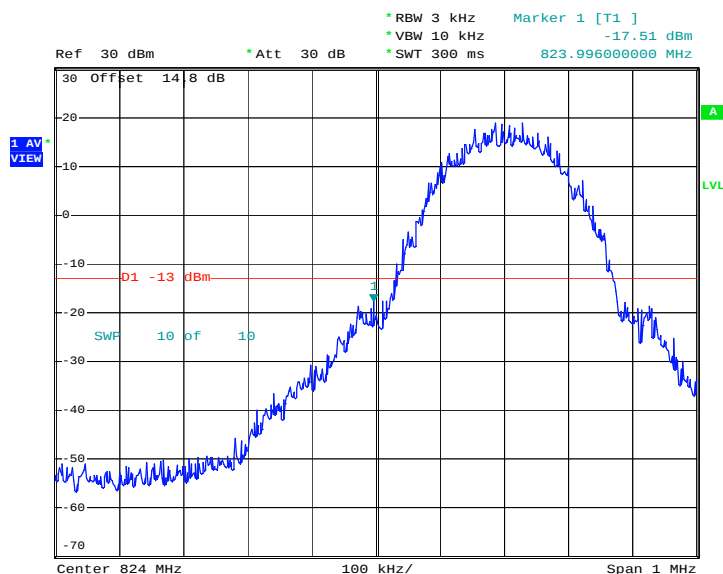


Date: 19.SEP.2013 09:44:51

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)

Band :	GSM850	Test Mode :	GPRS class 8 Link (GMSK)
Correction Factor :	0.20dB	Maximum 26dB Bandwidth :	0.314MHz
Band Edge :	-19.21dBm	Measurement Value :	-19.41dBm


Higher Band Edge Plot on Channel 251 (848.8 MHz)

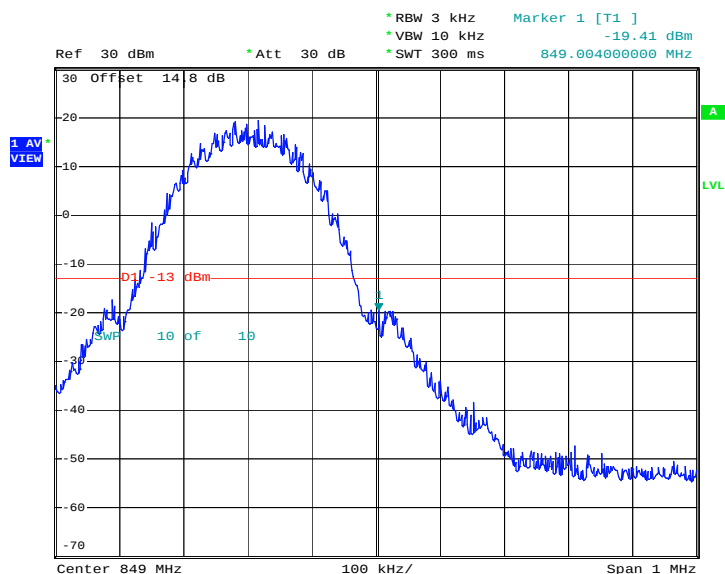

Date: 19.SEP.2013 09:45:20

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)


Band :	GSM850	Test Mode :	EDGE class 8 Link (8PSK)
Correction Factor :	0.11dB	Maximum 26dB Bandwidth :	0.308MHz
Band Edge :	-26.35dBm	Measurement Value :	-26.46dBm

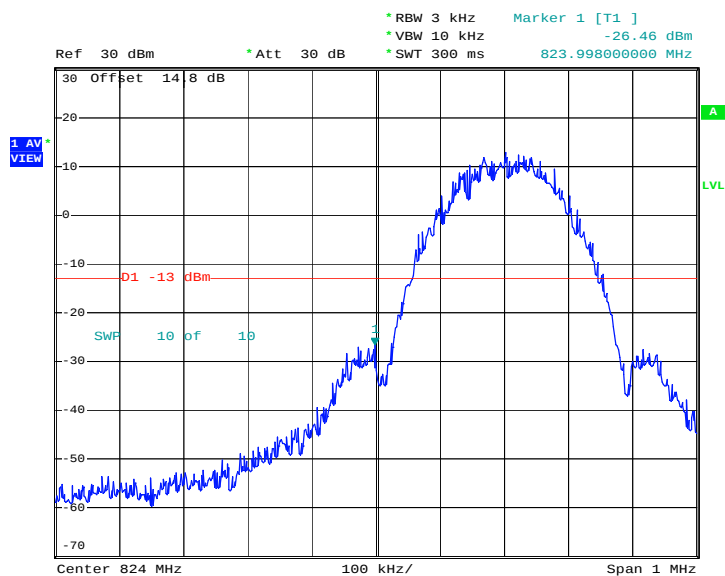Lower Band Edge Plot on Channel 128 (824.2 MHz)


Date : 19.SEP.2013 10:03:40

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)


Band :	GSM850	Test Mode :	EDGE class 8 Link (8PSK)
Correction Factor :	0.11dB	Maximum 26dB Bandwidth :	0.308MHz
Band Edge :	-27.62dBm	Measurement Value :	-27.73dBm

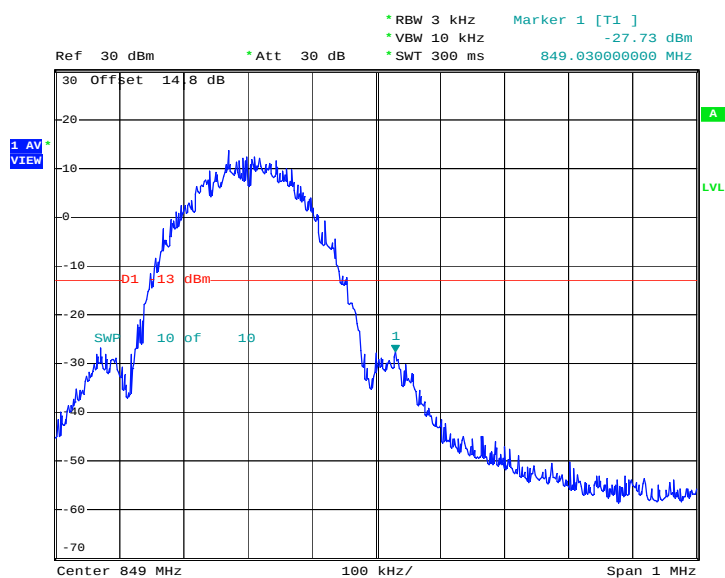Higher Band Edge Plot on Channel 251 (848.8 MHz)


Date: 19.SEP.2013 10:04:09

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)


Band :	GSM1900	Test Mode :	GPRS class 8 Link (GMSK)
Correction Factor :	0.25dB	Maximum 26dB Bandwidth :	0.318MHz
Band Edge :	-19.99dBm	Measurement Value :	-20.24dBm

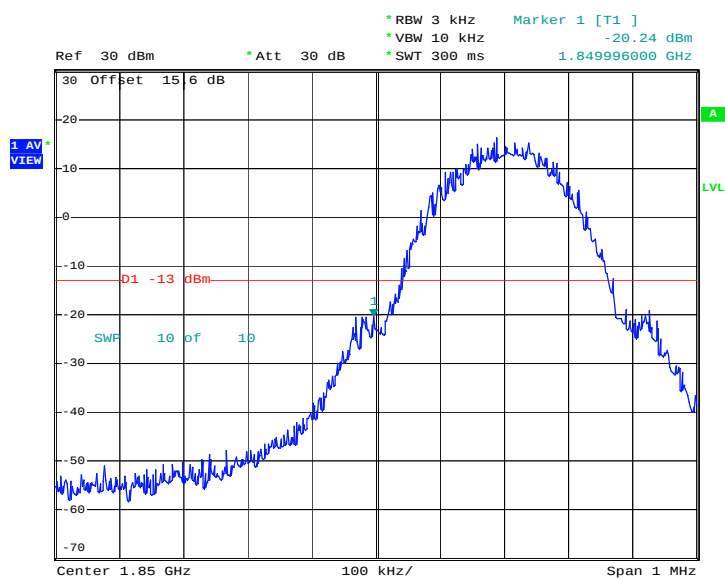Lower Band Edge Plot on Channel 512 (1850.2 MHz)


Date: 19.SEP.2013 11:03:59

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)


Band :	GSM1900	Test Mode :	GPRS class 8 Link (GMSK)
Correction Factor :	0.25dB	Maximum 26dB Bandwidth :	0.318MHz
Band Edge :	-21.01dBm	Measurement Value :	-21.26dBm

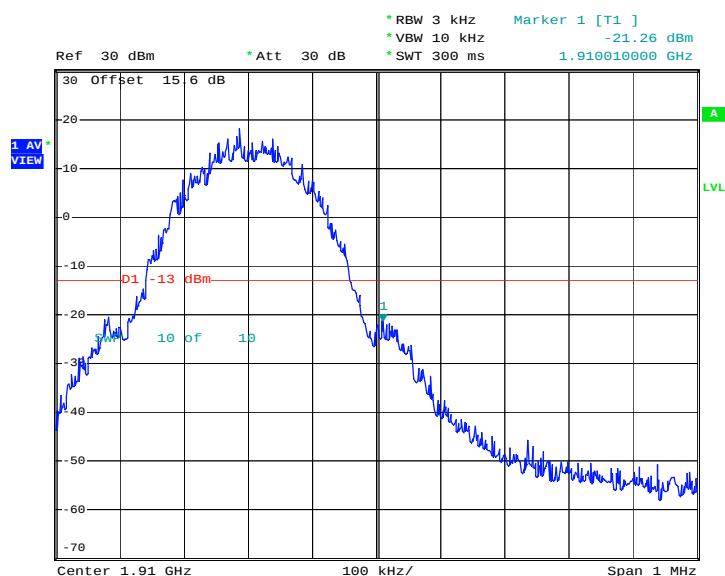Higher Band Edge Plot on Channel 810 (1909.8 MHz)


Date: 19.SEP.2013 11:04:28

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)


Band :	GSM1900	Test Mode :	EDGE class 8 Link (8PSK)
Correction Factor :	0.23dB	Maximum 26dB Bandwidth :	0.316MHz
Band Edge :	-23.46dBm	Measurement Value :	-23.69dBm

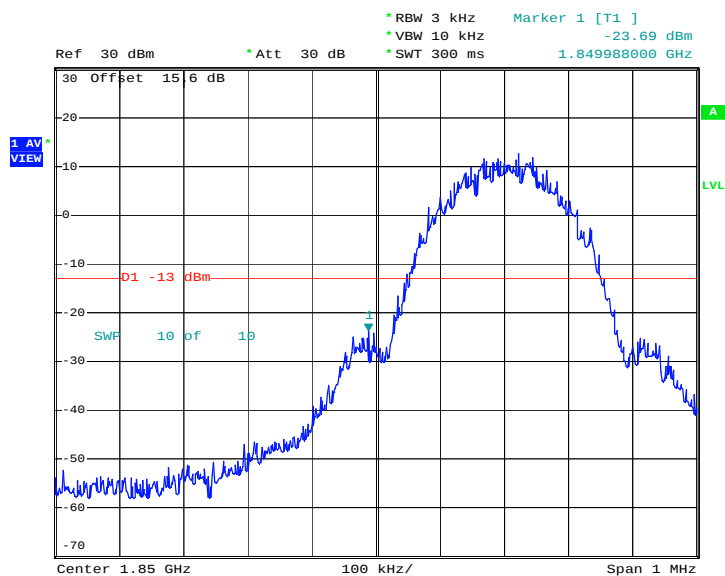Lower Band Edge Plot on Channel 512 (1850.2 MHz)


Date: 19.SEP.2013 11:25:26

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)


Band :	GSM1900	Test Mode :	EDGE class 8 Link (8PSK)
Correction Factor :	0.23dB	Maximum 26dB Bandwidth :	0.316MHz
Band Edge :	-22.82dBm	Measurement Value :	-23.05dBm

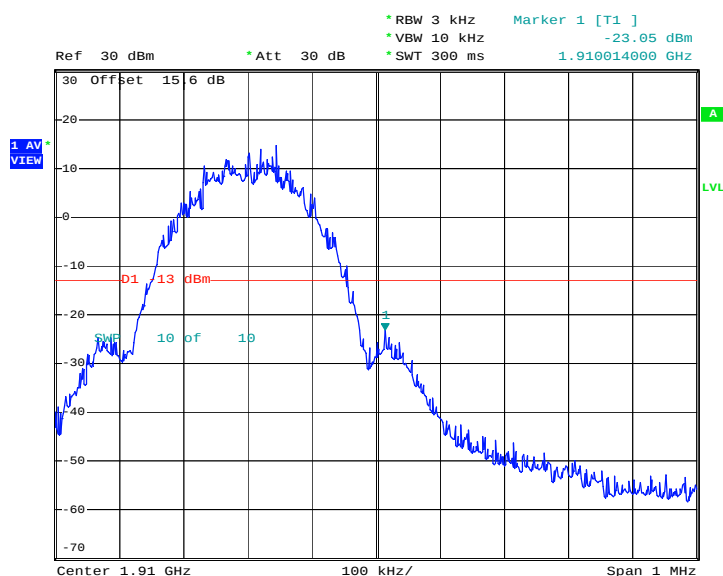Higher Band Edge Plot on Channel 810 (1909.8 MHz)


Date: 19.SEP.2013 11:25:55

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)


Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
Correction Factor :	-3.24dB	Maximum 26dB Bandwidth :	4.740MHz
Band Edge :	-27.06dBm	Measurement Value :	-23.82dBm

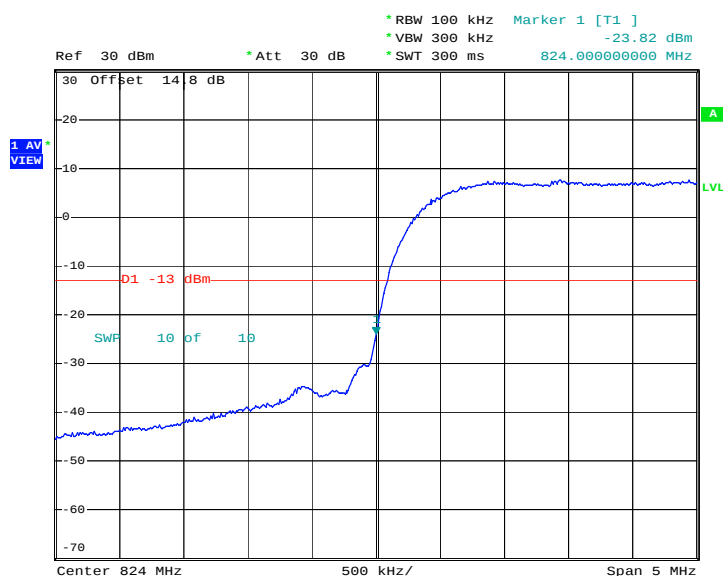Lower Band Edge Plot on Channel 4132 (826.4 MHz)


Date: 19.SEP.2013 10:43:06

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)

Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
Correction Factor :	-3.24dB	Maximum 26dB Bandwidth :	4.740MHz
Band Edge :	-25.14dBm	Measurement Value :	-21.90dBm

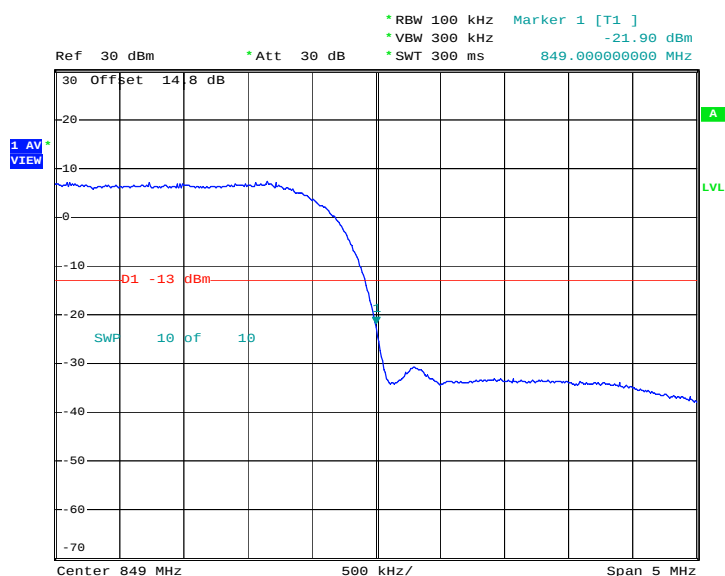
Higher Band Edge Plot on Channel 4233 (846.6 MHz)


Date: 19.SEP.2013 10:43:35

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)

Band :	WCDMA Band IV	Test Mode :	RMC 12.2Kbps Link (QPSK)
Correction Factor :	-3.26dB	Maximum 26dB Bandwidth :	4.720MHz
Band Edge :	-27.32dBm	Measurement Value :	-24.06dBm


Lower Band Edge Plot on Channel 1312 (1712.4 MHz)

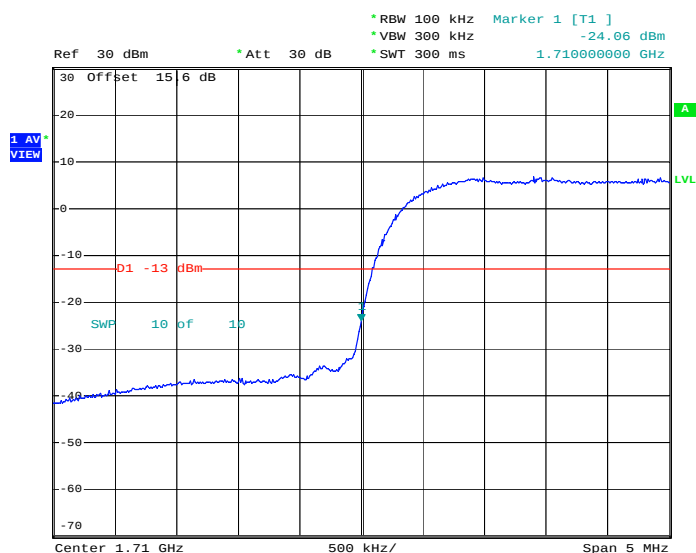

Date: 19.SEP.2013 23:55:04

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)

Band :	WCDMA Band IV	Test Mode :	RMC 12.2Kbps Link (QPSK)
Correction Factor :	-3.26dB	Maximum 26dB Bandwidth :	4.720MHz
Band Edge :	-26.03dBm	Measurement Value :	-22.77dBm

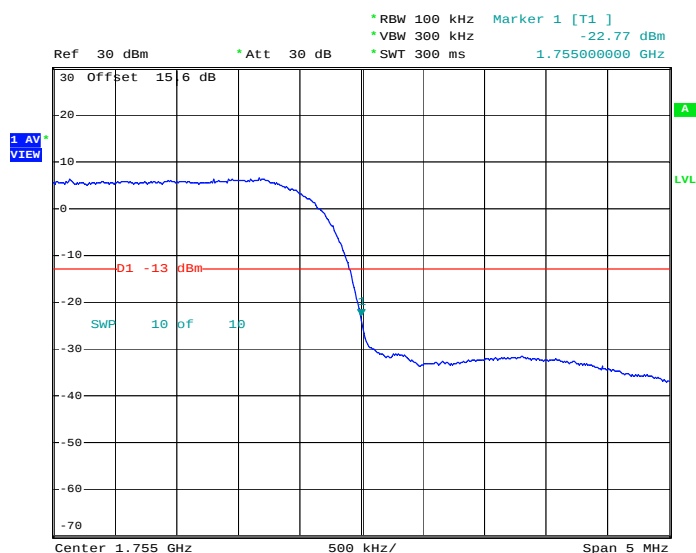
Higher Band Edge Plot on Channel 1513 (1752.6 MHz)


Date: 19.SEP.2013 23:55:33

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)

Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
Correction Factor :	-3.24dB	Maximum 26dB Bandwidth :	4.740MHz
Band Edge :	-24.43dBm	Measurement Value :	-21.19dBm

Lower Band Edge Plot on Channel 9262 (1852.4 MHz)

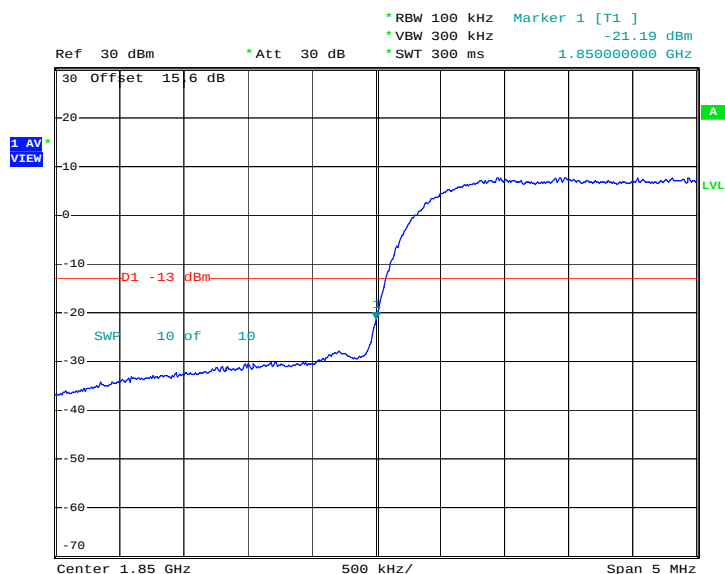


Date: 19.SEP.2013 10:53:23

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)

Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
Correction Factor :	-3.24dB	Maximum 26dB Bandwidth :	4.740MHz
Band Edge :	-27.08dBm	Measurement Value :	-23.84dBm

Higher Band Edge Plot on Channel 9538 (1907.6 MHz)

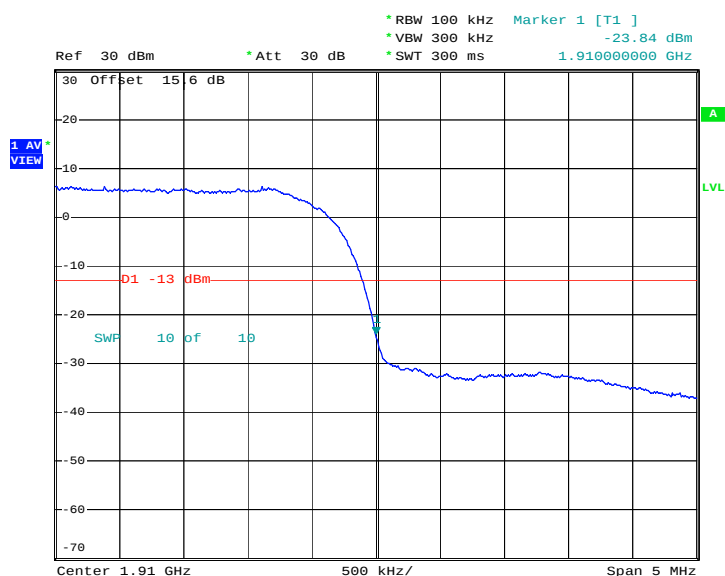

Date: 19.SEP.2013 10:53:52

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)

3.6 Conducted Spurious Emission Measurement

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

3.6.3 Test Procedures

1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$


3.6.4 Test Setup

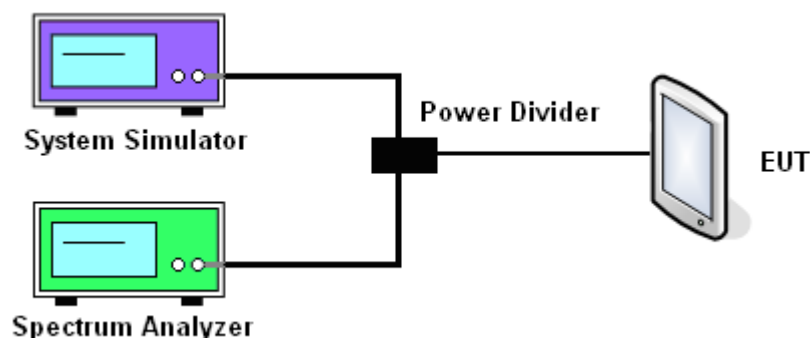

3.6.5 Test Result (Plots) of Conducted Emission


Band :	GSM850	Channel :	CH189
Test Mode :	GPRS class 8 Link (GMSK)	Frequency :	836.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

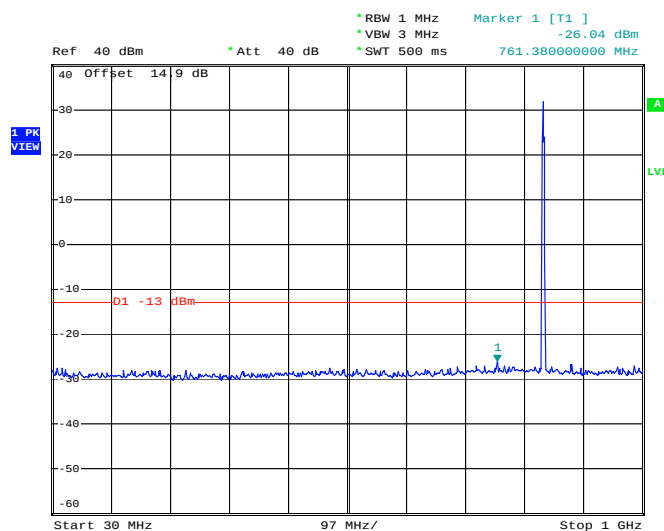


Date: 19.SEP.2013 14:05:00

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

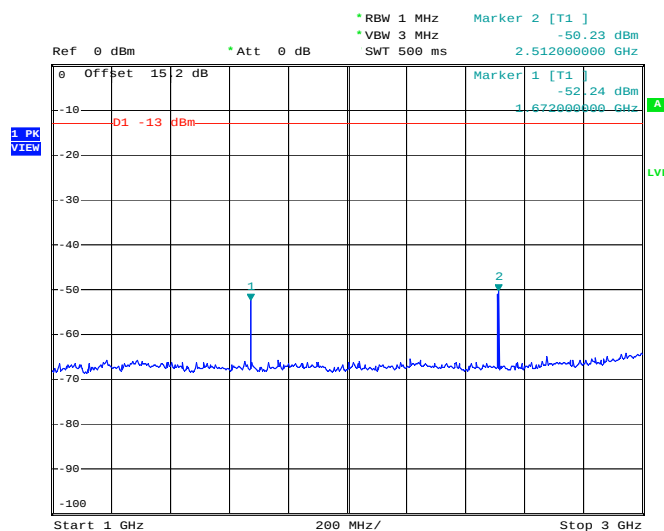


Date: 19.SEP.2013 14:07:01

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

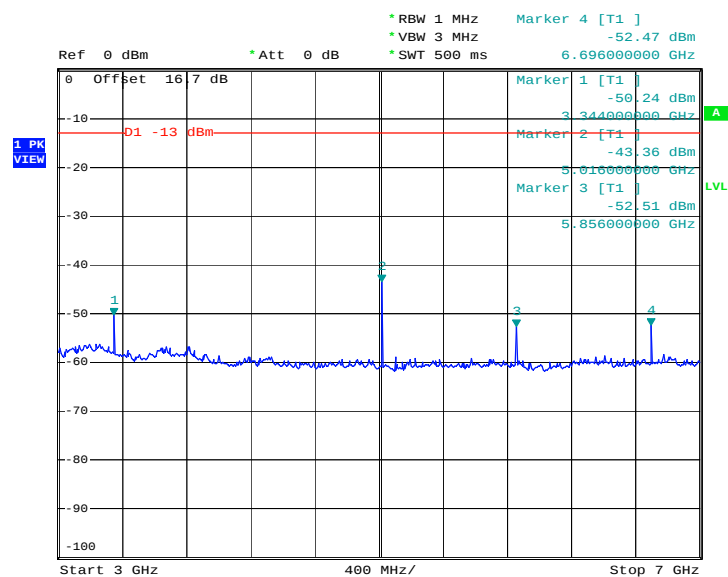


Date: 19.SEP.2013 14:08:48

Conducted Spurious Emission Plot between 7GHz ~ 9GHz

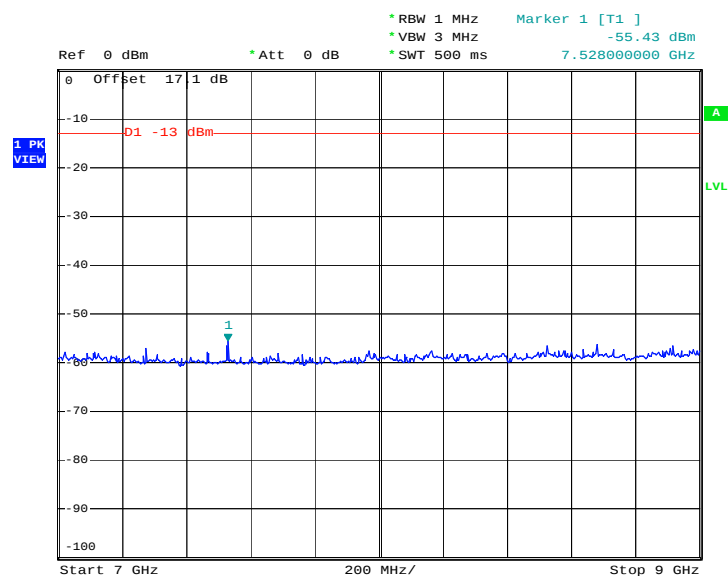


Date: 19.SEP.2013 14:10:04

Band :	GSM850	Channel :	CH189
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	836.4 MHz

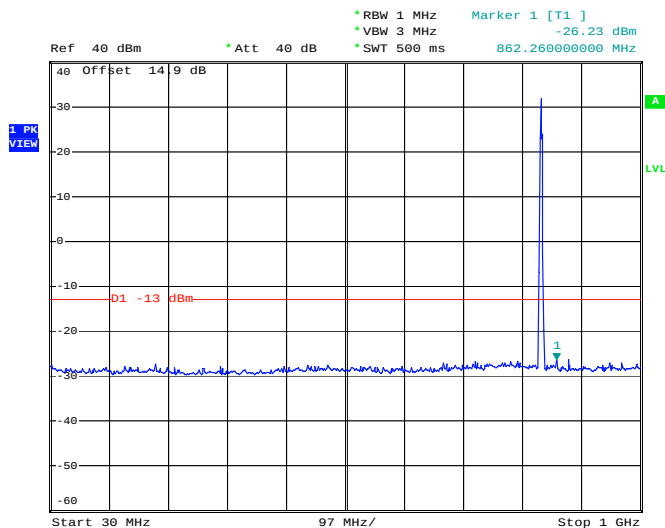Conducted Spurious Emission Plot between 30MHz ~ 1GHz


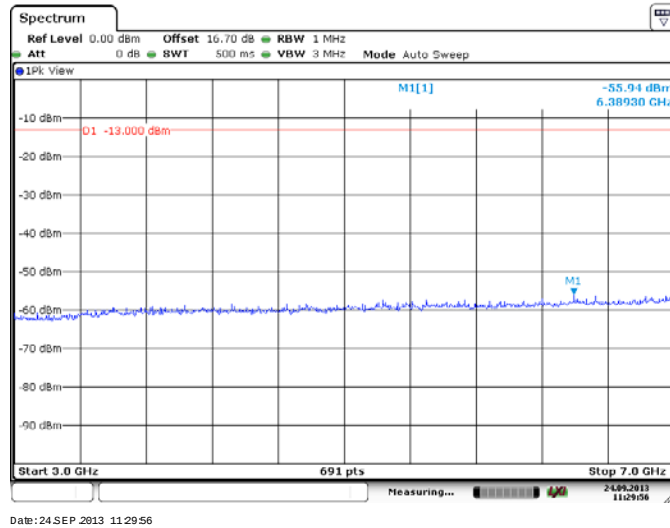
Date: 19.SEP.2013 14:03:44

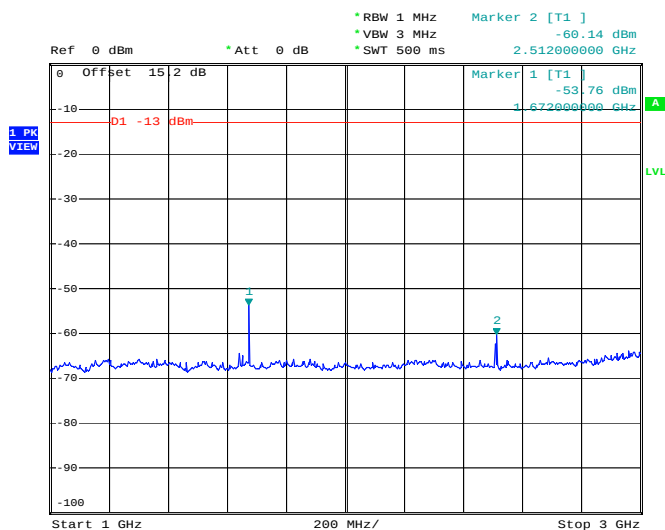Conducted Spurious Emission Plot between 1GHz ~ 3GHz


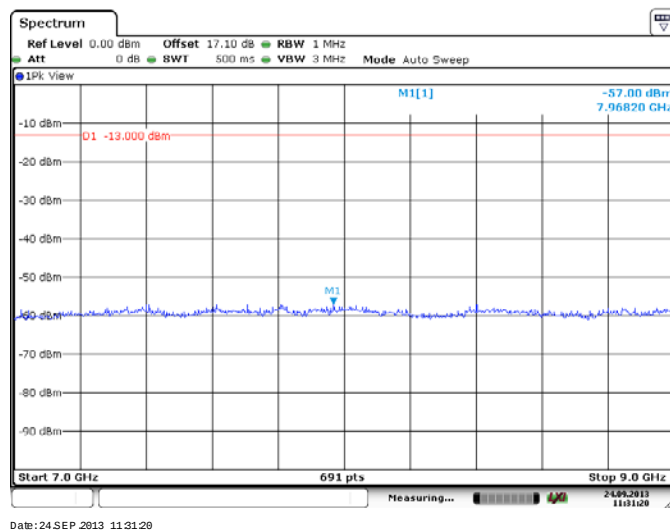
Date: 19.SEP.2013 14:24:57



Conducted Spurious Emission Plot between 3GHz ~ 7GHz




Conducted Spurious Emission Plot between 7GHz ~ 9GHz




Band :	GSM1900	Channel :	CH661
Test Mode :	GPRS class 8 Link (GMSK)	Frequency :	1880.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

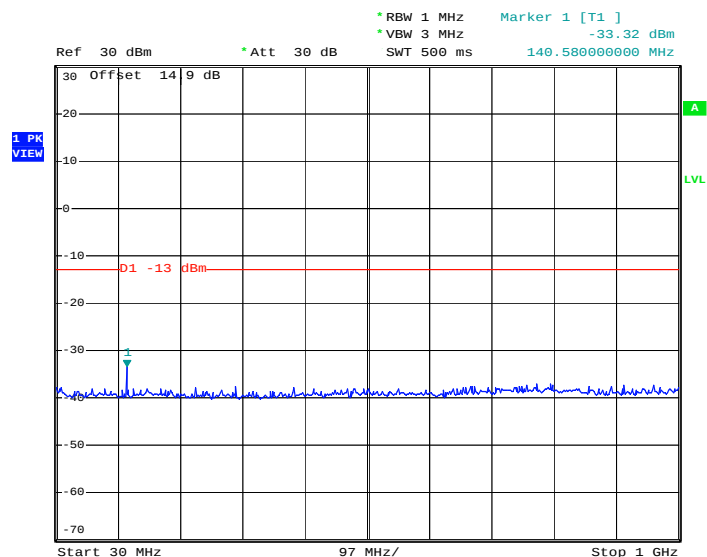


Date: 19.SEP.2013 13:58:32


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

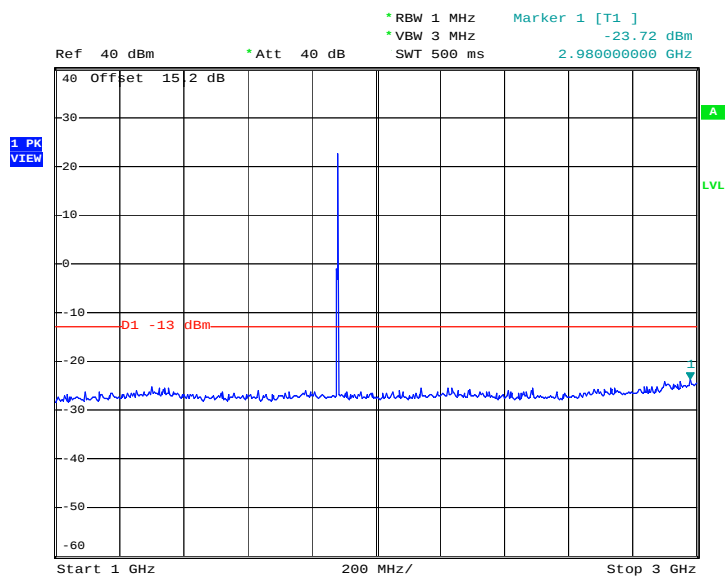

Date: 19.SEP.2013 13:57:49

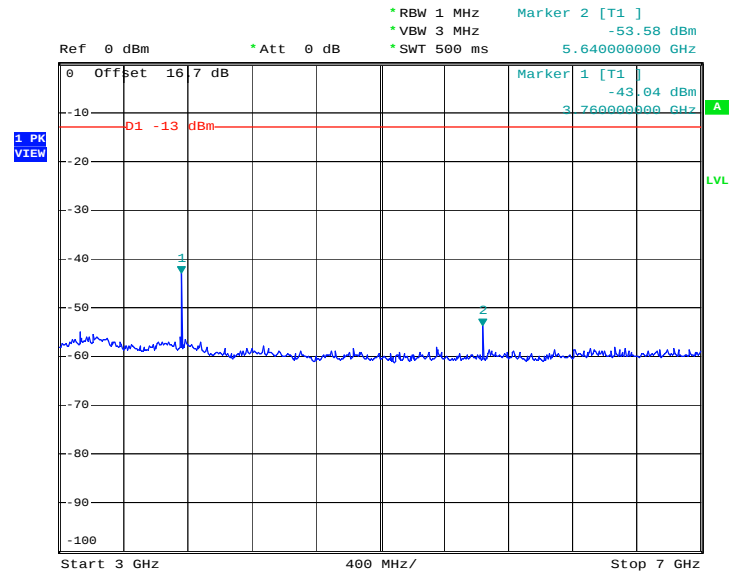Conducted Spurious Emission Plot between 3GHz ~ 7GHz


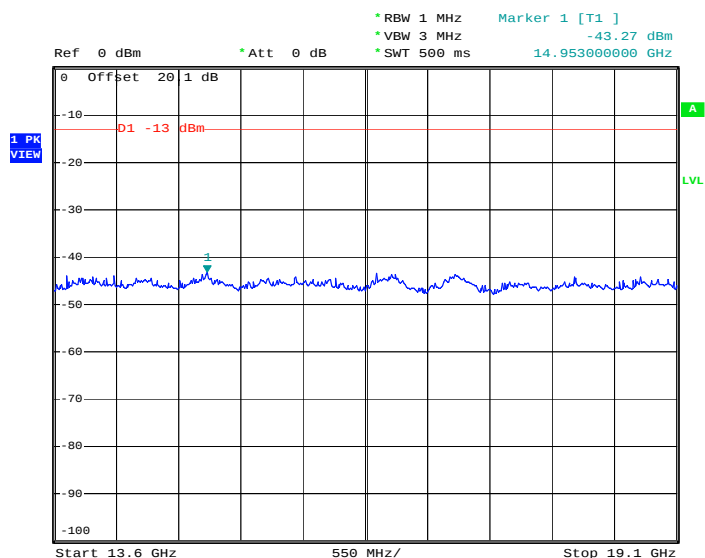
Date: 19.SEP.2013 13:56:47

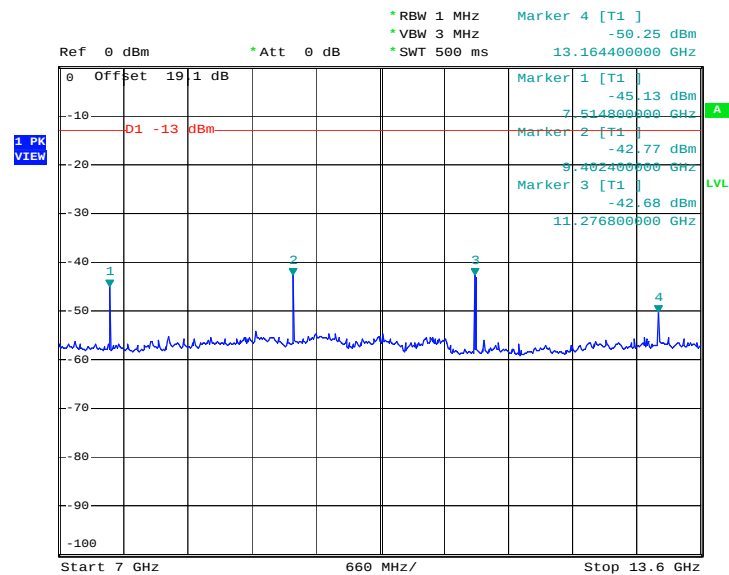Conducted Spurious Emission Plot between 7GHz ~ 13.6G


Date: 19.SEP.2013 13:54:20




Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz




Date: 19.SEP.2013 13:55:44

Band :	GSM1900	Channel :	CH661
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	1880.0 MHz

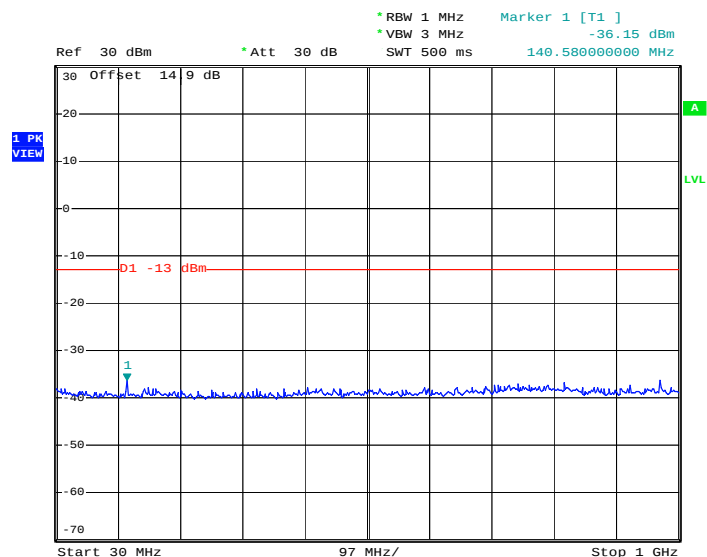
Conducted Spurious Emission Plot between 30MHz ~ 1GHz


Date: 19.SEP.2013 13:44:31

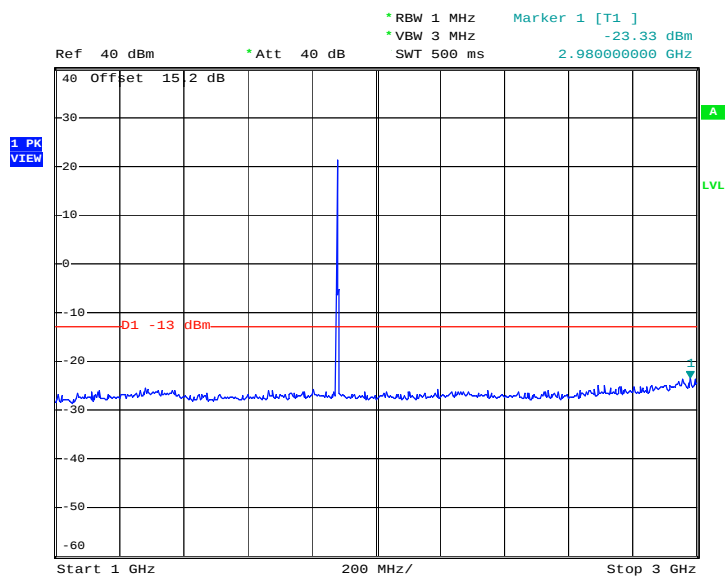Conducted Spurious Emission Plot between 1GHz ~ 3GHz


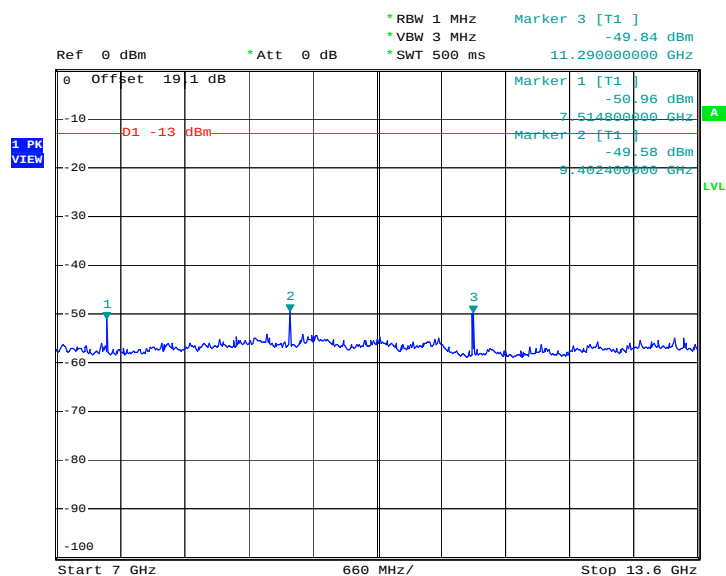
Date: 19.SEP.2013 13:45:26

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

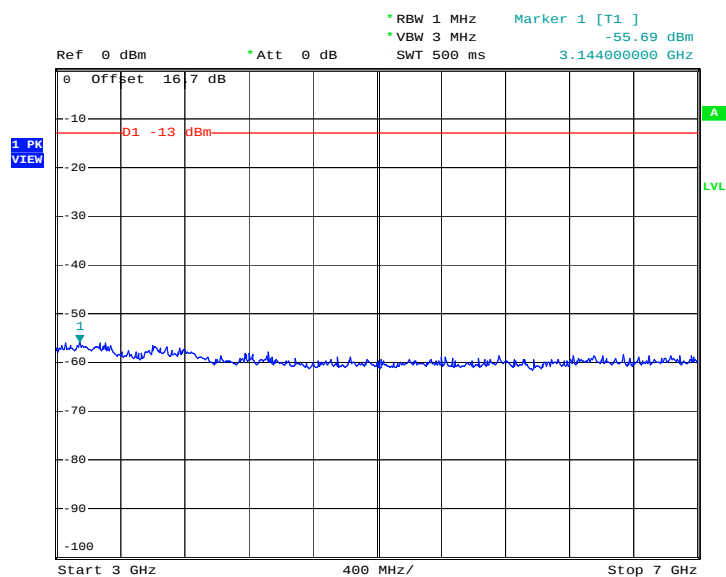


Date: 19.SEP.2013 13:46:30

Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz




Date: 19.SEP.2013 13:51:45

Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

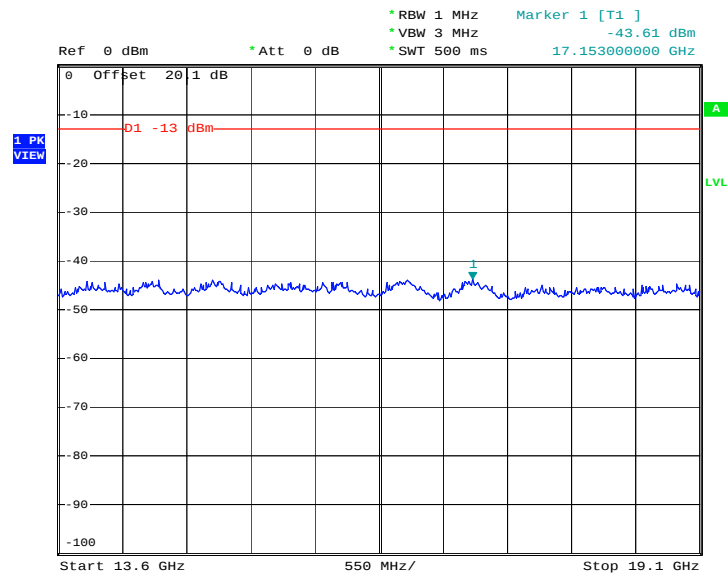


Date: 19.SEP.2013 13:48:33

Band :	WCDMA Band V	Channel :	CH4182
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	836.4 MHz

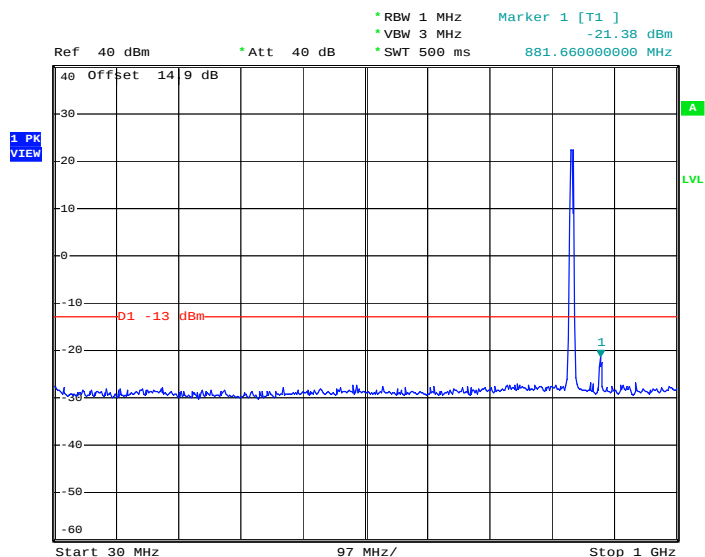
Conducted Spurious Emission Plot between 30MHz ~ 1GHz


Date: 19.SEP.2013 13:17:44

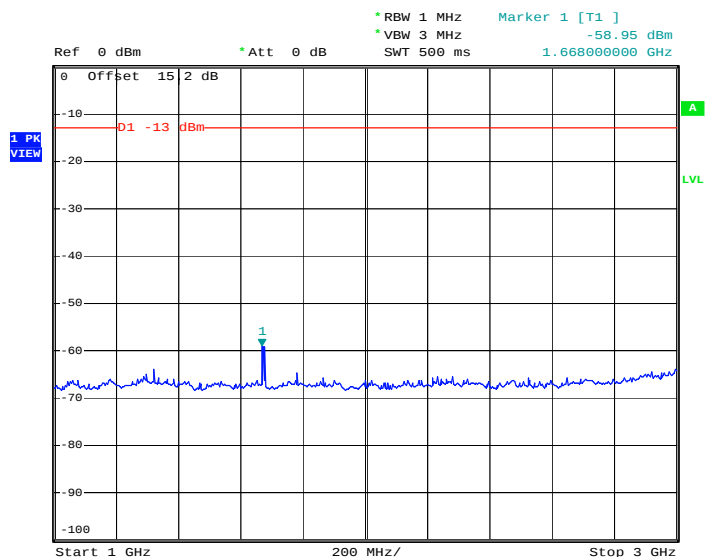Conducted Spurious Emission Plot between 1GHz ~ 3GHz


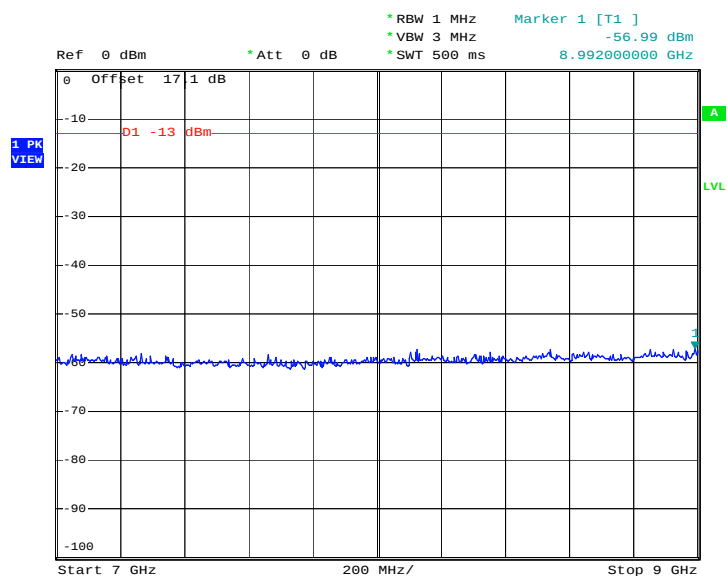
Date: 19.SEP.2013 13:19:17

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

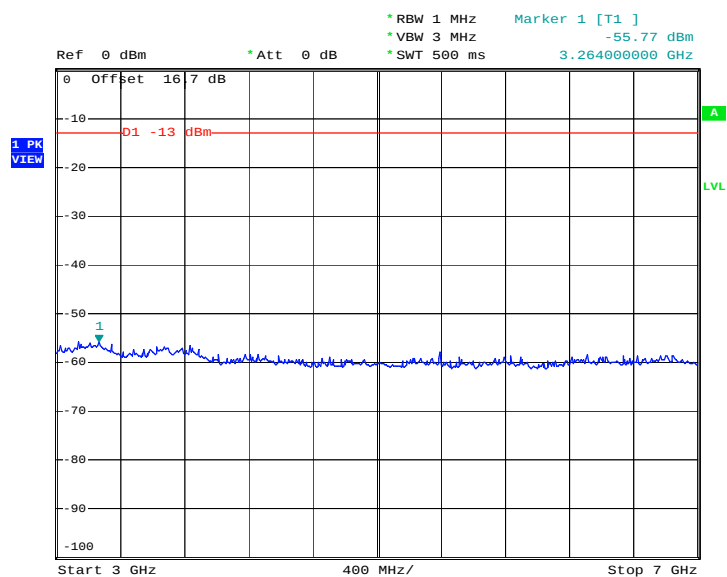

Date: 19.SEP.2013 13:20:10

Conducted Spurious Emission Plot between 7GHz ~ 9GHz




Date: 19.SEP.2013 13:20:53




Band :	WCDMA Band IV	Channel :	CH1413
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1732.6 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

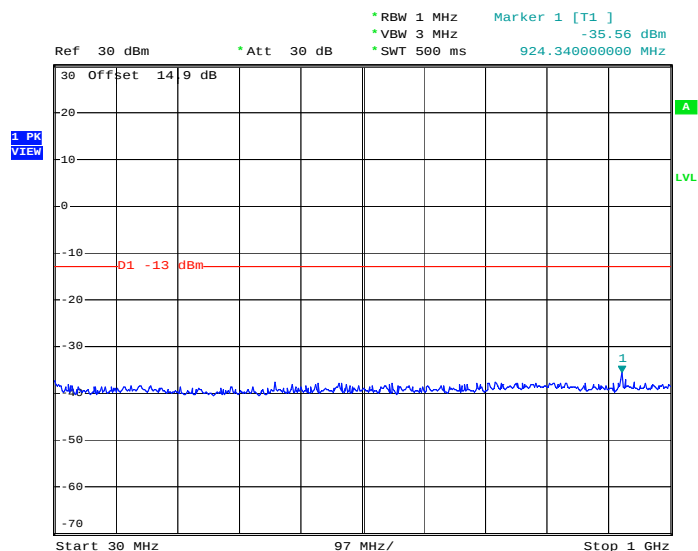

Date: 19.SEP.2013 22:14:56


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

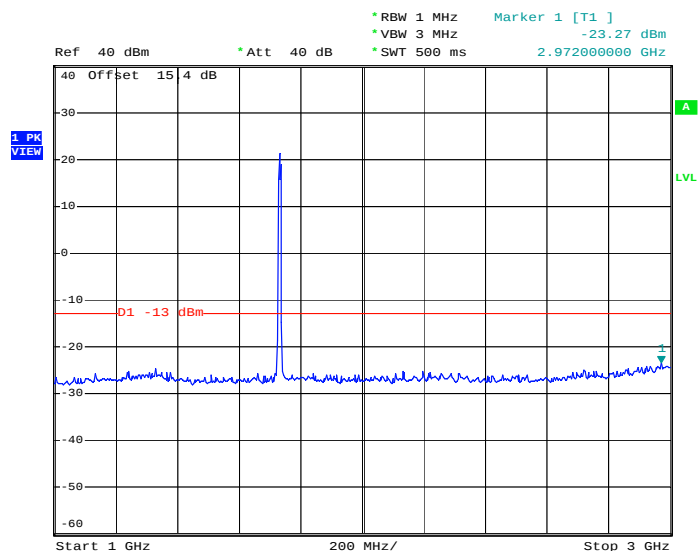

Date: 19.SEP.2013 22:16:41




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

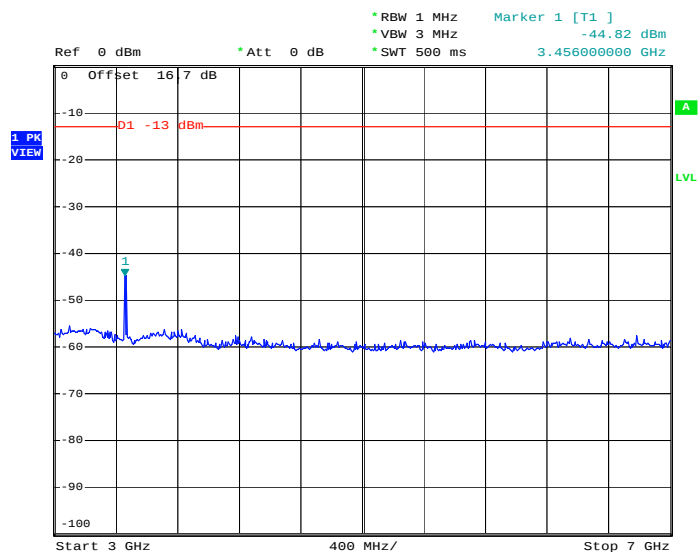

Date: 19.SEP.2013 22:18:04


Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

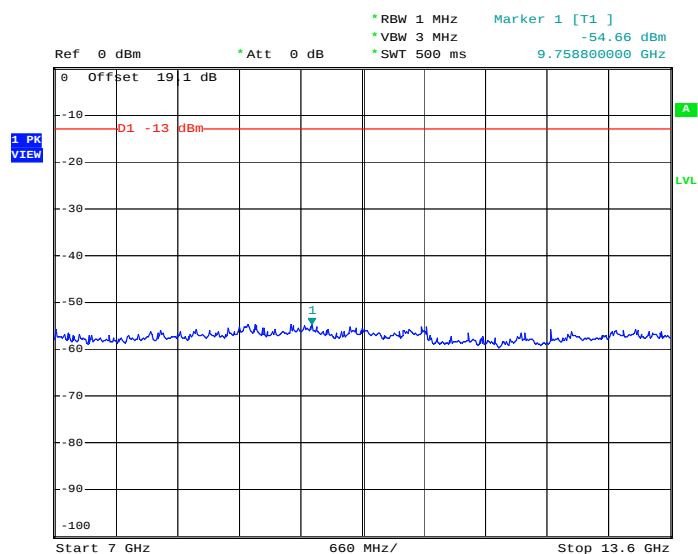

Date: 20.SEP.2013 00:03:43




Conducted Spurious Emission Plot between 13.6GHz ~ 18GHz

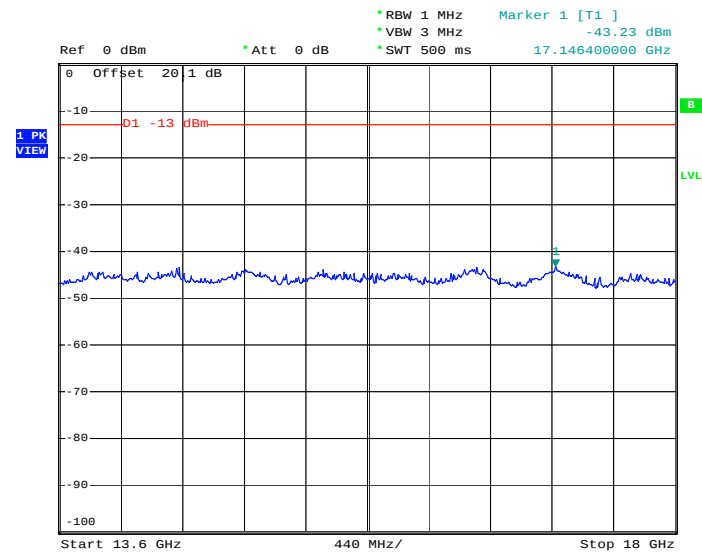

Date: 21.SEP.2013 13:22:46


Band :	WCDMA Band II	Channel :	CH9400
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1880.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

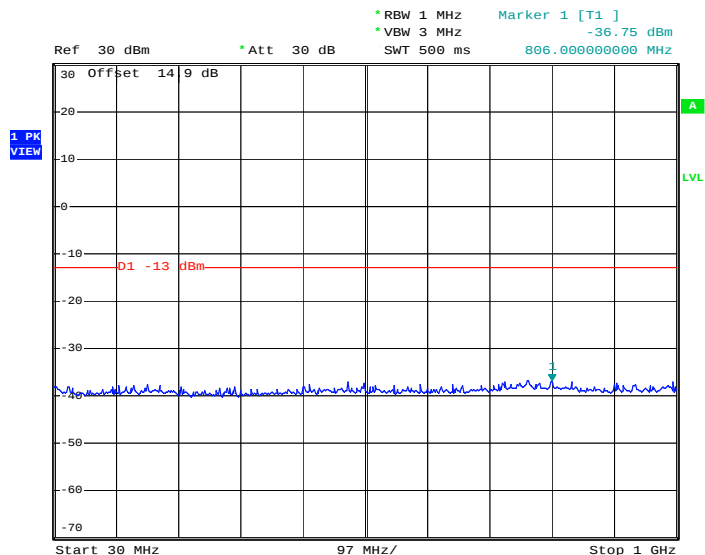


Date: 19.SEP.2013 13:23:40

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

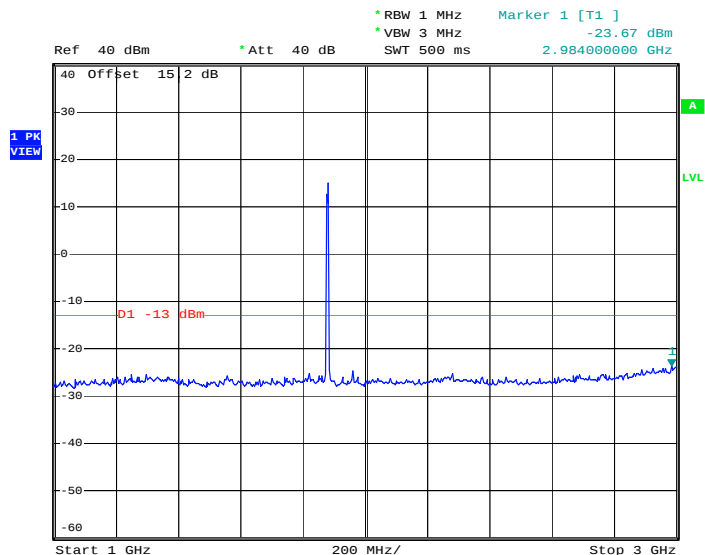


Date: 19.SEP.2013 13:31:25

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

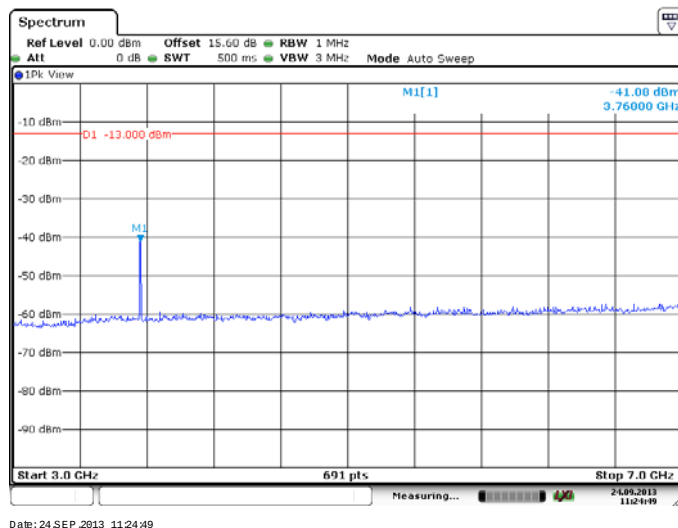


Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

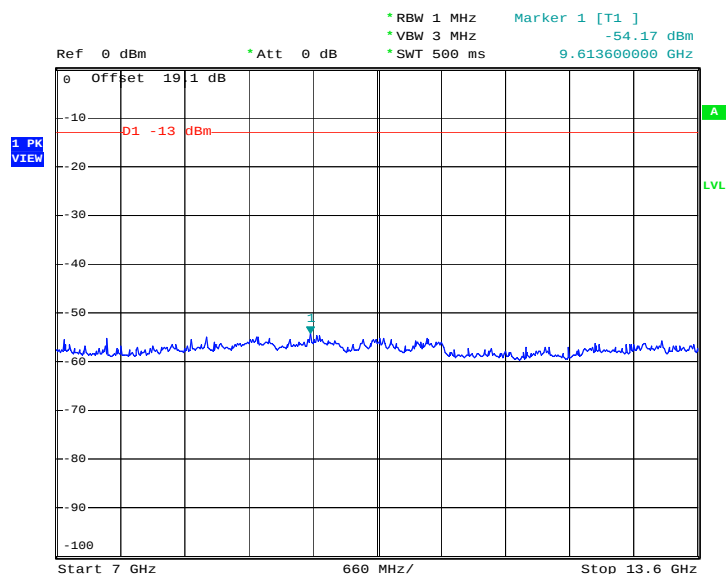



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

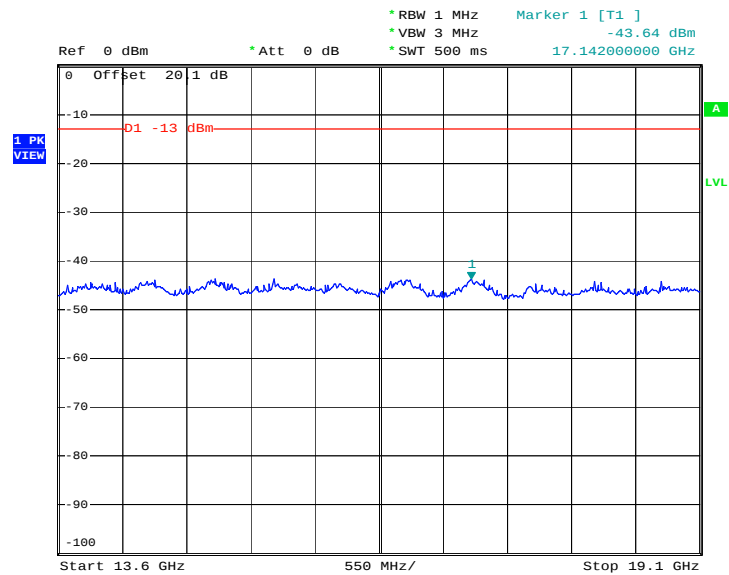

Date: 19.SEP.2013 13:28:46

3.7 Field Strength of Spurious Radiation Measurement

3.7.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.7.2 Measuring Instruments


See list of measuring instruments of this test report.

3.7.3 Test Procedures


1. The EUT was placed on a rotatable wooden table with 0.8 meter above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
11. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}$
12. $\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$
13. $\text{ERP (dBm)} = \text{EIRP} - 2.15$

3.7.4 Test Setup

For radiated emissions from 30MHz to 1GHz

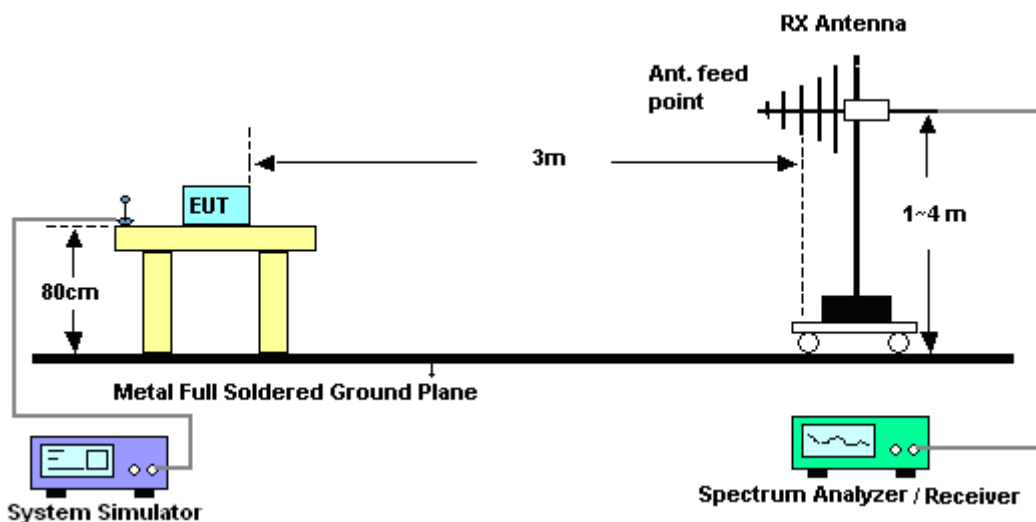


For radiated emissions above 1GHz

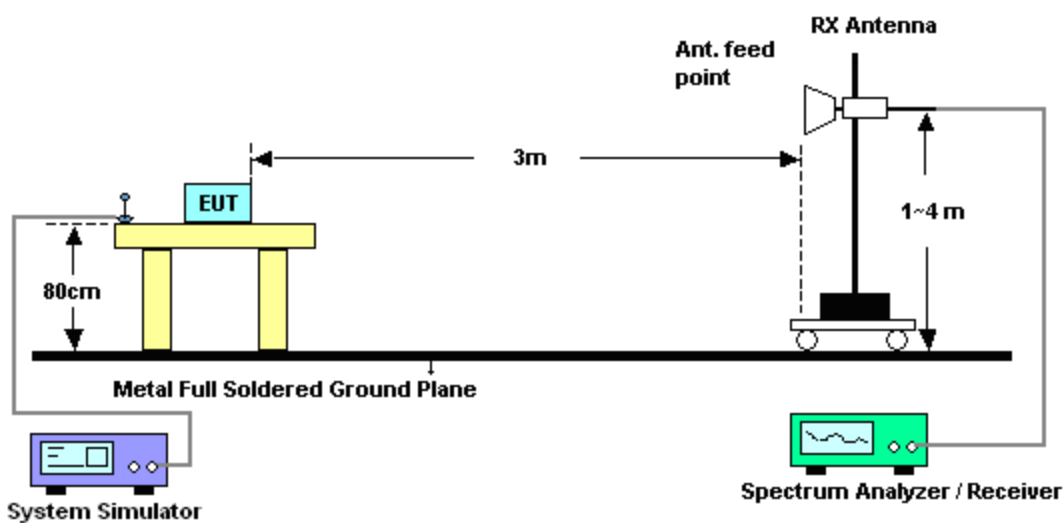

3.7.5 Test Result of Field Strength of Spurious Radiated


Band :	GSM850	Temperature :	22~23°C
Test Mode :	GPRS class 8 Link (GMSK) for Adapter 1	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

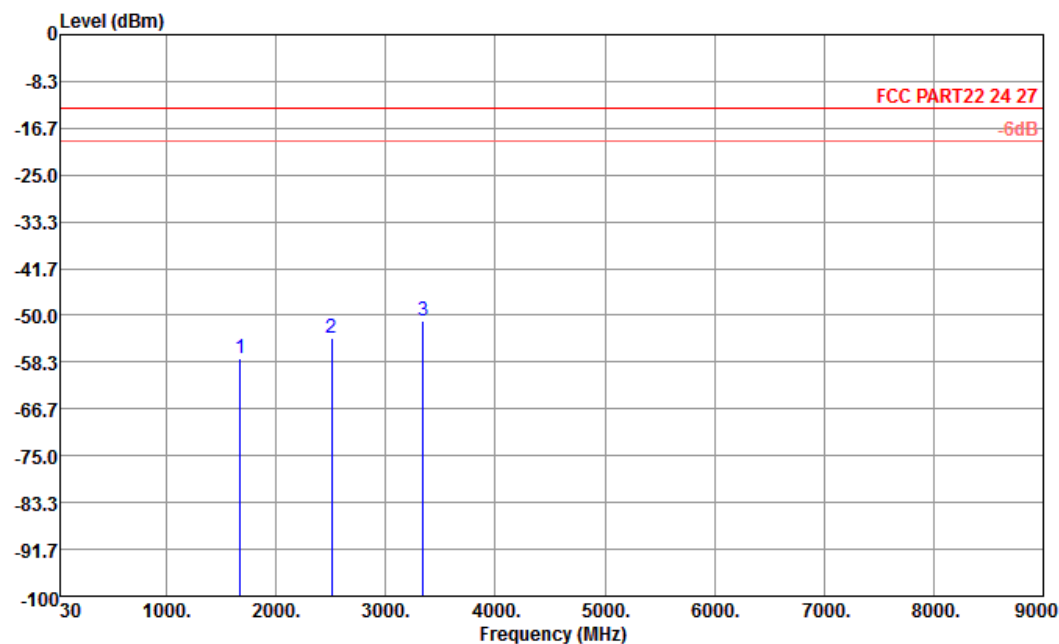

Site : 03CH01-KS
 Condition : FCC PART22 24 27 HF_EIRP_FACTOR130726 HORIZONTAL
 EUT : (FG)362701

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-57.64	-13	-44.64	-60.79	-58.29	0.57	3.37	H	Pass
2508	-54.00	-13	-41.00	-64.83	-56.23	0.78	5.16	H	Pass
3344	-50.88	-13	-37.88	-63.77	-54.52	0.87	6.66	H	Pass

Band :	GSM850	Temperature :	22~23°C
Test Mode :	GPRS class 8 Link (GMSK) for Adapter 1	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

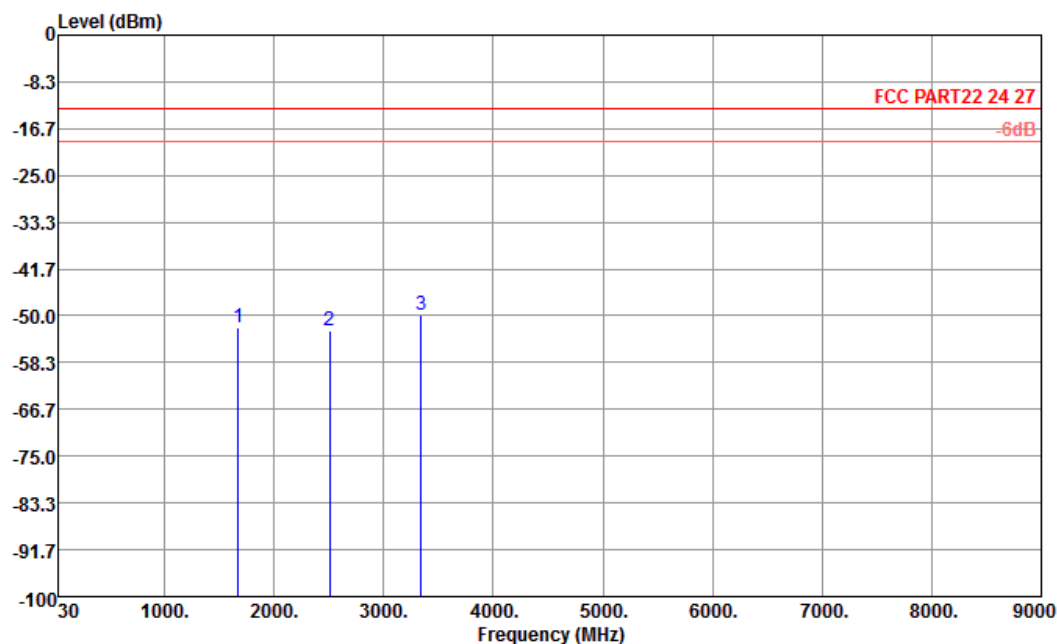


Site : 03CH01-KS
 Condition : FCC PART22 24 27 HF_EIRP_FACTOR130726 VERTICAL
 EUT : (FG)362701

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1674	-52.05	-13	-39.05	-57.98	-52.70	0.57	3.37	V	Pass
2508	-52.53	-13	-39.53	-64.61	-54.76	0.78	5.16	V	Pass
3344	-49.78	-13	-36.78	-64.16	-53.42	0.87	6.66	V	Pass




Band :	GSM850	Temperature :	22~23°C
Test Mode :	GPRS class 8 Link (GMSK) for Adapter 2	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

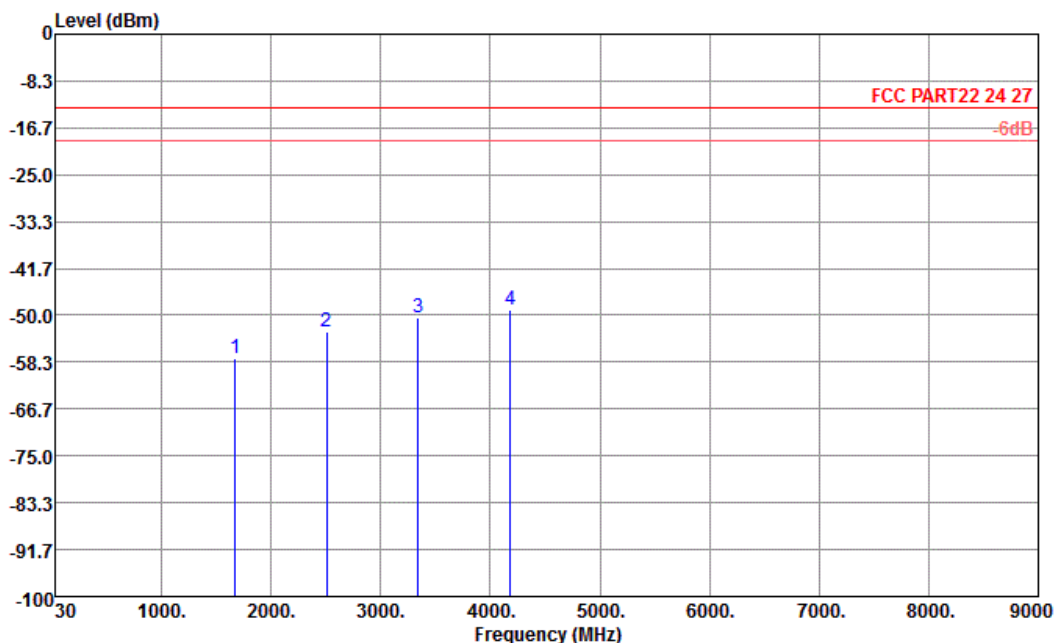

Site : 03CH01-KS
Condition : FCC PART22 24 27 HF_EIRP_FACTOR130726 HORIZONTAL
EUT : (FG)362701

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-57.66	-13	-44.66	-60.81	-58.31	0.57	3.37	H	Pass
2508	-52.90	-13	-39.90	-63.86	-55.13	0.78	5.16	H	Pass
3344	-50.49	-13	-37.49	-63.38	-54.13	0.87	6.66	H	Pass
4182	-48.89	-13	-35.89	-62.68	-53.48	0.97	7.71	H	Pass


Band :	GSM850	Temperature :	22~23°C
Test Mode :	GPRS class 8 Link (GMSK) for Adapter 2	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

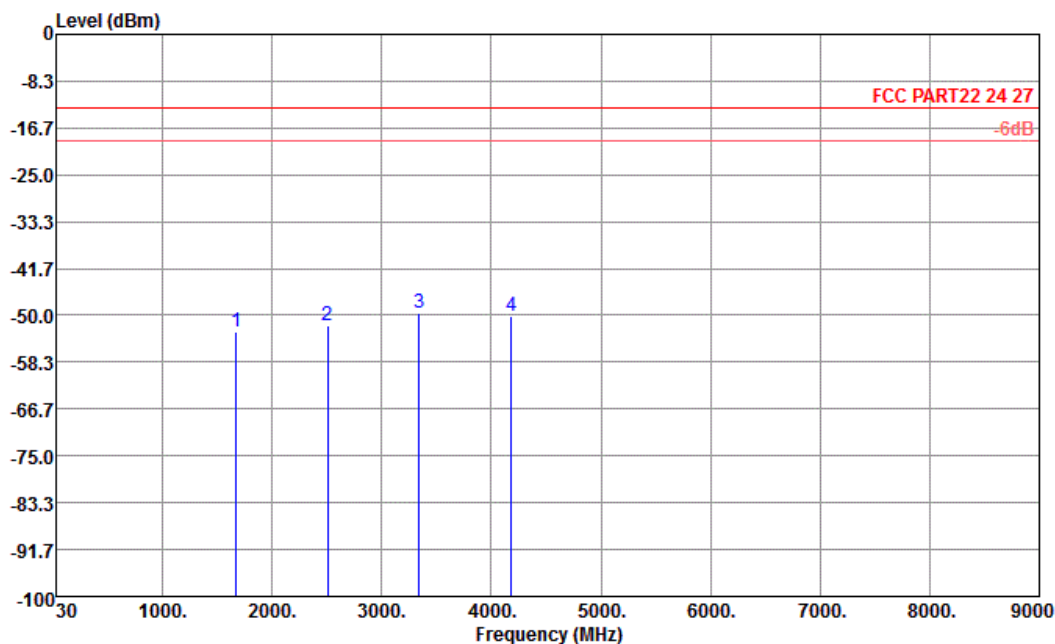

Site : 03CH01-KS
Condition : FCC PART22 24 27 HF_EIRP_FACTOR130726 VERTICAL
EUT : (FG)362701

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-54.02	-13	-41.02	-60.01	-54.67	0.57	3.37	V	Pass
2508	-51.87	-13	-38.87	-64.14	-54.10	0.78	5.16	V	Pass
3344	-49.71	-13	-36.71	-64.08	-53.35	0.87	6.66	V	Pass
4182	-50.26	-13	-37.26	-64.68	-54.85	0.97	7.71	V	Pass


Band :	GSM850	Temperature :	22~23°C
Test Mode :	EDGE class 8 Link (8PSK) for Adapter 1	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

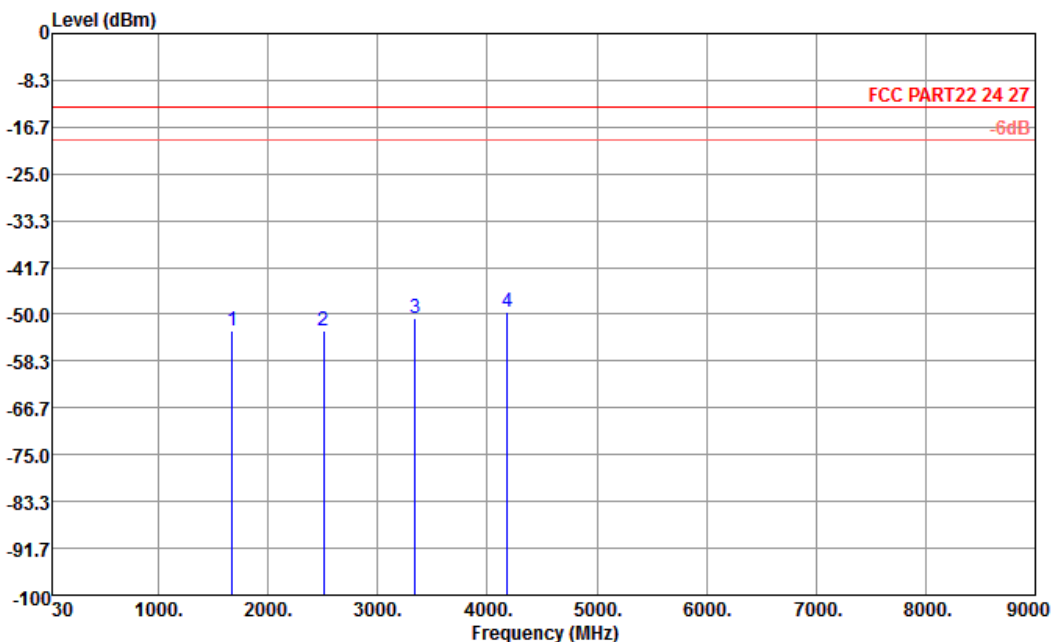

Site : 03CH01-KS
 Condition : FCC PART22 24 27 HF_EIRP_FACTOR130726 HORIZONTAL
 EUT : (FG)362701

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-52.90	-13	-39.90	-56.17	-53.55	0.57	3.37	H	Pass
2509	-52.90	-13	-39.90	-63.86	-55.13	0.78	5.16	H	Pass
3344	-50.63	-13	-37.63	-63.52	-54.27	0.87	6.66	H	Pass
4182	-49.45	-13	-36.45	-63.20	-54.04	0.97	7.71	H	Pass


Band :	GSM850	Temperature :	22~23°C
Test Mode :	EDGE class 8 Link (8PSK) for Adapter 1	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

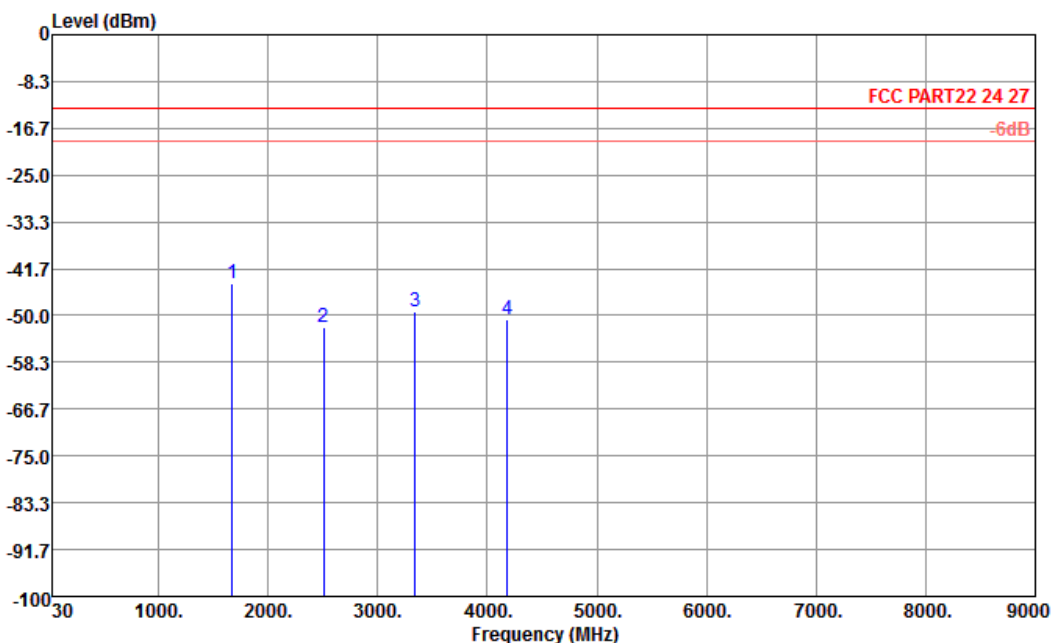

Site : 03CH01-KS
Condition : FCC PART22 24 27 HF_EIRP_FACTOR130726 VERTICAL
EUT : (FG)362701

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-44.40	-13	-31.40	-50.62	-45.05	0.57	3.37	V	Pass
2509	-51.95	-13	-38.95	-64.20	-54.18	0.78	5.16	V	Pass
3344	-49.40	-13	-36.40	-63.71	-53.04	0.87	6.66	V	Pass
4182	-50.56	-13	-37.56	-64.95	-55.15	0.97	7.71	V	Pass


Band :	GSM1900	Temperature :	22~23°C
Test Mode :	GPRS class 8 Link (GMSK) for Adapter 1	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

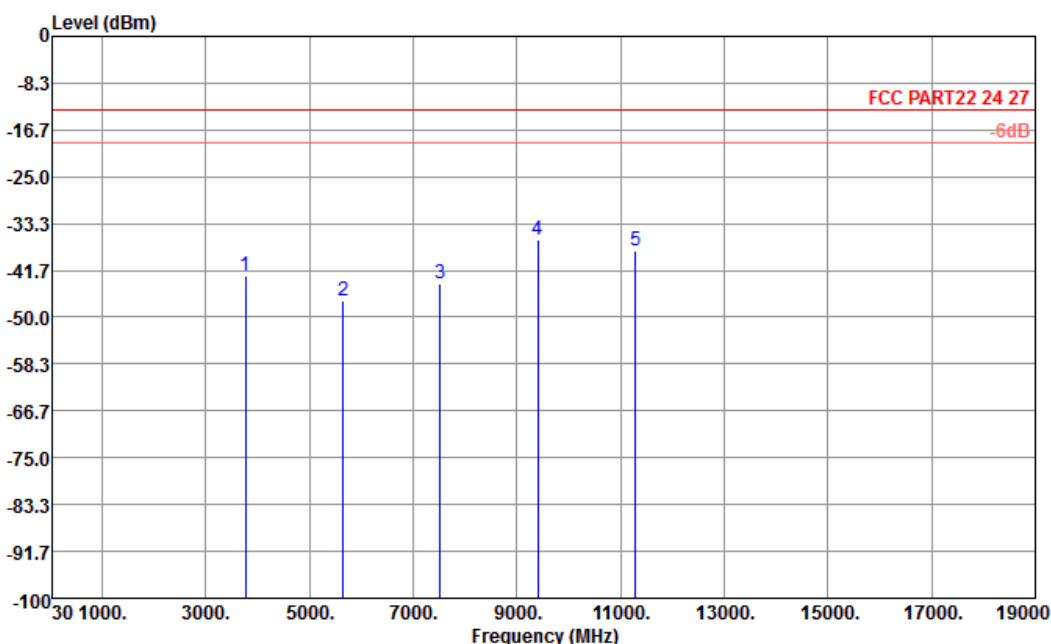

Site : 03CH01-KS
 Condition : FCC PART22 24 27 HF_EIRP_FACTOR130726 HORIZONTAL
 EUT : (FG)362701

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-42.66	-13	-29.66	-58.32	-49.04	0.78	7.16	H	Pass
5640	-47.04	-13	-34.04	-65.54	-55.58	1.04	9.58	H	Pass
7520	-43.88	-13	-30.88	-62.56	-53.99	1.35	11.46	H	Pass
9399	-36.19	-13	-23.19	-59.90	-47.25	1.75	12.81	H	Pass
11280	-38.05	-13	-25.05	-64.37	-49.14	2	13.09	H	Pass


Band :	GSM1900	Temperature :	22~23°C
Test Mode :	GPRS class 8 Link (GMSK) for Adapter 1	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

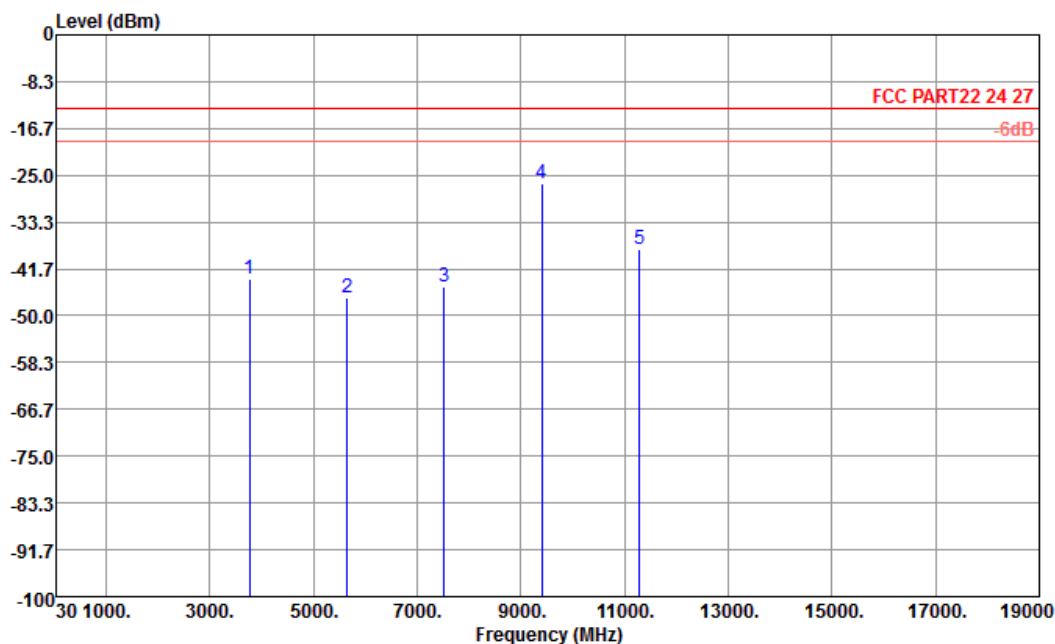

Site : 03CH01-KS
 Condition : FCC PART22 24 27 HF_EIRP_FACTOR130726 VERTICAL
 EUT : (FG)362701

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-43.54	-13	-30.54	-59.6	-49.92	0.78	7.16	V	Pass
5640	-46.80	-13	-33.80	-64.4	-55.34	1.04	9.58	V	Pass
7516	-44.79	-13	-31.79	-62.89	-54.90	1.35	11.46	V	Pass
9399	-26.57	-13	-13.57	-50.02	-37.63	1.75	12.81	V	Pass
11280	-38.10	-13	-25.10	-61.69	-49.19	2	13.09	V	Pass


Band :	GSM1900	Temperature :	22~23°C
Test Mode :	EDGE class 8 Link (8PSK) for Adapter 1	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

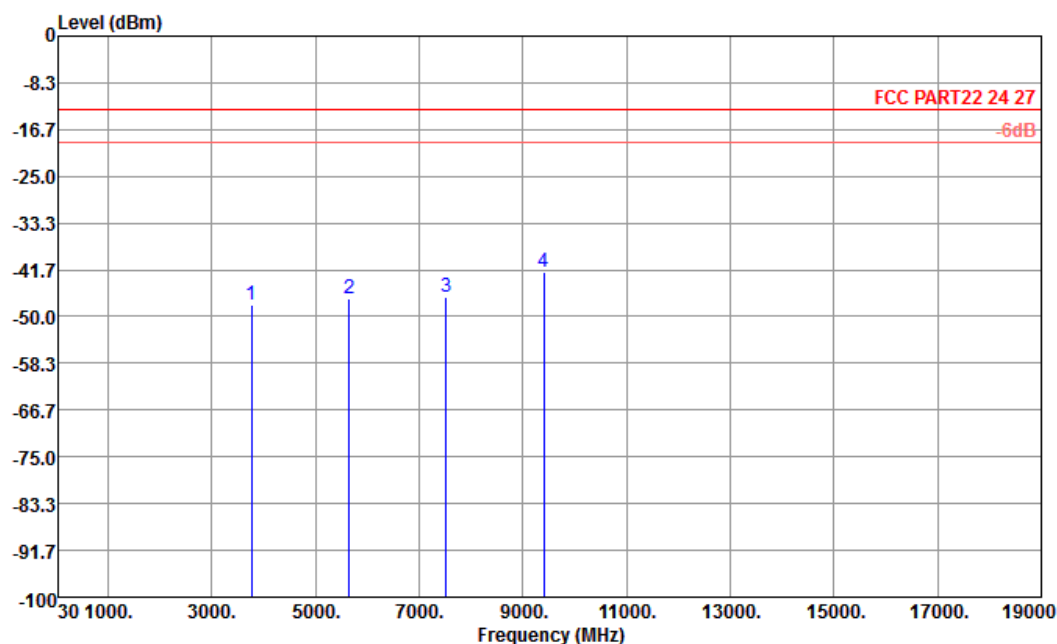

Site : 03CH01-KS
 Condition : FCC PART22 24 27 HF_EIRP_FACTOR130726 HORIZONTAL
 EUT : (FG)362701

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-48.01	-13	-35.01	-63.45	-54.39	0.78	7.16	H	Pass
5640	-46.75	-13	-33.75	-65.26	-55.29	1.04	9.58	H	Pass
7520	-46.65	-13	-33.65	-65.11	-56.76	1.35	11.46	H	Pass
9399	-42.04	-13	-29.04	-64.89	-53.10	1.75	12.81	H	Pass


Band :	GSM1900	Temperature :	22~23°C
Test Mode :	EDGE class 8 Link (8PSK) for Adapter 1	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

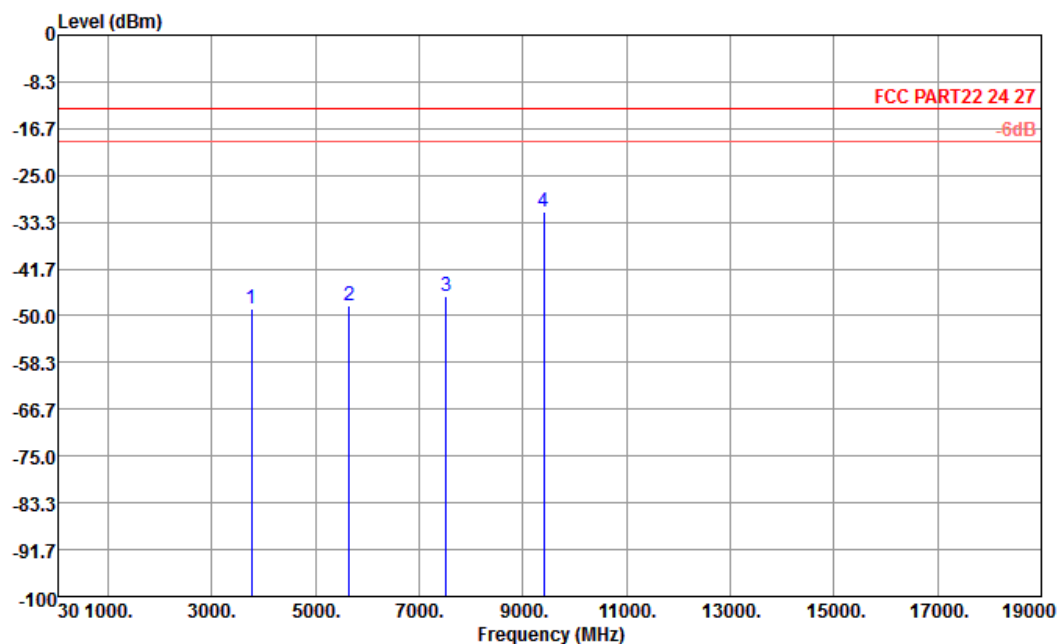

Site : 03CH01-KS
 Condition : FCC PART22 24 27 HF_EIRP_FACTOR130726 VERTICAL
 EUT : (FG)362701

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-48.83	-13	-35.83	-64.33	-55.21	0.78	7.16	V	Pass
5640	-48.12	-13	-35.12	-65.47	-56.66	1.04	9.58	V	Pass
7520	-46.51	-13	-33.51	-64.23	-56.62	1.35	11.46	V	Pass
9399	-31.60	-13	-18.60	-55	-42.66	1.75	12.81	V	Pass


Band :	WCDMA Band V	Temperature :	22~23°C
Test Mode :	RMC 12.2Kbps Link (QPSK) for Adapter 1	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

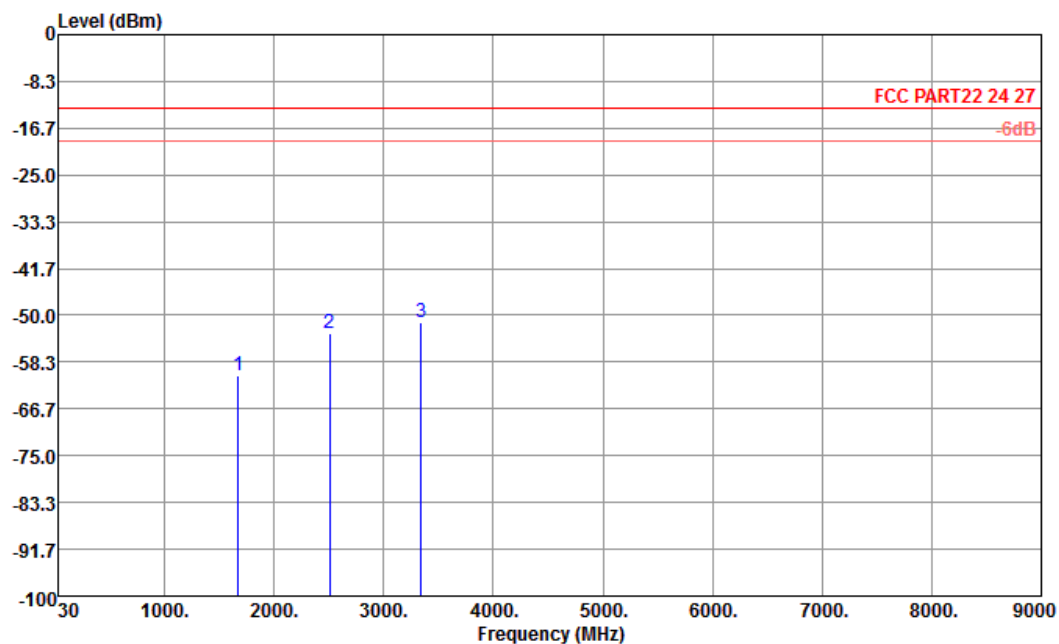

Site : 03CH01-KS
 Condition : FCC PART22 24 27 HF_EIRP_FACTOR130726 HORIZONTAL
 EUT : (FG)362701

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-60.69	-13	-47.69	-63.66	-61.34	0.57	3.37	H	Pass
2509	-53.18	-13	-40.18	-64.11	-55.41	0.78	5.16	H	Pass
3344	-51.37	-13	-38.37	-64.26	-55.01	0.87	6.66	H	Pass


Band :	WCDMA Band V	Temperature :	22~23°C
Test Mode :	RMC 12.2Kbps Link (QPSK) for Adapter 1	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

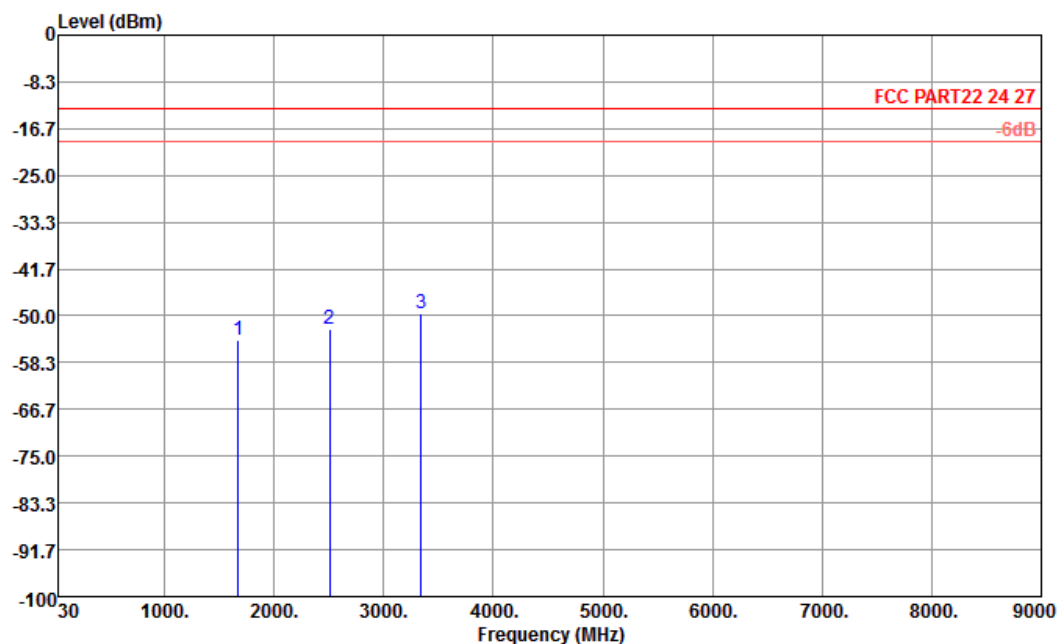

Site : 03CH01-KS
Condition : FCC PART22 24 27 HF_EIRP_FACTOR130726 VERTICAL
EUT : (FG)362701

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-54.35	-13	-41.35	-60.27	-55.00	0.57	3.37	V	Pass
2509	-52.35	-13	-39.35	-64.48	-54.58	0.78	5.16	V	Pass
3344	-49.72	-13	-36.72	-64.09	-53.36	0.87	6.66	V	Pass


Band :	WCDMA Band IV	Temperature :	22~23°C
Test Mode :	RMC 12.2Kbps Link (QPSK) for Adapter 1	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

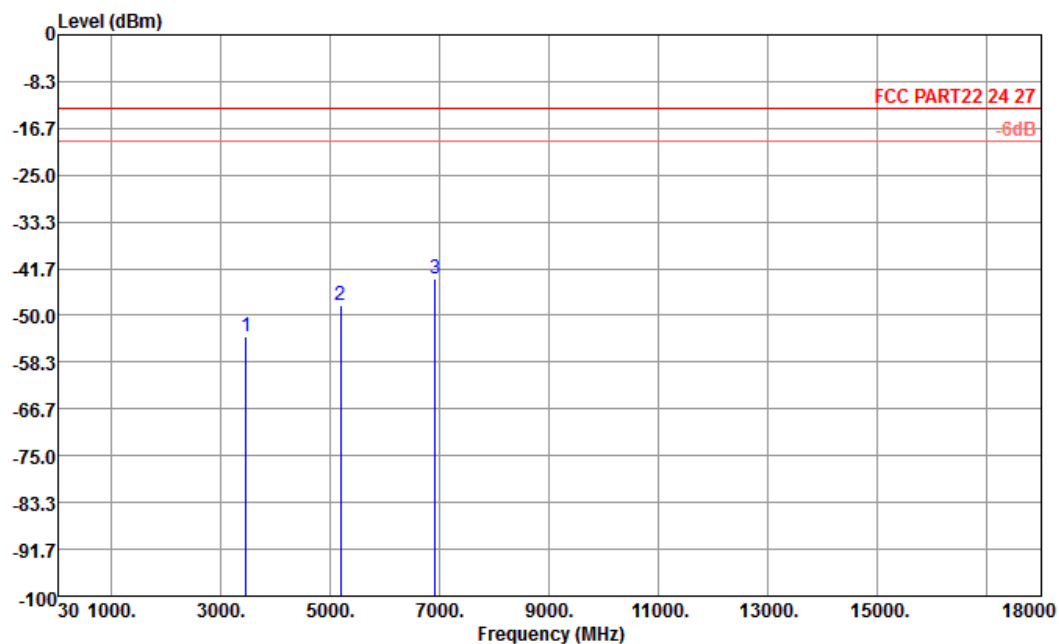

Site : 03CH01-KS
 Condition : FCC PART22 24 27 HF_EIRP_FACTOR130726 HORIZONTAL
 EUT : (FG)362701

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3462	-53.89	-13	-40.89	-63.70	-59.29	2.2	7.60	H	Pass
5194	-48.31	-13	-35.31	-65.09	-55.09	3.12	9.90	H	Pass
6924	-43.36	-13	-30.36	-64.72	-51.25	2.98	10.87	H	Pass


Band :	WCDMA Band IV	Temperature :	22~23°C
Test Mode :	RMC 12.2Kbps Link (QPSK) for Adapter 1	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

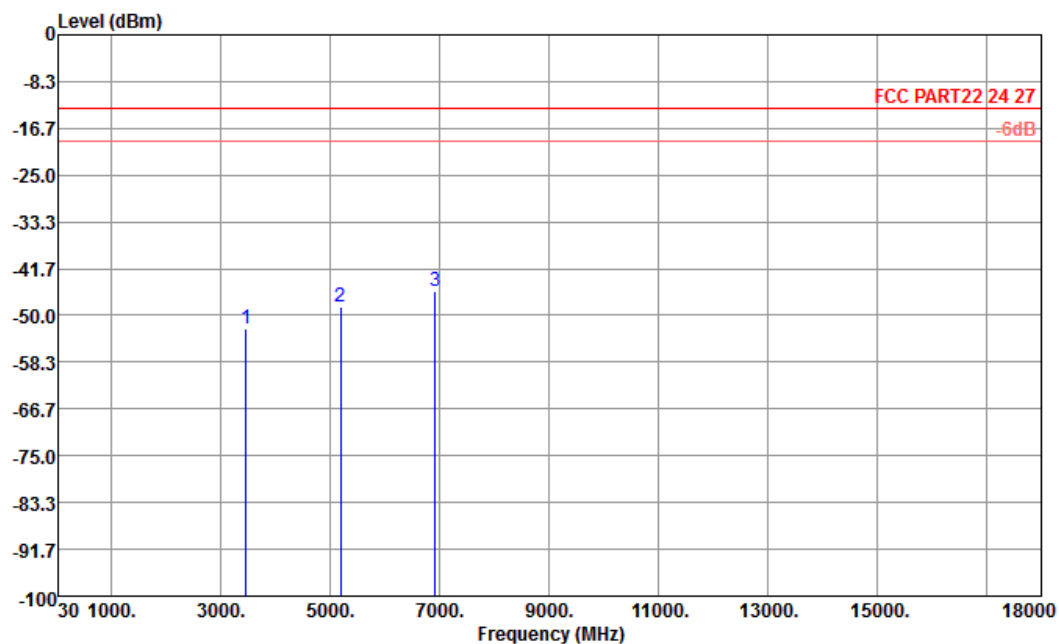

Site : 03CH01-KS
 Condition : FCC PART22 24 27 HF_EIRP_FACTOR130726 VERTICAL
 EUT : (FG)362701

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3462	-52.38	-13	-39.38	-63.32	-57.78	2.2	7.6	V	Pass
5194	-48.42	-13	-35.42	-65.07	-55.20	3.12	9.9	V	Pass
6924	-45.70	-13	-32.70	-65.61	-53.59	2.98	10.87	V	Pass


Band :	WCDMA Band IV	Temperature :	22~23°C
Test Mode :	RMC 12.2Kbps Link (QPSK) for Adapter 2	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

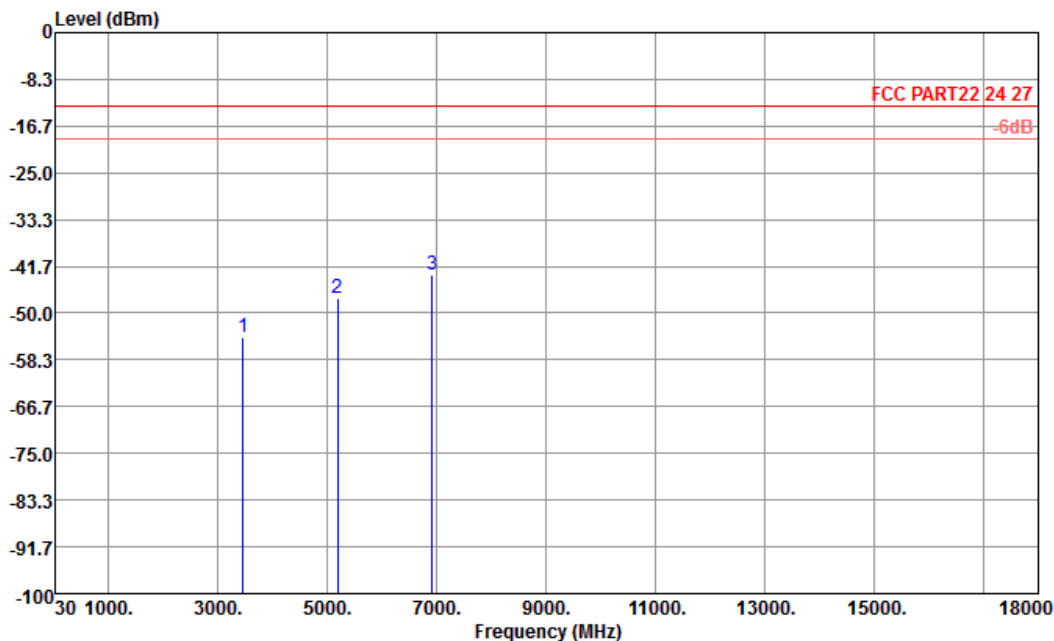

Site : 03CH01-KS
 Condition : FCC PART22 24 27 HF_EIRP_FACTOR130726 HORIZONTAL
 EUT : (FG)362701

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3462	-54.43	-13	-41.43	-64.28	-59.83	2.2	7.60	H	Pass
5194	-47.44	-13	-34.44	-64.61	-54.22	3.12	9.90	H	Pass
6924	-43.30	-13	-30.30	-64.66	-51.19	2.98	10.87	H	Pass

Band :	WCDMA Band IV	Temperature :	22~23°C
Test Mode :	RMC 12.2Kbps Link (QPSK) for Adapter 2	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

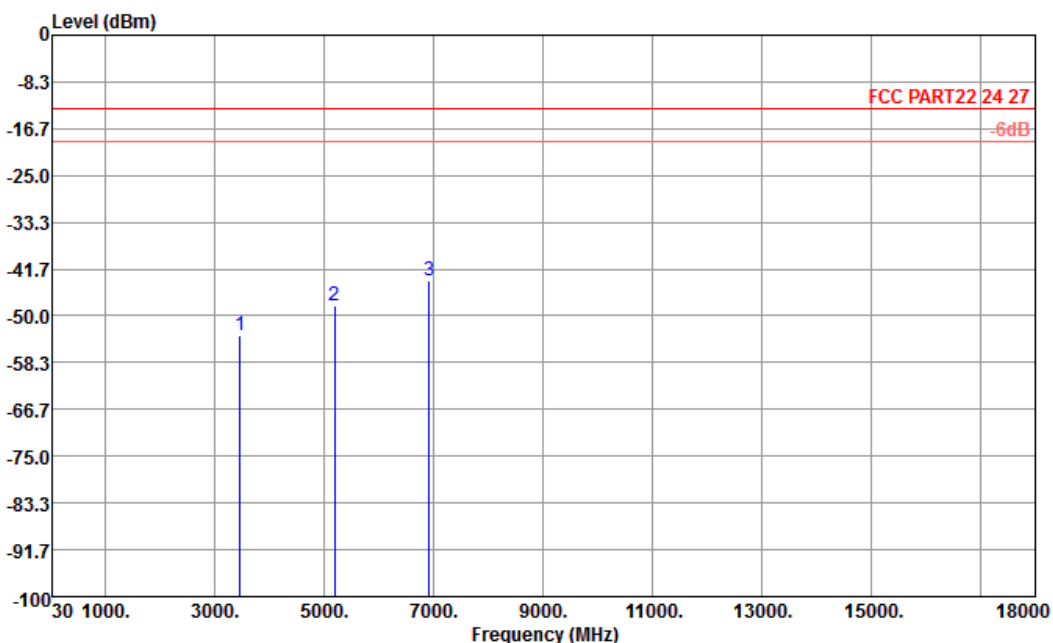


Site : 03CH01-KS
 Condition : FCC PART22 24 27 HF_EIRP_FACTOR130726 VERTICAL
 EUT : (FG)362701

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3462	-53.35	-13	-40.35	-64	-58.75	2.2	7.6	V	Pass
5194	-48.22	-13	-35.22	-64.82	-55.00	3.12	9.9	V	Pass
6924	-43.78	-13	-30.78	-64.4	-51.67	2.98	10.87	V	Pass




Band :	WCDMA Band II	Temperature :	22~23°C
Test Mode :	RMC 12.2Kbps Link (QPSK) for Adapter 1	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

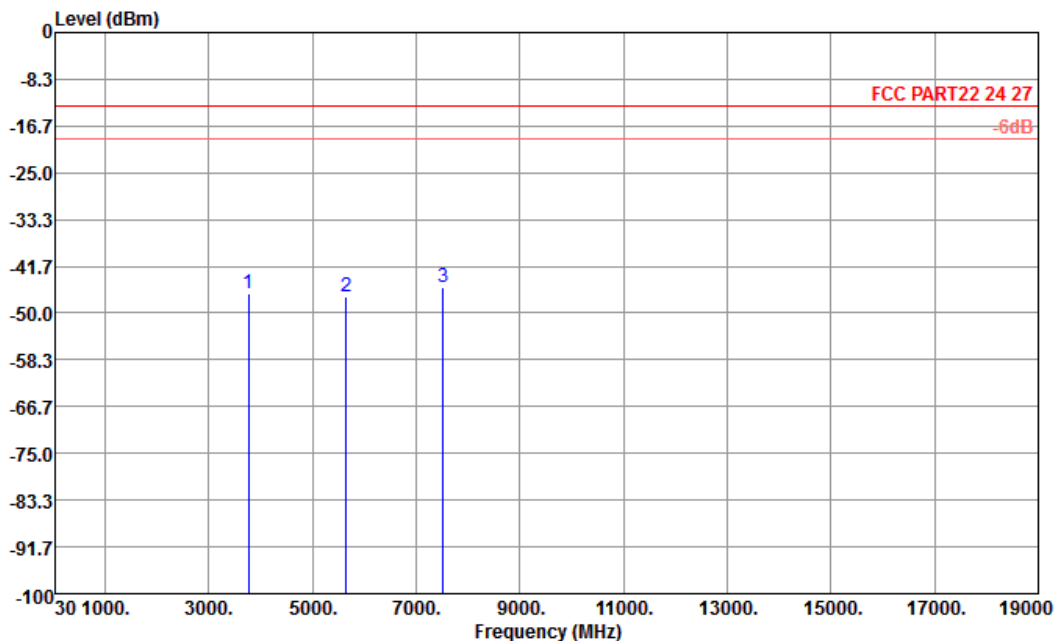

Site : 03CH01-KS
Condition : FCC PART22 24 27 HF_EIRP_FACTOR130726 HORIZONTAL
EUT : (FG)362701

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3758	-46.46	-13	-33.46	-61.90	-52.84	0.78	7.16	H	Pass
5640	-46.97	-13	-33.97	-65.48	-55.51	1.04	9.58	H	Pass
7520	-45.45	-13	-32.45	-64.03	-55.56	1.35	11.46	H	Pass


Band :	WCDMA Band II	Temperature :	22~23°C
Test Mode :	RMC 12.2Kbps Link (QPSK) for Adapter 1	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

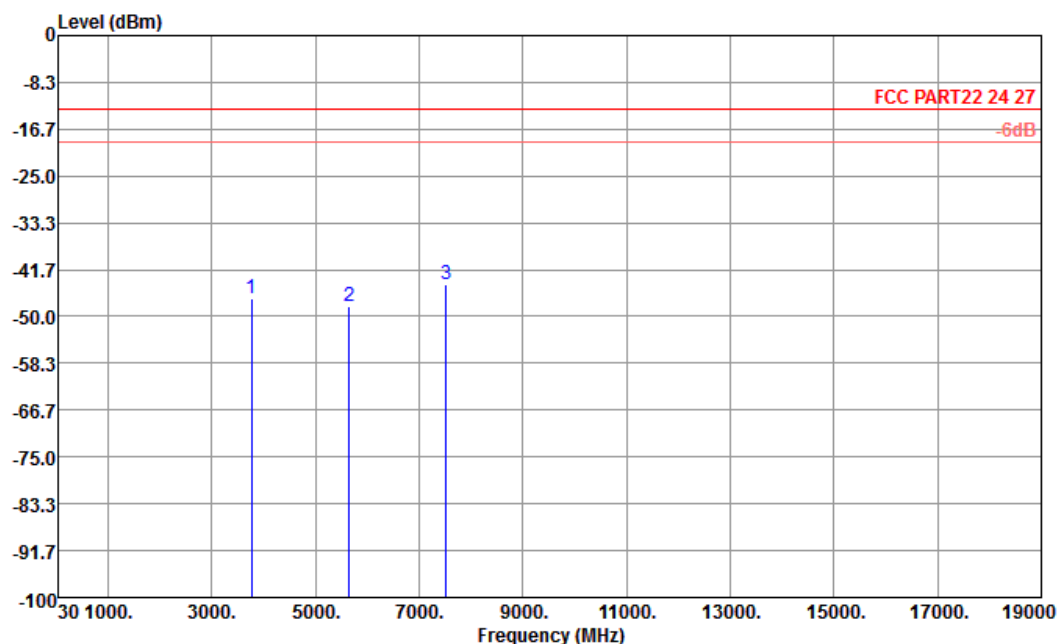

Site : 03CH01-KS
 Condition : FCC PART22 24 27 HF_EIRP_FACTOR130726 VERTICAL
 EUT : (FG)362701

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-46.83	-13	-33.83	-62.48	-53.21	0.78	7.16	V	Pass
5640	-48.06	-13	-35.06	-65.41	-56.60	1.04	9.58	V	Pass
7520	-44.26	-13	-31.26	-62.37	-54.37	1.35	11.46	V	Pass


Band :	WCDMA Band II	Temperature :	22~23°C
Test Mode :	RMC 12.2Kbps Link (QPSK) for Adapter 2	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

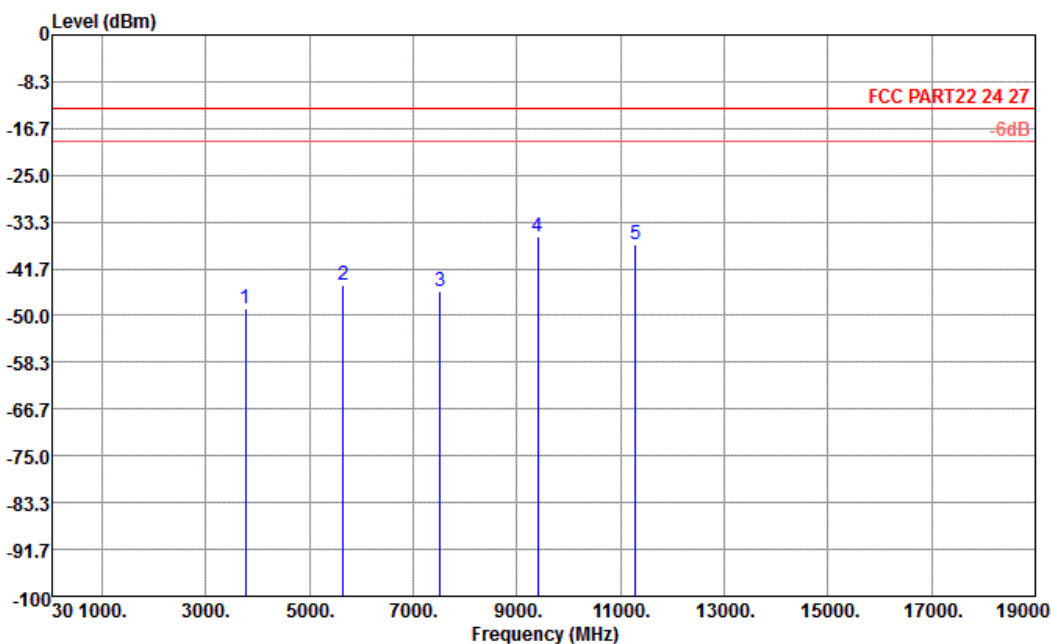

Site : 03CH01-KS
 Condition : FCC PART22 24 27 HF_EIRP_FACTOR130726 HORIZONTAL
 EUT : (FG)362701

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-48.75	-13	-35.75	-64.04	-55.13	0.78	7.16	H	Pass
5640	-44.58	-13	-31.58	-63.31	-53.12	1.04	9.58	H	Pass
7520	-45.79	-13	-32.79	-64.36	-55.90	1.35	11.46	H	Pass
9399	-35.81	-13	-22.81	-59.51	-46.87	1.75	12.81	H	Pass
11280	-37.33	-13	-24.33	-63.75	-48.42	2	13.09	H	Pass

Band :	WCDMA Band II	Temperature :	22~23°C
Test Mode :	RMC 12.2Kbps Link (QPSK) for Adapter 2	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

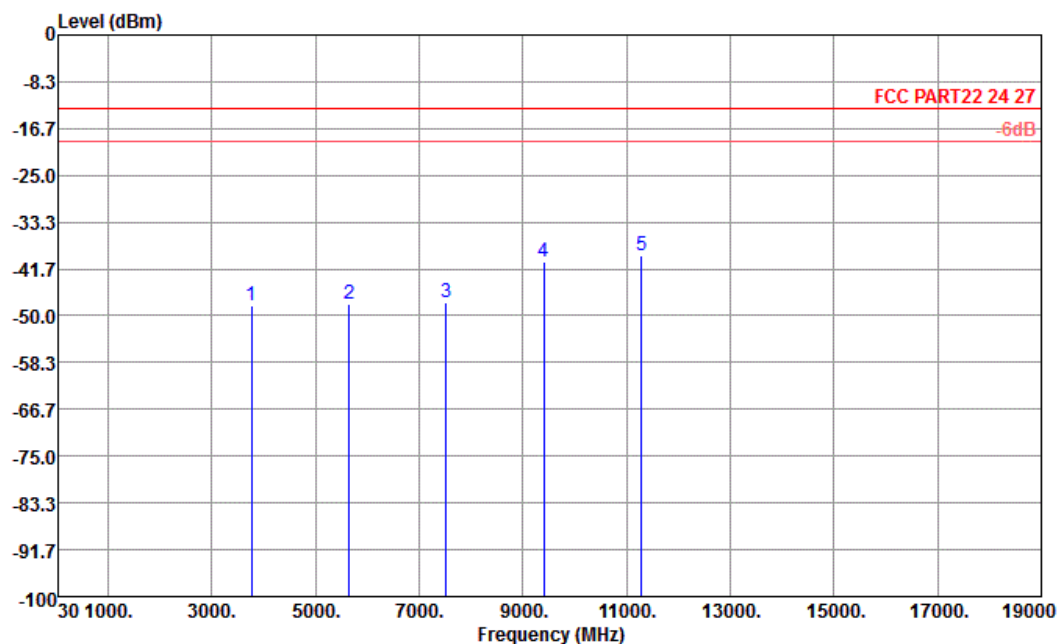

Site : 03CH01-KS

Condition : FCC PART22 24 27 HF_EIRP_FACTOR130726 VERTICAL

EUT : (FG)362701

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-48.09	-13	-35.09	-63.68	-54.47	0.78	7.16	V	Pass
5640	-47.85	-13	-34.85	-65.23	-56.39	1.04	9.58	V	Pass
7520	-47.59	-13	-34.59	-64.96	-57.70	1.35	11.46	V	Pass
9399	-40.47	-13	-27.47	-64.3	-51.53	1.75	12.81	V	Pass
11280	-39.33	-13	-26.33	-62.95	-50.42	2	13.09	V	Pass

3.8 Frequency Stability Measurement

3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.8.2 Measuring Instruments

See list of measuring instruments of this test report.


3.8.3 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.8.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the base station.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

3.8.5 Test Setup

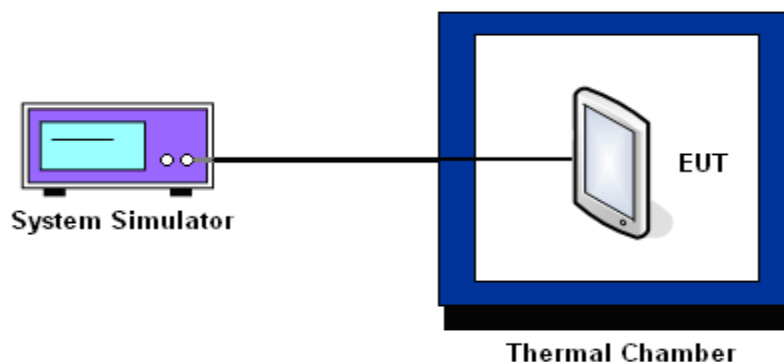

3.8.6 Test Result of Temperature Variation

Band :	GSM 850	Channel :	189
Limit (ppm) :	2.5	Frequency :	836.4 MHz

Temperature (°C)	GPRS class 8		EDGE class 8		Result
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	
-30	-28	-0.03	-30	-0.04	PASS
-20	-23	-0.03	-25	-0.03	
-10	-18	-0.02	-19	-0.02	
0	-20	-0.02	-21	-0.02	
10	16	+0.02	14	+0.02	
20	12	+0.01	13	+0.02	
30	9	+0.01	11	+0.01	
40	15	+0.02	13	+0.02	
50	-8	-0.01	-7	-0.01	
55	-6	-0.01	9	+0.01	

Note: The manufacturer declared that the EUT could work properly at temperature 55°C.

Band :	GSM 1900	Channel :	661
Limit (ppm) :	2.5	Frequency :	1880.0 MHz

Temperature (°C)	GPRS class 8		EDGE class 8		Result
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	
-30	-35	-0.02	-32	-0.02	PASS
-20	-24	-0.01	-23	-0.01	
-10	-15	-0.01	-16	-0.01	
0	-10	-0.01	-11	-0.01	
10	11	+0.01	12	+0.01	
20	13	+0.01	10	+0.01	
30	15	+0.01	14	+0.01	
40	10	+0.01	12	+0.01	
50	-12	-0.01	-10	-0.01	
55	-18	-0.01	-15	-0.01	

Note: The manufacturer declared that the EUT could work properly at temperature 55°C.

Band :	WCDMA Band V	Channel :	4182
Limit (ppm) :	2.5	Frequency :	836.4 MHz

Temperature (°C)	RMC 12.2Kbps		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	-31	-0.04	PASS
-20	-25	-0.03	
-10	-12	-0.01	
0	6	+0.01	
10	12	+0.01	
20	7	+0.01	
30	-4	+0.00	
40	-11	-0.01	
50	-24	-0.03	
55	-30	-0.04	

Note: The manufacturer declared that the EUT could work properly at temperature 55°C.

Band :	WCDMA Band IV	Channel :	1413
Limit (ppm) :	2.5	Frequency :	1732.6 MHz

Temperature (°C)	RMC 12.2Kbps		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	46	+0.03	PASS
-20	-44	-0.03	
-10	40	+0.02	
0	39	+0.02	
10	28	+0.02	
20	30	+0.02	
30	-36	-0.02	
40	-41	-0.02	
50	-45	-0.03	
55	-50	-0.03	

Note: The manufacturer declared that the EUT could work properly at temperature 55°C.

Band :	WCDMA Band II	Channel :	9400
Limit (ppm) :	2.5	Frequency :	1880 MHz

Temperature (°C)	RMC 12.2Kbps		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	-35	-0.02	PASS
-20	-28	-0.01	
-10	-16	-0.01	
0	10	+0.01	
10	15	+0.01	
20	11	+0.01	
30	-11	-0.01	
40	-16	-0.01	
50	-25	-0.01	
55	-34	-0.02	

Note: The manufacturer declared that the EUT could work properly at temperature 55°C.

3.8.7 Test Result of Voltage Variation

Band & Channel	Mode	Voltage (Volt)	Freq. Dev. (Hz)	Deviation (ppm)	Limit (ppm)	Result
GSM 850 CH189	GPRS class 8	3.8	9	+0.01	2.5	PASS
		BEP	-11	-0.01		
		4.2	8	+0.01		
	EDGE class 8	3.8	16	+0.02		
		BEP	18	+0.02		
		4.2	5	+0.01		
GSM 1900 CH661	GPRS class 8	3.8	14	+0.01		
		BEP	-10	-0.01		
		4.2	11	+0.01		
	EDGE class 8	3.8	16	+0.01		
		BEP	18	+0.01		
		4.2	10	+0.01		
WCDMA Band V CH4182	RMC 12.2Kbps	3.8	14	+0.02		
		BEP	-8	-0.01		
		4.2	9	+0.01		
WCDMA Band IV CH1413	RMC 12.2Kbps	3.8	34	+0.02		
		BEP	36	+0.02		
		4.2	44	+0.03		
WCDMA Band II CH9400	RMC 12.2Kbps	3.8	30	+0.02		
		BEP	29	+0.02		
		4.2	-28	-0.01		

Note:

1. Normal Voltage = 3.8V.
2. Battery End Point (BEP) = 3.5 V.

4 List of Measuring Equipments

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 29, 2012	Sep. 19, 2013~ Sep. 25, 2013	Dec. 28, 2013	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV30	100845	9kHz~30GHz	Nov. 06, 2012	Sep. 19, 2013~ Sep. 25, 2013	Nov. 05, 2013	Conducted (TH01-KS)
Power Meter	Agilent	E4418B	MY45107368	N/A	Jul.16, 2013	Sep. 19, 2013~ Sep. 25, 2013	Jul.15, 2014	Conducted (TH01-KS)
Power Sensor	Agilent	N9304A H18	MY41498364	1nW~100mW (-60~+20dBm)	Sep. 14, 2013	Sep. 19, 2013~ Sep. 25, 2013	Sep. 13, 2014	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	N/A	Dec. 29, 2012	Sep. 19, 2013~ Sep. 25, 2013	Dec. 28, 2013	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 08, 2012	Sep. 25, 2013	Nov. 07, 2013	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP30	101399	9kHz~30GHz	May 23, 2013	Sep. 25, 2013	May 22, 2014	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Dec. 07, 2012	Sep. 25, 2013	Dec. 06, 2013	Radiation (03CH01-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 22, 2012	Sep. 25, 2013	Oct. 21, 2013	Radiation (03CH01-KS)
Double Ridge Horn Antenna	EMCO	3117	75959	1GHz~18GHz	Dec. 07, 2012	Sep. 25, 2013	Dec. 06, 2013	Radiation (03CH01-KS)
Amplifier	com-power	PA-103A	161069	1MHz~1GHz	May 23, 2013	Sep. 25, 2013	May 22, 2014	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Dec. 29, 2012	Sep. 25, 2013	Dec. 28, 2013	Radiation (03CH01-KS)
Active Horn Antenna	com-power	AHA-118	701023	1GHz~18GHz	Nov. 07, 2012	Sep. 25, 2013	Nov. 06, 2013	Radiation (03CH01-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Nov. 23, 2012	Sep. 25, 2013	Nov. 22, 2013	Radiation (03CH01-KS)
Turn Table	MF	MF7802	N/A	0 ~ 360 degree	N/A	Sep. 25, 2013	N/A	Radiation (03CH01-KS)
Antenna Mast	MF	MF7802	N/A	1 m - 4 m	N/A	Sep. 25, 2013	N/A	Radiation (03CH01-KS)

5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.54
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.72
---	------