



FCC RF Test Report

APPLICANT : Hewlett Packard
EQUIPMENT : 12" Tablet
BRAND NAME : hp
MODEL NAME : HSTNH-C412DC
FCC ID : B94HHC412DC
STANDARD : 47 CFR Part 2, 27
CLASSIFICATION : PCS Licensed Transmitter (TNB)

The product was received on Oct. 10, 2014 and completely tested on Nov. 23, 2014. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-C-2004 and the testing has shown the tested sample to be in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY	4
SUMMARY OF TEST RESULT	5
1 GENERAL DESCRIPTION	6
1.1 Applicant	6
1.2 Manufacturer	6
1.3 Product Feature of Equipment Under Test.....	6
1.4 Product Specification subjective to this standard	7
1.5 Modification of EUT	7
1.6 Emission Designator	7
1.7 Testing Location	8
1.8 Applicable Standards.....	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Test Mode	9
2.2 Connection Diagram of Test System.....	10
2.3 Support Unit used in test configuration and system	11
2.4 Measurement Results Explanation Example.....	11
3 CONDUCTED TEST ITEMS	12
3.1 Measuring Instruments	12
3.2 Test Setup	12
3.3 Test Result of Conducted Test	12
3.4 Conducted Output Power and ERP/EIRP	13
3.5 Peak-to-Average Ratio	14
3.6 Occupied Bandwidth	15
3.7 Conducted Band Edge	16
3.8 Conducted Spurious Emission	17
3.9 Frequency Stability	18
4 RADIATED TEST ITEMS	19
4.1 Measuring Instruments	19
4.2 Test Setup	19
4.3 Test Result of Radiated Test	19
4.4 Effective Radiated Power and Effective Isotropic Radiated Power	20
4.5 Radiated Spurious Emission	22
5 LIST OF MEASURING EQUIPMENT	23
6 UNCERTAINTY OF EVALUATION	24



APPENDIX A. TEST RESULTS OF CONDUCTED TEST

APPENDIX B. TEST RESULTS OF RADIATED TEST

APPENDIX C. TEST SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG4O1415B	Rev. 01	Initial issue of report	Dec. 15, 2014
FG4O1415B	Rev. 02	Adding SHF-EHF Horn Antenna in section 5.	Dec. 26, 2014

**SUMMARY OF TEST RESULT**

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.4	§2.1046	RSS-199 (4.4)	Conducted Output Power	Reporting Only	PASS	-
3.5	N/A	N/A	Peak-to-Average Ratio	Reporting Only	PASS	-
3.6	§2.1049 §27.53(m)(6)	RSS-GEN(4.6.1) RSS-199 (4.2)	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §27.53(m)(4)	RSS-GEN(4.9) RSS-199 (4.5)	Conducted Band Edge Measurement	$< 43+10\log_{10}(P[\text{Watts}])$	PASS	-
3.8	§2.1053 §27.53(m)(4)	RSS-GEN(4.9) RSS-199 (4.5)	Conducted Spurious Emission	$< 55+10\log_{10}(P[\text{Watts}])$	PASS	-
3.9	§2.1055	RSS-GEN(4.7) RSS-199 (4.3)	Frequency Stability Temperature & Voltage	< 2.5 ppm for Part 22 Within Authorized Band	PASS	
4.4	§27.50(h)(2)	RSS-199 (4.4)	Equivalent Isotropic Radiated Power	EIRP < 2 Watt	PASS	
4.5	§2.1053 §27.53(m)(4)	RSS-GEN(4.9) RSS-199 (4.5)	Radiated Spurious Emission (Band 7)	$< 55+10\log_{10}(P[\text{Watts}])$	PASS	Under limit 8.55 dB at 7596.000 MHz



1 General Description

1.1 Applicant

Hewlett Packard

1501 Page Mill Road,MS 1419 Palo Alto,CA 94304-1126

1.2 Manufacturer

1. Compal Electronics Inc.

No. 581 Ruiguang Rd. Neihu District Taipei City114, Taiwan

2. Compal Electronics Technology (KunShan) Co.Ltd.

No. 25 Third Ave., A Zone, KunShan Comprehensive Free Trade Zone, KunShan Jiangsu, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	12" Tablet
Brand Name	hp
Model Name	HSTNH-C412DC
FCC ID	B94HHC412DC
EUT supports Radios application	GSM/EGPRS/WCDMA/HSPA/LTE/NFC WLAN 11b/g/n HT20 WLAN 11a/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth v4.0 EDR/LE
HW Version	GA-419
SW Version	0.00.21
EUT Stage	Identical Prototype

1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx Frequency	LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz
Rx Frequency	LTE Band 7 : 2622.5MHz ~ 2687.5 MHz
Bandwidth	LTE Band 7 : 5MHz/ 10MHz / 15MHz / 20MHz
Maximum Output Power to Antenna	LTE Band 7 : 23.76 dBm
Antenna Gain	LTE Band 7 : 2.50 dBi
Type of Modulation	QPSK / 16QAM

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Emission Designator

LTE Band 7 BW(MHz)	QPSK			16QAM		
	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
5	4M51G7D	-	0.419	4M51D7W	-	0.333
10	9M08G7D	0.0013	0.418	9M08D7W	-	0.333
15	13M5G7D	-	0.419	13M5D7W	-	0.331
20	18M6G7D	-	0.423	18M6D7W	-	0.333

1.7 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH02-HY	03CH07-HY

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 27
- ♦ ANSI / TIA / EIA-603-C-2004
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode


Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.


Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	7	-	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Peak-to-Average Ratio	7	-	-				✓	✓	✓	✓		✓	✓	✓	✓
26dB and 99% Bandwidth	7	-	-	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓
Conducted Band Edge	7	-	-	✓	✓	✓	✓	✓	✓	✓		✓	✓		✓
Conducted Spurious Emission	7	-	-	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
Frequency Stability	7	-	-	✓	✓			✓				✓		✓	
E.I.R.P.	7	-	-	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
Radiated Spurious Emission	7	-	-	✓	✓	✓	✓	✓		✓			✓	✓	✓
Note	- The mark "✓" means that this configuration is chosen for testing - The mark "-" means that this bandwidth is not supported. - For E.I.R.P. measurement, the widest bandwidth of each band is chosen for testing due to highest conducted power. Besides, the lowest bandwidth of each band is also measured for reporting only. - The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.														

2.2 Connection Diagram of Test System

ERP/EIRP

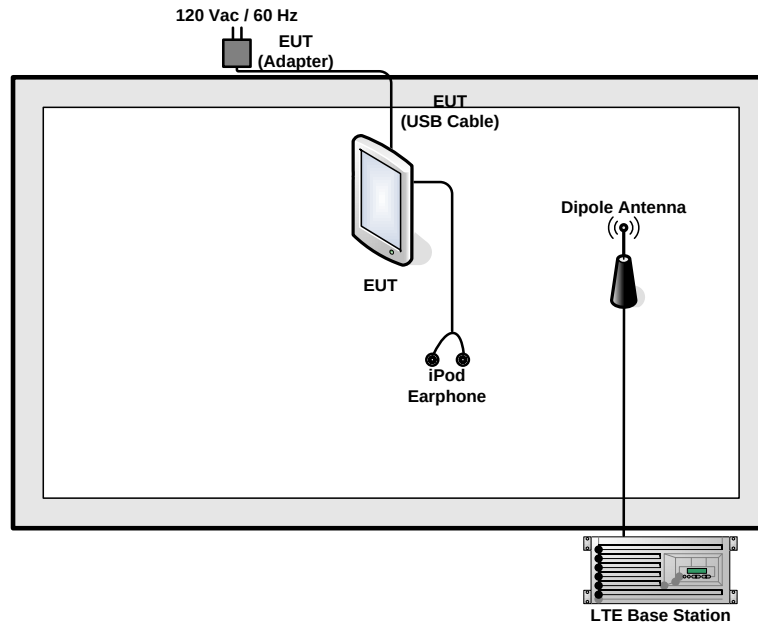

Radiated Spurious Emission

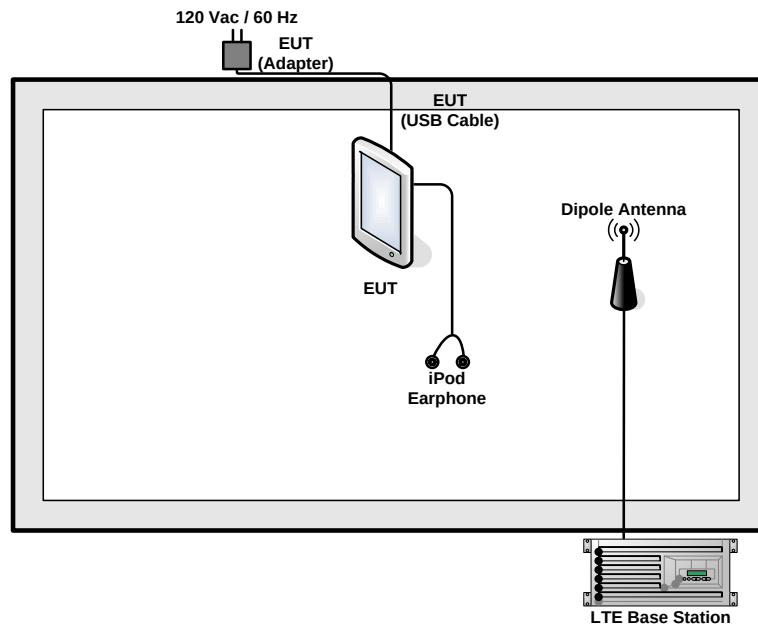

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example :

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

$$= 4.2 + 10 = 14.2 \text{ (dB)}$$


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

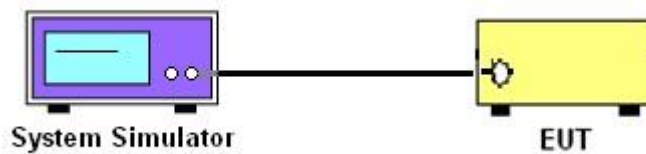

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

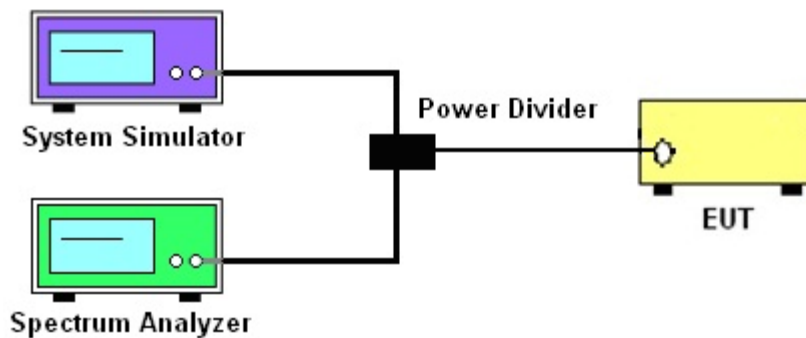

3.2.3 Frequency Stability

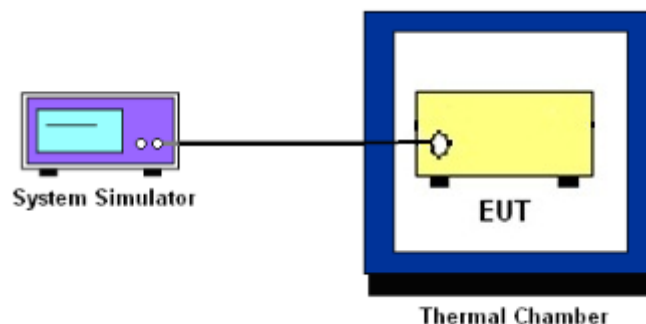

3.3 Test Result of Conducted Test

Please refer to Appendix A.



3.4 Conducted Output Power and EIRP

3.4.1 Description of the Conducted Output Power Measurement and EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The EIRP of mobile transmitters must not exceed 2 Watts for LTE Band 7.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.7.1.
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.



3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 4.2.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.



3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

27.53(m)(4) and RSS-199 for Band 7:

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

3.7.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Set spectrum analyzer with RMS detector.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13\text{dBm}$.

9. For Band 7

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz

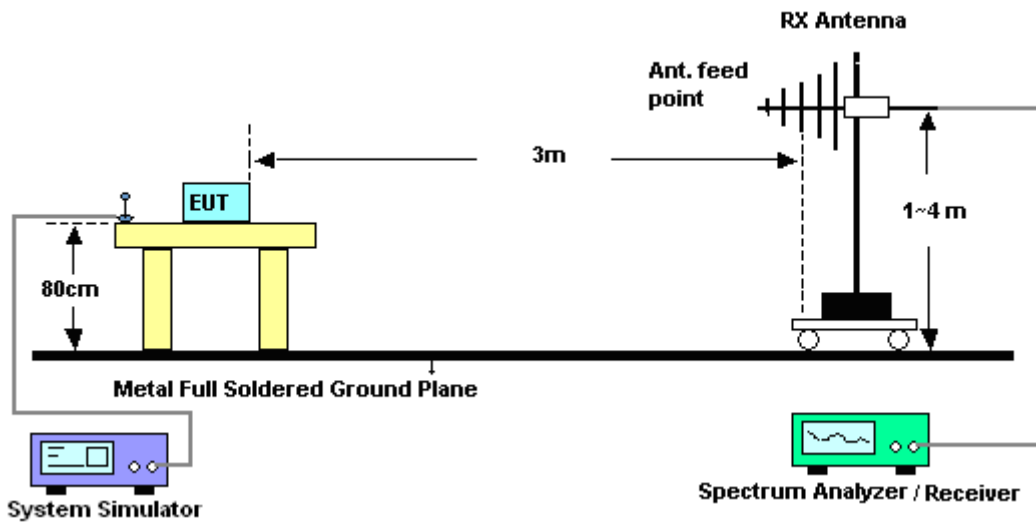

4.2.2 For radiated test above 1GHz

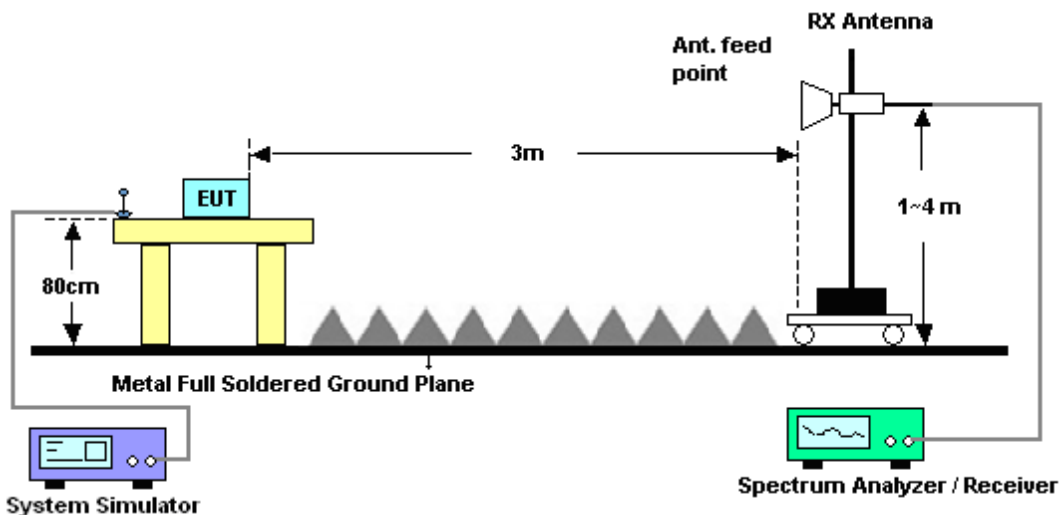

4.3 Test Result of Radiated Test

Please refer to Appendix B.



4.4 Effective Radiated Power and Effective Isotropic Radiated Power

4.4.1 Description of the EIRP Measurement

Equivalent isotropic radiated power output measurements by substitution method according to ANSI / TIA / EIA-603-C-2004, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v01r02. Mobile and portable (hand-held) stations operating are limited to average EIRP of 2 watts with LTE band 7.

4.4.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.2.1. (for CDMA/WCDMA), Section 5.2.2.2 (for GSM/GPRS/EDGE) and ANSI / TIA-603-C-2004 Section 2.2.17.
2. The EUT was placed on a non-conductive rotating platform 0.8 meters high in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RMS detector.
3. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
4. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-C. The EUT was replaced by dipole antenna (substitution antenna) at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, $EIRP = LVL + \text{Correction factor}$ and $ERP = EIRP - 2.15$.



	LTE					
LTE BW	1.4M	3M	5M	10M	15M	20M
Span	3MHz	6MHz	10MHz	20MHz	30MHz	40MHz
RBW	30kHz	100kHz	100kHz	300kHz	300kHz	300kHz
VBW	100kHz	300kHz	300kHz	1MHz	1MHz	1MHz
Detector	RMS	RMS	RMS	RMS	RMS	RMS
Trace	Average	Average	Average	Average	Average	Average
Average Type	Power	Power	Power	Power	Power	Power
Sweep Count	100	100	100	100	100	100



4.5 Radiated Spurious Emission

4.5.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.5.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-C-2004 Section 2.2.12.
2. The EUT was placed on a rotatable wooden table with 0.8 meter above ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$

$$= -13\text{dBm}.$$

For Band 7:

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)

$$12. \text{ EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$

$$13. \text{ ERP (dBm)} = \text{EIRP} - 2.15$$



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 09, 2014	Nov. 20, 2014 ~ Nov. 21, 2014	Jun. 08, 2015	Conducted (TH02-HY)
Thermal Chamber	Ten Billion	TTH-D3SP	TBN-930701	N/A	Jul. 17, 2014	Nov. 20, 2014 ~ Nov. 21, 2014	Jul. 16, 2015	Conducted (TH02-HY)
LTE Base Station	Anritsu	MT8820C	6201026480	30MHz~2.7GHz SISO	Jan. 07, 2014	Nov. 20, 2014 ~ Nov. 21, 2014	Jan. 06, 2015	Conducted (TH02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV30	101749	10Hz ~ 30GHz	Feb. 10, 2014	Nov. 22, 2014 ~ Nov. 23, 2014	Feb. 09, 2015	Radiation (03CH07-HY)
Bilog Antenna	Schaffner	CBL6111C	2726	30MHz ~ 1GHz	Sep. 27, 2014	Nov. 22, 2014 ~ Nov. 23, 2014	Sep. 26, 2015	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	75962	1GHz~18GHz	Aug. 19, 2014	Nov. 22, 2014 ~ Nov. 23, 2014	Aug. 18, 2015	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10 MHz ~ 1000MHz	Mar. 17, 2014	Nov. 22, 2014 ~ Nov. 23, 2014	Mar. 16, 2015	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1 GHz~26.5 GHz	Oct. 21, 2014	Nov. 22, 2014 ~ Nov. 23, 2014	Oct. 20, 2015	Radiation (03CH07-HY)
Turn Table	ChainTek	ChainTek 3000	N/A	0 ~ 360 degree	N/A	Nov. 22, 2014 ~ Nov. 23, 2014	N/A	Radiation (03CH07-HY)
Antenna Mast	ChainTek	M-400-0	114/8000604/L	N/A	N/A	Nov. 22, 2014 ~ Nov. 23, 2014	N/A	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	18GHz~40GHz	Oct. 02, 2014	Nov. 22, 2014 ~ Nov. 23, 2014	Oct. 01, 2015	Radiation (03CH07-HY)



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.54
---	-------------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.72
---	-------------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)



LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	23.72	23.29	23.27
5	1	12		23.71	23.23	23.23
5	1	24		23.26	23.25	23.12
5	12	0		22.58	22.26	22.17
5	12	6		22.63	22.21	22.15
5	12	11		22.47	22.19	22.14
5	25	0		22.39	22.05	21.99
5	1	0	16-QAM	22.72	22.29	22.24
5	1	12		22.66	22.26	22.18
5	1	24		22.58	22.28	22.15
5	12	0		21.68	21.25	21.26
5	12	6		21.64	21.27	21.18
5	12	11		21.68	21.25	21.18
5	25	0		21.47	21.03	21.03
10	1	0	QPSK	23.71	23.37	23.21
10	1	24		23.49	23.25	23.08
10	1	49		23.64	23.16	23.14
10	25	0		22.51	22.10	22.01
10	25	12		22.45	22.11	22.02
10	25	24		22.45	22.05	21.97
10	50	0		22.35	21.96	21.91
10	1	0	16-QAM	22.72	22.40	22.28
10	1	24		22.59	22.29	22.10
10	1	49		22.53	22.22	22.11
10	25	0		21.33	21.01	20.89
10	25	12		21.41	21.04	21.03
10	25	24		21.41	21.02	20.99
10	50	0		21.30	20.92	20.92



LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	23.72	23.47	23.22
15	1	37		23.69	23.27	23.20
15	1	74		23.63	23.17	23.21
15	36	0		22.51	22.07	22.04
15	36	18		22.49	22.08	22.00
15	36	37		22.47	22.22	22.07
15	75	0		22.44	22.03	22.02
15	1	0	16-QAM	22.70	22.46	22.24
15	1	37		22.66	22.28	22.22
15	1	74		22.57	22.12	22.20
15	36	0		21.24	21.00	20.83
15	36	18		21.38	21.02	20.93
15	36	37		21.40	21.15	21.07
15	75	0		21.32	21.04	20.90
20	1	0	QPSK	23.76	23.43	23.32
20	1	49		23.68	23.34	23.23
20	1	99		23.64	23.24	23.21
20	50	0		22.42	21.97	21.93
20	50	24		22.39	21.98	22.00
20	50	49		22.41	22.05	22.01
20	100	0		22.42	22.03	22.02
20	1	0	16-QAM	22.73	22.47	22.29
20	1	49		22.71	22.35	22.25
20	1	99		22.64	22.24	22.28
20	50	0		21.27	20.97	20.85
20	50	24		21.29	20.96	20.92
20	50	49		21.39	21.08	20.99
20	100	0		21.38	21.01	20.96

ERP/EIRP

LTE Band 7 (GT - L _C = 2.50 dB)						
Modes	(QPSK,BW=5M)			(16QAM,BW=5M)		
Channel	20775 (Low)	21100 (Mid)	21425 (High)	20775 (Low)	21100 (Mid)	21425 (High)
Frequency (MHz)	25025	2535	2567.5	25025	2535	2567.5
Conducted Power P _T (dBm)	23.72	23.29	23.27	22.72	22.29	22.24
Conducted Power P _T (Watts)	0.24	0.21	0.21	0.19	0.17	0.17
EIRP(dBm)	26.22	25.79	25.77	25.22	24.79	24.74
EIRP(Watts)	0.419	0.379	0.378	0.333	0.301	0.298

BRS and EBS Band (G _T - L _C = 2.50 dB)						
Modes	(QPSK,BW=10M)			(16QAM,BW=10M)		
Channel	20800 (Low)	21100 (Mid)	21400 (High)	20800 (Low)	21100 (Mid)	21400 (High)
Frequency (MHz)	2505	2535	2565	2505	2535	2565
Conducted Power P _T (dBm)	23.71	23.37	23.21	22.72	22.40	22.28
Conducted Power P _T (Watts)	0.23	0.22	0.21	0.19	0.17	0.17
EIRP(dBm)	26.21	25.87	25.71	25.22	24.9	24.78
EIRP(Watts)	0.418	0.386	0.372	0.333	0.309	0.301

PCS Band ($G_T - L_C = 2.50$ dB)						
Modes	LTE Band 7 (QPSK,BW=15M)			LTE Band 7 (16QAM,BW=15M)		
Channel	20825 (Low)	21100 (Mid)	21375 (High)	20825 (Low)	21100 (Mid)	21375 (High)
Frequency (MHz)	2507.5	2535	2562.5	2507.5	2535	2562.5
Conducted Power P_T (dBm)	23.72	23.47	23.22	22.70	22.46	22.24
Conducted Power P_T (Watts)	0.24	0.22	0.21	0.19	0.18	0.17
EIRP(dBm)	26.22	25.97	25.72	25.2	24.96	24.74
EIRP(Watts)	0.419	0.395	0.373	0.331	0.313	0.298

PCS Band ($G_T - L_C = 2.50$ dB)						
Modes	LTE Band 7 (QPSK,BW=20M)			LTE Band 7 (16QAM,BW=20M)		
Channel	20850 (Low)	21100id	21350 (High)	20850 (Low)	21100id	21350 (High)
Frequency (MHz)	2510	2535	2560	2510	2535	2560
Conducted Power P_T (dBm)	23.76	23.43	23.32	22.73	22.47	22.29
Conducted Power P_T (Watts)	0.24	0.22	0.21	0.19	0.18	0.17
EIRP(dBm)	26.26	25.93	25.82	25.23	24.97	24.79
EIRP(Watts)	0.423	0.392	0.382	0.333	0.314	0.301


**Peak-to-Average Ratio**

Mode	LTE Band 7 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	RB Size	Result
Lowest CH	3.85	5.71	5.35	6.51	PASS
Middle CH	4.36	5.8	5.8	6.6	
Highest CH	4.42	5.8	6.12	6.6	




LTE Band 7 / 20MHz / QPSK


Lowest Channel / 1RB

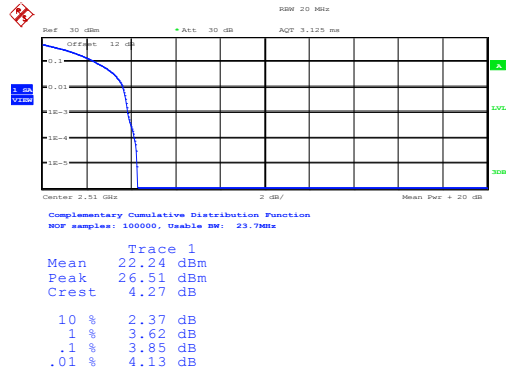


Lowest Channel / Full RB

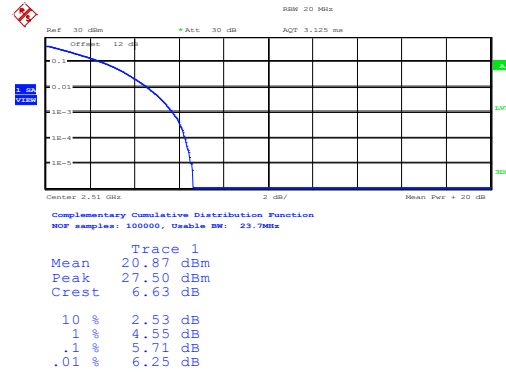


Middle Channel / 1RB

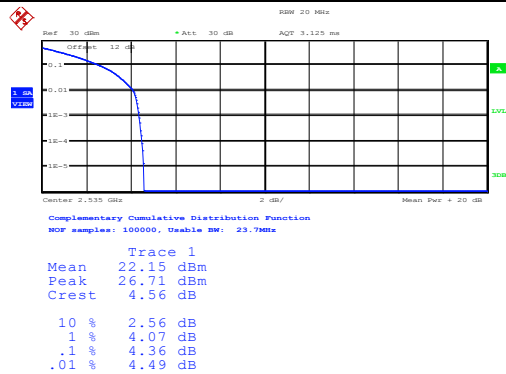


Middle Channel / Full RB

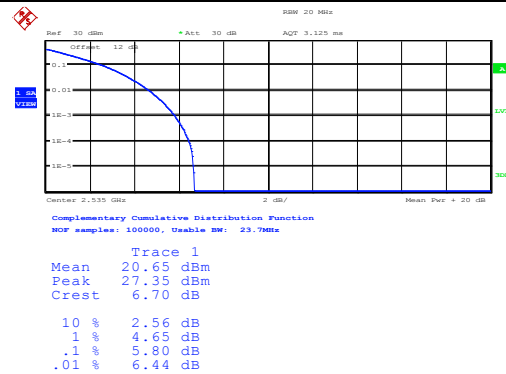


Highest Channel / 1RB

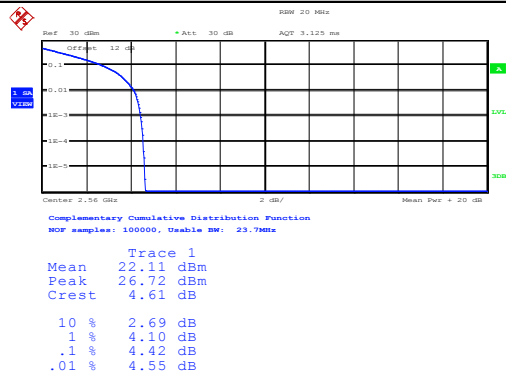


Highest Channel / Full RB

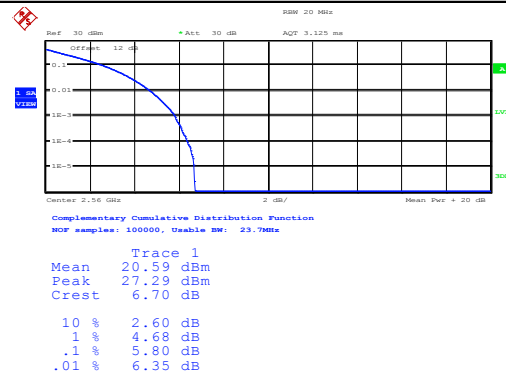


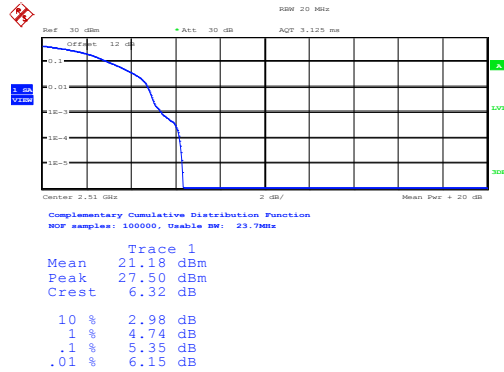**LTE Band 7 / 20MHz / 16QAM****Lowest Channel / 1RB**


Date: 20.NOV.2014 10:31:28

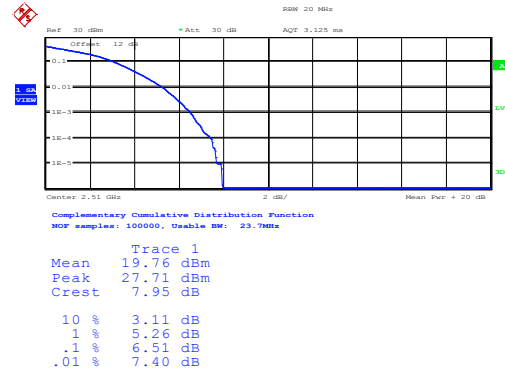Lowest Channel / Full RB


Date: 20.NOV.2014 10:26:13

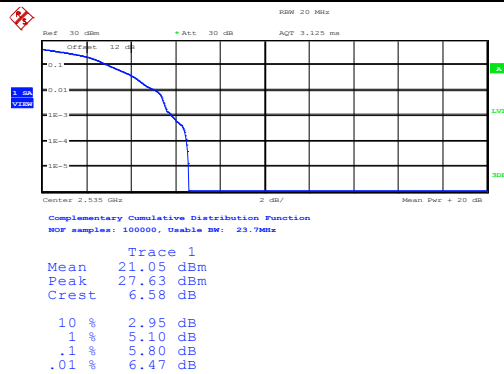Middle Channel / 1RB


Date: 20.NOV.2014 10:26:43

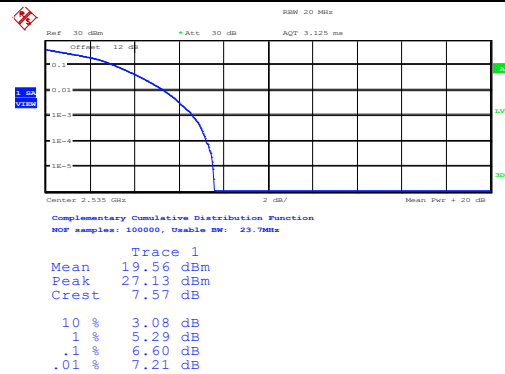Middle Channel / Full RB

Date: 20.NOV.2014 10:26:59

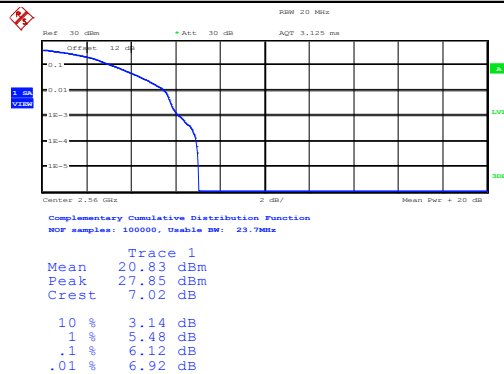Highest Channel / 1RB

Date: 20.NOV.2014 10:27:19

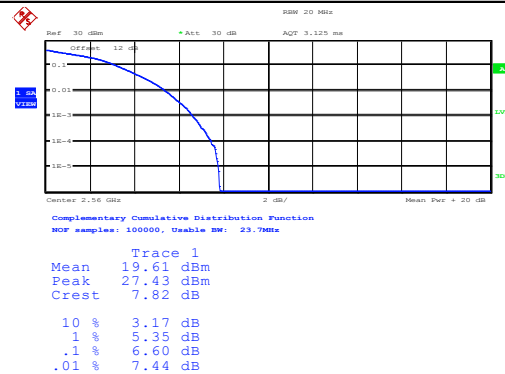Highest Channel / Full RB

Date: 20.NOV.2014 10:27:42


**26dB Bandwidth**

Mode	LTE Band 7 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	5.04	5.03	10.1	10.06	14.82	14.85	20.96	20.96
Middle CH	-	-	-	-	5.05	4.96	10.12	10.06	14.82	14.94	21	21.04
Highest CH	-	-	-	-	5.05	5.02	10.12	10.12	14.91	15	21.16	20.96




LTE Band 7


Lowest Channel / 5MHz / QPSK

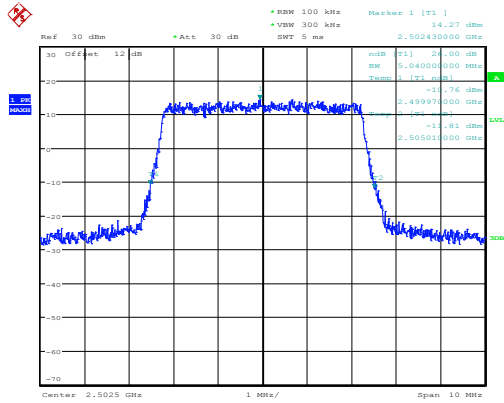


Lowest Channel / 5MHz / 16QAM

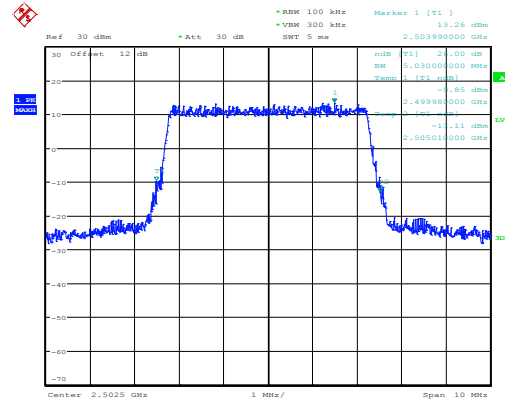


Middle Channel / 5MHz / QPSK

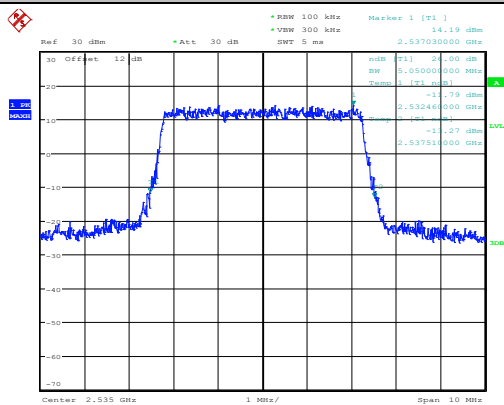


Middle Channel / 5MHz / 16QAM

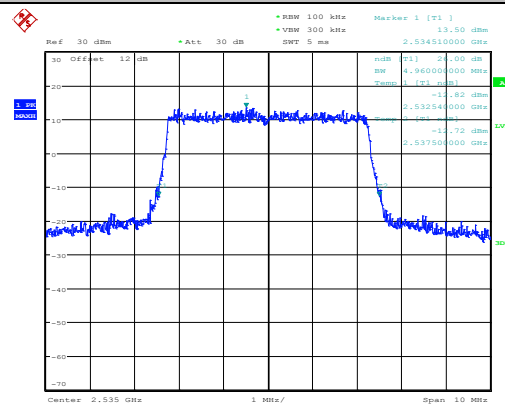

Highest Channel / 5MHz / QPSK

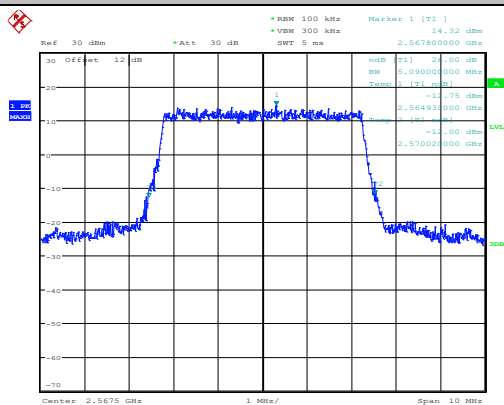


Highest Channel / 5MHz / 16QAM

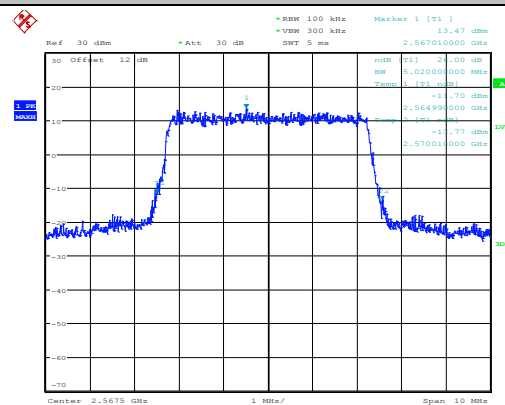




Lowest Channel / 10MHz / 16QAM

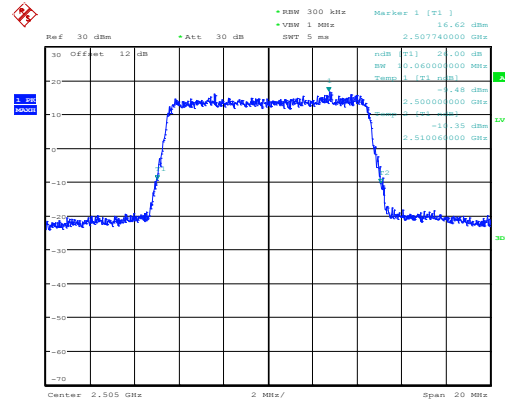


Date: 20.NOV.2014 09:28:50

Middle Channel / 10MHz / 16QAM

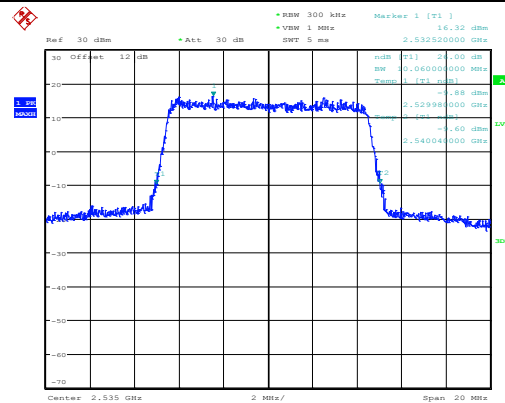

Date: 20.NOV.2014 09:36:36

Highest Channel / 10MHz / 16QAM

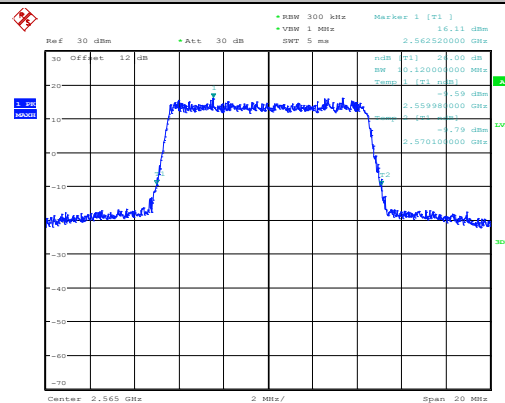


Date: 20.NOV.2014 09:39:42




LTE Band 7

Lowest Channel / 15MHz / QPSK

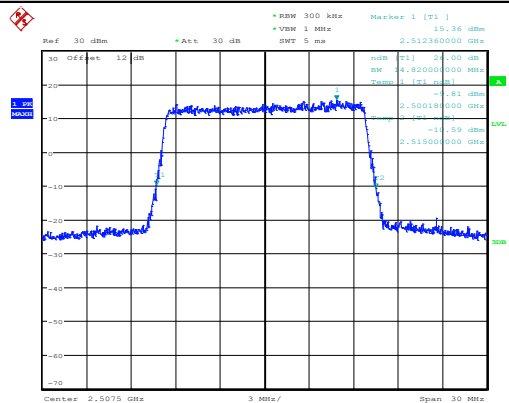


Date: 20.NOV.2014 09:47:20

Lowest Channel / 15MHz / 16QAM

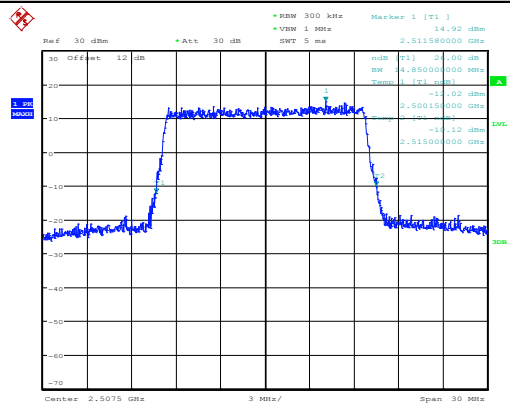


Date: 20.NOV.2014 09:47:33

Middle Channel / 15MHz / QPSK

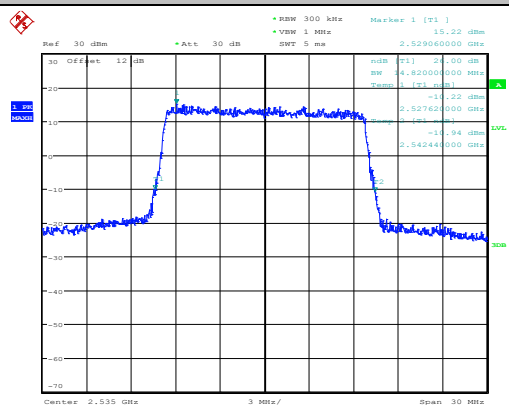


Date: 20.NOV.2014 09:55:07

Middle Channel / 15MHz / 16QAM

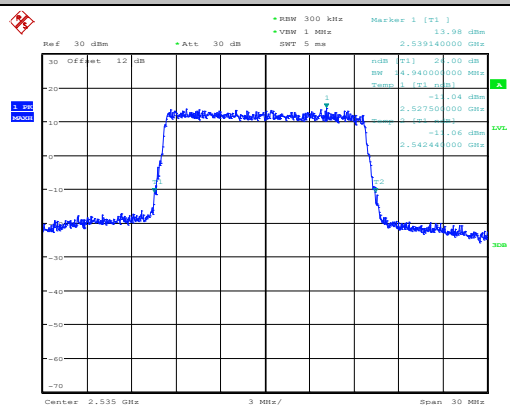


Date: 20.NOV.2014 09:55:20

Highest Channel / 15MHz / QPSK

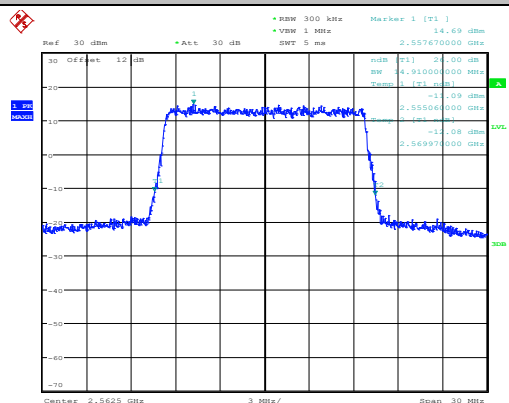

Date: 20.NOV.2014 09:58:14

Highest Channel / 15MHz / 16QAM

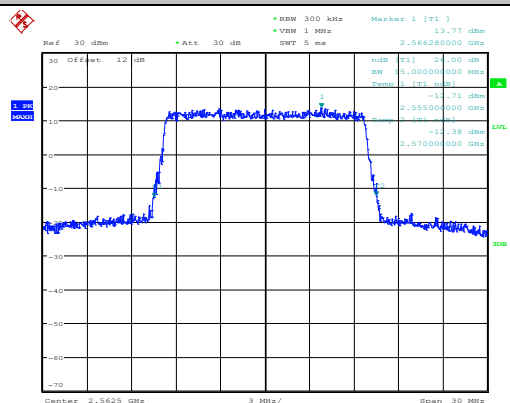

Date: 20.NOV.2014 09:58:26




**Occupied Bandwidth**

Mode	LTE Band 7 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.5	4.5	9.06	9.06	13.47	13.53	18.52	18.56
Middle CH	-	-	-	-	4.51	4.5	9.08	9.06	13.5	13.5	18.56	18.56
Highest CH	-	-	-	-	4.5	4.51	9.08	9.08	13.47	13.53	18.56	18.52




LTE Band 7

Lowest Channel / 5MHz / QPSK

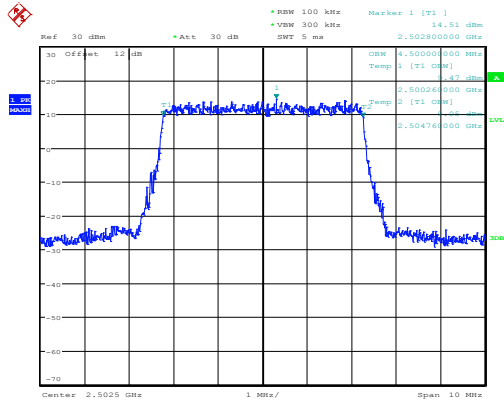


Date: 20.NOV.2014 09:09:27

Lowest Channel / 5MHz / 16QAM

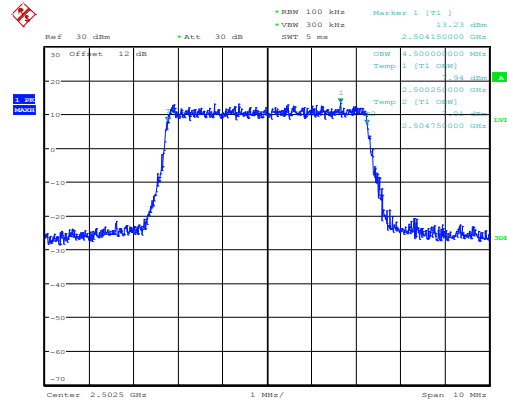


Date: 20.NOV.2014 09:09:38

Middle Channel / 5MHz / QPSK

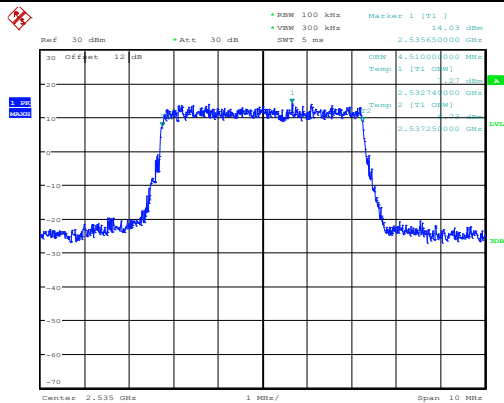


Date: 20.NOV.2014 09:17:16

Middle Channel / 5MHz / 16QAM

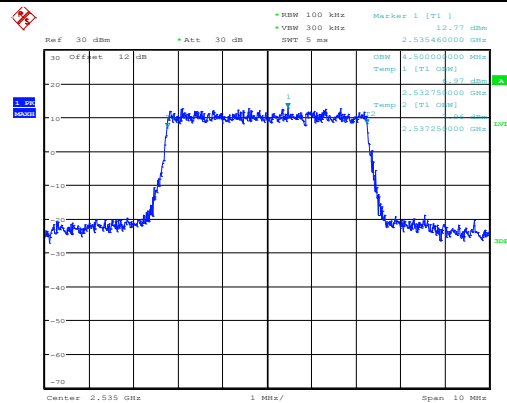


Date: 20.NOV.2014 09:17:27

Highest Channel / 5MHz / QPSK

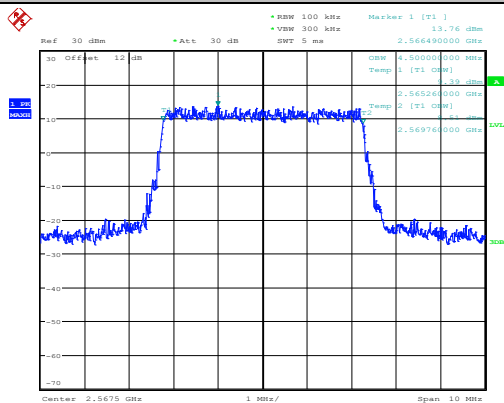

Date: 20.NOV.2014 09:20:22

Highest Channel / 5MHz / 16QAM

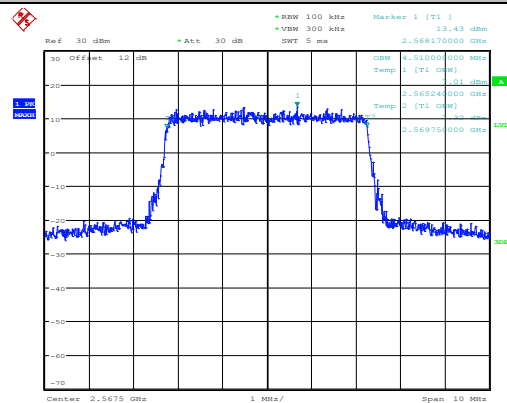


Date: 20.NOV.2014 09:20:33




LTE Band 7

Lowest Channel / 10MHz / QPSK

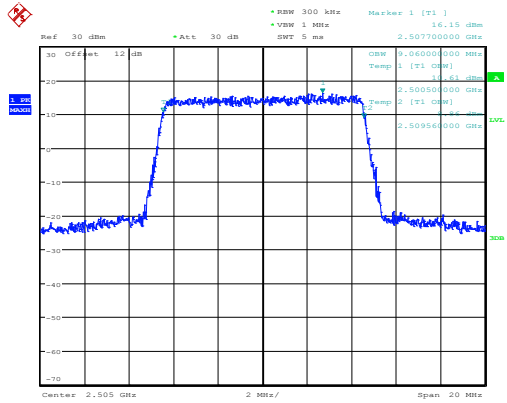


Date: 20.NOV.2014 09:28:13

Lowest Channel / 10MHz / 16QAM

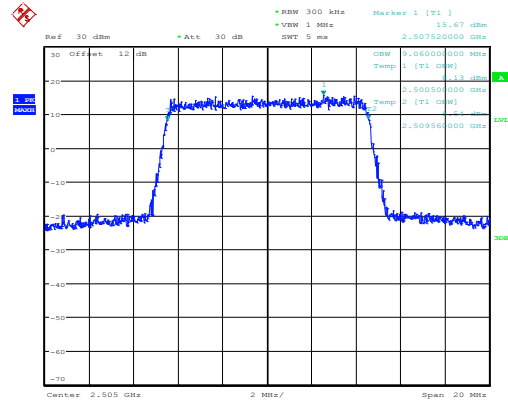


Date: 20.NOV.2014 09:28:24

Middle Channel / 10MHz / QPSK

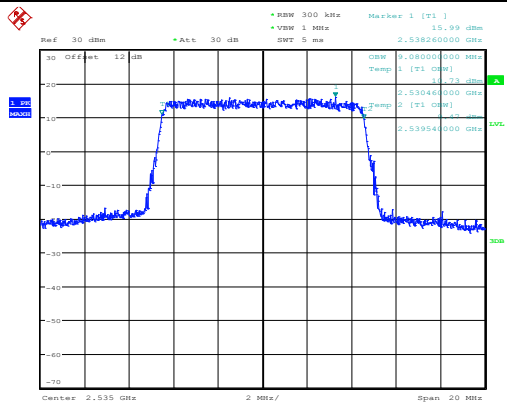


Date: 20.NOV.2014 09:35:59

Middle Channel / 10MHz / 16QAM

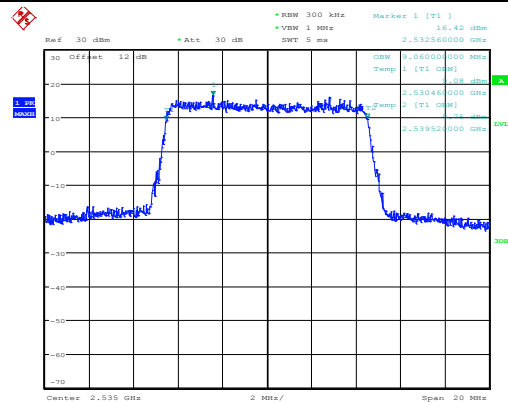


Date: 20.NOV.2014 09:36:10

Highest Channel / 10MHz / QPSK

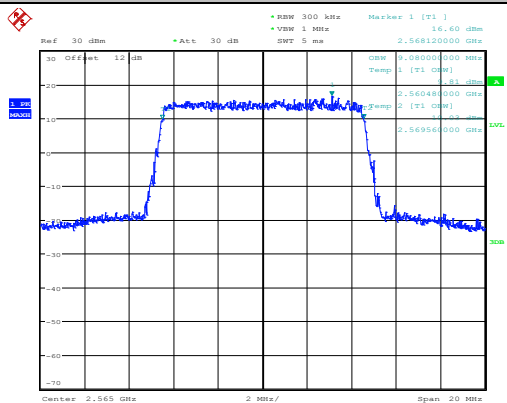

Date: 20.NOV.2014 09:39:06

Highest Channel / 10MHz / 16QAM

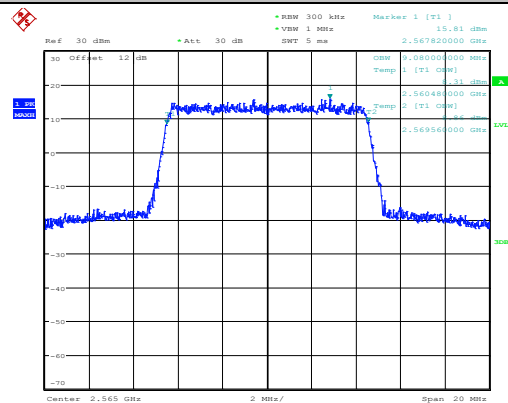


Date: 20.NOV.2014 09:39:17




LTE Band 7

Lowest Channel / 15MHz / QPSK

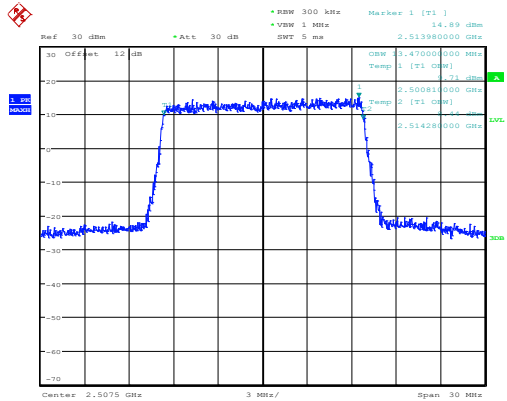


Date: 20.NOV.2014 09:46:57

Lowest Channel / 15MHz / 16QAM

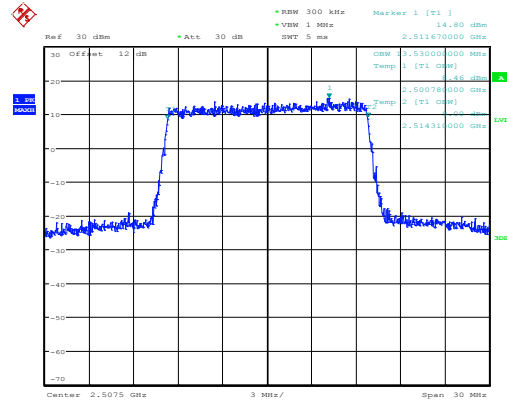


Date: 20.NOV.2014 09:47:07

Middle Channel / 15MHz / QPSK

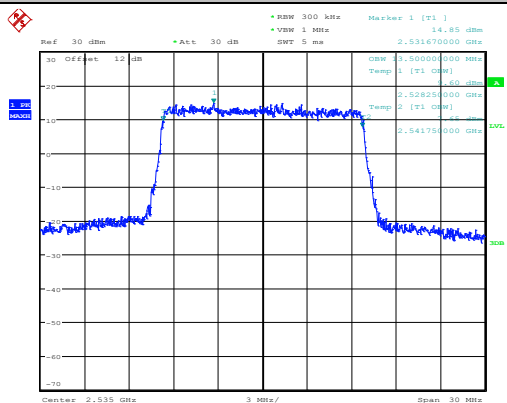


Date: 20.NOV.2014 09:54:43

Middle Channel / 15MHz / 16QAM

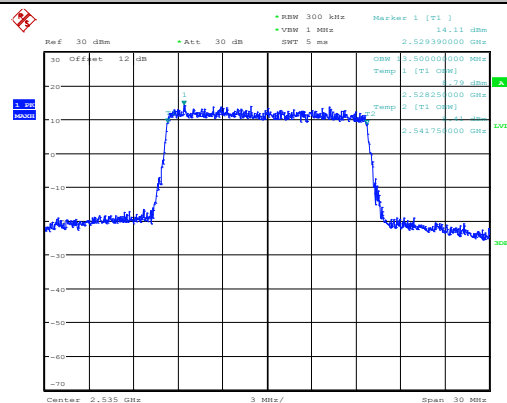


Date: 20.NOV.2014 09:54:54

Highest Channel / 15MHz / QPSK

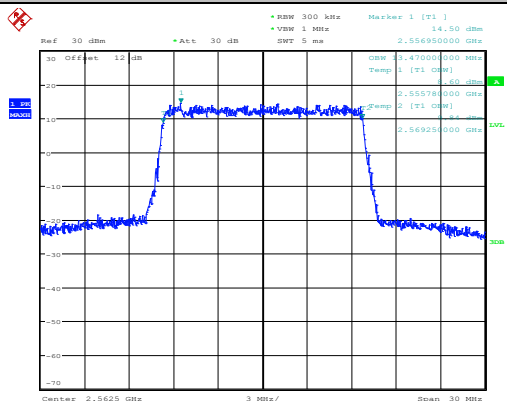

Date: 20.NOV.2014 09:57:50

Highest Channel / 15MHz / 16QAM

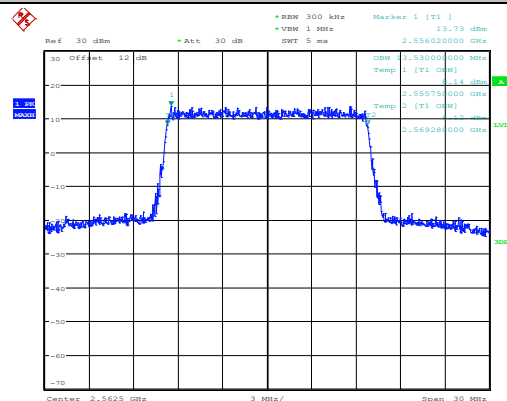


Date: 20.NOV.2014 09:58:01




LTE Band 7

Lowest Channel / 20MHz / QPSK

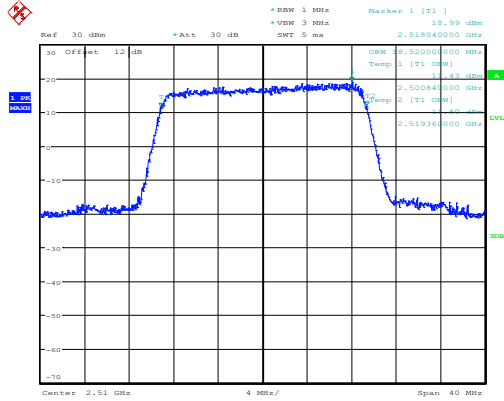


Date: 20.NOV.2014 10:14:17

Lowest Channel / 20MHz / 16QAM

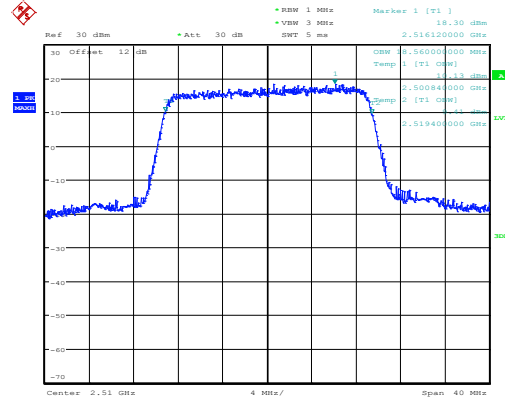


Date: 20.NOV.2014 10:14:28

Middle Channel / 20MHz / QPSK

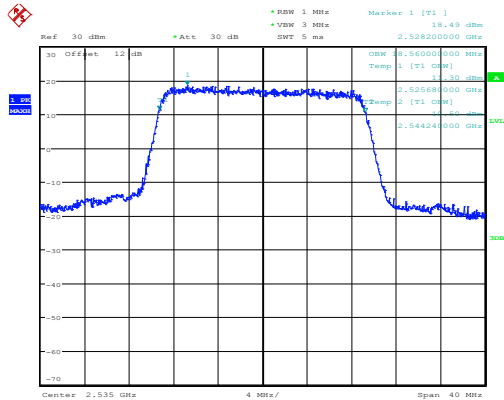


Date: 20.NOV.2014 10:17:23

Middle Channel / 20MHz / 16QAM

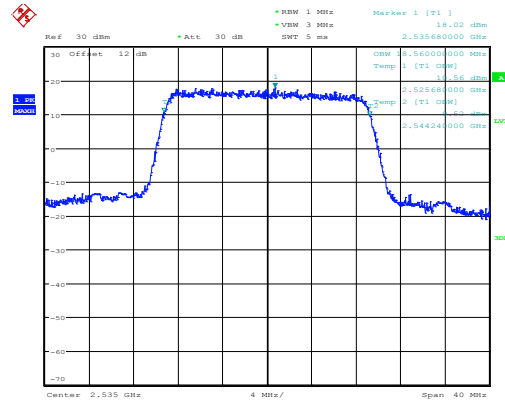


Date: 20.NOV.2014 10:17:34

Highest Channel / 20MHz / QPSK

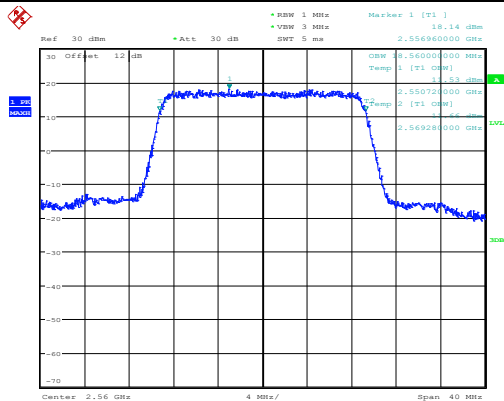


Date: 20.NOV.2014 10:20:30


Highest Channel / 20MHz / 16QAM

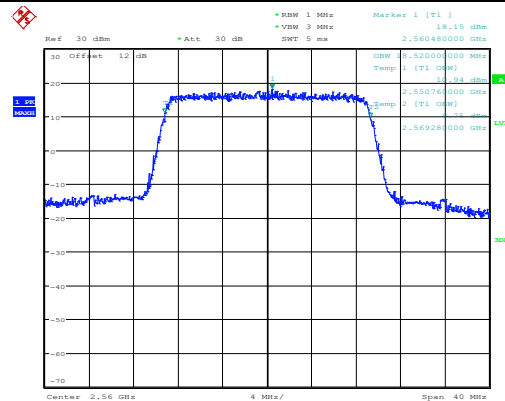


Date: 20.NOV.2014 10:20:41

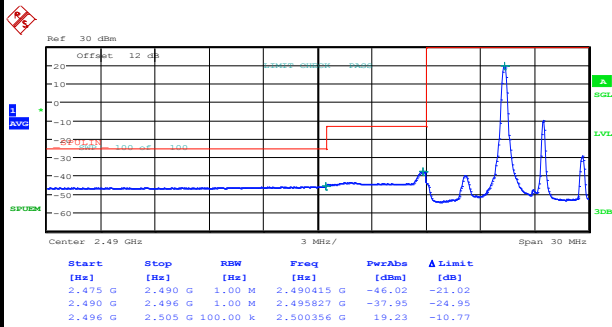**Conducted Band Edge****LTE Band 7 / 5MHz / QPSK****Lowest Band Edge / 1 RB**


Date: 20.NOV.2014 09:11:15

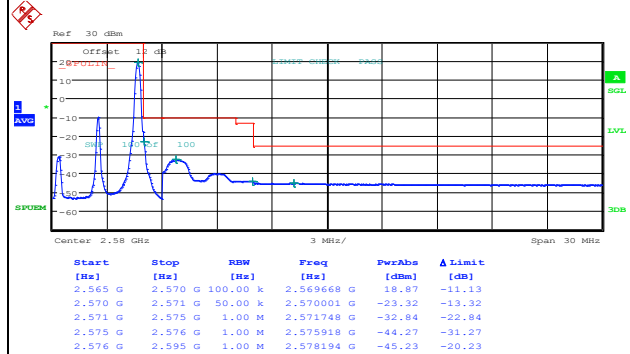Highest Band Edge / 1 RB

Date: 20.NOV.2014 09:22:08

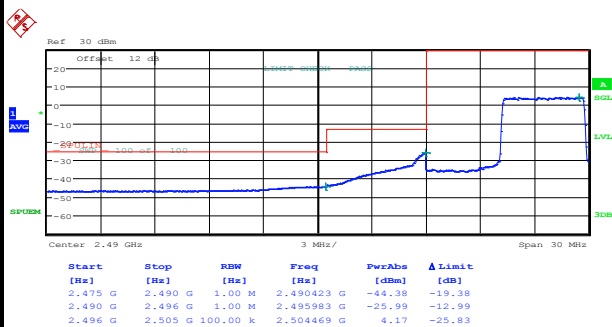Lowest Band Edge / Full RB

Date: 20.NOV.2014 09:13:35

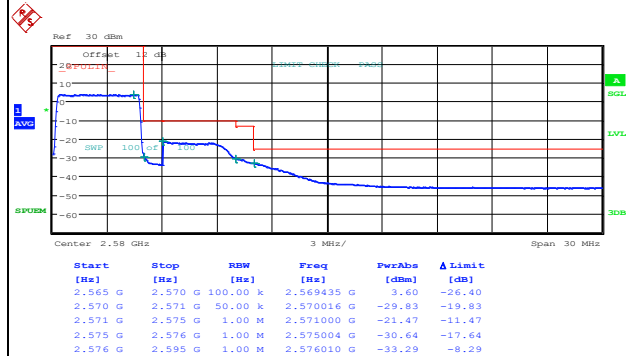
Highest Band Edge / Full RB

Date: 20.NOV.2014 09:24:29




LTE Band 7 / 5MHz / 16QAM

Lowest Band Edge / 1 RB

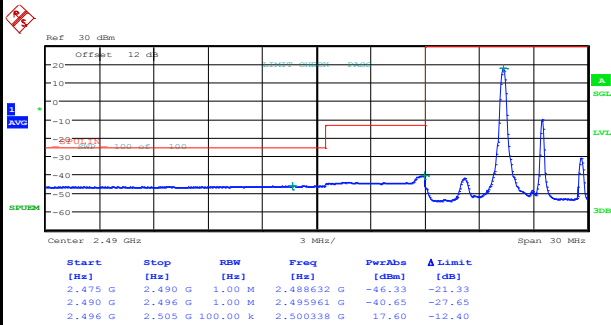


Date: 20.NOV.2014 09:12:25

Highest Band Edge / 1 RB

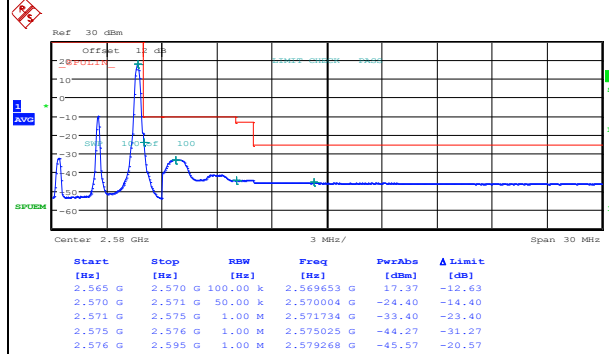


Date: 20.NOV.2014 09:23:19

Lowest Band Edge / Full RB

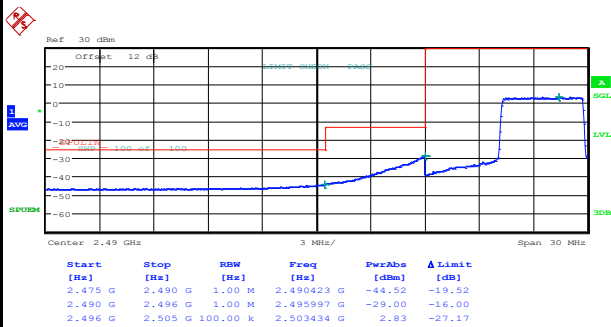

Date: 20.NOV.2014 09:14:46

Highest Band Edge / Full RB

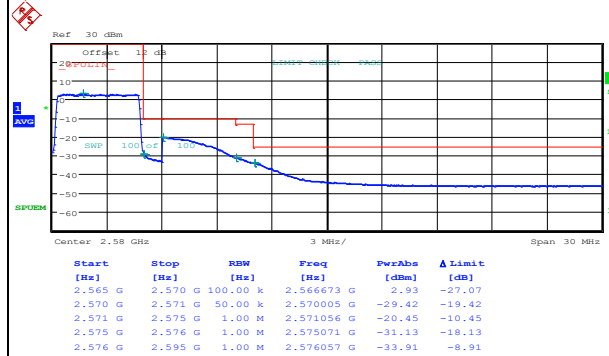


Date: 20.NOV.2014 09:25:39




LTE Band 7 / 10MHz / QPSK

Lowest Band Edge / 1 RB

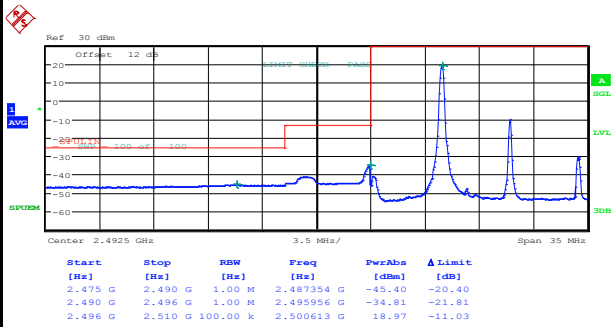


Date: 20.NOV.2014 09:30:00

Highest Band Edge / 1 RB

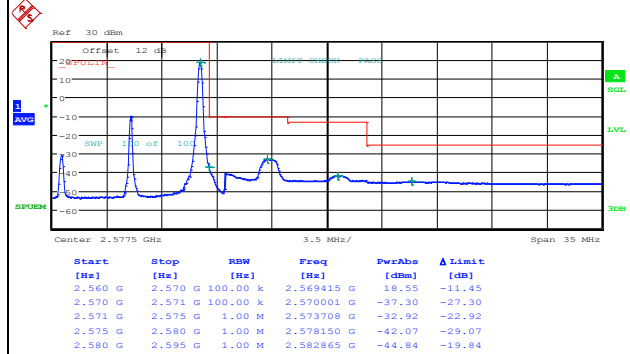


Date: 20.NOV.2014 09:40:52

Lowest Band Edge / Full RB

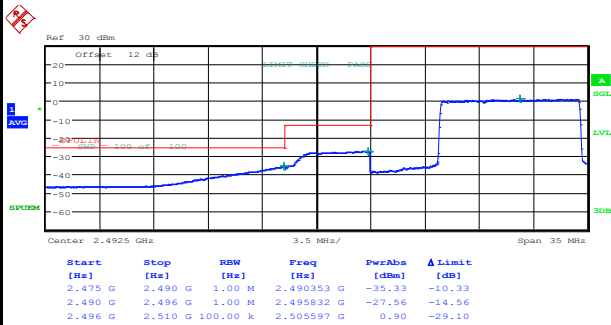

Date: 20.NOV.2014 09:32:19

Highest Band Edge / Full RB

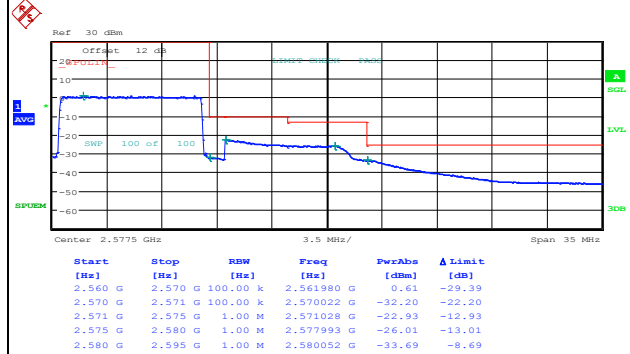


Date: 20.NOV.2014 09:43:12




LTE Band 7 / 10MHz / 16QAM

Lowest Band Edge / 1 RB

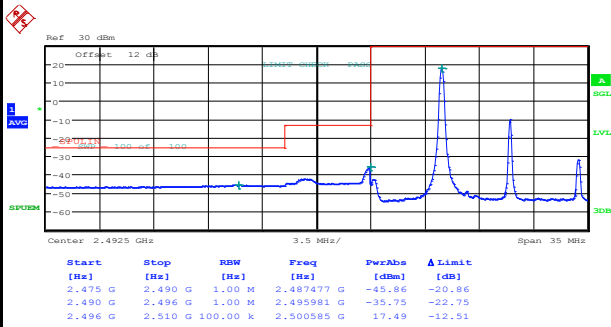


Date: 20.NOV.2014 09:31:10

Highest Band Edge / 1 RB

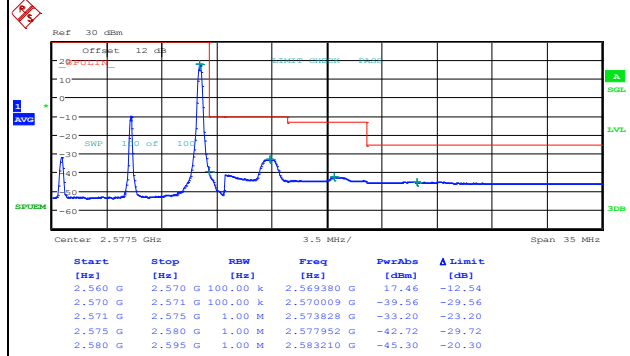


Date: 20.NOV.2014 09:42:02

Lowest Band Edge / Full RB

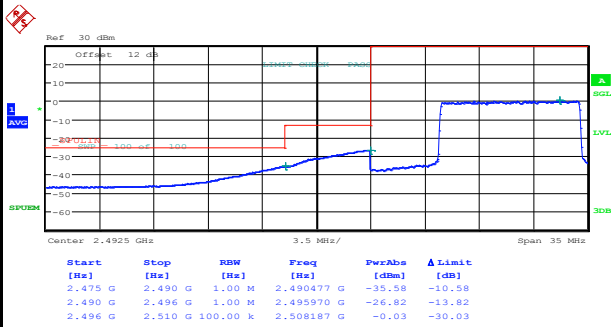

Date: 20.NOV.2014 09:33:29

Highest Band Edge / Full RB

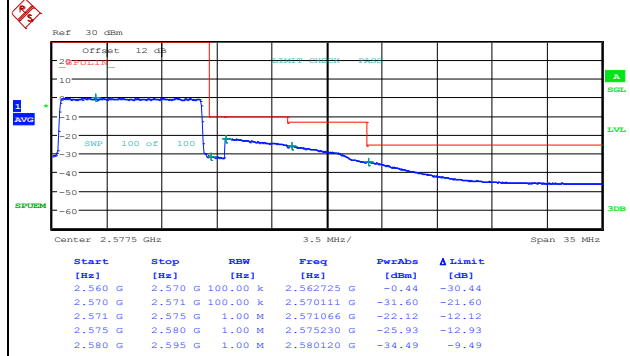


Date: 20.NOV.2014 09:44:22




LTE Band 7 / 15MHz / QPSK

Lowest Band Edge / 1 RB

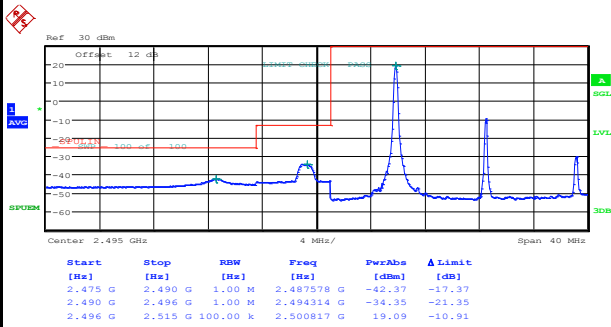


Date: 20.NOV.2014 09:48:43

Highest Band Edge / 1 RB

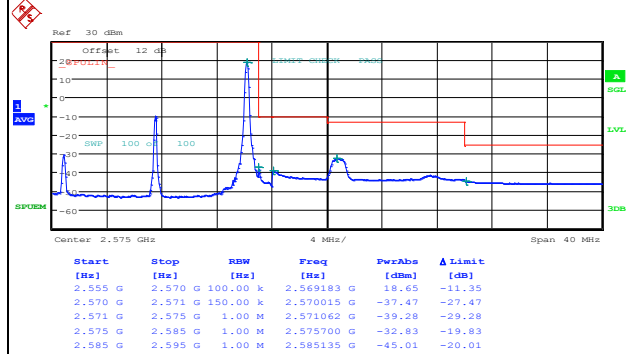


Date: 20.NOV.2014 09:59:36

Lowest Band Edge / Full RB

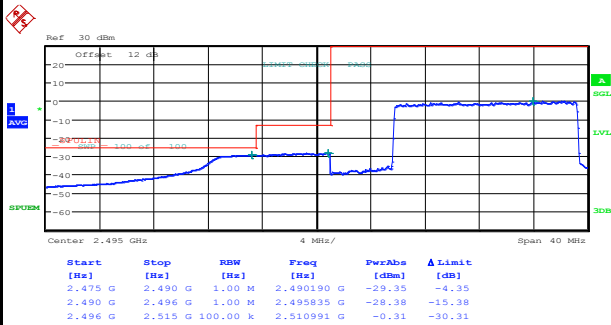

Date: 20.NOV.2014 09:51:03

Highest Band Edge / Full RB

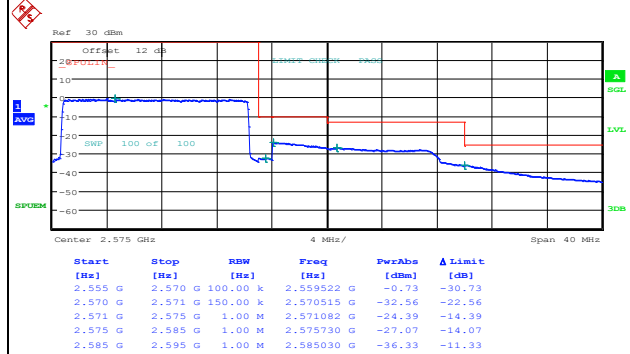


Date: 20.NOV.2014 10:02:02




LTE Band 7 / 15MHz / 16QAM

Lowest Band Edge / 1 RB

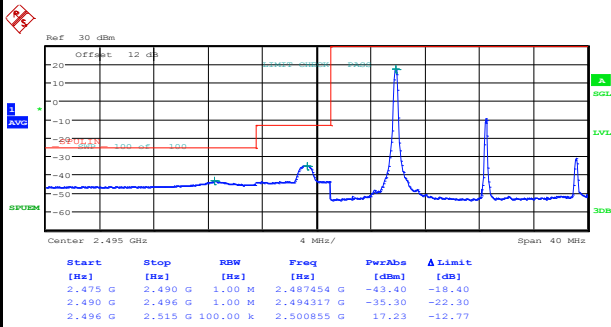


Date: 20.NOV.2014 09:49:53

Highest Band Edge / 1 RB

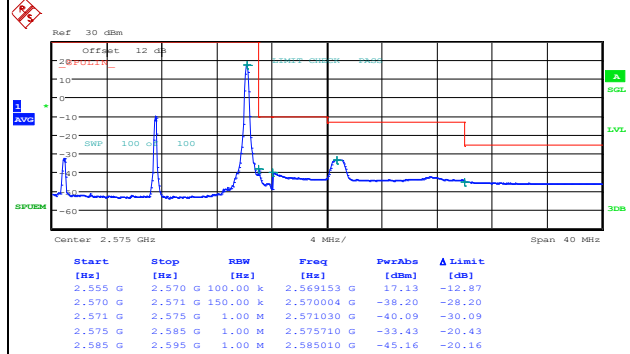


Date: 20.NOV.2014 10:00:51

Lowest Band Edge / Full RB

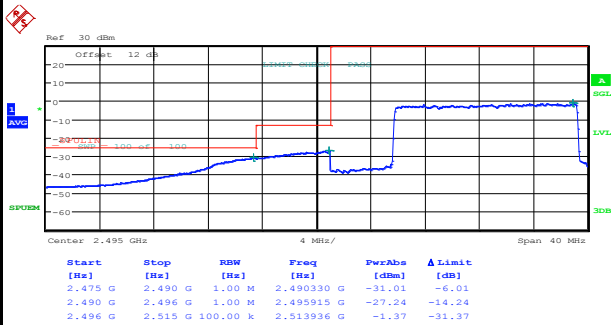

Date: 20.NOV.2014 09:52:13

Highest Band Edge / Full RB

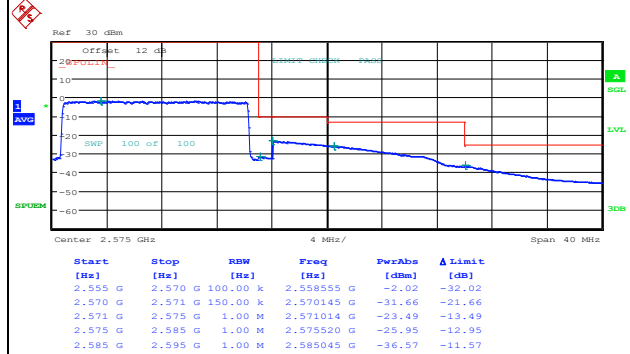


Date: 20.NOV.2014 10:04:56




LTE Band 7 / 20MHz / QPSK

Lowest Band Edge / 1 RB

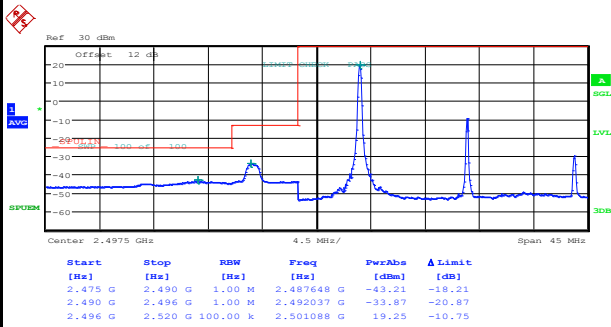


Date: 20.NOV.2014 10:09:22

Highest Band Edge / 1 RB

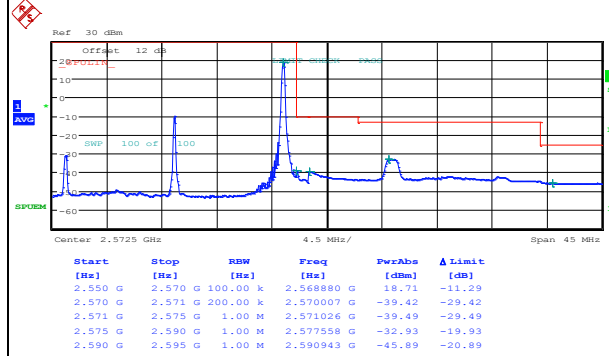


Date: 20.NOV.2014 11:20:34

Lowest Band Edge / Full RB

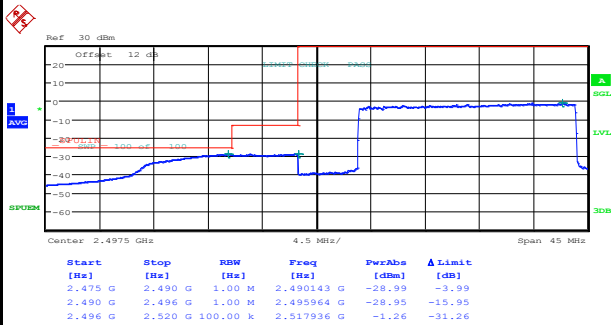

Date: 20.NOV.2014 11:18:15

Highest Band Edge / Full RB

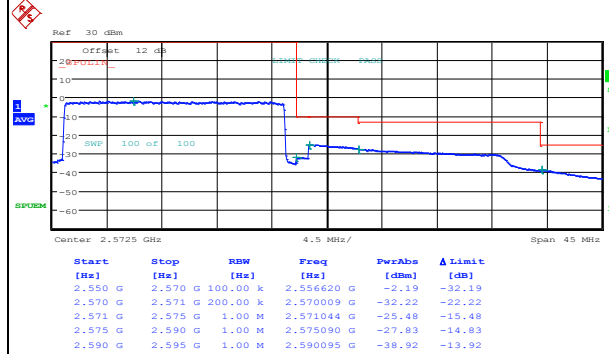


Date: 20.NOV.2014 11:21:57




LTE Band 7 / 20MHz / 16QAM

Lowest Band Edge / 1 RB

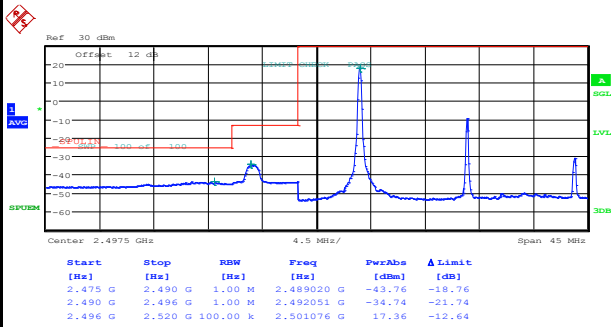


Date: 20.NOV.2014 10:10:32

Highest Band Edge / 1RB

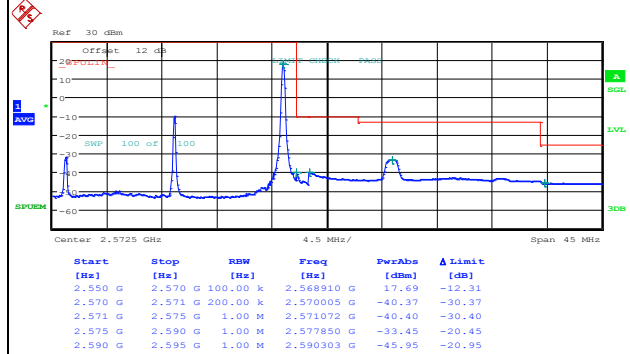


Date: 20.NOV.2014 11:19:48

Lowest Band Edge / Full RB

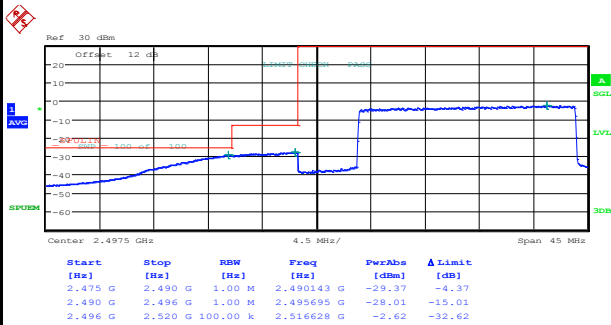

Date: 20.NOV.2014 11:18:48

Highest Band Edge / Full RB

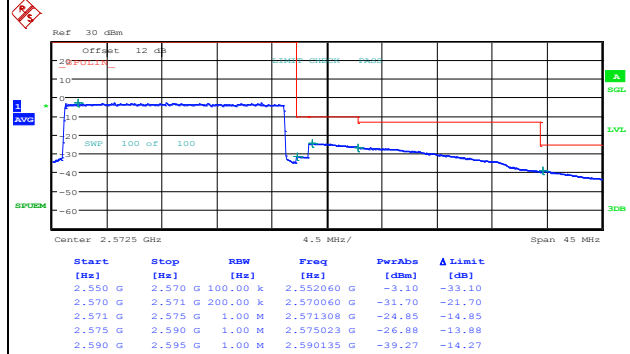


Date: 20.NOV.2014 11:24:18




LTE Band 7 / 5MHz / QPSK (IC)

Lowest Band Edge / 1 RB

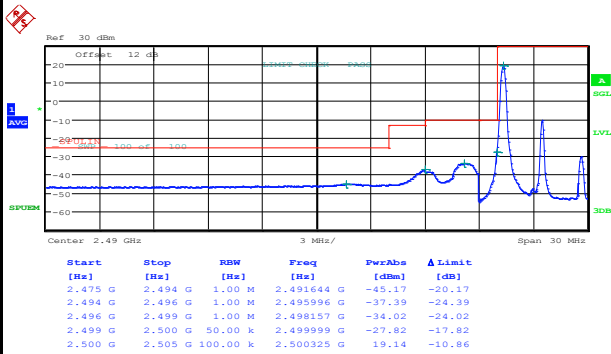


Date: 20.NOV.2014 10:33:54

Highest Band Edge / 1 RB

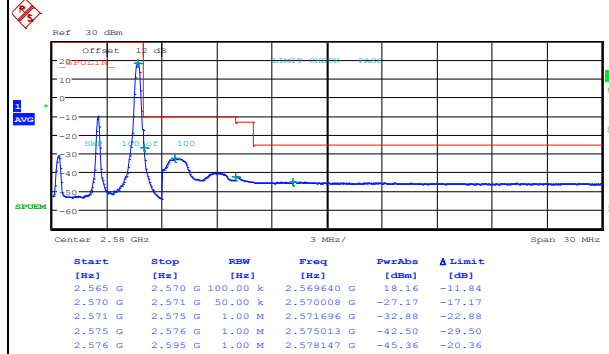


Date: 20.NOV.2014 10:38:31

Lowest Band Edge / Full RB

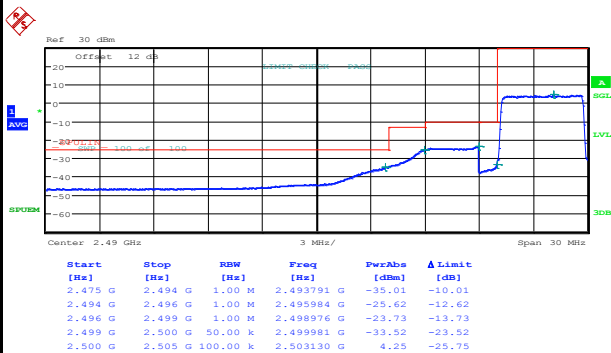

Date: 20.NOV.2014 10:36:12

Highest Band Edge / Full RB

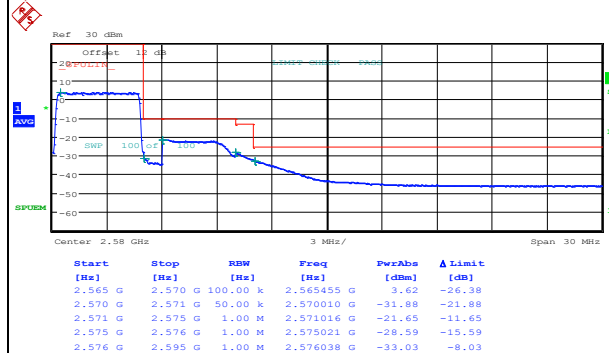


Date: 20.NOV.2014 10:40:50




LTE Band 7 / 5MHz / 16QAM (IC)

Lowest Band Edge / 1 RB

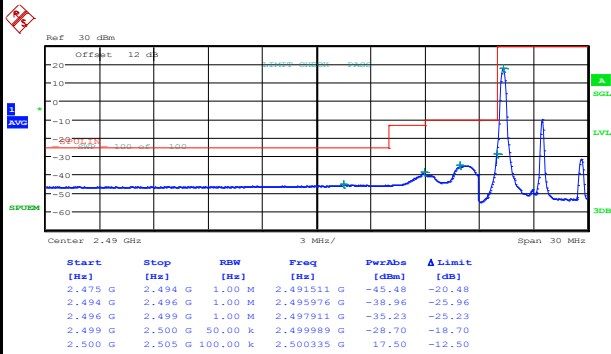


Date: 20.NOV.2014 10:35:03

Highest Band Edge / 1 RB

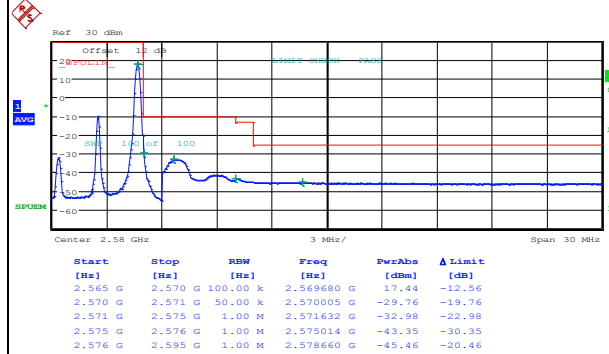


Date: 20.NOV.2014 10:39:40

Lowest Band Edge / Full RB

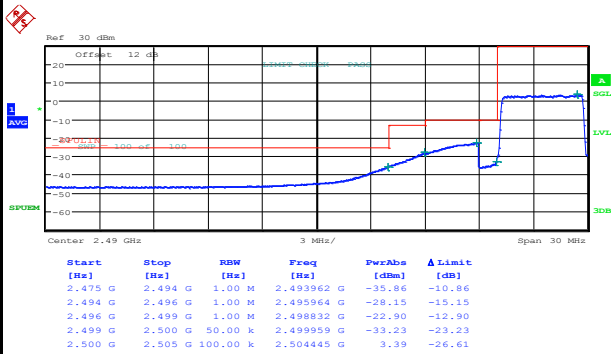

Date: 20.NOV.2014 10:37:22

Highest Band Edge / Full RB

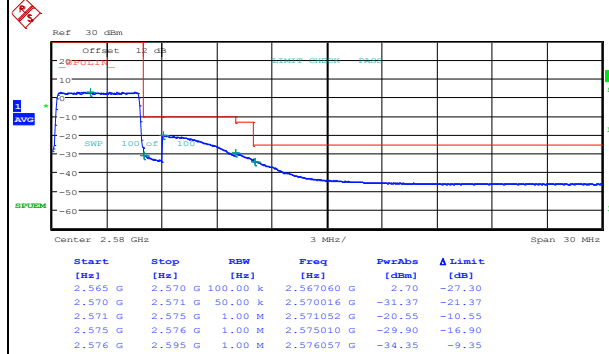

Date: 20.NOV.2014 10:41:59



Highest Band Edge / 1 RB




Highest Band Edge / Full RB






LTE Band 7 / 10MHz / 16QAM (IC)

Lowest Band Edge / 1 RB

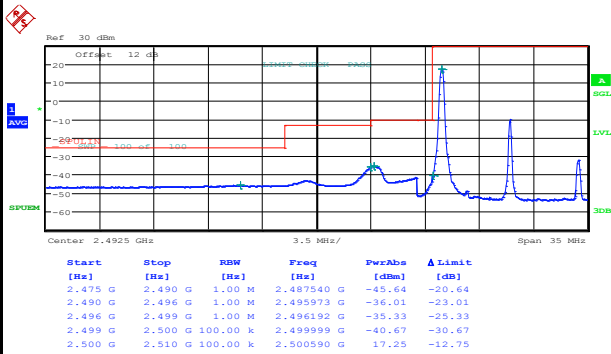


Date: 20.NOV.2014 10:44:22

Highest Band Edge / 1 RB

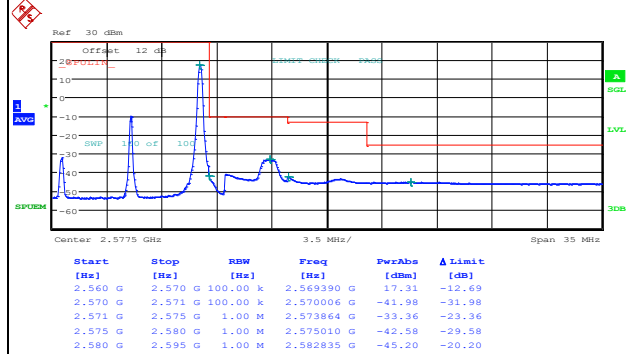


Date: 20.NOV.2014 10:48:59

Lowest Band Edge / Full RB

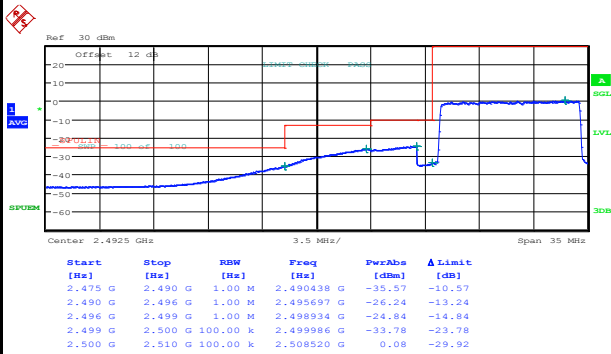

Date: 20.NOV.2014 10:46:40

Highest Band Edge / Full RB

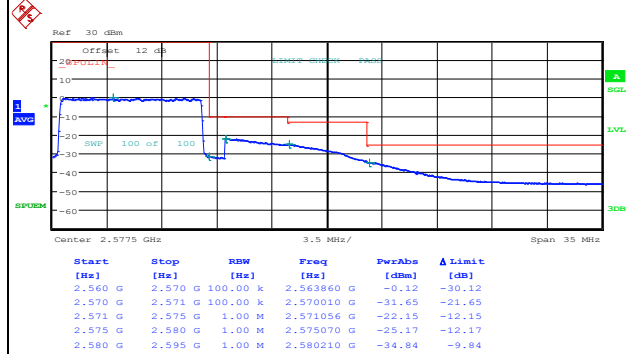


Date: 20.NOV.2014 10:51:18




LTE Band 7 / 15MHz / QPSK (IC)

Lowest Band Edge / 1 RB

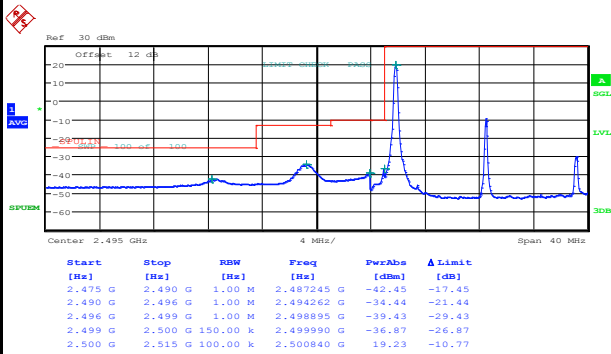


Date: 20.NOV.2014 10:52:31

Highest Band Edge / 1 RB

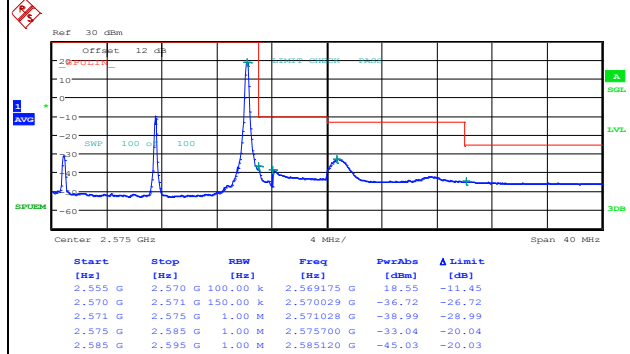


Date: 20.NOV.2014 10:57:09

Lowest Band Edge / Full RB

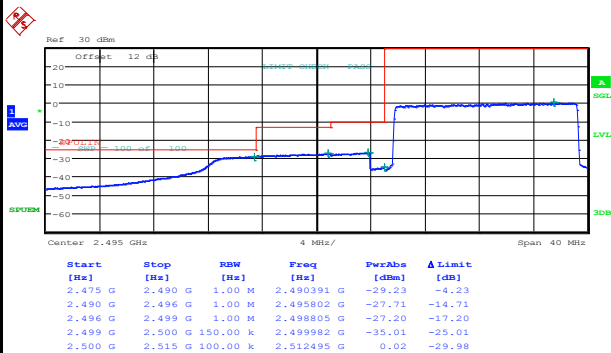

Date: 20.NOV.2014 10:54:50

Highest Band Edge / Full RB

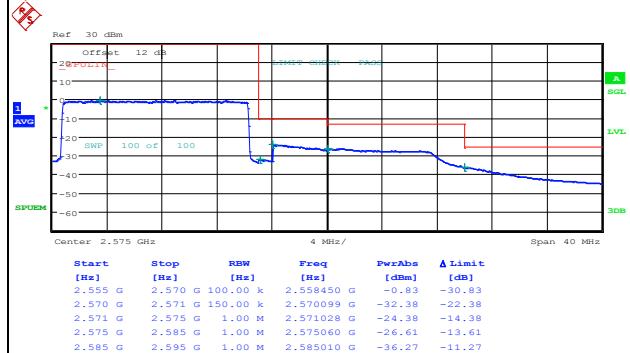


Date: 20.NOV.2014 10:59:28




LTE Band 7 / 15MHz / 16QAM (IC)

Lowest Band Edge / 1 RB

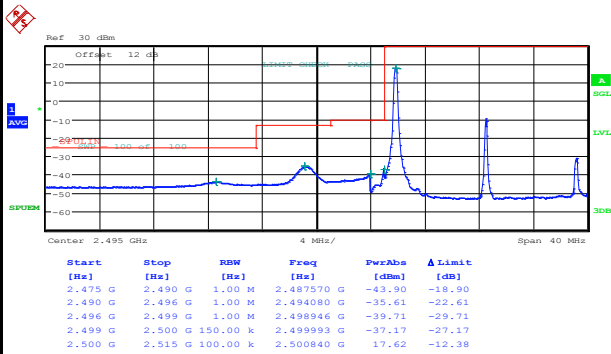


Date: 20.NOV.2014 10:53:41

Highest Band Edge / 1 RB

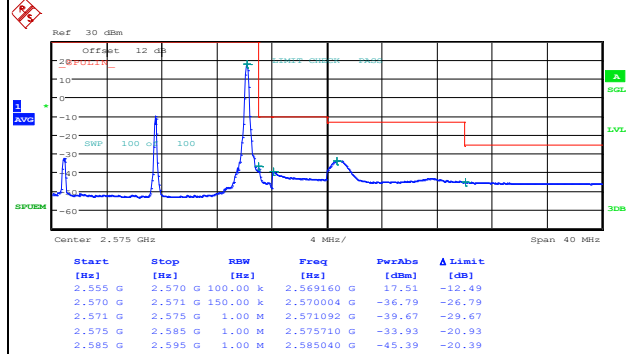


Date: 20.NOV.2014 10:58:18

Lowest Band Edge / Full RB

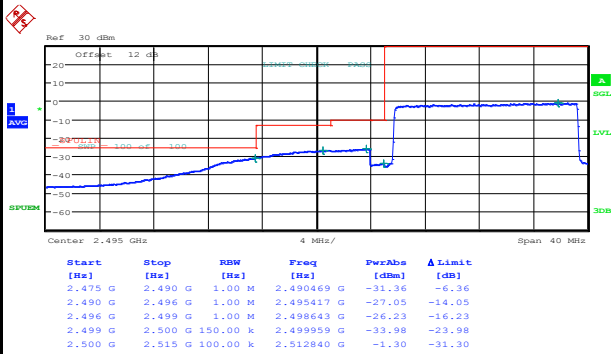

Date: 20.NOV.2014 10:55:59

Highest Band Edge / Full RB

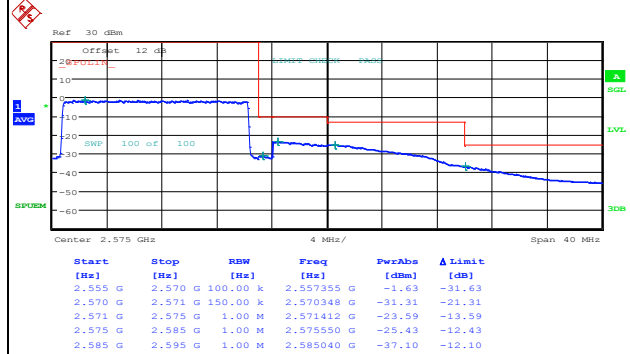


Date: 20.NOV.2014 11:00:37




LTE Band 7 / 20MHz / QPSK (IC)

Lowest Band Edge / 1 RB

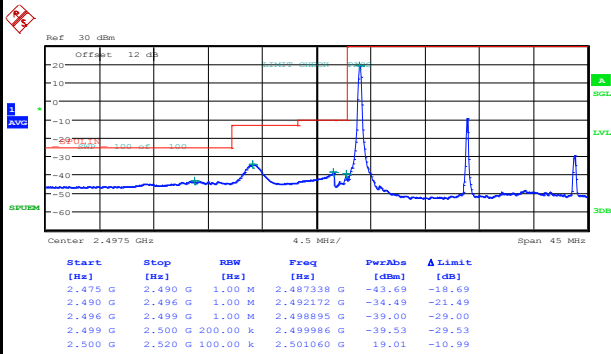


Date: 20.NOV.2014 11:01:50

Highest Band Edge / 1 RB

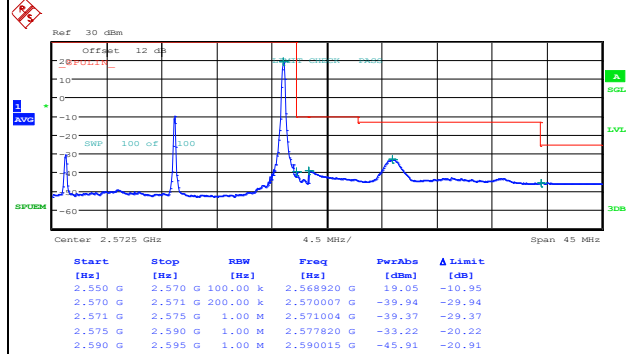


Date: 20.NOV.2014 11:06:28

Lowest Band Edge / Full RB

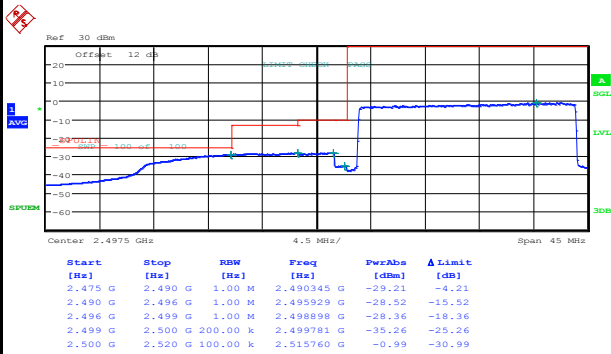

Date: 20.NOV.2014 11:04:09

Highest Band Edge / Full RB

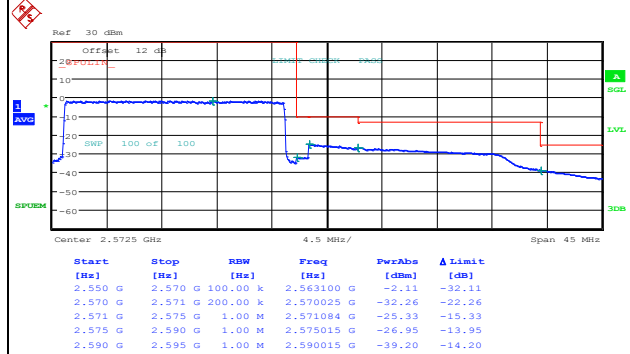


Date: 20.NOV.2014 11:09:56




LTE Band 7 / 20MHz / 16QAM (IC)

Lowest Band Edge / 1 RB

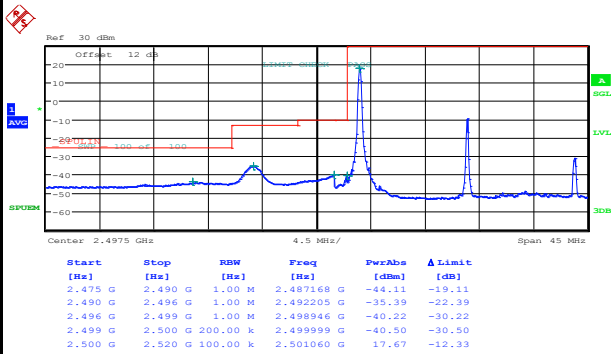


Date: 20.NOV.2014 11:03:00

Highest Band Edge / 1RB

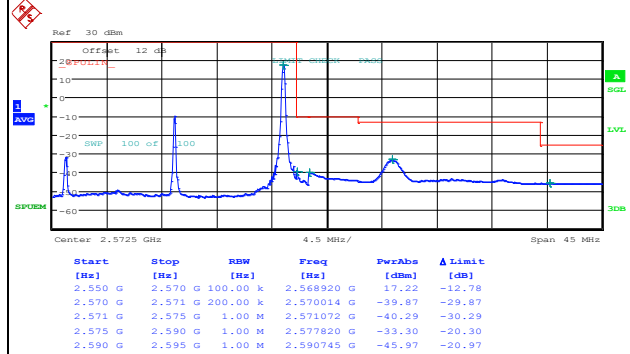


Date: 20.NOV.2014 11:07:37

Lowest Band Edge / Full RB

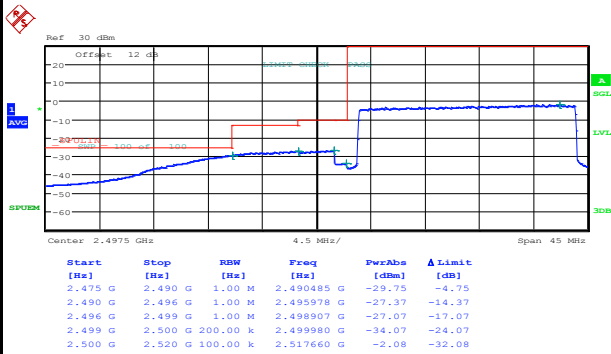


Date: 20.NOV.2014 11:05:18


Highest Band Edge / Full RB

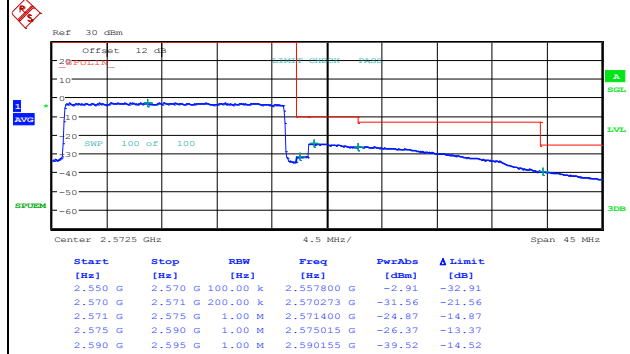


Date: 20.NOV.2014 11:08:47

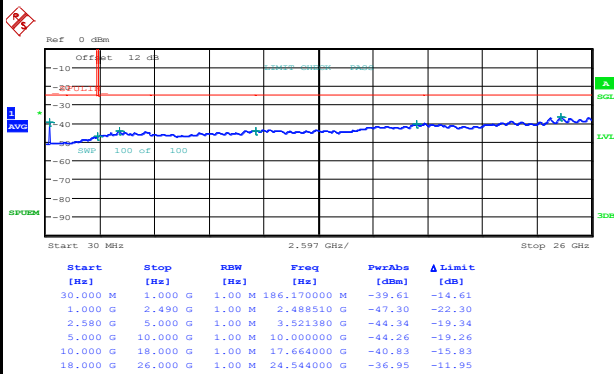**Conducted Spurious Emission****LTE Band 7 / 5MHz****Lowest Channel / QPSK**


Date: 20.NOV.2014 09:15:55

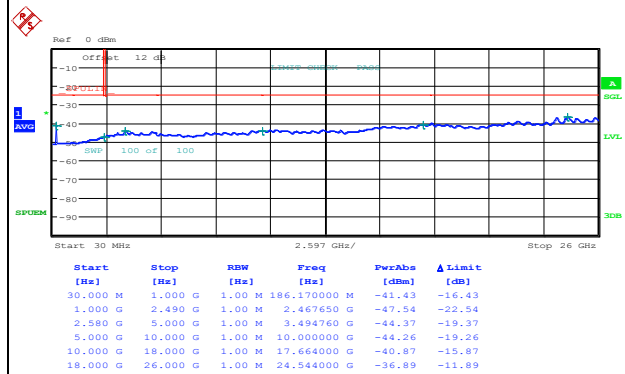Lowest Channel / 16QAM

Date: 20.NOV.2014 09:17:05

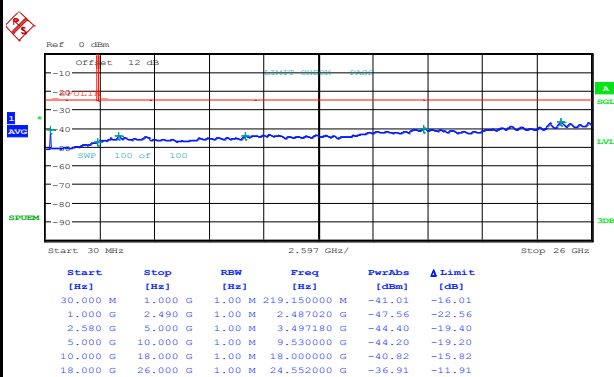Middle Channel / QPSK

Date: 20.NOV.2014 09:19:01

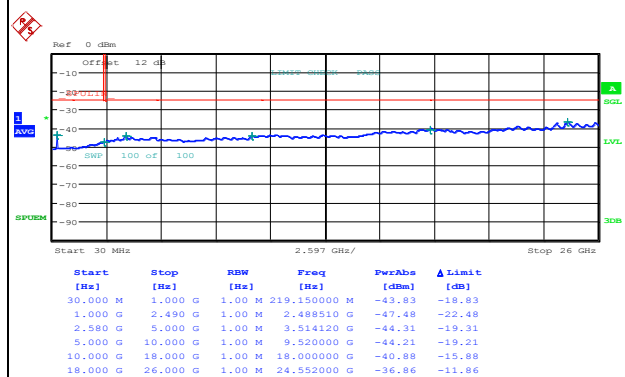
Middle Channel / 16QAM

Date: 20.NOV.2014 09:20:11




LTE Band 7 / 5MHz

Highest Channel / QPSK

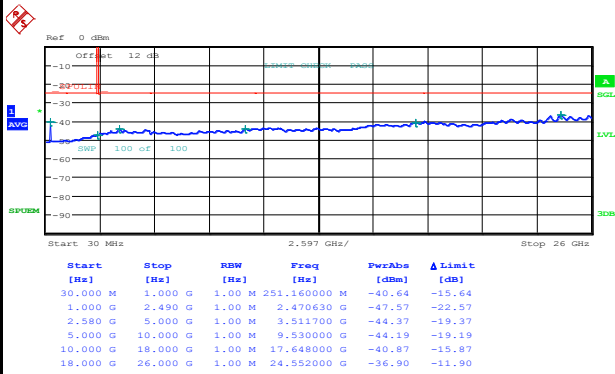

Date: 20.NOV.2014 09:26:48


Highest Channel / 16QAM

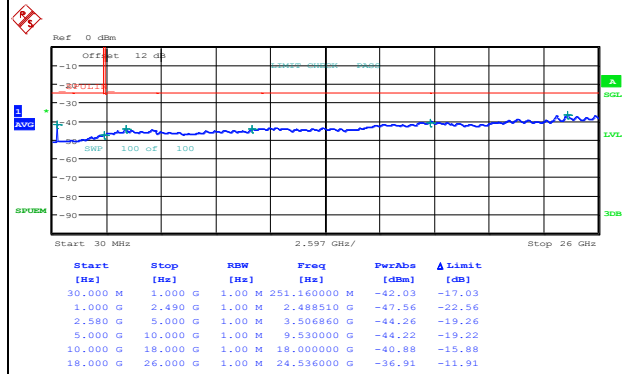

Date: 20.NOV.2014 09:27:58


LTE Band 7 / 10MHz

Lowest Channel / QPSK

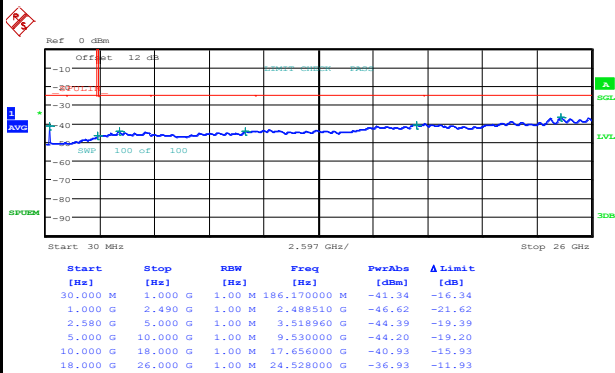

Date: 20.NOV.2014 09:34:39

Lowest Channel / 16QAM

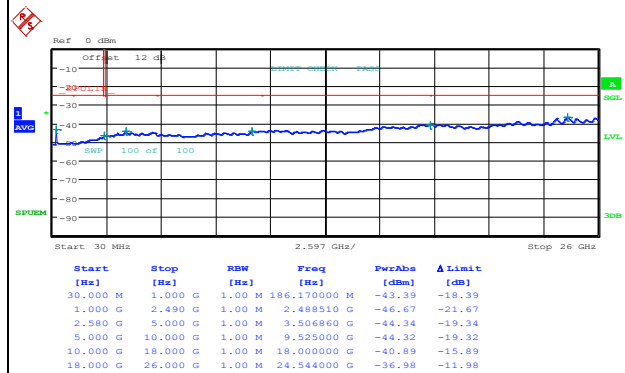


Date: 20.NOV.2014 09:35:48




LTE Band 7 / 10MHz

Middle Channel / QPSK

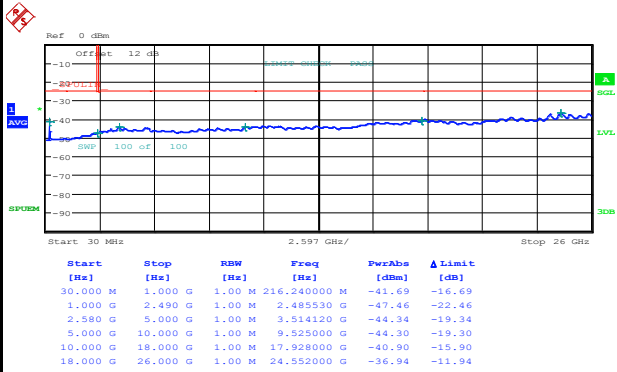


Date: 20.NOV.2014 09:37:45

Middle Channel / 16QAM

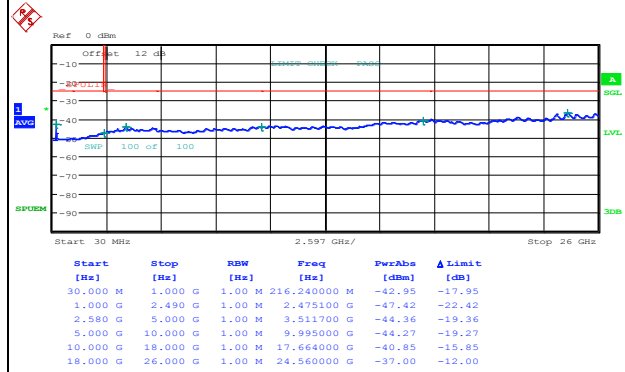


Date: 20.NOV.2014 09:38:55

Highest Channel / QPSK

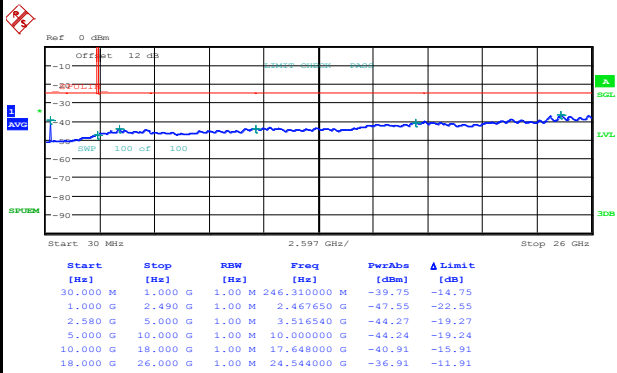

Date: 20.NOV.2014 09:45:32

Highest Channel / 16QAM

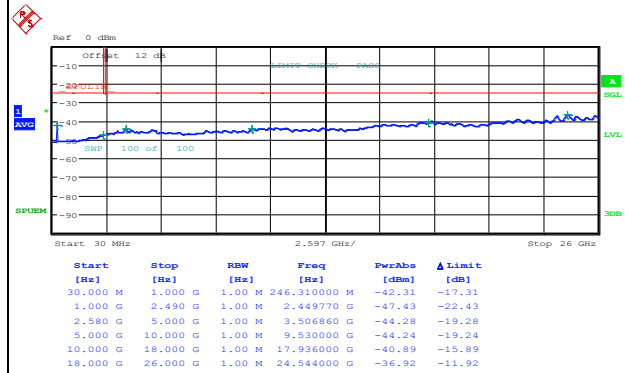


Date: 20.NOV.2014 09:46:41




LTE Band 7 / 15MHz

Lowest Channel / QPSK

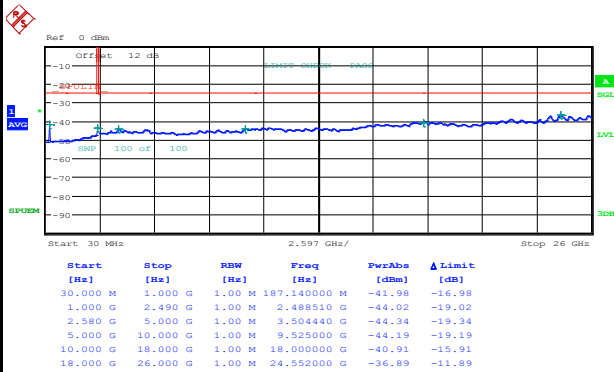


Date: 20.NOV.2014 09:53:23

Lowest Channel / 16QAM

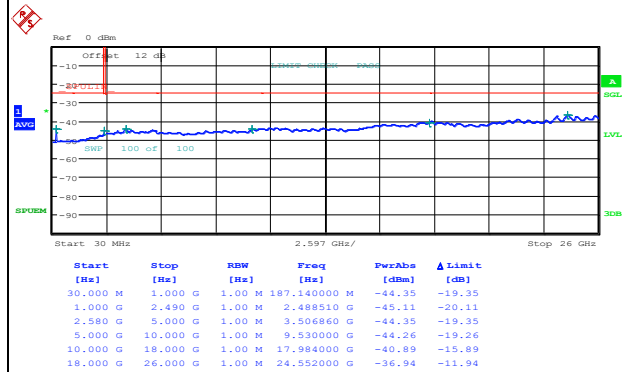


Date: 20.NOV.2014 09:54:32

Middle Channel / QPSK

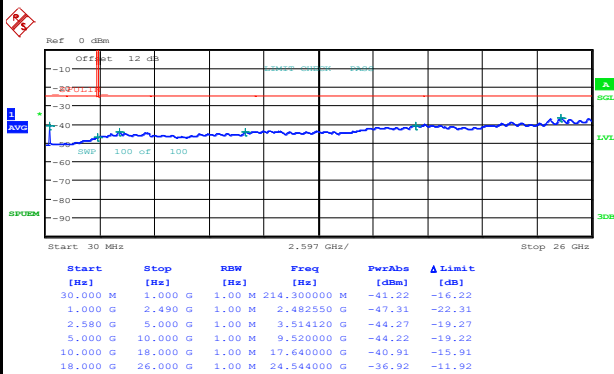

Date: 20.NOV.2014 09:56:29

Middle Channel / 16QAM

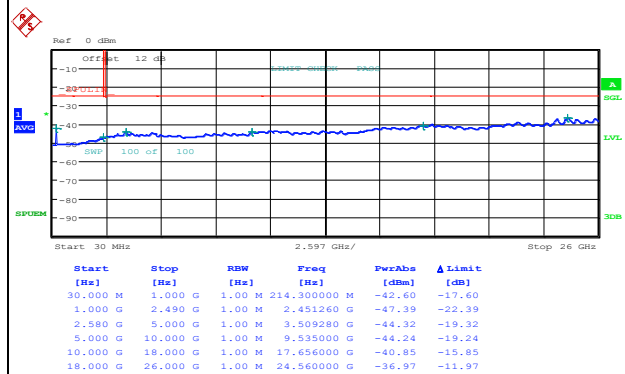


Date: 20.NOV.2014 09:57:39




LTE Band7 / 15MHz

Highest Channel / QPSK

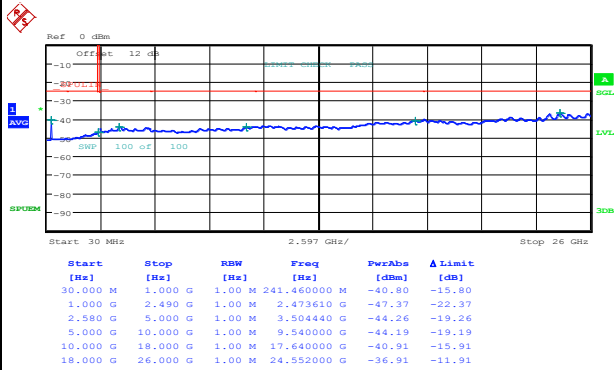

Date: 20.NOV.2014 10:06:07


Highest Channel / 16QAM

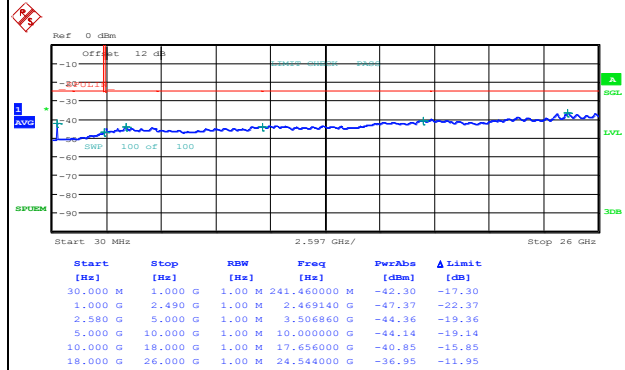

Date: 20.NOV.2014 10:07:19


LTE Band 7 / 20MHz

Lowest Channel / QPSK

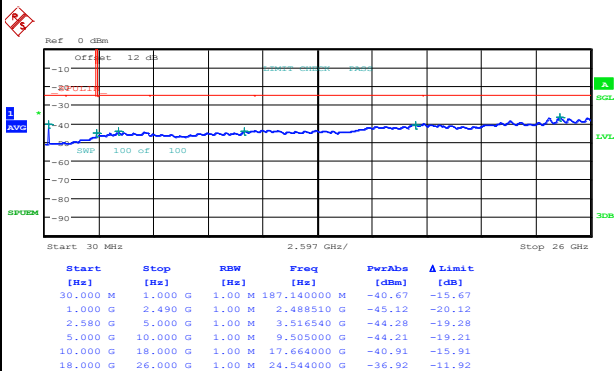

Date: 20.NOV.2014 10:16:03

Lowest Channel / 16QAM

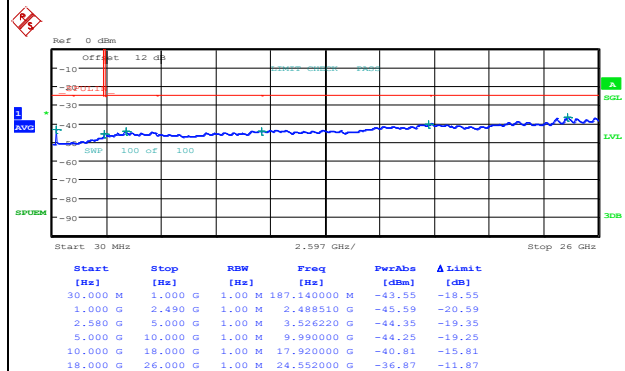


Date: 20.NOV.2014 10:17:12




LTE Band 7 / 20MHz

Middle Channel / QPSK

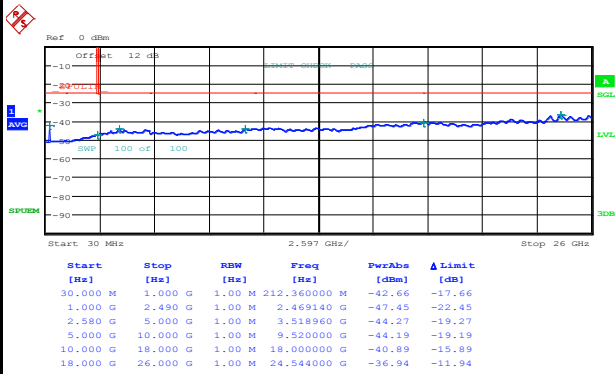


Date: 20.NOV.2014 10:19:09

Middle Channel / 16QAM

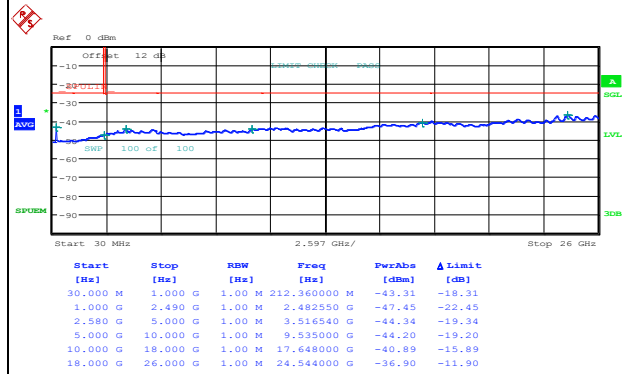


Date: 20.NOV.2014 10:20:19

Highest Channel / QPSK

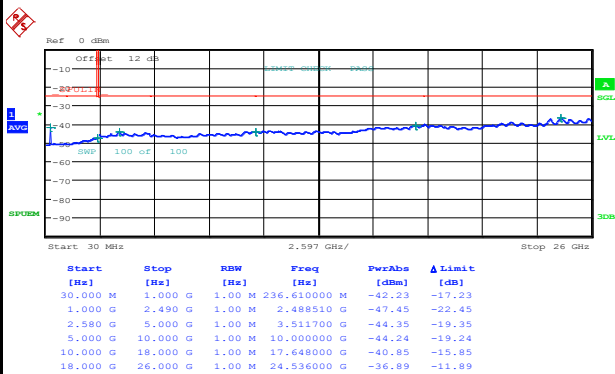

Date: 20.NOV.2014 10:22:15

Highest Channel / 16QAM

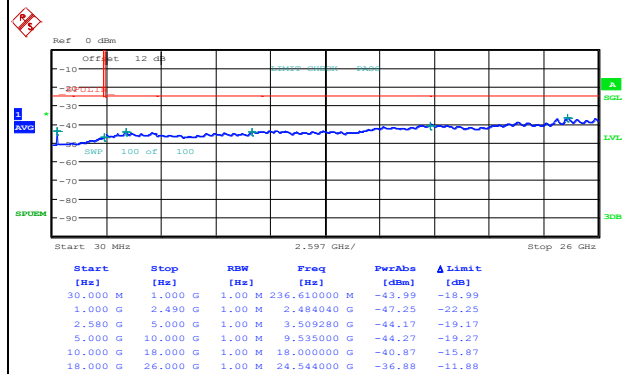

Date: 20.NOV.2014 10:23:25

**Frequency Stability**

Test Conditions		LTE Band 7 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 10MHz	Note 2.
		Deviation (ppm)	Result
50	Normal Voltage	0.0002	PASS
40	Normal Voltage	0.0004	
30	Normal Voltage	0.0013	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0013	
0	Normal Voltage	0.0013	
-10	Normal Voltage	0.0001	
-20	Normal Voltage	0.0007	
-30	Normal Voltage	0.0005	
20	Maximum Voltage	0.0008	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0012	

Note:

1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.4 V. ; Maximum Voltage =4.2 V
2. Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Appendix B. Test Results of Radiated Test

Radiated Spurious Emission

LTE Band 7 / 5MHz / QPSK / RB Size 1 Offset 0									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	4999.96	-47.76	-25	-22.76	-68.1	-55.12	2.34	9.70	H
	7500	-35.55	-25	-10.55	-65.68	-44.92	2.43	11.80	H
	9999.92	-36.58	-25	-11.58	-68	-46.08	2.70	12.20	H
	4999.96	-47.05	-25	-22.05	-68.28	-54.41	2.34	9.70	V
	7499.94	-39.02	-25	-14.02	-68.3	-48.39	2.43	11.80	V
	9999.92	-38.15	-25	-13.15	-68.53	-47.65	2.70	12.20	V
Middle	5064.96	-47.80	-25	-22.80	-68.4	-55.13	2.37	9.70	H
	7596	-33.60	-25	-8.60	-62.52	-43.06	2.40	11.86	H
	10129.92	-38.81	-25	-13.81	-69.65	-48.37	2.70	12.25	H
	5064.96	-48.83	-25	-23.83	-68.81	-56.16	2.37	9.70	V
	7596	-34.86	-25	-9.86	-63.67	-44.32	2.40	11.86	V
	10129.92	-39.12	-25	-14.12	-69.43	-48.68	2.70	12.25	V
Highest	5129.96	-48.19	-25	-23.19	-69.43	-55.48	2.41	9.70	H
	7694.94	-39.51	-25	-14.51	-67.8	-49.06	2.37	11.92	H
	10259.92	-37.74	-25	-12.74	-68.39	-47.35	2.69	12.30	H
	5129.96	-47.70	-25	-22.70	-69.01	-54.99	2.41	9.70	V
	7694.94	-40.80	-25	-15.80	-68.73	-50.35	2.37	11.92	V
	10259.92	-38.47	-25	-13.47	-68.8	-48.08	2.69	12.30	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



LTE Band 7 / 10MHz / QPSK / RB Size 1 Offset 0									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	5004	-47.46	-25	-22.46	-67.45	-54.82	2.34	9.70	H
	7502.04	-36.67	-25	-11.67	-66.78	-46.04	2.43	11.80	H
	10002.72	-37.81	-25	-12.81	-68.7	-47.31	2.70	12.20	H
	5004	-47.73	-25	-22.73	-68.02	-55.09	2.34	9.70	V
	7502.04	-39.25	-25	-14.25	-68.68	-48.62	2.43	11.80	V
	10002.72	-38.13	-25	-13.13	-68.49	-47.63	2.70	12.20	V
Middle	5061.36	-46.95	-25	-21.95	-67.06	-54.28	2.37	9.70	H
	7596	-33.55	-25	-8.55	-63.03	-43.01	2.40	11.86	H
	10122.72	-37.77	-25	-12.77	-69.32	-47.32	2.70	12.25	H
	5064	-47.68	-25	-22.68	-68	-55.01	2.37	9.70	V
	7596	-34.86	-25	-9.86	-63.11	-44.32	2.40	11.86	V
	10122.72	-39.56	-25	-14.56	-69.7	-49.11	2.70	12.25	V
Highest	5124	-48.52	-25	-23.52	-69.02	-55.81	2.41	9.70	H
	7682.04	-39.11	-25	-14.11	-67.83	-48.65	2.37	11.91	H
	10242.72	-37.81	-25	-12.81	-69.23	-47.41	2.69	12.30	H
	5124	-47.43	-25	-22.43	-68.87	-54.72	2.41	9.70	V
	7682.04	-38.45	-25	-13.45	-66.46	-47.99	2.37	11.91	V
	10242.72	-38.65	-25	-13.65	-68.74	-48.25	2.69	12.30	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



LTE Band 7 / 15MHz / QPSK / RB Size 1 Offset 0									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	5004	-47.76	-25	-22.76	-67.61	-55.12	2.34	9.70	H
	7502.52	-37.45	-25	-12.45	-66.96	-46.82	2.43	11.80	H
	10003.36	-37.15	-25	-12.15	-68.51	-46.65	2.70	12.20	H
	5004	-47.06	-25	-22.06	-68.23	-54.42	2.34	9.70	V
	7502.52	-38.26	-25	-13.26	-67.88	-47.63	2.43	11.80	V
	10008	-37.80	-25	-12.80	-68.01	-47.31	2.70	12.20	V
Middle	5052	-46.75	-25	-21.75	-67.07	-54.08	2.37	9.70	H
	7585.02	-38.17	-25	-13.17	-68.33	-47.62	2.40	11.85	H
	10113.36	-37.52	-25	-12.52	-69.09	-47.07	2.70	12.25	H
	5052	-46.66	-25	-21.66	-67.14	-53.99	2.37	9.70	V
	7585.02	-40.69	-25	-15.69	-69.26	-50.14	2.40	11.85	V
	10113.36	-38.58	-25	-13.58	-69.19	-48.13	2.70	12.25	V
Highest	5112	-47.74	-25	-22.74	-68.55	-55.04	2.40	9.70	H
	7667.52	-39.06	-25	-14.06	-67.94	-48.58	2.38	11.90	H
	10223.36	-37.10	-25	-12.10	-69.13	-46.69	2.69	12.29	H
	5112	-46.71	-25	-21.71	-67.6	-54.01	2.40	9.70	V
	7667.52	-39.79	-25	-14.79	-67.54	-49.31	2.38	11.90	V
	10223.36	-37.14	-25	-12.14	-68.5	-46.73	2.69	12.29	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



LTE Band 7 / 20MHz / QPSK / RB Size 1 Offset 0									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	5004	-46.48	-25	-21.48	-67.24	-53.84	2.34	9.70	H
	7500	-36.76	-25	-11.76	-66.08	-46.13	2.43	11.80	H
	10004.72	-38.16	-25	-13.16	-69.22	-47.66	2.70	12.20	H
	5004	-46.65	-25	-21.65	-67.54	-54.01	2.34	9.70	V
	7503.54	-38.87	-25	-13.87	-68.14	-48.24	2.43	11.80	V
	10004.72	-38.21	-25	-13.21	-68.79	-47.71	2.70	12.20	V
Middle	5052	-47.70	-25	-22.70	-68.17	-55.03	2.37	9.70	H
	7578.54	-39.37	-25	-14.37	-68.99	-48.81	2.40	11.85	H
	10104.72	-38.17	-25	-13.17	-69.79	-47.72	2.70	12.24	H
	5052	-47.59	-25	-22.59	-68.16	-54.92	2.37	9.70	V
	7578.54	-39.91	-25	-14.91	-69.16	-49.35	2.40	11.85	V
	10104.72	-38.53	-25	-13.53	-69.24	-48.08	2.70	12.24	V
Highest	5100	-47.01	-25	-22.01	-68.44	-54.32	2.39	9.70	H
	7653.54	-39.57	-25	-14.57	-68.24	-49.08	2.38	11.89	H
	10204.72	-36.54	-25	-11.54	-68.31	-46.13	2.70	12.28	H
	5100	-47.32	-25	-22.32	-67.98	-54.63	2.39	9.70	V
	7653.54	-39.30	-25	-14.30	-67.84	-48.81	2.38	11.89	V
	10204.72	-38.27	-25	-13.27	-68.81	-47.86	2.70	12.28	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.