

FCC Test Report

(PART 22)

Report No.: RF190326C28

FCC ID: B94HNC04PD

Test Model: HSN-C04C

Received Date: Mar. 26, 2019

Test Date: Apr. 19, 2019 ~ Apr. 26, 2019

Issued Date: May 07, 2019

Applicant: HP Inc.

Address: 3390 East Harmony Road, Fort Collins Colorado, 80528 United States

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan
(R.O.C)

Test Location: No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil, Kwei Shan Dist., Taoyuan City
33383, Taiwan (R.O.C)

**FCC Registration /
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Test Site and Instruments	6
3 General Information	8
3.1 General Description of EUT	8
3.2 Configuration of System under Test	10
3.2.1 Description of Support Units	10
3.3 Test Mode Applicability and Tested Channel Detail	11
3.4 EUT Operating Conditions	12
3.5 General Description of Applied Standards	12
4 Test Types and Results	13
4.1 Output Power Measurement	13
4.1.1 Limits of Output Power Measurement	13
4.1.2 Test Procedures	13
4.1.3 Test Setup	14
4.1.4 Test Results	15
4.2 Radiated Emission Measurement	22
4.2.1 Limits of Radiated Emission Measurement	22
4.2.2 Test Procedure	22
4.2.3 Deviation from Test Standard	22
4.2.4 Test Setup	23
4.2.5 Test Results	24
5 Pictures of Test Arrangements	66
Appendix – Information of the Testing Laboratories	67

Release Control Record

Issue No.	Description	Date Issued
RF190326C28	Original Release	May 07, 2019

1 Certificate of Conformity

Product: Tablet

Brand: HP

Test Model: HSN-C04C

Sample Status: Engineering Sample

Applicant: HP Inc.

Test Date: Apr. 19, 2019 ~ Apr. 26, 2019

Standards: FCC Part 22, Subpart H

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Rona Chen, **Date:** May 07, 2019
Rona Chen / Specialist

Approved by : Dylan Chiou, **Date:** May 07, 2019
Dylan Chiou / Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 22 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 22.913 (a)	Effective Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	N/A	Refer to Note
2.1046 22.913 (d)	Peak to Average Ratio	N/A	Refer to Note
2.1055 22.355	Frequency Stability	N/A	Refer to Note
2.1049	Occupied Bandwidth	N/A	Refer to Note
22.917	Band Edge Measurements	N/A	Refer to Note
2.1051 22.917	Conducted Spurious Emissions	N/A	Refer to Note
2.1053 22.917	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -28.89 dB at 30.00 MHz.

Note:

1. This report is a partial report. Therefore, only test item of Effective Radiated Power and Radiated Spurious Emissions tests were performed for this report. Other testing data please refer to BV CPS report no.: RF170106C02 for module (Brand: Fibocom, Model: L850-GL)
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Mar. 18, 2019	Mar. 17, 2020
Spectrum Analyzer Agilent	N9010A	MY52220314	Dec. 13, 2018	Dec. 12, 2019
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	100115	Jan. 21, 2019	Jan. 20, 2020
Spectrum Analyzer ROHDE & SCHWARZ	FSW26	102023	Oct. 11, 2018	Oct. 10, 2019
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-969	Nov. 25, 2018	Nov. 24, 2019
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Nov. 23, 2018	Nov. 22, 2019
Double Ridge Guide Horn Antenna EMCO	3115	5619	Nov. 25, 2018	Nov. 24, 2019
BILOG Antenna SCHWARZBECK	VULB 9168	9168-153	Nov. 23, 2018	Nov. 22, 2019
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 15, 2019	Apr. 14, 2020
MXG Vector signal generator Agilent	N5182B	MY53050430	Nov. 19, 2018	Nov. 18, 2019
Preamplifier EMCI	EMC 012645	980115	Oct. 12, 2018	Oct. 11, 2019
Preamplifier EMCI	EMC 330H	980112	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable HUBER+SUHNNER	EMC104-SM-SM-800 0&3000	140811+170717	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable HUBER+SUHNNER	SUCOFLEX 104	EMC104-SM-SM-1 000(140807)	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable WOKEN	8D-FB	Cable-Ch10-01	Oct. 12, 2018	Oct. 11, 2019
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Communications Tester-Wireless Agilent	8960 Series 10	MY53201073	Jun. 28, 2017	Jun. 27, 2019
Radio Communication Analyzer Anritsu	MT8820C	6201300640	Aug. 16, 2017	Aug. 15, 2019
Temperature & Humidity Chamber	GTH-120-40-CP-AR	MAA1306-019	Sep. 05, 2018	Sep. 04, 2019
DC Power Supply Topward	33010D	807748	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 10.
3. The IC Site Registration No. is 7450F-10.

3 General Information

3.1 General Description of EUT

Product	Tablet	
Brand	HP	
Test Model	HSN-C04C	
Status of EUT	Engineering Sample	
Power Supply Rating	7.7 Vdc (Li-ion battery) 20 Vdc (Adapter)	
Modulation Type	WCDMA	QPSK
	LTE	QPSK, 16QAM
Frequency Range	WCDMA	826.4 ~ 846.6 MHz
	LTE 5 (Channel Bandwidth: 1.4 MHz)	824.7 ~ 848.3 MHz
	LTE 5 (Channel Bandwidth: 3 MHz)	825.5 ~ 847.5 MHz
	LTE 5 (Channel Bandwidth: 5 MHz)	826.5 ~ 846.5 MHz
	LTE 5 (Channel Bandwidth: 10 MHz)	829 ~ 844 MHz
	LTE 26 (Channel Bandwidth: 1.4 MHz)	824.7 ~ 848.3 MHz
	LTE 26 (Channel Bandwidth: 3 MHz)	825.5 ~ 847.5 MHz
	LTE 26 (Channel Bandwidth: 5 MHz)	826.5 ~ 846.5 MHz
	LTE 26 (Channel Bandwidth: 10 MHz)	829 ~ 844 MHz
	LTE 26 (Channel Bandwidth: 15 MHz)	831.5 ~ 841.5 MHz
Max. ERP Power	WCDMA	126.47 mW
	LTE 5 (Channel Bandwidth: 1.4 MHz)	126.77 mW
	LTE 5 (Channel Bandwidth: 3 MHz)	134.28 mW
	LTE 5 (Channel Bandwidth: 5 MHz)	141.91 mW
	LTE 5 (Channel Bandwidth: 10 MHz)	149.62 mW
	LTE 26 (Channel Bandwidth: 1.4 MHz)	134.59 mW
	LTE 26 (Channel Bandwidth: 3 MHz)	142.23 mW
	LTE 26 (Channel Bandwidth: 5 MHz)	151.01 mW
	LTE 26 (Channel Bandwidth: 10 MHz)	159.59 mW
	LTE 26 (Channel Bandwidth: 15 MHz)	168.27 mW
Antenna Type	PIFA Antenna	
Accessory Device	Refer to Note as below	
Data Cable Supplied	Refer to Note as below	

Note:

1. The WWAN module (Brand: Fibocom, Model: L850-GL) was installed in EUT.

2. The EUT contains following accessory devices.

Product	Brand	Model	Description
Adapter	AcBel	TPN-AA03	I/P: 100-240 Vac, 50-60 Hz, 1500 mA O/P: 20 Vdc, 3.25 A
Battery	Dynapack	HSTNN-DB9E	7.7 Vdc, 5950 mAh
Keyboard 1	Primax	HSN-P01K	--
Keyboard 2	Cosmo	HSN-C01K	--
BT/WLAN Module	Intel® Wi-Fi 6 AX200	AX200D2WL	--
LTE Module	Fibocom	L850-GL	--


3. The antenna information of EUT is listed as below.

Ant. Type	Manufacturer	Parts Number	WWAN Antenna Gain (dBi)	
			WCDMA V / LTE 5	LTE 26
PIFA	INPAQ	Main Antenna: WA-P-LTE15-02-001 (DC330029D20) Aux. Antenna: WA-P-LTE15-02-002 (DC330029D30)	0.20	0.20


4. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

<Radiated Emission Test>

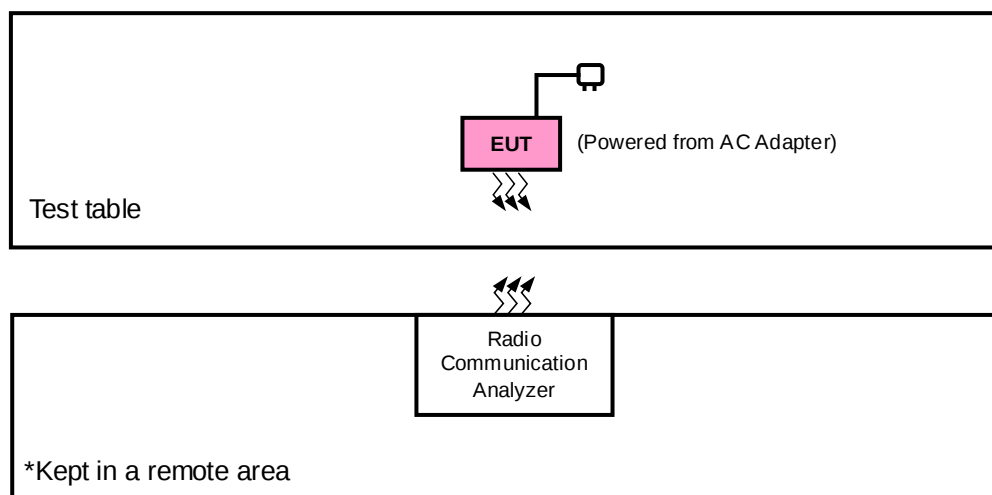

<E.R.P. Test>

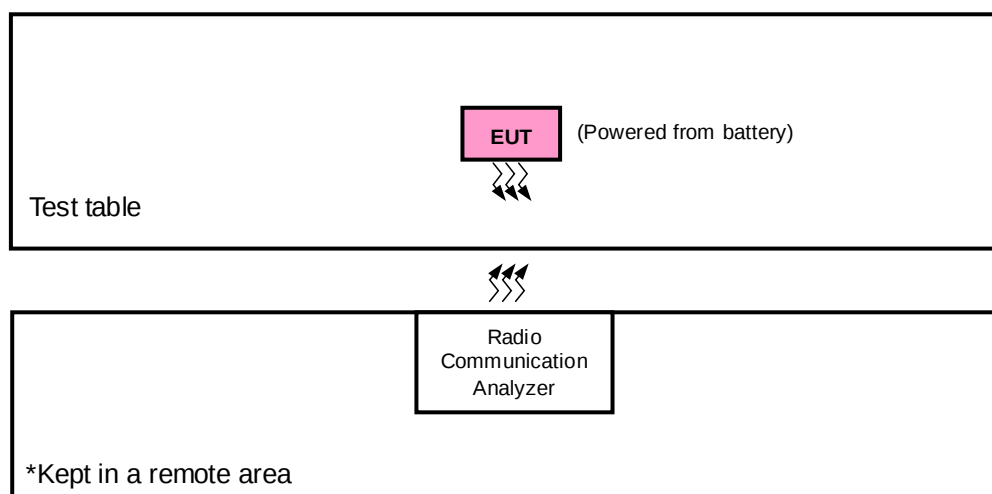

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis & NB Mode, and antenna ports.

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	ERP	Radiated Emission
WCDMA	X-plane	X-axis
LTE Band 5	X-plane	Y-axis
LTE Band 26	X-plane	NB Mode

WCDMA

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
-	ERP	4132 to 4233	4132, 4182, 4233	WCDMA
-	Radiated Emission	4132 to 4233	4132, 4182, 4233	WCDMA

LTE Band 5

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	ERP	20407 to 20643	20407, 20525, 20643	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20415 to 20635	20415, 20525, 20635	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20425 to 20625	20425, 20525, 20625	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20450 to 20600	20450, 20525, 20600	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Radiated Emission	20407 to 20643	20407, 20525, 20643	1.4 MHz	QPSK	1 RB / 0 RB Offset
		20425 to 20625	20425, 20525, 20625	5 MHz	QPSK	1 RB / 0 RB Offset
		20450 to 20600	20450, 20525, 20600	10 MHz	QPSK	1 RB / 0 RB Offset

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.
2. For radiated emission above 1 GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5 MHz & highest channel bandwidth for final test.

LTE Band 26

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	ERP	26797 to 27033	26797, 26915, 27033	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		26805 to 27025	26805, 26915, 27025	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		26815 to 27015	26815, 26915, 27015	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		26840 to 26990	26840, 26915, 26990	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		26865 to 26965	26865, 26915, 26965	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Radiated Emission	26797 to 27033	26797, 26915, 27033	1.4 MHz	QPSK	1 RB / 0 RB Offset
		26815 to 27015	26815, 26915, 27015	5 MHz	QPSK	1 RB / 0 RB Offset
		26865 to 26965	26865, 26915, 26965	15 MHz	QPSK	1 RB / 0 RB Offset

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.
2. For radiated emission above 1 GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5 MHz & highest channel bandwidth for final test.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
ERP	25 deg. C, 65 % RH	3.3 Vdc	Jisyong Wang
Radiated Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz (System)	Jisyong Wang

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 22

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-E 2016

ANSI 63.26-2015

Note: All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 7 watts e.r.p.

4.1.2 Test Procedures

EIRP / ERP Measurement:

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 5 MHz for WCDMA and 10 MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G.
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$. E.R.P power can be calculated from E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15 \text{ dB}$.


Conducted Power Measurement:

The EUT was set up for the maximum power with WCDMA and LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


4.1.3 Test Setup

EIRP / ERP Measurement:

<Radiated Emission below or equal 1 GHz>

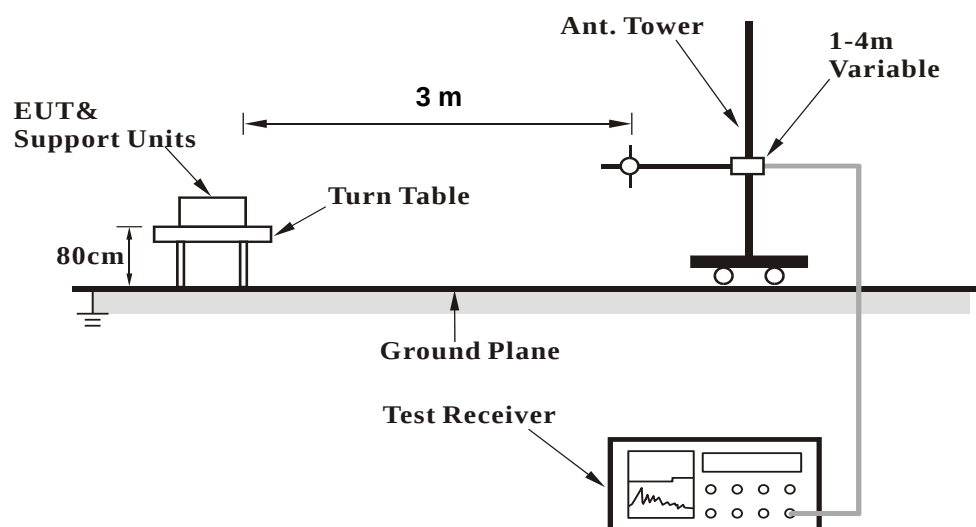


<Radiated Emission above 1 GHz>

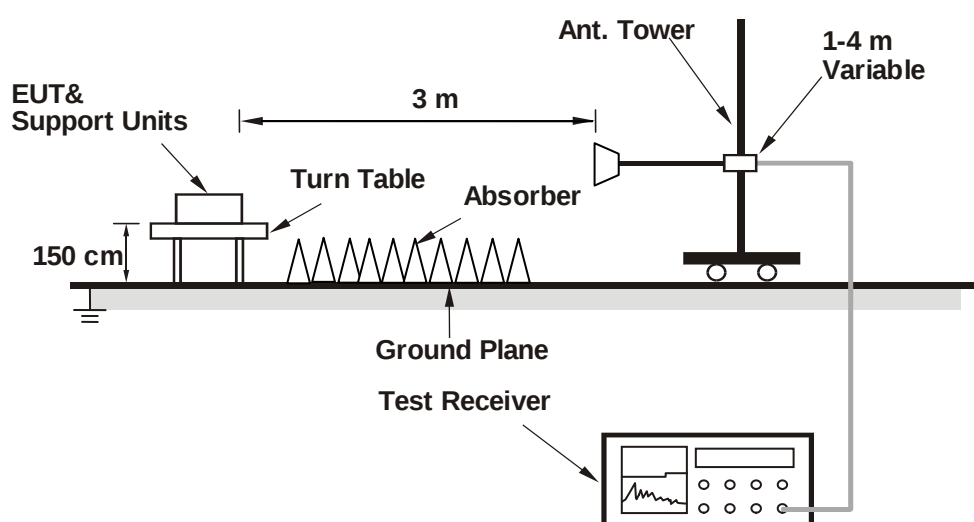

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Conducted Power Measurement:



4.1.4 Test Results

Conducted Output Power (dBm)

Band	WCDMA V		
Channel	4132	4182	4233
Frequency (MHz)	826.4	836.4	846.6
RMC 12.2K	23.44	23.37	23.38
HSDPA Subtest-1	22.64	22.57	22.58
HSDPA Subtest-2	22.60	22.53	22.54
HSDPA Subtest-3	22.10	22.03	22.04
HSDPA Subtest-4	22.03	21.96	21.97
DC-HSDPA Subtest-1	22.53	22.46	22.47
DC-HSDPA Subtest-2	22.49	22.42	22.43
DC-HSDPA Subtest-3	21.99	21.92	21.93
DC-HSDPA Subtest-4	21.92	21.85	21.86
HSUPA Subtest-1	22.69	22.62	22.63
HSUPA Subtest-2	20.50	20.43	20.44
HSUPA Subtest-3	21.23	21.16	21.17
HSUPA Subtest-4	20.75	20.68	20.69
HSUPA Subtest-5	22.68	22.61	22.62

LTE Band 5															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20450	20525	20600				Channel		20425	20525	20625	
		Frequency (MHz)		829.0	836.5	844.0				Frequency (MHz)		826.5	836.5	846.5	
10M	QPSK	1	0	22.76	22.97	22.94	0	5M	QPSK	1	0	22.74	22.95	22.92	0
		1	24	22.64	22.85	22.82	0			1	12	22.62	22.83	22.80	0
		1	49	22.69	22.90	22.87	0			1	24	22.67	22.88	22.85	0
		25	0	21.77	21.98	21.95	1			12	0	21.75	21.96	21.93	1
		25	12	21.72	21.93	21.90	1			12	6	21.70	21.91	21.88	1
		25	25	21.70	21.91	21.88	1			12	13	21.68	21.89	21.86	1
		50	0	21.73	21.94	21.91	1			25	0	21.71	21.92	21.89	1
		50	0	21.73	21.94	21.91	1			25	0	21.71	21.92	21.89	1
	16QAM	1	0	21.74	21.95	21.92	1		16QAM	1	0	21.72	21.93	21.90	1
		1	24	21.62	21.83	21.80	1			1	12	21.60	21.81	21.78	1
		1	49	21.67	21.88	21.85	1			1	24	21.65	21.86	21.83	1
		25	0	20.75	20.96	20.93	2			12	0	20.73	20.94	20.91	2
		25	12	20.70	20.91	20.88	2			12	6	20.68	20.89	20.86	2
		25	25	20.68	20.89	20.86	2			12	13	20.66	20.87	20.84	2
3M	QPSK	1	0	22.71	22.92	22.89	0	1.4M	QPSK	1	0	22.68	22.89	22.86	0
		1	7	22.59	22.80	22.77	0			1	2	22.56	22.77	22.74	0
		1	14	22.64	22.85	22.82	0			1	5	22.61	22.82	22.79	0
		8	0	21.72	21.93	21.90	1			3	0	21.69	21.90	21.87	0
		8	3	21.67	21.88	21.85	1			3	1	21.64	21.85	21.82	0
		8	7	21.65	21.86	21.83	1			3	3	21.62	21.83	21.80	0
		15	0	21.68	21.89	21.86	1			6	0	21.65	21.86	21.83	1
		15	0	21.68	21.89	21.86	1			6	0	21.65	21.86	21.83	1
	16QAM	1	0	21.69	21.90	21.87	1		16QAM	1	0	21.66	21.87	21.84	1
		1	7	21.57	21.78	21.75	1			1	2	21.54	21.75	21.72	1
		1	14	21.62	21.83	21.80	1			1	5	21.59	21.80	21.77	1
		8	0	20.70	20.91	20.88	2			3	0	20.67	20.88	20.85	1
		8	3	20.65	20.86	20.83	2			3	1	20.62	20.83	20.80	1
		8	7	20.63	20.84	20.81	2			3	3	20.60	20.81	20.78	1
3M	QPSK	1	0	22.71	22.92	22.89	0	1.4M	QPSK	1	0	22.68	22.89	22.86	0
		1	7	22.59	22.80	22.77	0			1	2	22.56	22.77	22.74	0
		1	14	22.64	22.85	22.82	0			1	5	22.61	22.82	22.79	0
		8	0	21.72	21.93	21.90	1			3	0	21.69	21.90	21.87	0
		8	3	21.67	21.88	21.85	1			3	1	21.64	21.85	21.82	0
		8	7	21.65	21.86	21.83	1			3	3	21.62	21.83	21.80	0
		15	0	21.68	21.89	21.86	1			6	0	21.65	21.86	21.83	1
		15	0	21.68	21.89	21.86	1			6	0	21.65	21.86	21.83	1
	16QAM	1	0	21.69	21.90	21.87	1		16QAM	1	0	21.66	21.87	21.84	1
		1	7	21.57	21.78	21.75	1			1	2	21.54	21.75	21.72	1
		1	14	21.62	21.83	21.80	1			1	5	21.59	21.80	21.77	1
		8	0	20.70	20.91	20.88	2			3	0	20.67	20.88	20.85	1
		8	3	20.65	20.86	20.83	2			3	1	20.62	20.83	20.80	1
		8	7	20.63	20.84	20.81	2			3	3	20.60	20.81	20.78	1
3M	QPSK	1	0	22.71	22.92	22.89	0	1.4M	QPSK	1	0	22.68	22.89	22.86	0
		1	7	22.59	22.80	22.77	0			1	2	22.56	22.77	22.74	0
		1	14	22.64	22.85	22.82	0			1	5	22.61	22.82	22.79	0
		8	0	21.72	21.93	21.90	1			3	0	21.69	21.90	21.87	0
		8	3	21.67	21.88	21.85	1			3	1	21.64	21.85	21.82	0
		8	7	21.65	21.86	21.83	1			3	3	21.62	21.83	21.80	0
		15	0	21.68	21.89	21.86	1			6	0	21.65	21.86	21.83	1
		15	0	21.68	21.89	21.86	1			6	0	21.65	21.86	21.83	1
	16QAM	1	0	21.69	21.90	21.87	1		16QAM	1	0	21.66	21.87	21.84	1
		1	7	21.57	21.78	21.75	1			1	2	21.54	21.75	21.72	1
		1	14	21.62	21.83	21.80	1			1	5	21.59	21.80	21.77	1
		8	0	20.70	20.91	20.88	2			3	0	20.67	20.88	20.85	1
		8	3	20.65	20.86	20.83	2			3	1	20.62	20.83	20.80	1
		8	7	20.63	20.84	20.81	2			3	3	20.60	20.81	20.78	1

LTE Band 26															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26865	26915	26965				Channel		26840	26915	26990	
		Frequency (MHz)		831.5	836.5	841.5				Frequency (MHz)		829.0	836.5	844.0	
15M	QPSK	1	0	22.86	22.76	22.93	0	10M	QPSK	1	0	22.81	22.70	22.84	0
		1	37	22.84	22.83	22.91	0			1	24	22.69	22.83	22.87	0
		1	74	22.81	22.81	22.88	0			1	49	22.79	22.78	22.88	0
		36	0	21.93	21.89	21.98	1			25	0	21.86	21.83	21.91	1
		36	19	21.89	21.79	21.96	1			25	12	21.86	21.79	21.96	1
		36	39	21.85	21.81	21.92	1			25	25	21.71	21.76	21.82	1
		75	0	21.86	21.77	21.93	1			50	0	21.78	21.72	21.88	1
	16QAM	1	0	21.87	21.83	21.94	1		16QAM	1	0	21.80	21.73	21.88	1
		1	37	21.85	21.77	21.92	1			1	24	21.84	21.65	21.84	1
		1	74	21.82	21.76	21.89	1			1	49	21.76	21.61	21.84	1
		36	0	20.94	20.88	20.99	2			25	0	20.86	20.81	20.93	2
		36	19	20.90	20.81	20.97	2			25	12	20.81	20.74	20.88	2
		36	39	20.86	20.82	20.93	2			25	25	20.72	20.68	20.87	2
		75	0	20.87	20.83	20.94	2			50	0	20.85	20.79	20.94	2
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26815	26915	27015				Channel		26805	26915	27025	
		Frequency (MHz)		826.5	836.5	846.5				Frequency (MHz)		825.5	836.5	847.5	
5M	QPSK	1	0	22.76	22.70	22.69	0	3M	QPSK	1	0	22.58	22.84	22.72	0
		1	12	22.65	22.82	22.74	0			1	7	22.71	22.83	22.65	0
		1	24	22.64	22.74	22.78	0			1	14	22.63	22.86	22.73	0
		12	0	21.74	21.82	21.90	1			8	0	21.81	21.89	21.78	1
		12	6	21.76	21.68	21.91	1			8	3	21.75	21.86	21.73	1
		12	13	21.64	21.75	21.69	1			8	7	21.61	21.74	21.74	1
		25	0	21.63	21.72	21.79	1			15	0	21.58	21.87	21.70	1
	16QAM	1	0	21.67	21.59	21.74	1		16QAM	1	0	21.67	21.78	21.88	1
		1	12	21.84	21.58	21.76	1			1	7	21.65	21.72	21.70	1
		1	24	21.61	21.51	21.81	1			1	14	21.55	21.80	21.84	1
		12	0	20.82	20.67	20.99	2			8	0	20.69	20.79	20.92	2
		12	6	20.66	20.63	20.89	2			8	3	20.70	20.73	20.83	2
		12	13	20.57	20.63	20.80	2			8	7	20.55	20.86	20.78	2
		25	0	20.85	20.69	20.80	2			15	0	20.64	20.79	20.85	2
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)								
		Channel		26797	26915	27033									
		Frequency (MHz)		824.7	836.5	848.3									
1.4M	QPSK	1	0	22.61	22.72	22.80	0								
		1	2	22.68	22.73	22.69	0								
		1	5	22.64	22.82	22.68	0								
		3	0	22.76	22.79	22.76	0								
		3	1	22.77	22.86	22.80	0								
		3	3	22.66	22.67	22.81	0								
		6	0	21.57	21.82	21.84	1								
	16QAM	1	0	21.71	21.76	21.84	1								
		1	2	21.54	21.84	21.76	1								
		1	5	21.52	21.72	21.77	1								
		3	0	21.71	21.80	21.96	1								
		3	1	21.59	21.74	21.92	1								
		3	3	21.56	21.83	21.89	1								
		6	0	20.73	20.81	20.90	2								

ERP Power (dBm)

WCDMA							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	4132	826.4	-9.62	32.62	20.85	121.62	H
	4182	836.4	-9.72	32.52	20.65	116.14	
	4233	846.6	-9.48	32.65	21.02	126.47	
	4132	826.4	-15.25	32.76	15.36	34.36	V
	4182	836.4	-15.13	32.39	15.11	32.43	
	4233	846.6	-14.87	32.54	15.52	35.65	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 5							
Channel Bandwidth: 1.4 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	20407	824.7	-9.71	32.62	20.76	119.12	H
	20525	836.5	-9.48	32.52	20.89	122.74	
	20643	848.3	-9.47	32.65	21.03	126.77	
	20407	824.7	-15.48	32.76	15.13	32.58	V
	20525	836.5	-14.85	32.39	15.39	34.59	
	20643	848.3	-14.59	32.54	15.80	38.02	
Channel Bandwidth: 1.4 MHz / 16QAM							
X	20407	824.7	-10.72	32.62	19.75	94.41	H
	20525	836.5	-10.49	32.52	19.88	97.27	
	20643	848.3	-10.48	32.65	20.02	100.46	
	20407	824.7	-16.49	32.76	14.12	25.82	V
	20525	836.5	-15.86	32.39	14.38	27.42	
	20643	848.3	-15.60	32.54	14.79	30.13	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 5							
Channel Bandwidth: 3 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	20415	825.5	-9.46	32.62	21.01	126.18	H
	20525	836.5	-9.23	32.52	21.14	130.02	
	20635	847.5	-9.22	32.65	21.28	134.28	
	20415	825.5	-15.23	32.76	15.38	34.51	V
	20525	836.5	-14.60	32.39	15.64	36.64	
	20635	847.5	-14.34	32.54	16.05	40.27	
Channel Bandwidth: 3 MHz / 16QAM							
X	20415	825.5	-10.48	32.62	19.99	99.77	H
	20525	836.5	-10.25	32.52	20.12	102.80	
	20635	847.5	-10.24	32.65	20.26	106.17	
	20415	825.5	-16.25	32.76	14.36	27.29	V
	20525	836.5	-15.62	32.39	14.62	28.97	
	20635	847.5	-15.36	32.54	15.03	31.84	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 5							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	20425	826.5	-9.22	32.62	21.25	133.35	H
	20525	836.5	-8.99	32.52	21.38	137.40	
	20625	846.5	-8.98	32.65	21.52	141.91	
	20425	826.5	-14.99	32.76	15.62	36.48	V
	20525	836.5	-14.36	32.39	15.88	38.73	
	20625	846.5	-14.10	32.54	16.29	42.56	
Channel Bandwidth: 5 MHz / 16QAM							
X	20425	826.5	-10.23	32.62	20.24	105.68	H
	20525	836.5	-10.00	32.52	20.37	108.89	
	20625	846.5	-9.99	32.65	20.51	112.46	
	20425	826.5	-16.00	32.76	14.61	28.91	V
	20525	836.5	-15.37	32.39	14.87	30.69	
	20625	846.5	-15.11	32.54	15.28	33.73	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 5							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	20450	829.0	-8.99	32.62	21.48	140.60	H
	20525	836.5	-8.76	32.52	21.61	144.88	
	20600	844.0	-8.75	32.65	21.75	149.62	
	20450	829.0	-14.76	32.76	15.85	38.46	V
	20525	836.5	-14.13	32.39	16.11	40.83	
	20600	844.0	-13.87	32.54	16.52	44.87	
Channel Bandwidth: 10 MHz / 16QAM							
X	20425	826.5	-9.97	32.62	20.50	112.20	H
	20525	836.5	-9.74	32.52	20.63	115.61	
	20625	846.5	-9.73	32.65	20.77	119.40	
	20425	826.5	-15.74	32.76	14.87	30.69	V
	20525	836.5	-15.11	32.39	15.13	32.58	
	20625	846.5	-14.85	32.54	15.54	35.81	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 26							
Channel Bandwidth: 1.4 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	26797	824.7	-9.18	32.62	21.29	134.59	H
	26915	836.5	-9.29	32.52	21.08	128.23	
	27033	848.3	-9.62	32.65	20.88	122.46	
	26797	824.7	-15.06	32.76	15.55	35.89	V
	26915	836.5	-15.07	32.39	15.17	32.89	
	27033	848.3	-15.31	32.54	15.08	32.21	
Channel Bandwidth: 1.4 MHz / 16QAM							
X	26797	824.7	-10.15	32.62	20.32	107.65	H
	26915	836.5	-10.26	32.52	20.11	102.57	
	27033	848.3	-10.59	32.65	19.91	97.95	
	26797	824.7	-16.03	32.76	14.58	28.71	V
	26915	836.5	-16.04	32.39	14.20	26.30	
	27033	848.3	-16.28	32.54	14.11	25.76	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 26							
Channel Bandwidth: 3 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	26805	825.5	-8.94	32.62	21.53	142.23	H
	26915	836.5	-9.05	32.52	21.32	135.52	
	27025	847.5	-9.38	32.65	21.12	129.42	
	26805	825.5	-14.82	32.76	15.79	37.93	V
	26915	836.5	-14.83	32.39	15.41	34.75	
	27025	847.5	-15.07	32.54	15.32	34.04	
Channel Bandwidth: 3 MHz / 16QAM							
X	26805	825.5	-9.92	32.62	20.55	113.50	H
	26915	836.5	-10.03	32.52	20.34	108.14	
	27025	847.5	-10.36	32.65	20.14	103.28	
	26805	825.5	-15.80	32.76	14.81	30.27	V
	26915	836.5	-15.81	32.39	14.43	27.73	
	27025	847.5	-16.05	32.54	14.34	27.16	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 26							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	26815	826.5	-8.68	32.62	21.79	151.01	H
	26915	836.5	-8.79	32.52	21.58	143.88	
	27015	846.5	-9.12	32.65	21.38	137.40	
	26815	826.5	-14.56	32.76	16.05	40.27	V
	26919	836.5	-14.57	32.39	15.67	36.90	
	27015	846.5	-14.81	32.54	15.58	36.14	
Channel Bandwidth: 5 MHz / 16QAM							
X	26815	826.5	-9.70	32.62	20.77	119.40	H
	26915	836.5	-9.81	32.52	20.56	113.76	
	27015	846.5	-10.14	32.65	20.36	108.64	
	26815	826.5	-15.58	32.76	15.03	31.84	V
	26919	836.5	-15.59	32.39	14.65	29.17	
	27015	846.5	-15.83	32.54	14.56	28.58	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 26							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	26840	829.0	-8.44	32.62	22.03	159.59	H
	26915	836.5	-8.55	32.52	21.82	152.05	
	26990	844.0	-8.88	32.65	21.62	145.21	
	26840	829.0	-14.32	32.76	16.29	42.56	V
	26919	836.5	-14.33	32.39	15.91	38.99	
	26990	844.0	-14.57	32.54	15.82	38.19	
Channel Bandwidth: 10 MHz / 16QAM							
X	26840	829.0	-9.46	32.62	21.01	126.18	H
	26915	836.5	-9.57	32.52	20.80	120.23	
	26990	844.0	-9.90	32.65	20.60	114.82	
	26840	829.0	-15.34	32.76	15.27	33.65	V
	26919	836.5	-15.35	32.39	14.89	30.83	
	26990	844.0	-15.59	32.54	14.80	30.20	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 26							
Channel Bandwidth: 15 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	26865	831.5	-8.21	32.62	22.26	168.27	H
	26915	836.5	-8.32	32.52	22.05	160.32	
	26965	841.5	-8.65	32.65	21.85	153.11	
	26865	831.5	-14.09	32.76	16.52	44.87	V
	26915	836.5	-14.10	32.39	16.14	41.11	
	26965	841.5	-14.34	32.54	16.05	40.27	
Channel Bandwidth: 15 MHz / 16QAM							
X	26865	831.5	-9.23	32.62	21.24	133.05	H
	26915	836.5	-9.34	32.52	21.03	126.77	
	26965	841.5	-9.67	32.65	20.83	121.06	
	26865	831.5	-15.11	32.76	15.50	35.48	V
	26915	836.5	-15.12	32.39	15.12	32.51	
	26965	841.5	-15.36	32.54	15.03	31.84	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

4.2 Radiated Emission Measurement

4.2.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit is equal to -13 dBm.

4.2.2 Test Procedure

- Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G
- $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}.$
- E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15 \text{ dB}.$


NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz.

4.2.3 Deviation from Test Standard


No deviation.

4.2.4 Test Setup

<Radiated Emission below or equal 1 GHz>

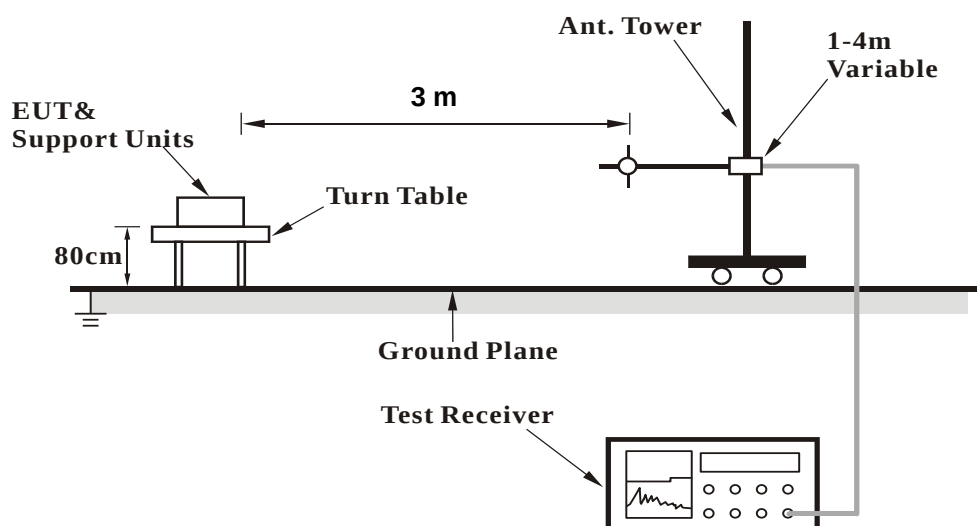

<Radiated Emission above 1 GHz>

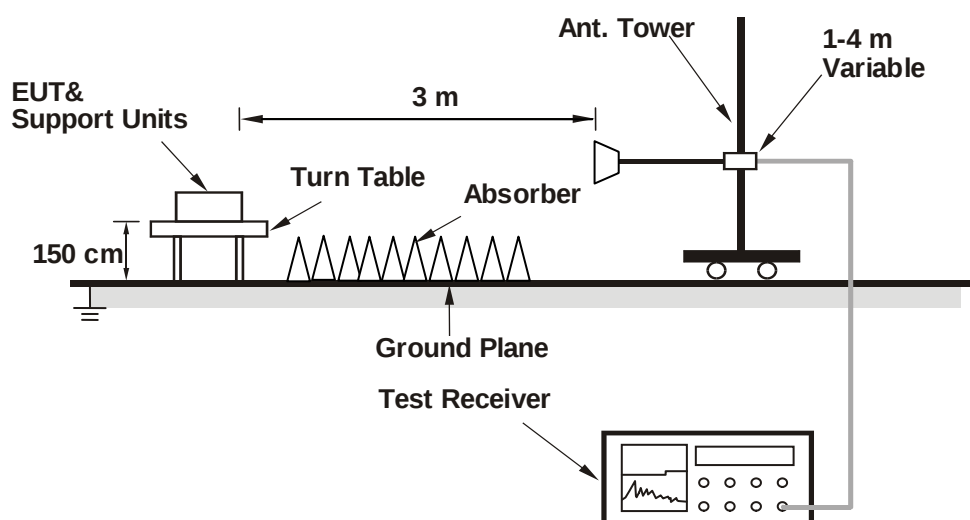

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.5 Test Results

WCDMA:


Low Channel

Bureau Veritas Consumer Products Services Ltd., Taoyuan



A D T

Data: 3

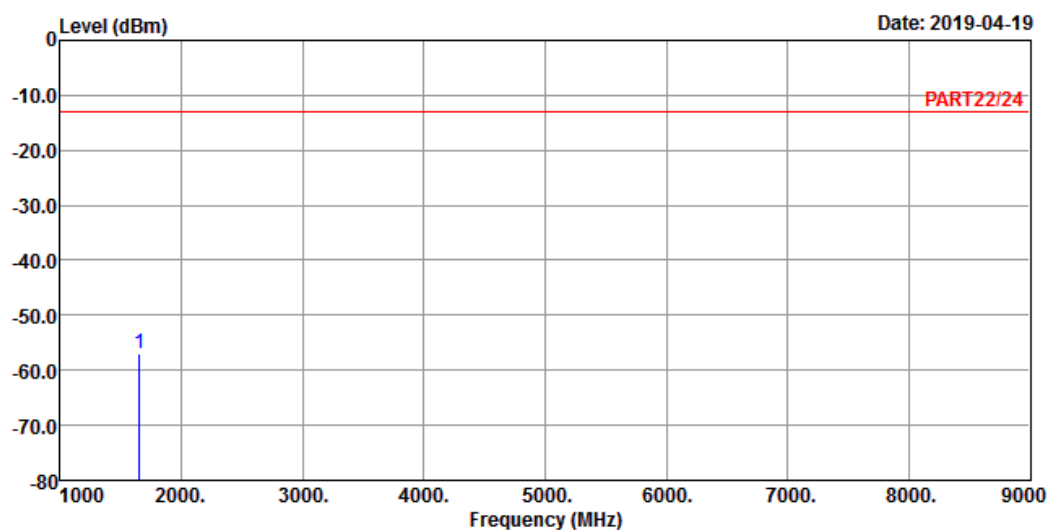

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL


Remak : WCDMA Band V Link_L-CH

Tested by: tim-chen

	Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	pp 1652.80	-56.92	-43.15	-13.00	-13.77	-43.92	Peak



Data: 4

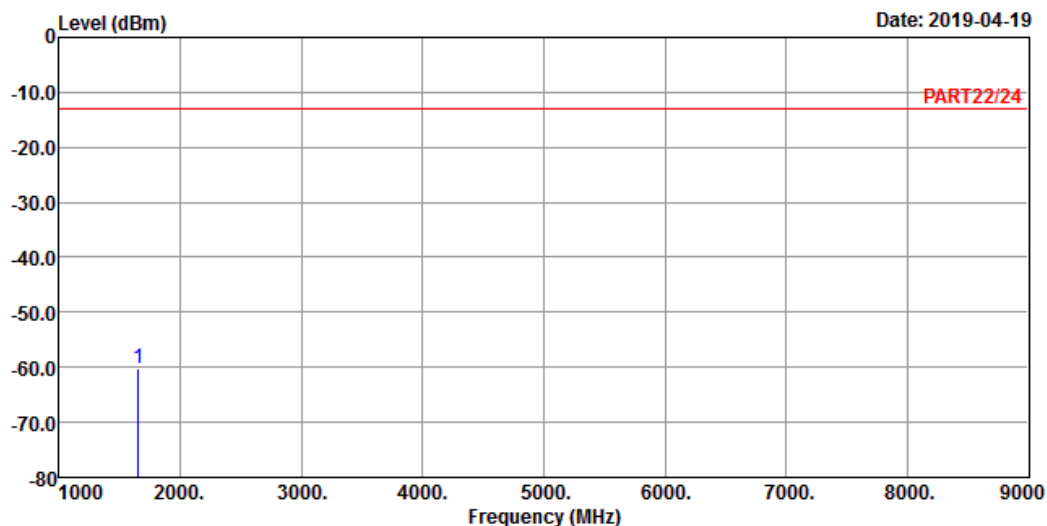

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remak : WCDMA Band V Link_L-CH
 Tested by: tim-chen

Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1652.80	-60.34	-46.57	-13.00	-13.77	-47.34	Peak


Middle Channel

Bureau Veritas Consumer Products Services Ltd., Taoyuan 32453



A D T

Data: 3

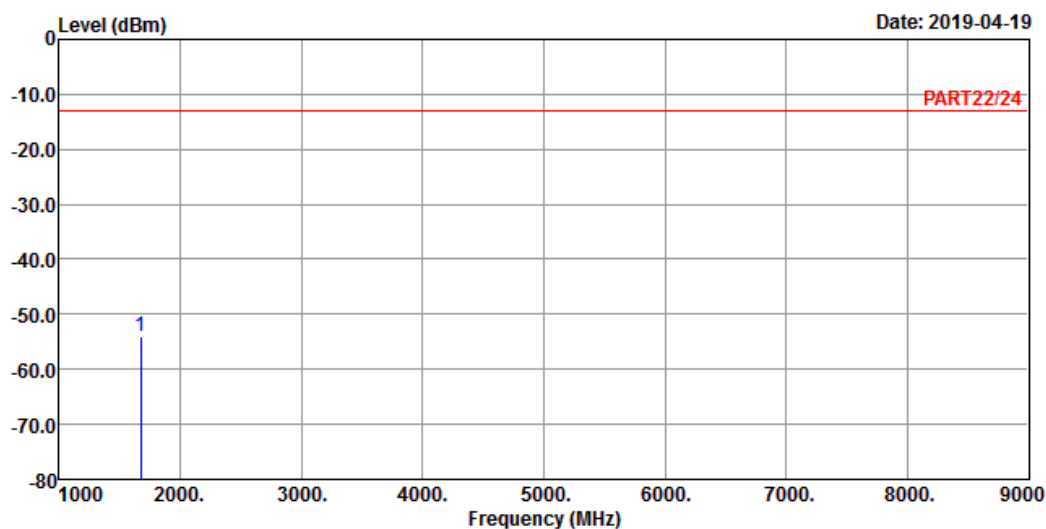


Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : WCDMA Band V Link_M-CH
Tested by: tim-chen

		Read	Limit		Over	
Freq	Level	Level	Line	Factor	Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1672.80	-53.95	-40.05	-13.00	-13.90	-40.95	Peak



A D T

Data: 4

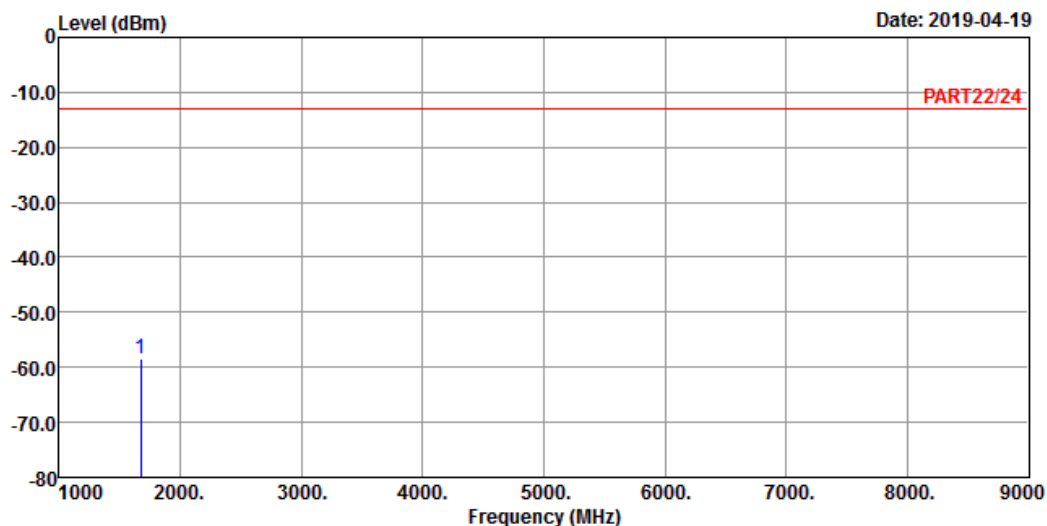

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remak : WCDMA Band V Link_M-CH
 Tested by: tim-chen

Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1672.80	-58.33	-44.43	-13.00	-13.90	-45.33	Peak


High Channel

Bureau Veritas Consumer Products Services Ltd., Taoyuan 32453



A D T

Data: 7

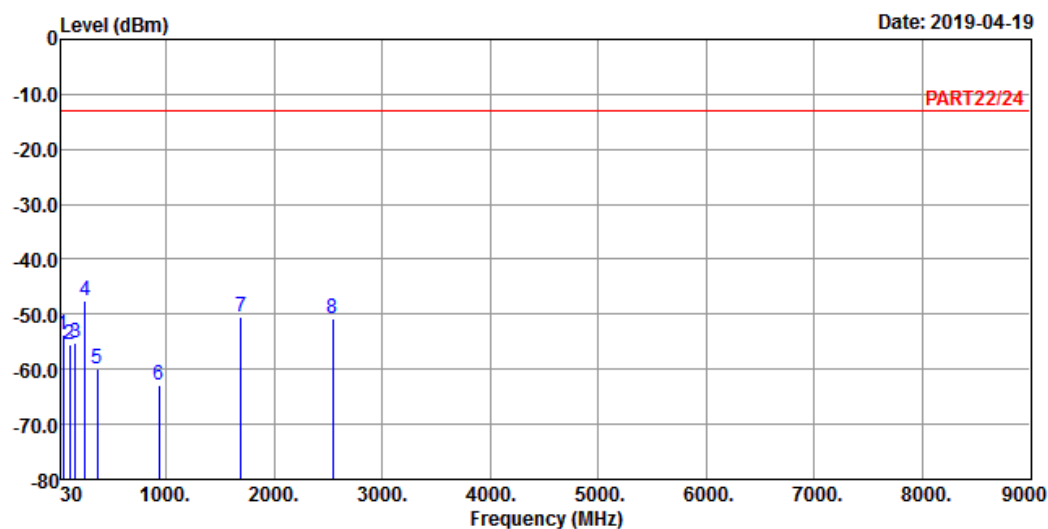

Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : WCDMA Band V Link_H-CH
Tested by: tim-chen


	Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	44.55	-53.74	-51.75	-13.00	-1.99	-40.74	Peak
2	107.60	-55.55	-45.18	-13.00	-10.37	-42.55	Peak
3	161.92	-55.24	-50.26	-13.00	-4.98	-42.24	Peak
4 pp	252.13	-47.49	-41.46	-13.00	-6.03	-34.49	Peak
5	365.62	-59.94	-53.79	-13.00	-6.15	-46.94	Peak
6	936.95	-62.89	-64.38	-13.00	1.49	-49.89	Peak
7	1693.20	-50.35	-36.33	-13.00	-14.02	-37.35	Peak
8	2539.80	-50.75	-40.69	-13.00	-10.06	-37.75	Peak

Bureau Veritas Consumer Products Services Ltd., Taoyuan 32663



A D T

Data: 8

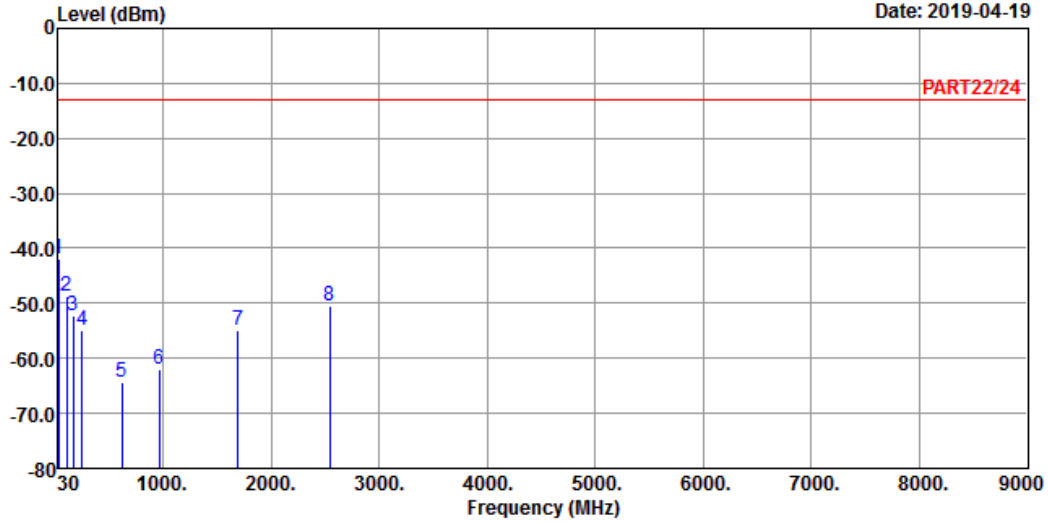

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remak : WCDMA Band V Link_H-CH
 Tested by: tim-chen

	Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	30.00	-41.89	-42.27	-13.00	0.38	-28.89	Peak
2	107.60	-48.75	-38.38	-13.00	-10.37	-35.75	Peak
3	165.80	-52.40	-47.15	-13.00	-5.25	-39.40	Peak
4	251.16	-54.97	-48.96	-13.00	-6.01	-41.97	Peak
5	619.76	-64.46	-63.66	-13.00	-0.80	-51.46	Peak
6	961.20	-61.90	-64.11	-13.00	2.21	-48.90	Peak
7	1693.20	-54.79	-40.77	-13.00	-14.02	-41.79	Peak
8	2539.80	-50.46	-40.40	-13.00	-10.06	-37.46	Peak


LTE Band 5
Channel Bandwidth: 1.4 MHz / QPSK
Low Channel

Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch



A D T

Data: 5

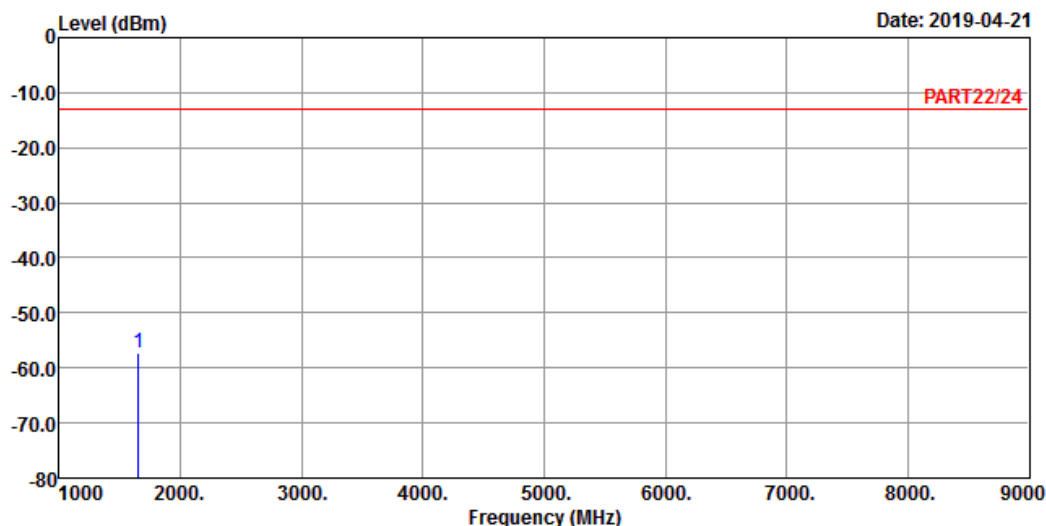


Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : LTE Band 5 QPSK_1.4M Link_L-CH
Tested by: Jisyong Wang

		Read	Limit		Over	
Freq	Level	Level	Line	Factor	Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1649.40	-57.31	-43.57	-13.00	-13.74	-44.31	Peak



A D T

Data: 6

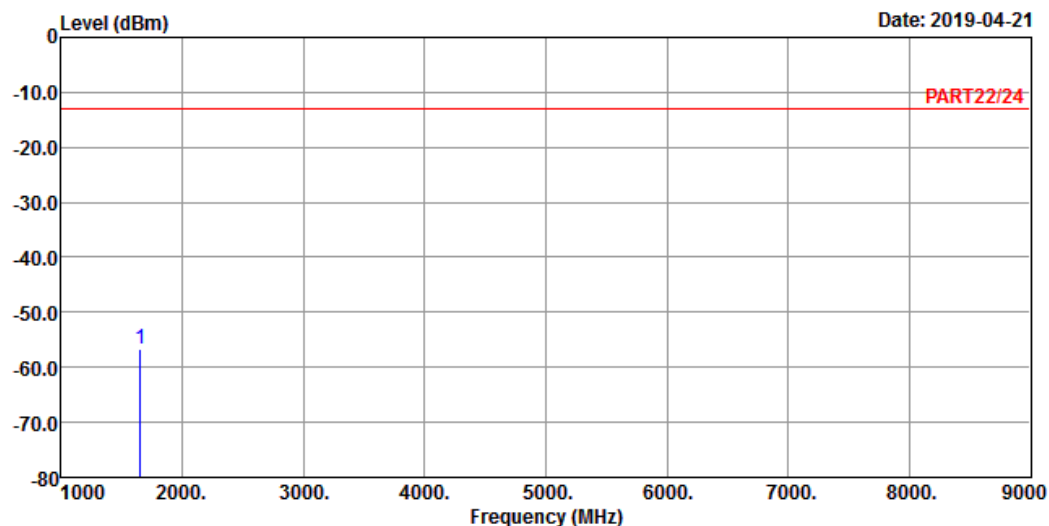

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 5 QPSK_1.4M Link_L-CH

Tested by: Jisyong Wang

		Read	Limit		Over	
Freq	Level	Level	Line	Factor	Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1649.40 -56.72 -42.98 -13.00 -13.74 -43.72 Peak


Middle Channel

Bureau Veritas Consumer Products Services Ltd., Taoyuan 32453



A D T

Data: 5

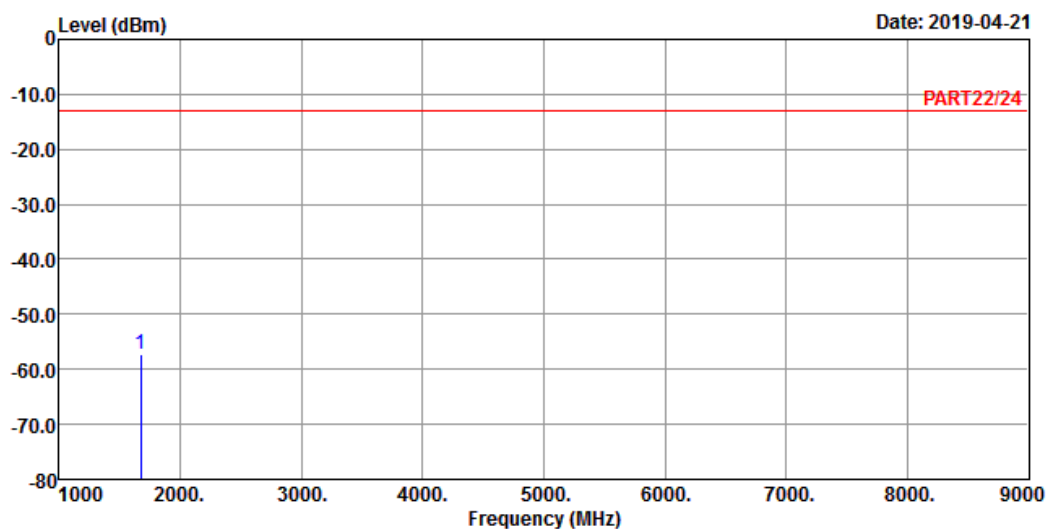

Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : LTE Band 5 QPSK_1.4M Link_M-CH
Tested by: Jisyong Wang


Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1673.00 -57.17 -43.27 -13.00 -13.90 -44.17 Peak



Data: 6

Date: 2019-04-21

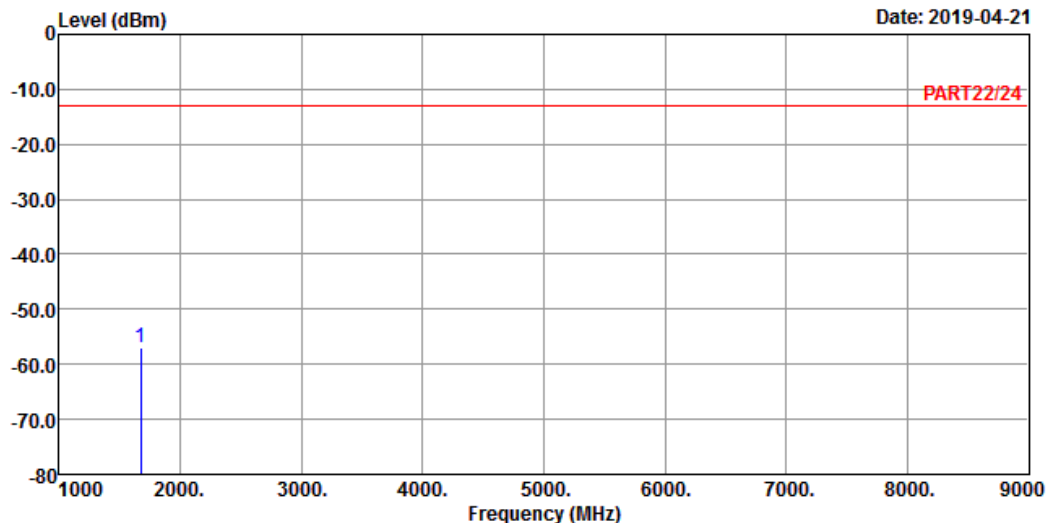

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 5 QPSK_1.4M Link_M-CH

Tested by: Jisyong Wang

Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1673.00 -56.92 -43.02 -13.00 -13.90 -43.92 Peak


High Channel

Bureau Veritas Consumer Products Services Ltd., Taoyuan 32453



A D T

Data: 5

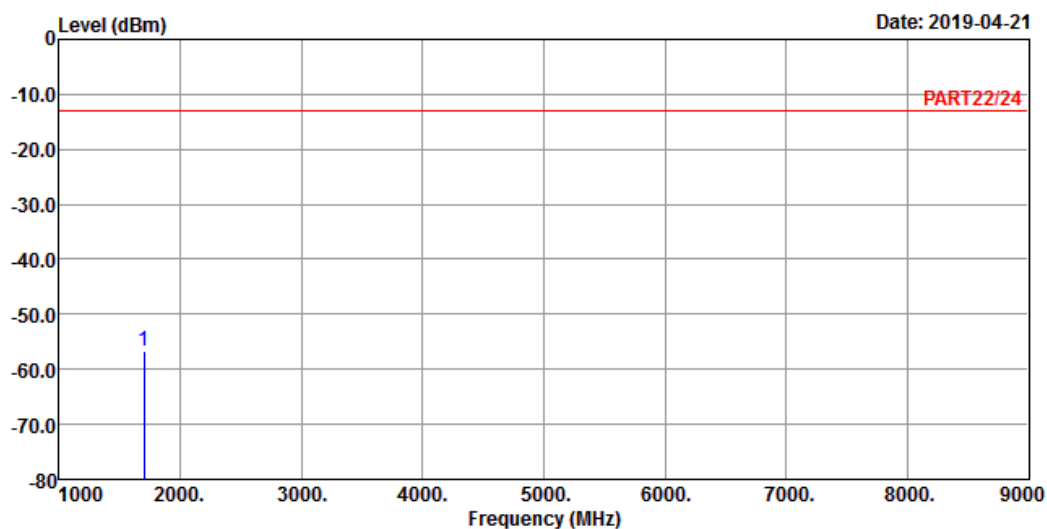


Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : LTE Band 5 QPSK_1.4M Link_H-CH
Tested by: Jisyong Wang

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1696.60 -56.62 -42.60 -13.00 -14.02 -43.62 Peak



Data: 6

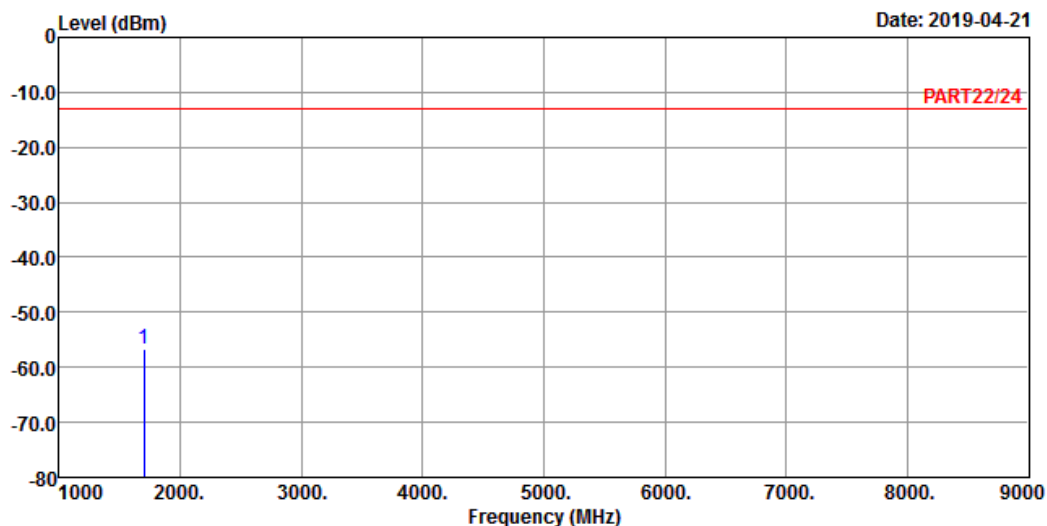

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remak : LTE Band 5 QPSK_1.4M Link_H-CH
 Tested by: Jisyong Wang

		Read	Limit		Over	
Freq	Level	Level	Line	Factor	Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1696.60	-56.67	-42.65	-13.00	-14.02	-43.67	Peak

Channel Bandwidth: 5 MHz / QPSK
Low Channel


Bureau Veritas Consumer Products Services Ltd., Taoyuan 31041



A D T

Data: 5

Date: 2019-04-21

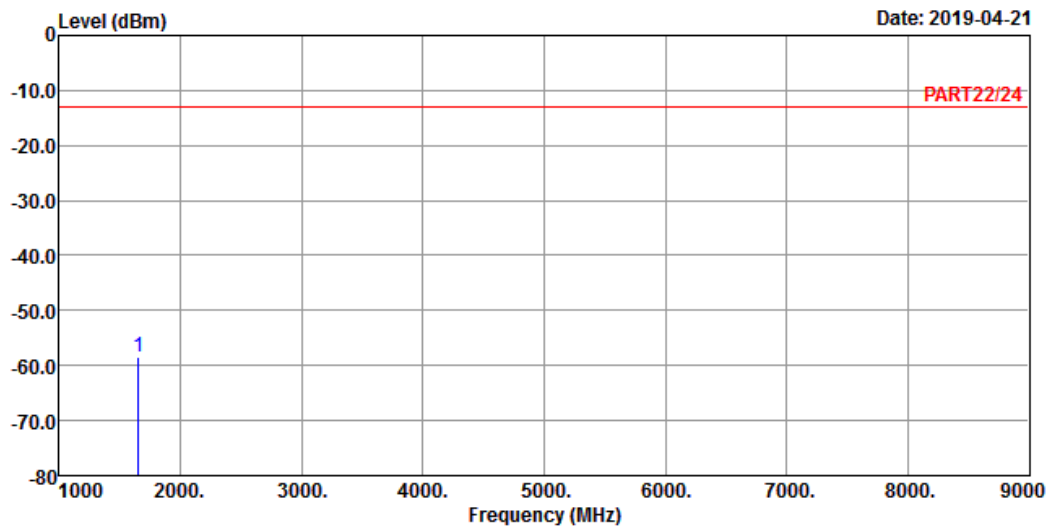


Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : LTE Band 5 QPSK_5M Link_L-CH
Tested by: Jisyong Wang

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1653.00	-58.49	-44.72	-13.00	-13.77	-45.49	Peak



Data: 6

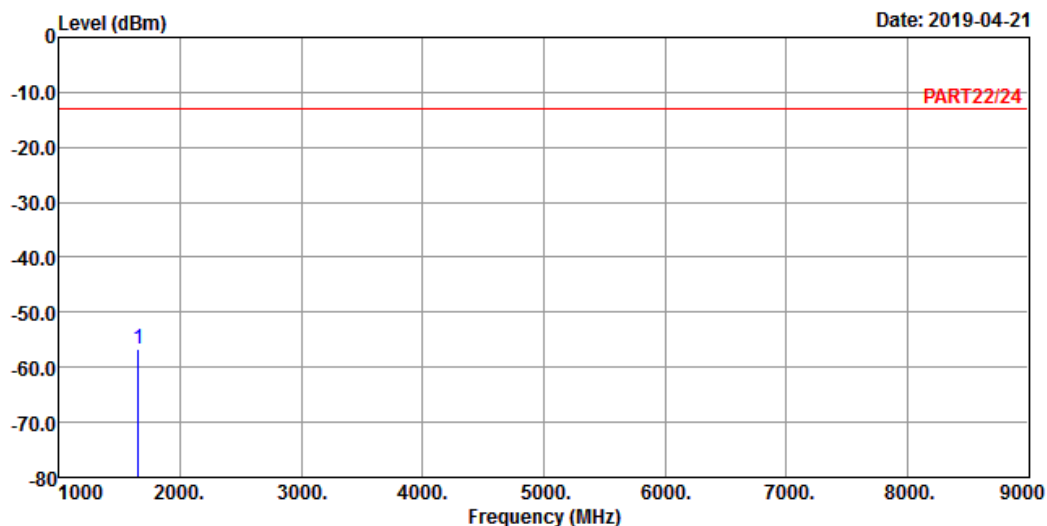

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 5 QPSK_5M Link_L-CH

Tested by: Jisyong Wang

Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1653.00 -56.73 -42.96 -13.00 -13.77 -43.73 Peak


Middle Channel

Bureau Veritas Consumer Products Services Ltd., Taoyuan 32453



A D T

Data: 5

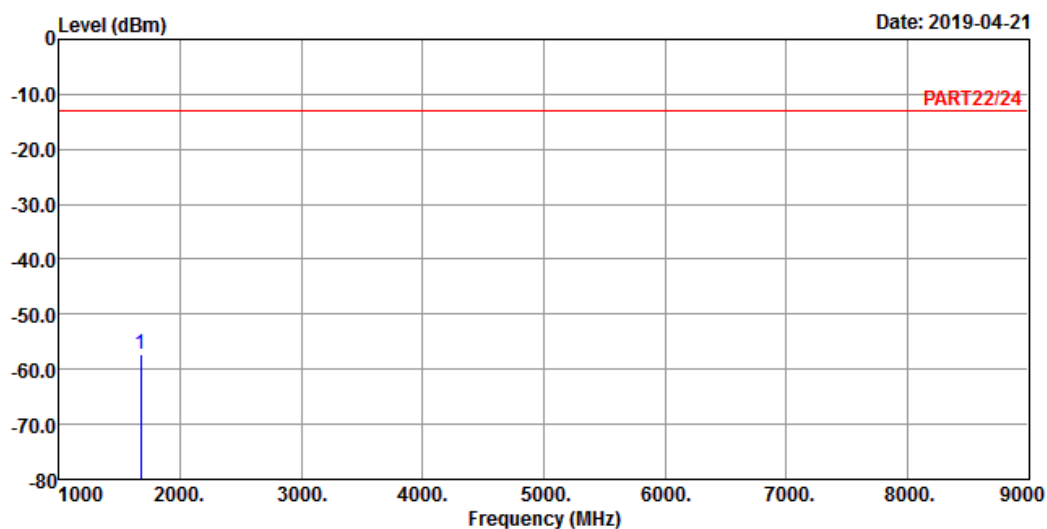

Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : LTE Band 5 QPSK_5M Link_M-CH
Tested by: Jisyong Wang


Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1673.00 -57.28 -43.38 -13.00 -13.90 -44.28 Peak



A D T

Data: 6

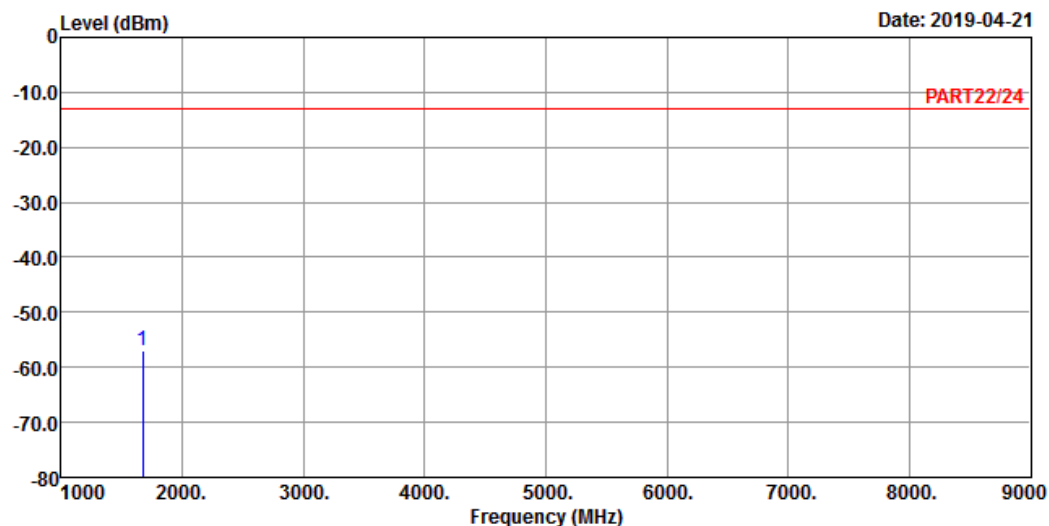

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 5 QPSK_5M Link_M-CH

Tested by: Jisyong Wang

		Read	Limit		Over	
Freq	Level	Level	Line	Factor	Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1673.00 -56.86 -42.96 -13.00 -13.90 -43.86 Peak


High Channel

Bureau Veritas Consumer Products Services Ltd., Taoyuan 32453



A D T

Data: 5

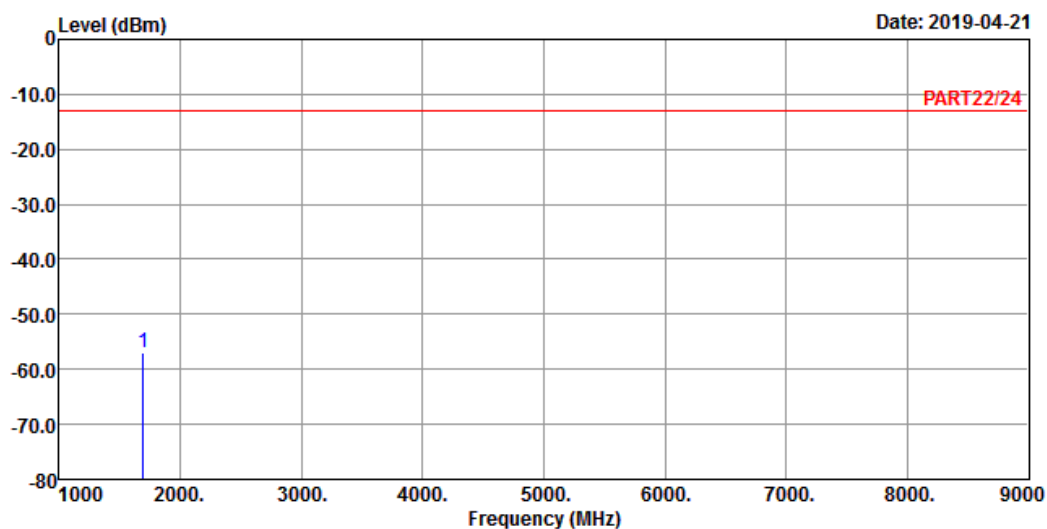


Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : LTE Band 5 QPSK_5M Link_H-CH
Tested by: Jisyong Wang

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1693.00 -57.00 -42.98 -13.00 -14.02 -44.00 Peak



Data: 6

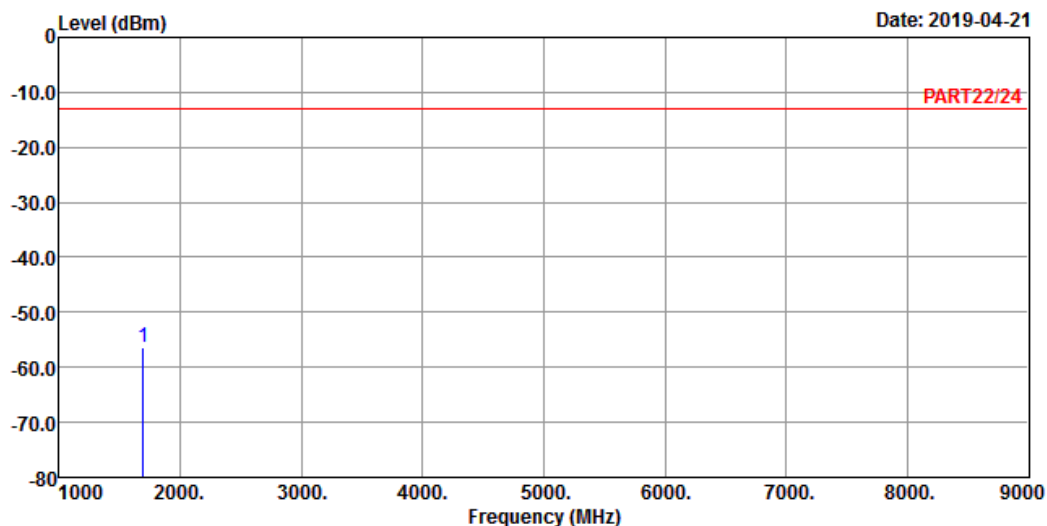

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 5 QPSK_5M Link_H-CH

Tested by: Jisyong Wang

Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1693.00 -56.52 -42.50 -13.00 -14.02 -43.52 Peak

Channel Bandwidth: 10 MHz / QPSK
Low Channel


Bureau Veritas Consumer Products Services Ltd., Taoyuan 31041



A D T

Data: 3

Date: 2019-04-21

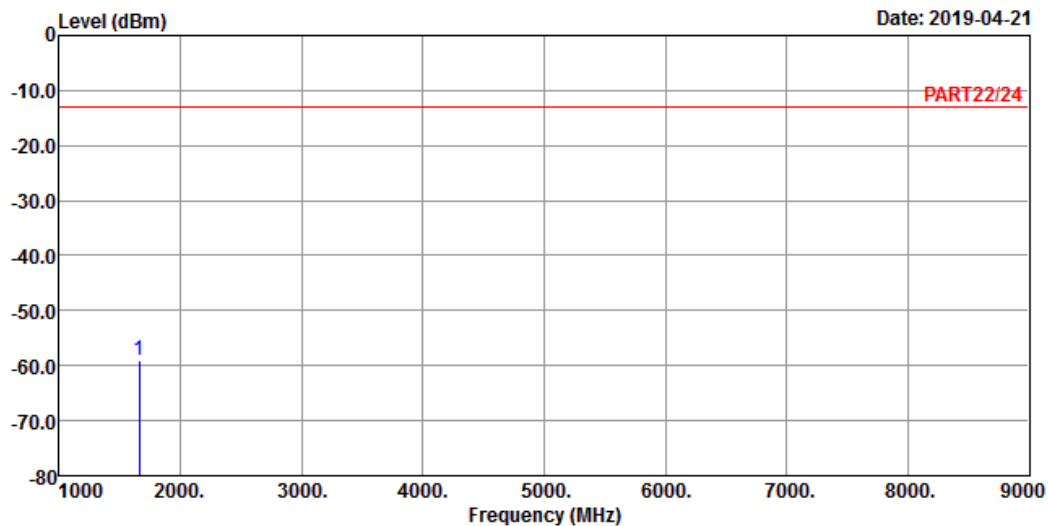

Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : LTE Band 5 QPSK_10M Link_L-CH
Tested by: Jisyong Wang


Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1658.00 -59.07 -45.27 -13.00 -13.80 -46.07 Peak



A D T

Data: 4

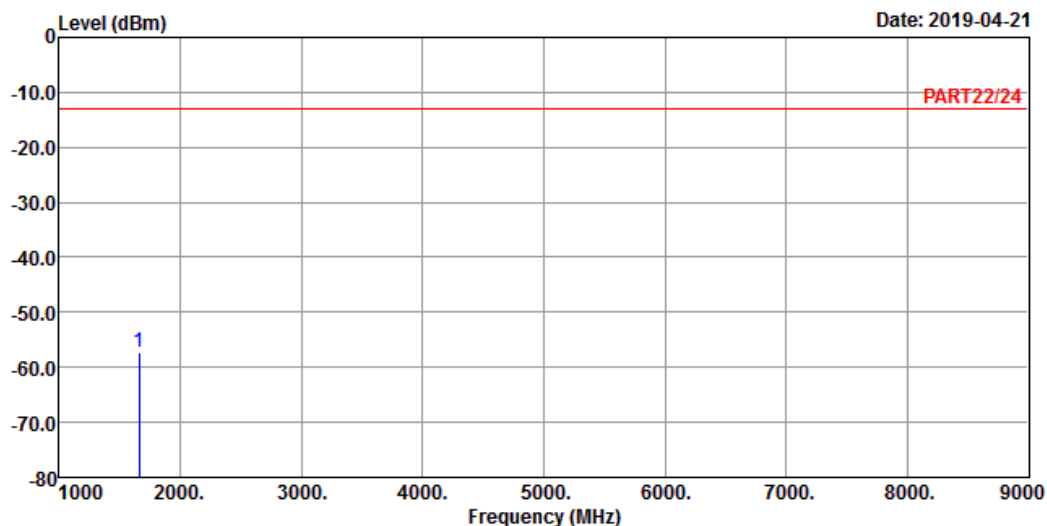

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 5 QPSK_10M Link_L-CH

Tested by: Jisyong Wang

Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1658.00	-57.21	-43.41	-13.00	-13.80	-44.21	Peak


Middle Channel

Bureau Veritas Consumer Products Services Ltd., Taoyuan 32453



A D T

Data: 5

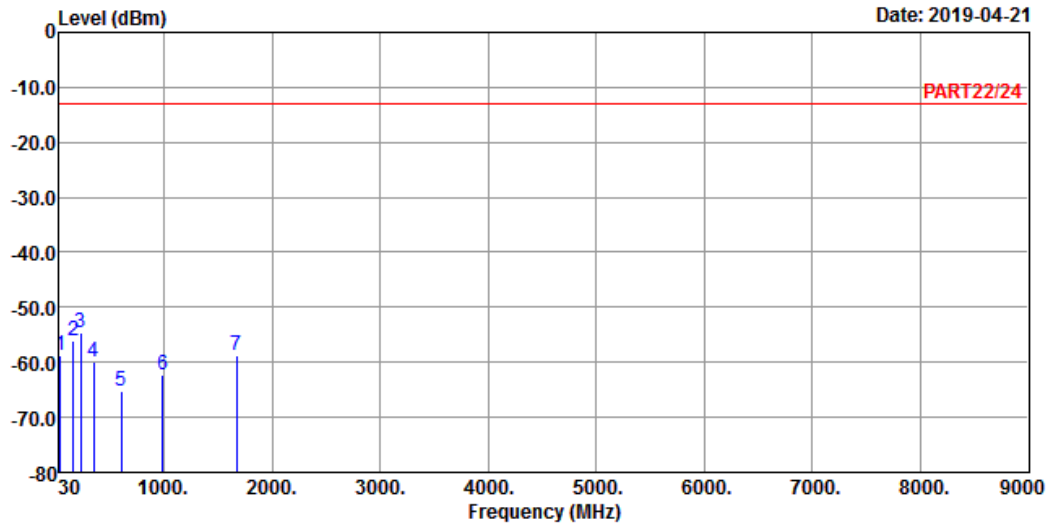


Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : LTE Band 5 QPSK_10M Link_M-CH
Tested by: Jisyoung Wang

	Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	41.64	-58.80	-58.39	-13.00	-0.41	-45.80	Peak
2	161.92	-56.12	-51.14	-13.00	-4.98	-43.12	Peak
3 pp	230.79	-54.54	-47.77	-13.00	-6.77	-41.54	Peak
4	348.16	-59.79	-53.52	-13.00	-6.27	-46.79	Peak
5	603.27	-65.14	-64.38	-13.00	-0.76	-52.14	Peak
6	990.30	-62.43	-65.67	-13.00	3.24	-49.43	Peak
7	1673.00	-58.65	-44.75	-13.00	-13.90	-45.65	Peak

Data: 6

Date: 2019-04-21

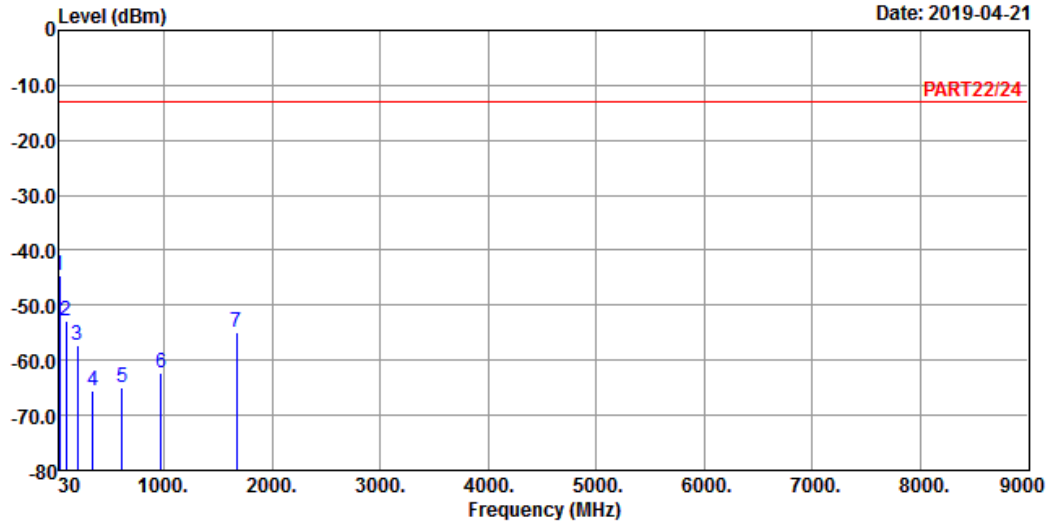

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 5 QPSK_10M Link_M-CH

Tested by: Jisyong Wang

	Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	32.91	-44.55	-43.46	-13.00	-1.09	-31.55	Peak
2	95.96	-52.98	-42.20	-13.00	-10.78	-39.98	Peak
3	196.84	-57.20	-49.46	-13.00	-7.74	-44.20	Peak
4	342.34	-65.52	-59.16	-13.00	-6.36	-52.52	Peak
5	612.00	-64.86	-64.08	-13.00	-0.78	-51.86	Peak
6	972.84	-62.32	-64.94	-13.00	2.62	-49.32	Peak
7	1673.00	-55.01	-41.11	-13.00	-13.90	-42.01	Peak


High Channel

Bureau Veritas Consumer Products Services Ltd., Taoyuan 32453



A D T

Data: 3

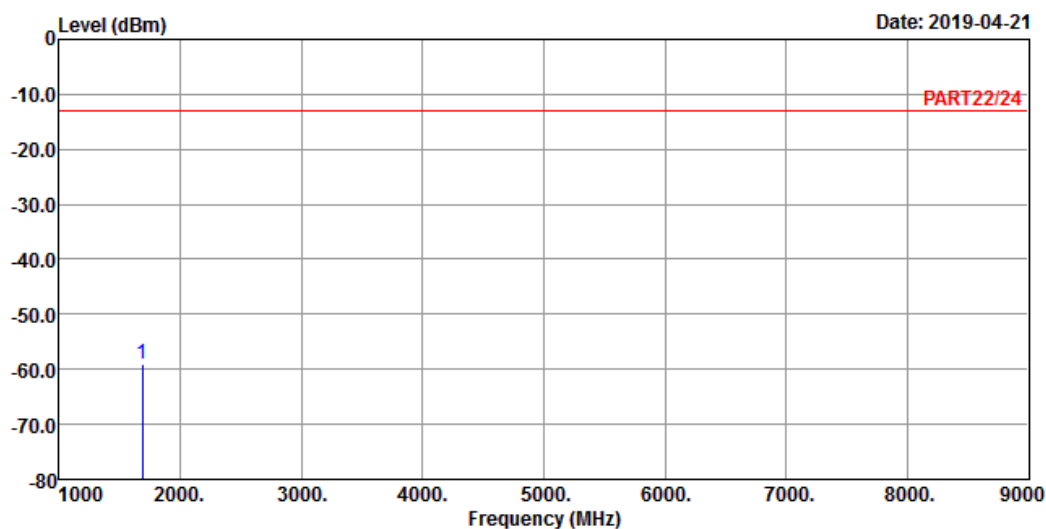


Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : LTE Band 5 QPSK_10M Link_H-CH
Tested by: Jisyong Wang

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1688.00 -58.89 -44.90 -13.00 -13.99 -45.89 Peak



Data: 4

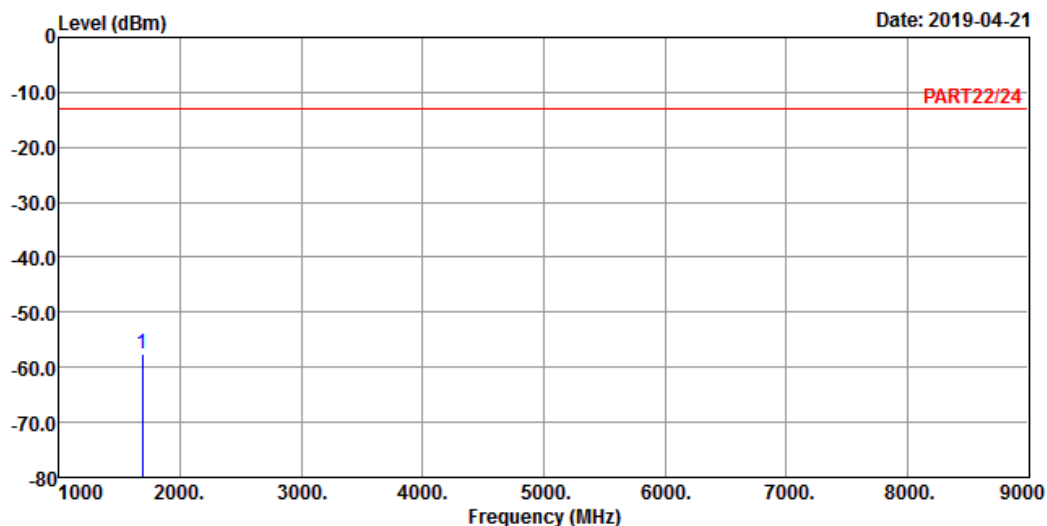

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 5 QPSK_10M Link_H-CH

Tested by: Jisyong Wang

Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1688.00	-57.59	-43.60	-13.00	-13.99	-44.59	Peak


LTE Band 26
Channel Bandwidth: 1.4 MHz / QPSK
Low Channel

Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch



A D T

Data: 3

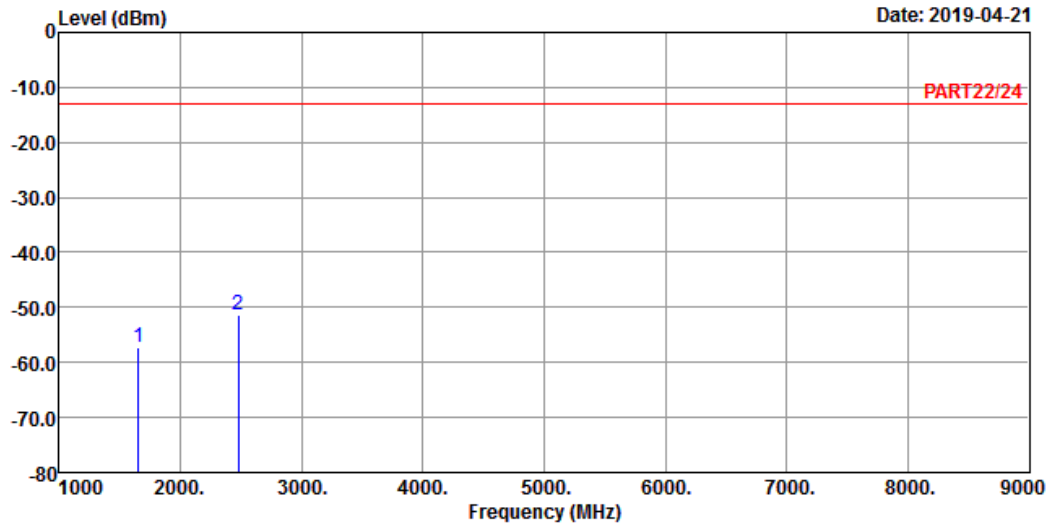


Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : LTE Band 26 QPSK_1.4M Link_L-CH
Tested by: Jisyong Wang

		Read	Limit		Over	
Freq	Level	Level	Line	Factor	Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	
1	1649.40	-57.29	-43.55	-13.00	-13.74	-44.29 Peak
2 pp	2474.10	-51.31	-41.29	-13.00	-10.02	-38.31 Peak



Data: 4

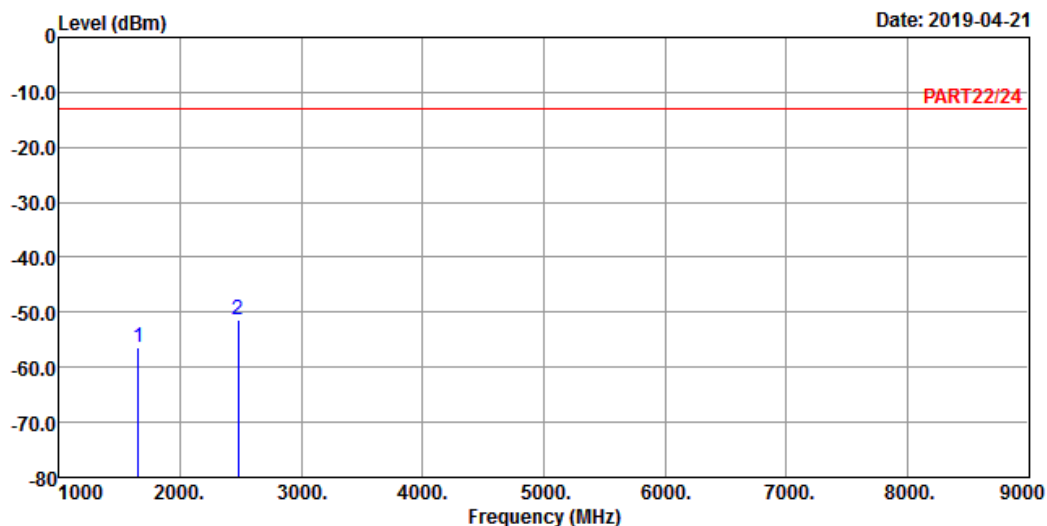

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 26 QPSK_1.4M Link_L-CH

Tested by: Jisyong Wang

	Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1649.40	-56.42	-42.68	-13.00	-13.74	-43.42	Peak
2 pp	2474.10	-51.39	-41.37	-13.00	-10.02	-38.39	Peak


Middle Channel

Bureau Veritas Consumer Products Services Ltd., Taoyuan 32453



A D T

Data: 3

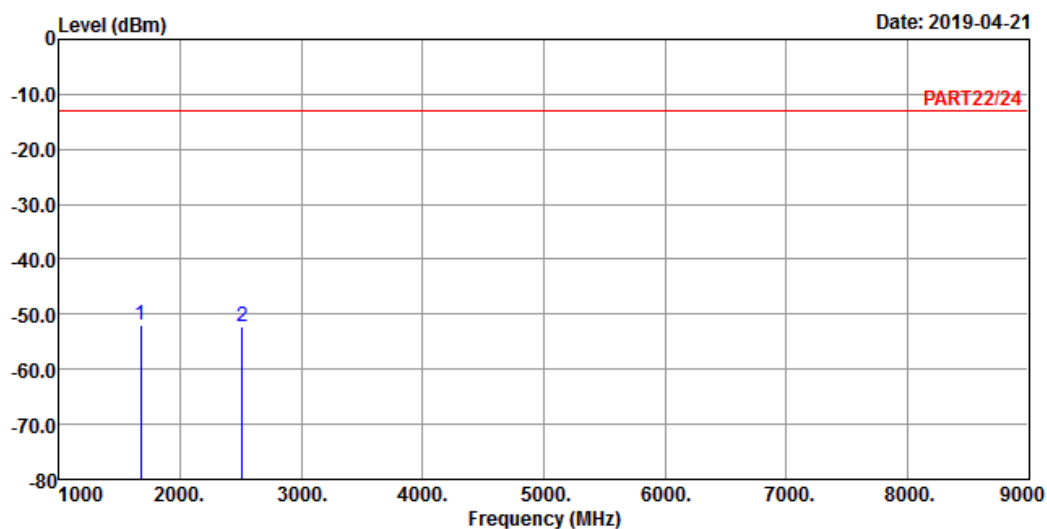


Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : LTE Band 26 QPSK_1.4M Link_M-CH
Tested by: Jisyong Wang

			Read	Limit		Over	
	Freq	Level	Level	Line	Factor	Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	1673.00	-52.04	-38.14	-13.00	-13.90	-39.04	Peak
2	2509.50	-52.15	-42.07	-13.00	-10.08	-39.15	Peak



Data: 4

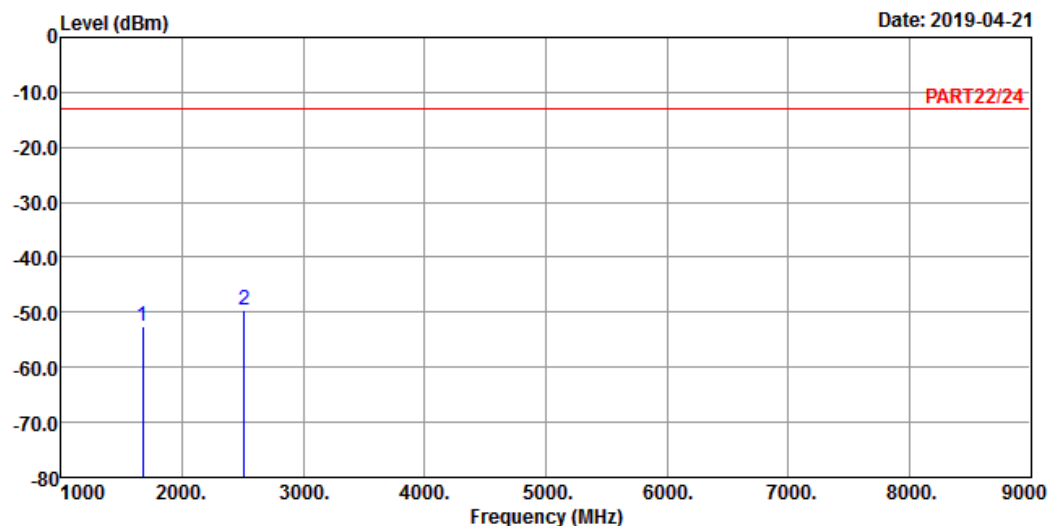

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 26 QPSK_1.4M Link_M-CH

Tested by: Jisyong Wang

	Freq	Level	Read Level	Limit Line	Over Factor	Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1673.00	-52.44	-38.54	-13.00	-13.90	-39.44	Peak
2 pp	2509.50	-49.52	-39.44	-13.00	-10.08	-36.52	Peak


High Channel

Bureau Veritas Consumer Products Services Ltd., Taoyuan 32453



A D T

Data: 3

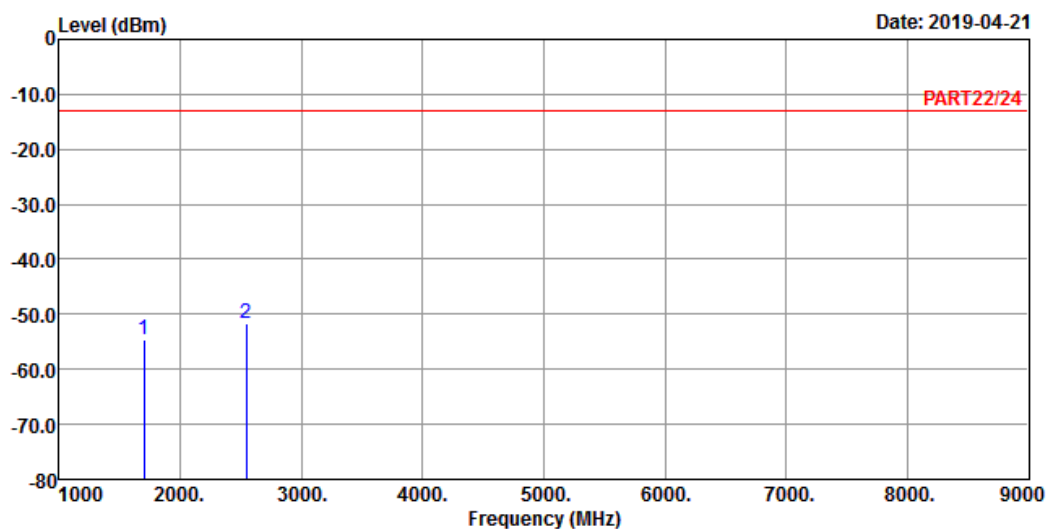


Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : LTE Band 26 QPSK_1.4M Link_H-CH
Tested by: Jisyong Wang

			Read	Limit		Over	
	Freq	Level	Level	Line	Factor	Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1696.60	-54.55	-40.53	-13.00	-14.02	-41.55	Peak
2 pp	2544.90	-51.67	-41.61	-13.00	-10.06	-38.67	Peak



A D T

Data: 4

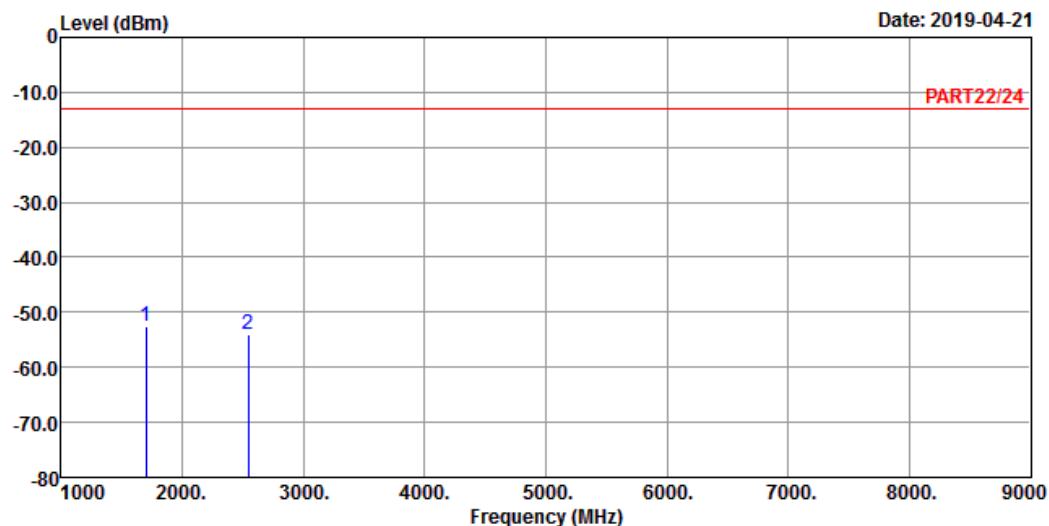

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 26 QPSK_1.4M Link_H-CH

Tested by: Jisyong Wang

	Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	1696.60	-52.69	-38.67	-13.00	-14.02	-39.69	Peak
2	2544.90	-54.06	-44.00	-13.00	-10.06	-41.06	Peak

Channel Bandwidth: 5 MHz / QPSK
Low Channel


Bureau Veritas Consumer Products Services Ltd., Taoyuan 31041



A D T

Data: 3

Date: 2019-04-21

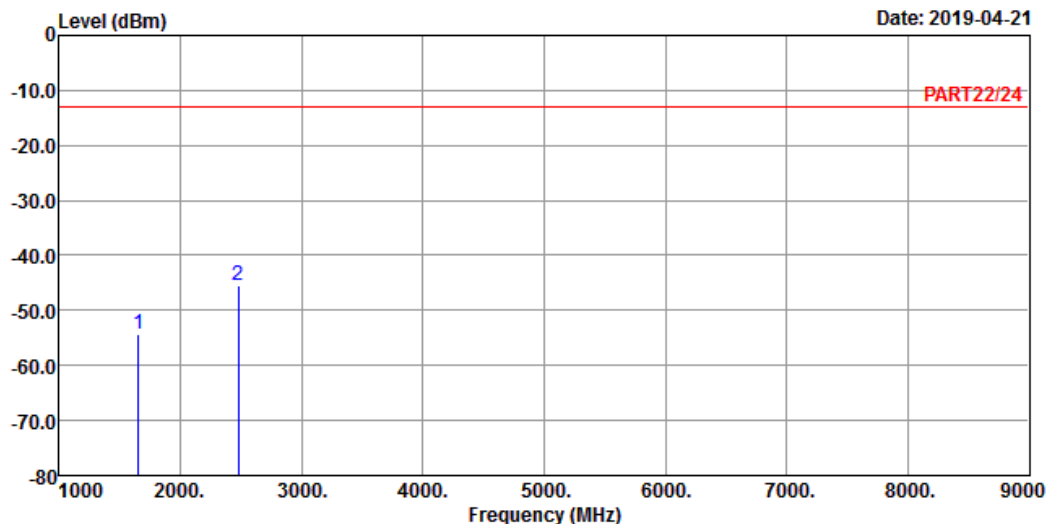


Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : LTE Band 26 QPSK_5M Link_L-CH
Tested by: Jisyong Wang

	Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1653.00	-54.28	-40.51	-13.00	-13.77	-41.28	Peak
2 pp	2479.50	-45.41	-35.38	-13.00	-10.03	-32.41	Peak



Data: 4

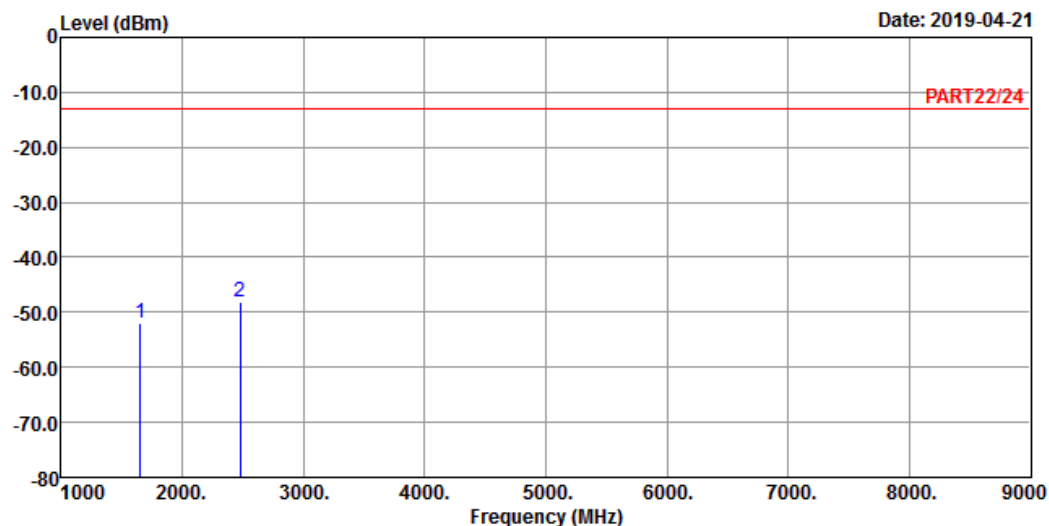

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 26 QPSK_5M Link_L-CH

Tested by: Jisyong Wang

	Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1653.00	-51.92	-38.15	-13.00	-13.77	-38.92	Peak
2 pp	2479.50	-48.24	-38.21	-13.00	-10.03	-35.24	Peak


Middle Channel

Bureau Veritas Consumer Products Services Ltd., Taoyuan 32453



A D T

Data: 3

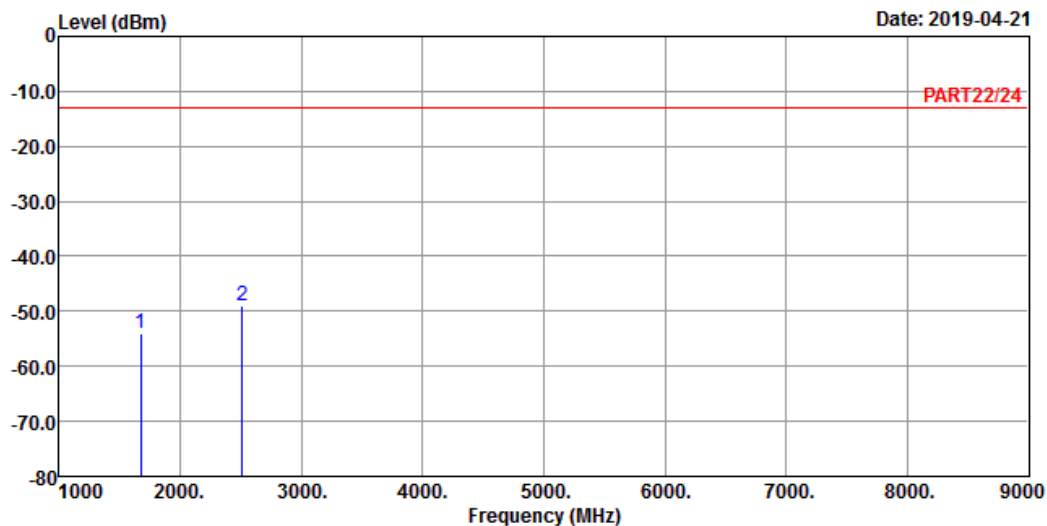


Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : LTE Band 26 QPSK_5M Link_M-CH
Tested by: Jisyong Wang

	Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1673.00	-54.03	-40.13	-13.00	-13.90	-41.03	Peak
2 pp	2509.50	-48.98	-38.90	-13.00	-10.08	-35.98	Peak



Data: 4

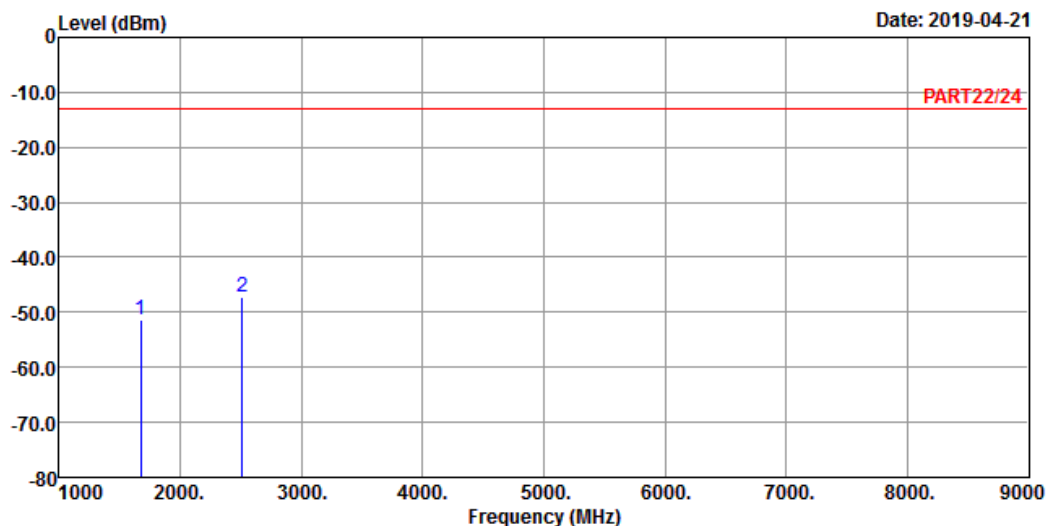

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 26 QPSK_5M Link_M-CH

Tested by: Jisyong Wang

	Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1673.00	-51.46	-37.56	-13.00	-13.90	-38.46	Peak
2 pp	2509.50	-47.34	-37.26	-13.00	-10.08	-34.34	Peak


High Channel

Bureau Veritas Consumer Products Services Ltd., Taoyuan 32453



A D T

Data: 3

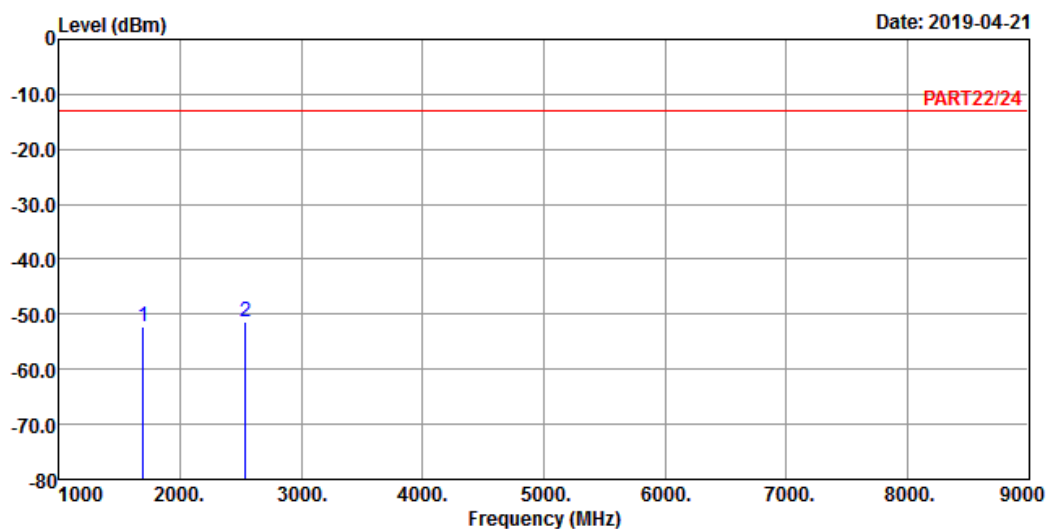


Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : LTE Band 26 QPSK_5M Link_H-CH
Tested by: Jisyong Wang

			Read	Limit		Over	
	Freq	Level	Level	Line	Factor	Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1693.00	-52.38	-38.36	-13.00	-14.02	-39.38	Peak
2 pp	2539.50	-51.50	-41.44	-13.00	-10.06	-38.50	Peak



Data: 4

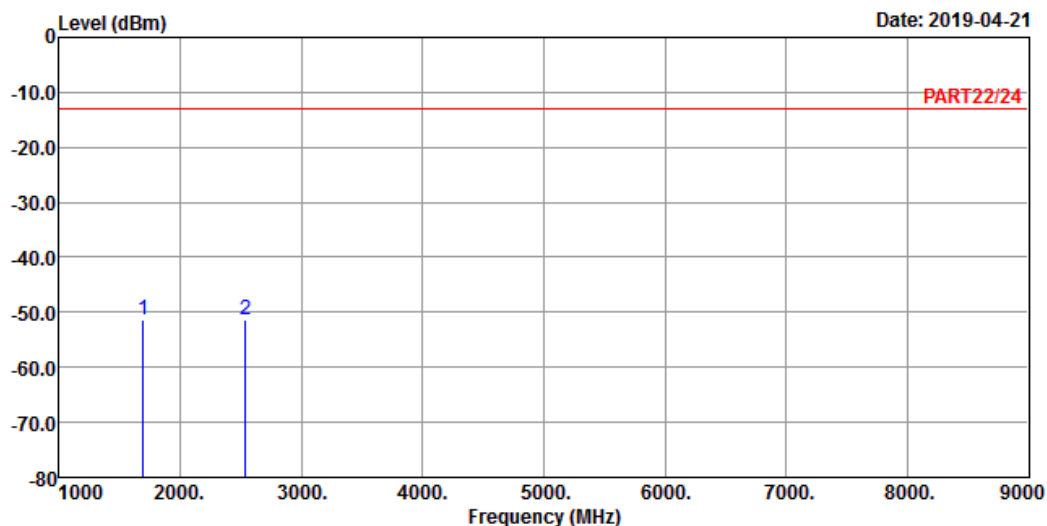

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 26 QPSK_5M Link_H-CH

Tested by: Jisyong Wang

	Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	1693.00	-51.22	-37.20	-13.00	-14.02	-38.22	Peak
2	2539.50	-51.23	-41.17	-13.00	-10.06	-38.23	Peak

Channel Bandwidth: 15 MHz / QPSK
Low Channel


Bureau Veritas Consumer Products Services Ltd., Taoyuan 31041



A D T

Data: 5

Date: 2019-04-21

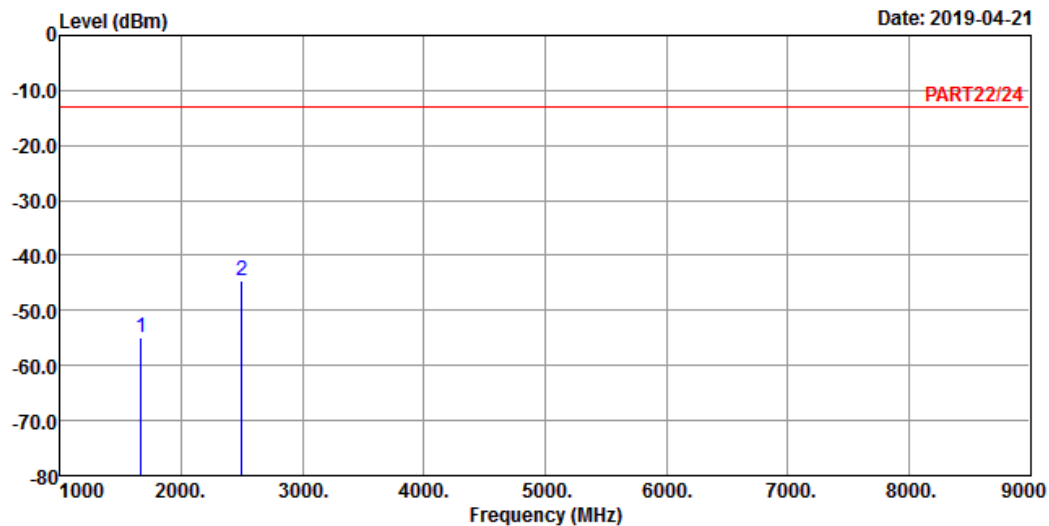


Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : LTE Band 26 QPSK_15M Link_L-CH
Tested by: Jisyong Wang

	Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1663.00	-54.87	-41.04	-13.00	-13.83	-41.87	Peak
2 pp	2494.50	-44.54	-34.48	-13.00	-10.06	-31.54	Peak



Data: 6

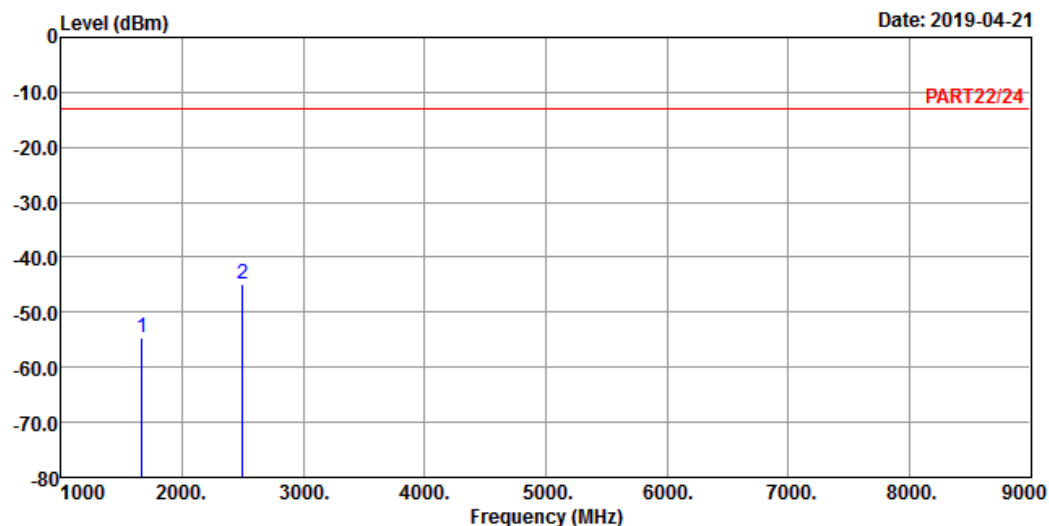

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 26 QPSK_15M Link_L-CH

Tested by: Jisyong Wang

	Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1663.00	-54.58	-40.75	-13.00	-13.83	-41.58	Peak
2 pp	2494.50	-44.94	-34.88	-13.00	-10.06	-31.94	Peak


Middle Channel

Bureau Veritas Consumer Products Services Ltd., Taoyuan 32453



A D T

Data: 7

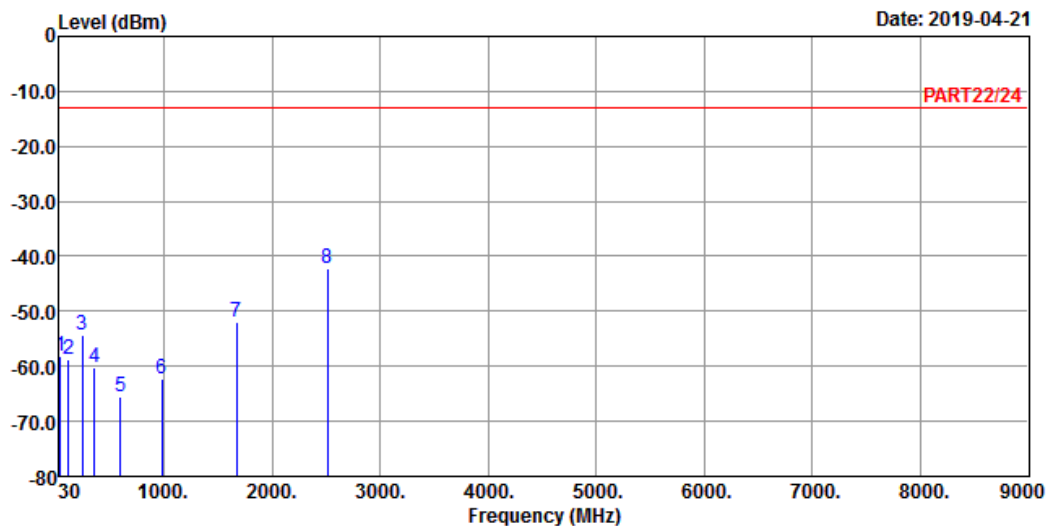

Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : LTE Band 26 QPSK_15M Link_M-CH
Tested by: Jisyoung Wang


	Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	41.64	-58.08	-57.67	-13.00	-0.41	-45.08	Peak
2	112.45	-58.81	-48.61	-13.00	-10.20	-45.81	Peak
3	241.46	-54.39	-48.05	-13.00	-6.34	-41.39	Peak
4	356.89	-60.19	-53.99	-13.00	-6.20	-47.19	Peak
5	599.39	-65.59	-64.80	-13.00	-0.79	-52.59	Peak
6	981.57	-62.17	-65.10	-13.00	2.93	-49.17	Peak
7	1673.00	-51.89	-37.99	-13.00	-13.90	-38.89	Peak
8 pp	2509.50	-42.10	-32.02	-13.00	-10.08	-29.10	Peak

Bureau Veritas Consumer Products Services Ltd., Taoyuan 31068



A D T

Data: 8

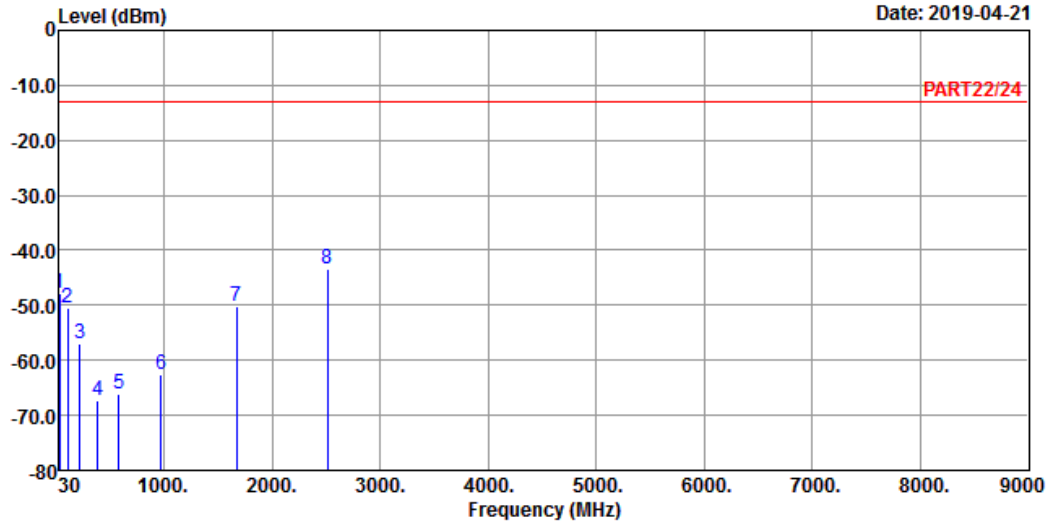

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 26 QPSK_15M Link_M-CH

Tested by: Jisyong Wang

	Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	34.85	-47.84	-45.77	-13.00	-2.07	-34.84	Peak
2	109.54	-50.55	-40.22	-13.00	-10.33	-37.55	Peak
3	217.21	-57.01	-49.69	-13.00	-7.32	-44.01	Peak
4	385.02	-67.26	-61.23	-13.00	-6.03	-54.26	Peak
5	583.87	-65.99	-64.55	-13.00	-1.44	-52.99	Peak
6	967.99	-62.52	-64.97	-13.00	2.45	-49.52	Peak
7	1673.00	-50.24	-36.34	-13.00	-13.90	-37.24	Peak
8 pp	2509.50	-43.41	-33.33	-13.00	-10.08	-30.41	Peak


High Channel

Bureau Veritas Consumer Products Services Ltd., Taoyuan 32453



A D T

Data: 5

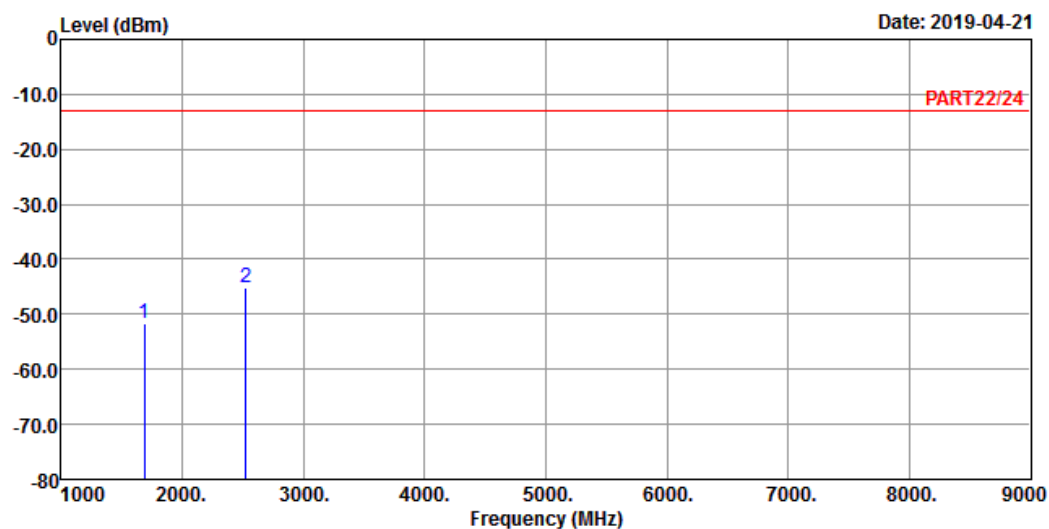


Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : LTE Band 26 QPSK_15M Link_H-CH
Tested by: Jisyong Wang

		Read	Limit		Over	
Freq	Level	Level	Line	Factor	Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	
1	1683.00	-51.62	-37.66	-13.00	-13.96	-38.62 Peak
2 pp	2524.50	-45.19	-35.12	-13.00	-10.07	-32.19 Peak



Data: 6

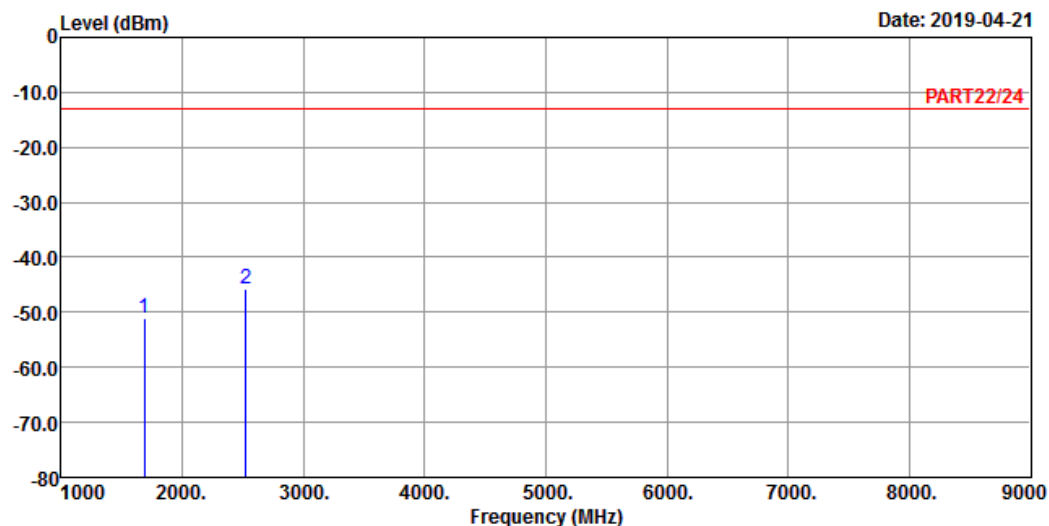

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 26 QPSK_15M Link_H-CH

Tested by: Jisyong Wang

	Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1683.00	-51.03	-37.07	-13.00	-13.96	-38.03	Peak
2 pp	2524.50	-45.77	-35.70	-13.00	-10.07	-32.77	Peak

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---