



FCC RADIO TEST REPORT

FCC ID : B94HNC09CTKR
Equipment : Convertible PC
Brand Name : HP
Model Name : HSN-C09C
Applicant : HP Inc.
3390 East Harmony Road, Fort Collins,
Colorado, United States 80528
Standard : FCC 47 CFR Part 2, 22(H), 27

The product was received on Aug. 21, 2020 and testing was started from Nov. 13, 2020 and completed on Nov. 20, 2020 We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	6
1.1 Product Feature of Equipment Under Test.....	6
1.2 Modification of EUT	6
1.3 Testing Location	8
1.4 Applicable Standards.....	8
2 Test Configuration of Equipment Under Test	9
2.1 Test Mode.....	9
2.2 Connection Diagram of Test System.....	10
2.3 Support Unit used in test configuration and system	10
2.4 Frequency List of Low/Middle/High Channels	11
3 Radiated Test Items	12
3.1 Measuring Instruments	12
3.2 Radiated Spurious Emission Measurement	14
4 List of Measuring Equipment.....	15
5 Uncertainty of Evaluation	16
Appendix A. Test Results of Radiated Test	



History of this test report

Report No.	Version	Description	Issued Date
FG082123-01C	01	Initial issue of report	Dec. 17, 2020
FG082123-01C	02	Revise summary description and applicant information	Dec. 24, 2020

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
-	§2.1046	Conducted Output Power	-	See Note
	§22.913 (a)(2)	Effective Radiated Power (n5)	-	
	§27.50 (c)(10)	Effective Radiated Power (n12)		
	§27.50 (h)(2)	Equivalent Isotropic Radiated Power (n2) (n7) (n38) (n41)		
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power (n66)		
-	§24.232 (d) §27.50 (d)(5)	Peak-to-Average Ratio	-	See Note
-	§2.1049	Occupied Bandwidth	-	See Note
-	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g) §27.53 (h)	Conducted Band Edge Measurement (n2) (n5) (n12) (n66)	-	See Note
	§2.1051 §27.53 (m)(4)	Conducted Band Edge Measurement (n7) (n38) (n41)		
-	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g) §27.53 (h)	Conducted Spurious Emission (n2) (n5) (n12) (n66)	-	See Note
	§2.1051 §27.53 (m)(4)	Conducted Spurious Emission (n7) (n38) (n41)		
-	§2.1055 §22.355 §27.54	Frequency Stability Temperature & Voltage	-	See Note



Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1053 §22.917 (a) §24.238 (a) §27.53 (g) §27.53 (h)	Radiated Spurious Emission (n2) (n5) (n12) (n66)	Pass	Under limit 19.23 dB at 10364.000 MHz
	§2.1051 §27.53 (m)(4)	Radiated Spurious Emission (n7) (n38) (n41)		

Note: The module (Model: T99W175) makes no difference after verifying output power and Radiated Spurious Emission worse case (RSE verify detail test channel please refer to section 2.4), this report reuses test data from the module report.

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Cindy Liu

1 General Description

1.1 Product Feature of Equipment Under Test

WCDMA/LTE/5G NR, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, and GNSS.

Product Specification subjective to this standard	
WWAN Module	Brand Name: FOXCONN Model Name: T99W175
Antenna Type	WWAN <Ant. 1>: PIFA Antenna <Ant. 2>: PIFA Antenna (Rx Only) <Ant. 3>: Couple Antenna <Ant. 4>: Couple Antenna (Rx Only) WLAN <Ant. 1>: Couple Antenna <Ant. 2>: Couple Antenna Bluetooth: Couple Antenna GPS/Glonass/BDS/Galileo: PIFA Antenna

WWAN Antenna Information_NB Mode			
Antenna Part Number	Manufacture	Antenna Type	Peak Gain (dBi)
Tx1 Main Antenna 260-24315 (DC33002FX20)	HONG-BO	PIFA	824-849MHz -5.33 dBi (peak)
			880-915MHz -5.19 dBi (peak)
			1710-1785MHz -3.50 dBi (peak)
			1850-1910MHz -1.81 dBi (peak)
			1920-1980MHz -0.23 dBi (peak)
			704-716MHz -5.56 dBi (peak)
			746-756MHz -3.93 dBi (peak)
			777-787MHz -5.35 dBi (peak)
			832-862MHz -4.85 dBi (peak)
			1710-1755MHz -4.61 dBi (peak)
			2500-2570MHz -1.34 dBi (peak)
			2570-2620MHz -3.21 dBi (peak)
Rx2(Aux) Antenna 260-24315 (DC33002FX20)	HONG-BO	PIFA	2300-2400MHz 0.40 dBi (peak)
			869-894MHz -5.76 dBi (peak)
			925-960MHz -6.32 dBi (peak)
			1805-1880MHz -0.89 dBi (peak)
			1930-1990MHz -2.70 dBi (peak)
			2110-2170MHz -0.66 dBi (peak)
			734-746MHz -2.85 dBi (peak)
			746-756MHz -2.74 dBi (peak)
			791-821MHz -2.78 dBi (peak)
			2132-2155MHz -0.85 dBi (peak)
			2620-2690MHz -7.89 dBi (peak)
			2570-2620MHz -5.26 dBi (peak)
			2300-2400MHz -4.47 dBi (peak)



WWAN Antenna Information_TB Mode			
Antenna Part Number	Manufacture	Antenna Type	Peak Gain loss (dBi)
Tx1 Main Antenna 260-24315 (DC33002FX20)	HONG-BO	PIFA	824-849MHz -4.92 dBi (peak)
			880-915MHz -5.52 dBi (peak)
			1710-1785MHz -0.09 dBi (peak)
			1850-1910MHz -0.45 dBi (peak)
			1920-1980MHz -0.17 dBi (peak)
			704-716MHz -8.11 dBi (peak)
			746-756MHz -7.17 dBi (peak)
			777-787MHz -6.54 dBi (peak)
			832-862MHz -4.92 dBi (peak)
			1710-1755MHz -0.31 dBi (peak)
			2500-2570MHz -3.24dBi (peak)
			2570-2620MHz -3.24 dBi (peak)
			2300-2400MHz -0.58 dBi (peak)
Rx2(Aux) Antenna 260-24315 (DC33002FX20)	HONG-BO	PIFA	869-894MHz -6.55 dBi (peak)
			925-960MHz -11.41 dBi (peak)
			1805-1880MHz -1.34 dBi (peak)
			1930-1990MHz -0.94 dBi (peak)
			2110-2170MHz -0.26 dBi (peak)
			734-746MHz -8.16 dBi (peak)
			746-756MHz -6.21 dBi (peak)
			791-821MH -3.36 dBi (peak)
			2132-2155MHz -2.31 dBi (peak)
			2620-2690MHz -7.03 dBi (peak)
			2570-2620MHz -5.03 dBi (peak)
			2300-2400MHz -1.65 dBi dBi (peak)

Remark: The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Testing Location

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. 03CH11-HY
Test Engineer	Bill Chang, Fu Chen and Troye Hsieh
Temperature	20.1~26.1℃
Relative Humidity	49.6~69.9%

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW0007

1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 22(H), 27
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

2.1 Test Mode


Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in Tablet Type (three orthogonal panels, X, Y, Z) and Notebook Type. The worst cases (Notebook type in 45 degree for 5G NR n2, n7, n41 and Z Plane for 5G NR n5) were recorded in this report.

Test Items	Band	Bandwidth (MHz)										Modulation			RB #			Test Channel		
		20+20	20+15	15+20	20+10	10+20	20+5	5+20	15+15	10+10	10+15	PI/2 BPSK	QPSK	16QAM	1	Half	Full	L	M	H
Radiated Spurious Emission	n2										v	v			v			v	v	v
	n5									v		v			v			v	v	v
	n7										v	v			v			v	v	v
Remark	- The mark "v" means that this configuration is chosen for testing - The mark "-" means that this bandwidth is not supported. - The device is investigated from 1GHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. - Test combination is EN-DC 13A-n2A, EN-DC 7A-n5A, EN-DC 12A-n7A. - For radiated measurement, pre-scanned in two modes, DFT-s OFDM and CP OFDM. The worst cases (DFT-s OFDM) were recorded in this report. - All the radiated test cases were performed with Adapter 1.																			

Test Items	NR Band	Bandwidth (MHz)									Modulation					RB #			Test Channel		
		10	15	20	40	50	60	80	90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H
Radiated Spurious Emission	n41									v	v					v			v	v	v
Remark	1. The mark “v ” means that this configuration is chosen for testing 2. The mark “-“ means that this bandwidth is not supported. 3. The device is investigated from 1GHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. For radiated measurement, pre-scanned in two modes, DFT-s OFDM and CP OFDM. The worst cases (DFT-s OFDM) were recorded in this report. 5. The NR radio operation is controlled via software tool QRCT 4 FTM mode (SW: Version 4.0.00.156.0) under 100% duty cycle transmission, expect that the frequency stability is tested by system simulator. 6. All the radiated test cases were performed with Adapter 1.																				

2.2 Connection Diagram of Test System

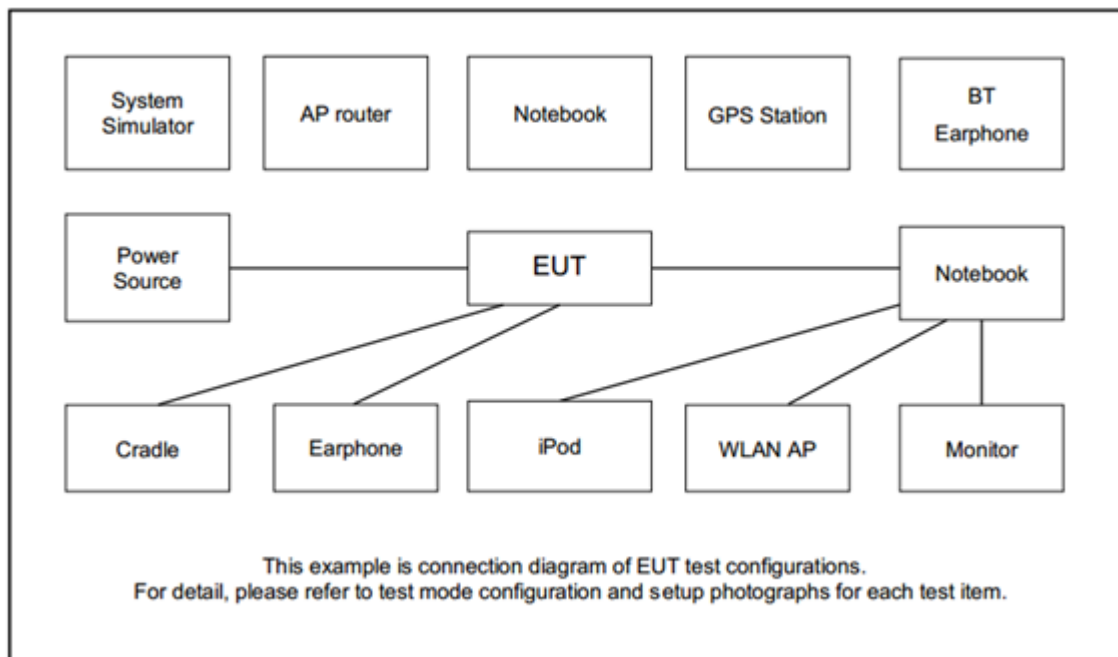

2.3 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A
2.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
3.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m

2.4 Frequency List of Low/Middle/High Channels

5G NR Band n2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
15	Channel	371500	376000	380500
	Frequency	1857.5	1880	1902.5

5G NR Band n5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	20450	20525	20600
	Frequency	829	836.5	844

5G NR Band n7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
15	Channel	501500	507000	512500
	Frequency	2507.5	2535	2562.5

5G NR Band n41 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	509202	518598	528000
	Frequency	2546.01	2592.99	2640


3 Radiated Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


For radiated test below 30MHz

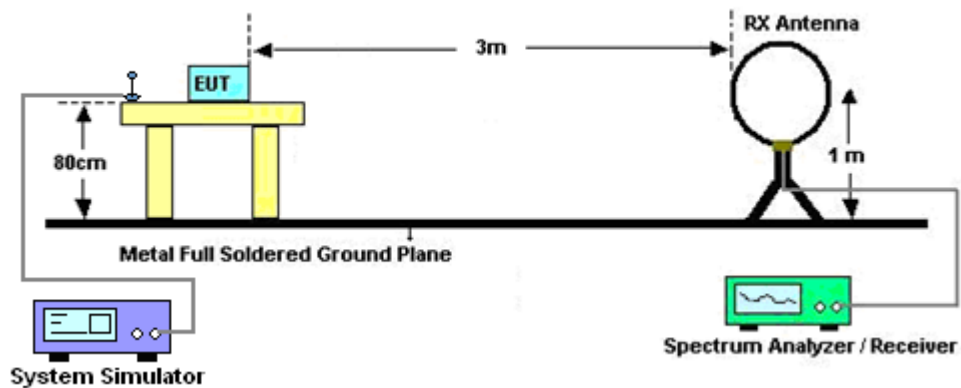

For radiated test from 30MHz to 1GHz

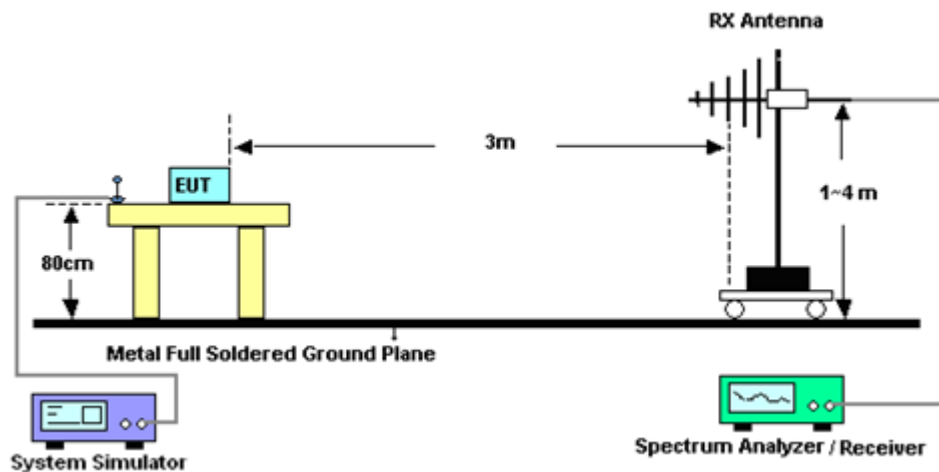

For radiated test above 1GHz

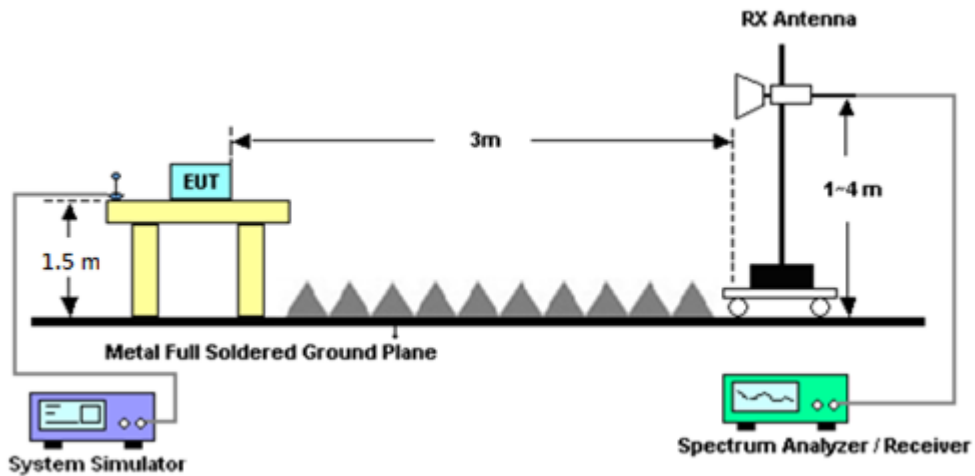

3.1.2 Test Result of Radiated Test

Please refer to Appendix A.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Sitev01r01, and the result came out very similar

3.2 Radiated Spurious Emission Measurement

3.2.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For 5G NR n7, n41

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.2.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

For 5G NR n7, n41

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)

$EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$

$ERP \text{ (dBm)} = EIRP - 2.15$



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 03, 2019	Nov. 13, 2020~ Nov. 20, 2020	Dec. 02, 2020	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D & N-6-06	35414 & AT-N0602	30MHz~1GHz	Oct. 11, 2020	Nov. 13, 2020~ Nov. 20, 2020	Oct. 10, 2021	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1326	1GHz~18GHz	Nov. 03, 2020	Nov. 13, 2020~ Nov. 20, 2020	Nov. 02, 2021	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Jul. 14, 2020	Nov. 13, 2020~ Nov. 20, 2020	Jul. 13, 2021	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Nov. 12, 2020	Nov. 13, 2020~ Nov. 20, 2020	Nov. 11, 2021	Radiation (03CH11-HY)
Preamplifier	Jet-Power	JPA0118-55-3 03	1710001800 055007	1GHz~18GHz	Mar. 31, 2020	Nov. 13, 2020~ Nov. 20, 2020	Mar. 30, 2021	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz~44GHz	Oct. 23, 2020	Nov. 13, 2020~ Nov. 20, 2020	Oct. 22, 2021	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-1080 -1200-15000-6 0SS	SN2	1.2GHz High Pass Filter	Sep. 14, 2020	Nov. 13, 2020~ Nov. 20, 2020	Sep. 13, 2021	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 0SS	SN3	3GHz High Pass Filter	Sep. 14, 2020	Nov. 13, 2020~ Nov. 20, 2020	Sep. 13, 2021	Radiation (03CH11-HY)
Filter	Wainwright	WLK4-1000-15 30-8000-40SS	SN11	1.53GHz Low Pass Filter	Sep. 14, 2020	Nov. 13, 2020~ Nov. 20, 2020	Sep. 13, 2021	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz~40GHz	Mar. 12, 2020	Nov. 13, 2020~ Nov. 20, 2020	Mar. 11, 2021	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	30MHz~18GHz	Mar. 12, 2020	Nov. 13, 2020~ Nov. 20, 2020	Mar. 11, 2021	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY4274/2	30MHz~40GHz	Mar. 12, 2020	Nov. 13, 2020~ Nov. 20, 2020	Mar. 11, 2021	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY11681/4P E	30MHz~18GHz	Mar. 12, 2020	Nov. 13, 2020~ Nov. 20, 2020	Mar. 11, 2021	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Nov. 13, 2020~ Nov. 20, 2020	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Nov. 13, 2020~ Nov. 20, 2020	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Nov. 13, 2020~ Nov. 20, 2020	N/A	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA917057 6	18GHz~40GHz	May 22, 2020	Nov. 13, 2020~ Nov. 20, 2020	May 21, 2021	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D&00802 N1D01N-06	54682 & AT-N0603	30MHz~1GHz	N/A	Nov. 13, 2020~ Nov. 20, 2020	N/A	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1212	1GHz~18GHz	May 20, 2020	Nov. 13, 2020~ Nov. 20, 2020	May 19, 2021	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA9170	BBHA917098 0	18GHz~40GHz	N/A	Nov. 13, 2020~ Nov. 20, 2020	N/A	Radiation (03CH11-HY)
Signal Generator	Anritsu	MG3694C	163401	0.1Hz~40GHz	Feb. 15, 2020	Nov. 13, 2020~ Nov. 20, 2020	Feb. 14, 2021	Radiation (03CH11-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz~40GHz	Dec. 13, 2019	Nov. 13, 2020~ Nov. 20, 2020	Dec. 12, 2020	Radiation (03CH11-HY)



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.29
--	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.32
--	------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.08
--	------



Appendix A. Test Results of Radiated Test

EN-DC 7A-n5A

EN-DC 7A-n5A / 10MHz / PI/2 BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-53.65	-13	-40.65	-63.74	-60.6	0.53	9.63	H
	2472	-41.00	-13	-28.00	-54.69	-48.98	0.65	10.78	H
	3296	-58.34	-13	-45.34	-74.7	-67.42	0.76	11.99	H
									H
									H
									H
	1648	-57.89	-13	-44.89	-67.68	-64.84	0.53	9.63	V
	2472	-41.97	-13	-28.97	-56.19	-49.95	0.65	10.78	V
	3296	-58.79	-13	-45.79	-75.12	-67.87	0.76	11.99	V
									V
									V
									V
Middle	1664	-56.25	-13	-43.25	-66.49	-63.23	0.53	9.66	H
	2496	-43.15	-13	-30.15	-56.8	-51.14	0.65	10.80	H
	3328	-58.62	-13	-45.62	-75.07	-67.79	0.76	12.08	H
									H
									H
									H
									H
	1664	-56.65	-13	-43.65	-66.48	-63.63	0.53	9.66	V
	2496	-41.75	-13	-28.75	-55.84	-49.74	0.65	10.80	V
	3328	-58.73	-13	-45.73	-75.01	-67.9	0.76	12.08	V
									V
									V
									V
									V



Highest	1680	-54.88	-13	-41.88	-65.26	-61.9	0.53	9.70	H
	2520	-45.50	-13	-32.50	-59.2	-53.5	0.66	10.81	H
	3360	-58.80	-13	-45.80	-75.28	-68.06	0.77	12.18	H
									H
									H
									H
									H
	1680	-57.72	-13	-44.72	-67.58	-64.74	0.53	9.70	V
	2520	-47.87	-13	-34.87	-61.95	-55.87	0.66	10.81	V
	3360	-59.02	-13	-46.02	-75.22	-68.28	0.77	12.18	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**EN-DC 12A-n7A**

EN-DC 12A-n7A / 15MHz / PI/2 BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	5004	-52.85	-25	-27.85	-73.73	-64.12	0.94	12.21	H
	7506	-52.91	-25	-27.91	-77.5	-62.15	1.18	10.42	H
	10008	-46.40	-25	-21.40	-77.72	-57.12	1.37	12.08	H
									H
									H
									H
									H
	5004	-53.68	-25	-28.68	-74.75	-64.95	0.94	12.21	V
	7506	-52.51	-25	-27.51	-77.23	-61.75	1.18	10.42	V
	10008	-44.85	-25	-19.85	-77.84	-55.57	1.37	12.08	V
									V
									V
									V
									V
Middle	5058	-50.45	-25	-25.45	-71.4	-61.81	0.95	12.32	H
	7587	-52.45	-25	-27.45	-77.26	-61.91	1.18	10.64	H
	10116	-46.29	-25	-21.29	-77.47	-56.79	1.38	11.88	H
									H
									H
									H
									H
	5058	-50.02	-25	-25.02	-71.15	-61.38	0.95	12.32	V
	7587	-52.58	-25	-27.58	-77.12	-62.04	1.18	10.64	V
	10116	-44.51	-25	-19.51	-77.4	-55.01	1.38	11.88	V
									V
									V
									V
									V



Highest	5112	-49.82	-25	-24.82	-70.82	-61.28	0.97	12.42	H
	7668	-52.00	-25	-27.00	-76.95	-61.69	1.19	10.87	H
	10224	-45.90	-25	-20.90	-76.94	-56.19	1.39	11.67	H
									H
									H
									H
									H
	5112	-50.53	-25	-25.53	-71.7	-61.99	0.97	12.42	V
	7668	-51.96	-25	-26.96	-76.71	-61.65	1.19	10.87	V
	10224	-44.39	-25	-19.39	-77.19	-54.68	1.39	11.67	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**EN-DC 13A-n2A**

EN-DC 13A-n2A / 15MHz / PI/2 BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3702	-55.54	-13	-42.54	-72.81	-67.33	0.72	12.52	H
	5550	-53.55	-13	-40.55	-75.54	-65.72	1.00	13.17	H
	7400	-52.87	-13	-39.87	-77.79	-62.27	1.18	10.58	H
									H
									H
									H
									H
	3702	-54.55	-13	-41.55	-73.02	-66.34	0.72	12.52	V
	5550	-53.29	-13	-40.29	-75.37	-65.46	1.00	13.17	V
	7400	-53.05	-13	-40.05	-77.76	-62.45	1.18	10.58	V
									V
									V
									V
									V
Middle	3748	-56.91	-13	-43.91	-74.31	-68.71	0.70	12.50	H
	5622	-53.68	-13	-40.68	-75.57	-65.83	0.98	13.13	H
	7496	-53.07	-13	-40.07	-77.69	-62.3	1.18	10.41	H
									H
									H
									H
									H
	3748	-55.42	-13	-42.42	-74.02	-67.22	0.70	12.50	V
	5622	-51.08	-13	-38.08	-73.15	-63.23	0.98	13.13	V
	7496	-53.04	-13	-40.04	-77.76	-62.27	1.18	10.41	V
									V
									V
									V
									V



Highest	3792	-56.75	-13	-43.75	-74.23	-68.56	0.67	12.48	H
	5688	-54.68	-13	-41.68	-76.63	-66.78	0.99	13.09	H
	7584	-52.39	-13	-39.39	-77.14	-61.84	1.18	10.64	H
									H
									H
									H
									H
	3792	-55.45	-13	-42.45	-74.18	-67.26	0.67	12.48	V
	5688	-53.48	-13	-40.48	-75.62	-65.58	0.99	13.09	V
	7584	-52.55	-13	-39.55	-77.08	-62	1.18	10.64	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**n41 HPUE FTM Mode**

LTE Band 41 HPUE / 100MHz / PI/2 BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	4994	-55.82	-25	-30.82	-76.79	-67.11	0.91	12.20	H
	7491	-53.64	-25	-28.64	-78.27	-62.88	1.18	10.42	H
	9988	-47.07	-25	-22.07	-78.4	-57.41	1.40	11.73	H
									H
									H
									H
									H
	4994	-55.25	-25	-30.25	-76.34	-66.54	0.91	12.20	V
	7491	-52.89	-25	-27.89	-77.62	-62.13	1.18	10.42	V
	9988	-45.37	-25	-20.37	-78.36	-55.71	1.40	11.73	V
									V
									V
									V
									V
Middle	5088	-55.84	-25	-30.84	-76.8	-67.26	0.96	12.38	H
	7632	-47.49	-25	-22.49	-72.37	-57.08	1.18	10.77	H
	10176	-46.28	-25	-21.28	-77.39	-56.66	1.38	11.77	H
									H
									H
									H
									H
	5088	-55.92	-25	-30.92	-77.08	-67.34	0.96	12.38	V
	7632	-47.50	-25	-22.50	-72.11	-57.09	1.18	10.77	V
	10176	-44.61	-25	-19.61	-77.46	-54.99	1.38	11.77	V
									V
									V
									V
									V



Highest	5182	-56.27	-25	-31.27	-77.37	-67.85	0.99	12.56	H
	7773	-51.89	-25	-26.89	-77.06	-61.86	1.19	11.16	H
	10364	-46.20	-25	-21.20	-77.04	-56.21	1.40	11.41	H
									H
									H
									H
									H
	5182	-56.09	-25	-31.09	-77.35	-67.67	0.99	12.56	V
	7773	-51.97	-25	-26.97	-77.08	-61.94	1.19	11.16	V
	10364	-44.23	-25	-19.23	-76.89	-54.24	1.40	11.41	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

————THE END————