



FCC RF Test Report

APPLICANT : Hewlett-Packard Company
EQUIPMENT : Tablet PC
BRAND NAME : HP
MODEL NAME : HSTNN-I19C
FCC ID : B94HNI19CHW736
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)
CLASSIFICATION : PCS Licensed Transmitter (PCB)

The product was received on Apr. 18, 2014 and testing was completed on May 27, 2014. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-C-2004 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : B94HNI19CHW736

Page Number : 1 of 169

Report Issued Date : Jun. 12, 2014

Report Version : Rev. 01



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	6
1.1 Applicant.....	6
1.2 Manufacturer	6
1.3 Product Feature of Equipment Under Test	6
1.4 Product Specification subjective to this standard.....	7
1.5 Modification of EUT	7
1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator	8
1.7 Testing Location	8
1.8 Applicable Standards	9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	10
2.1 Test Mode.....	10
2.2 Connection Diagram of Test System	12
2.3 Support Unit used in test configuration	12
2.4 Measurement Results Explanation Example	12
3 TEST RESULT.....	13
3.1 Conducted Output Power and ERP/EIRP Measurement.....	13
3.2 Peak-to-Average Ratio	16
3.3 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	32
3.4 Band Edge Measurement.....	56
3.5 Conducted Spurious Emission Measurement.....	64
3.6 Field Strength of Spurious Radiation Measurement	119
3.7 Frequency Stability Measurement.....	163
4 LIST OF MEASURING EQUIPMENT	168
5 UNCERTAINTY OF EVALUATION.....	169
APPENDIX A. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG441846	Rev. 01	Initial issue of report	Jun. 12, 2014



SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	§2.1046	RSS-132 (5.4) RSS-133 (6.4) RSS-139 (6.4)	Conducted Output Power	Reporting Only	PASS	-
3.1	§22.913(a)(2)	RSS-132(5.4) SRSP-503(5.1.3)	Effective Radiated Power	< 7 Watts	PASS	-
	§24.232(c)	RSS-133 (6.4) SRSP-510(5.1.2)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
	§27.50(d)(4)	RSS-139 (6.4) SRSP-513(5.1.2)	Equivalent Isotropic Radiated Power	< 1 Watts	PASS	-
3.2	§24.232(d) §27.50(d)(5)	RSS-132 (5.4) RSS-133 (6.4) RSS-139 (6.4)	Peak-to-Average Ratio	< 13 dB	PASS	-
3.3	§2.1049 §22.917(b) §24.238(b) §27.53(g)	RSS-GEN(4.6.1) RSS-133(6.5) RSS-139 (6.5)	Occupied Bandwidth	Reporting Only	PASS	-
3.4	§2.1051 §22.917(a) §24.238(a) §27.53(g)	RSS-GEN(4.9) RSS-132 (5.5) RSS-133 (6.5) RSS-139 (6.5)	Band Edge Measurement	< 43+10log10(P[Watts])	PASS	-
3.5	§2.1051 §22.917(a) §24.238(a) §27.53(g)	RSS-GEN(4.9) RSS-132 (5.5) RSS-133 (6.5) RSS-139 (6.5)	Conducted Emission	< 43+10log10(P[Watts])	PASS	-
3.6	§2.1053 §22.917(a) §24.238(a) §27.53(g)	RSS-GEN(4.9) RSS-132 (5.5) RSS-133 (6.5) RSS-139 (6.5)	Field Strength of Spurious Radiation	< 43+10log10(P[Watts])	PASS	Under limit 14.71 dB at 2510.000 MHz



Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.7	§2.1055 §22.355 §24.235 §27.54	RSS-GEN(4.7) RSS-132 (5.3) RSS-133 (6.3) RSS-139 (6.3)	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-



1 General Description

1.1 Applicant

Hewlett-Packard Company

3000 Hanover Street, Palo Alto, California 94304, USA

1.2 Manufacturer

Inventec Corporation

Inventec Building, No. 66 Hou-Kang Street Shilin District, Taipei 11170, Taiwan

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Tablet PC
Brand Name	HP
Model Name	HSTNN-I19C
FCC ID	B94HNI19CHW736
Integrated the WWAN Module Card	Brand Name: HUAWEI Model Name: MU736 FCC ID: 6369A-MU736
EUT supports Radios application	GSM/EGPRS/WCDMA/HSPA WLAN 11b/g/n (HT20/HT40)
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx Frequency	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV : 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz
Rx Frequency	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band IV : 2112.4 MHz ~ 2152.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz
Maximum Output Power to Antenna	GSM850 : 31.85 dBm GSM1900 : 29.09 dBm WCDMA Band V : 23.01 dBm WCDMA Band IV : 23.24 dBm WCDMA Band II : 23.50 dBm
Antenna Type	PIFA Antenna
Antenna Gain	Cellular Band: -3.60 dBi PCS Band: -0.59 dBi AWS Band: -1.33 dBi
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE: GMSK / 8PSK WCDMA: QPSK (Uplink) HSDPA: QPSK (Uplink) HSUPA: QPSK (Uplink)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22	GSM850 GPRS class 8	GMSK	0.41	0.0263 ppm	246KGXW
Part 22	GSM850 EDGE class 8	8PSK	0.11	0.0239 ppm	250KG7W
Part 22	WCDMA Band V RMC 12.2Kbps	QPSK	0.05	0.0167 ppm	4M08F9W
Part 24	GSM1900 GPRS class 8	GMSK	0.71	0.0165 ppm	244KGXW
Part 24	GSM1900 EDGE class 8	8PSK	0.27	0.0176 ppm	248KG7W
Part 24	WCDMA Band II RMC 12.2Kbps	QPSK	0.20	0.0154 ppm	4M08F9W
Part 27	WCDMA Band IV RMC 12.2Kbps	QPSK	0.16	0.0133 ppm	4M08F9W

1.7 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH02-HY	03CH07-HY



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ ANSI / TIA / EIA-603-C-2004
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r01
- ♦ FCC KDB 412172 D01 Determining ERP and ERIP v01

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r01 with maximum output power.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V.
2. 30 MHz to 18000 MHz for WCDMA Band IV.
3. 30 MHz to 19000 MHz for GSM1900 and WCDMA Band II.

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	■ GPRS class 8 Link ■ EDGE class 8 Link	■ GPRS class 8 Link ■ EDGE class 8 Link
GSM 1900	■ GPRS class 8 Link ■ EDGE class 8 Link	■ GPRS class 8 Link ■ EDGE class 8 Link
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

Note: The maximum power levels are chosen to test as the worst case configuration as follows:

GPRS multi-slot class 8 mode for GMSK modulation,

EDGE multi-slot class 8 mode for 8PSK modulation,

RMC 12.2Kbps mode for WCDMA band V,

RMC 12.2Kbps mode for WCDMA band IV,

RMC 12.2Kbps mode for WCDMA band II, only these modes were used for all tests.




Conducted Power Measurement Results:

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8
GPRS class 8	31.81	31.83	31.85	29.09	28.88	28.66
GPRS class 10	29.51	29.52	29.54	26.60	26.38	26.17
EGPRS class 8	26.12	26.13	26.13	24.90	24.80	24.59
EGPRS class 10	23.85	23.85	23.86	22.58	22.50	22.29
EGPRS class 11	22.37	22.40	22.41	21.05	21.00	21.10
EGPRS class 12	20.90	20.91	20.93	19.55	19.49	19.25

Conducted Power (*Unit: dBm)									
Band	WCDMA Band V			WCDMA Band II			WCDMA Band IV		
Channel	4132	4182	4233	9262	9400	9538	1312	1413	1513
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6	1712.4	1732.6	1752.6
RMC 12.2K	23.01	22.68	22.70	23.27	23.50	23.10	23.24	23.10	22.80
HSDPA Subtest-1	22.89	22.67	22.64	23.15	23.28	22.62	23.20	22.94	22.78
HSDPA Subtest-2	22.01	21.64	21.60	22.28	22.21	22.00	22.18	22.05	22.00
HSDPA Subtest-3	21.78	21.45	21.52	22.10	22.02	21.60	21.92	21.87	21.71
HSDPA Subtest-4	21.45	21.27	21.33	21.90	21.89	21.50	21.72	21.65	21.54
HSUPA Subtest-1	21.92	21.77	21.78	22.26	22.23	21.90	22.17	21.97	21.92
HSUPA Subtest-2	19.98	19.83	19.79	20.39	20.45	20.18	20.28	20.10	20.00
HSUPA Subtest-3	20.75	20.58	20.55	21.18	21.15	20.95	21.04	20.95	20.85
HSUPA Subtest-4	20.27	20.10	20.05	20.78	20.74	20.49	20.39	20.18	20.04
HSUPA Subtest-5	22.13	21.87	21.88	22.34	22.40	22.11	22.08	22.10	22.12

2.2 Connection Diagram of Test System

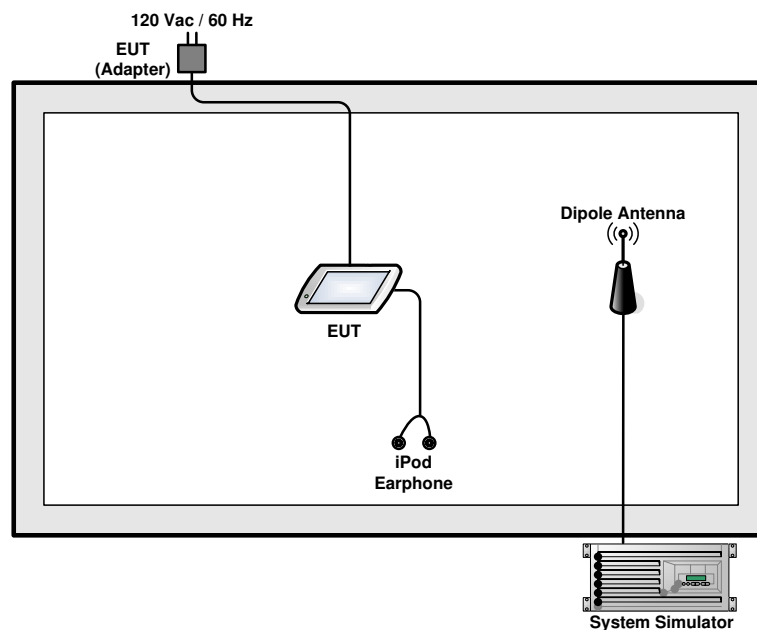

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example :

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 4.2 + 10 = 14.2 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 Conducted Output Power and ERP/EIRP Measurement

3.1.1 Description of the Conducted Output Power and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts (Cellular Band) and the EIRP of mobile transmitters are limited to 2 Watts (PCS Band) and 1 Watts (AWS Band). According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

3.1.4 Test Setup

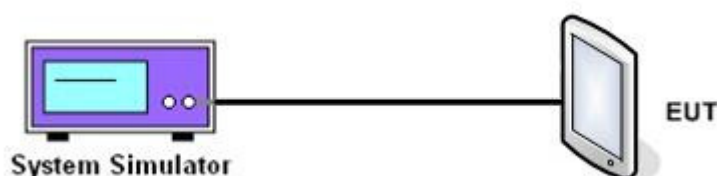

3.1.5 Test Result of Conducted Output Power

Cellular Band ($G_T - L_C = -3.60$ dB)									
Modes	GSM850 (GPRS class 8)			GSM850 (EDGE class 8)			WCDMA Band V (RMC 12.2Kbps)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8	826.4	836.4	846.6
Conducted Power (dBm)	31.81	31.83	31.85	26.12	26.13	26.13	23.01	22.68	22.70
Conducted Power (Watts)	1.52	1.52	1.53	0.41	0.41	0.41	0.20	0.19	0.19
ERP (dBm)	26.06	26.08	26.10	20.37	20.38	20.38	17.26	16.93	16.95
ERP (Watts)	0.40	0.41	0.41	0.11	0.11	0.11	0.05	0.05	0.05

PCS Band ($G_T - L_C = -0.59$ dB)									
Modes	GSM1900 (GPRS class 8)			GSM1900 (EDGE class 8)			WCDMA Band II (RMC 12.2Kbps)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8	1852.4	1880	1907.6
Conducted Power (dBm)	29.09	28.88	28.66	24.90	24.80	24.59	23.27	23.50	23.10
Conducted Power (Watts)	0.81	0.77	0.73	0.31	0.30	0.29	0.21	0.22	0.20
EIRP (dBm)	28.5	28.29	28.07	24.31	24.21	24	22.68	22.91	22.51
EIRP (Watts)	0.71	0.68	0.64	0.27	0.26	0.25	0.19	0.20	0.18

AWS Band ($G_T - L_C = -1.33$ dB)			
Modes	WCDMA Band IV (RMC 12.2Kbps)		
Channel	1312(Low)	1413 (Mid)	1513 (High)
Frequency (MHz)	1712.4	1732.6	1752.6
Conducted Power (dBm)	23.24	23.10	22.80
Conducted Power (Watts)	0.21	0.20	0.19
EIRP (dBm)	21.91	21.77	21.47
EIRP (Watts)	0.16	0.15	0.14

Note: maximum burst average power for GSM, and maximum average power for WCDMA.

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2 Peak-to-Average Ratio

3.2.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. Set EUT to transmit at maximum output power.
3. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
4. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer.
Record the maximum PAPR level associated with a probability of 0.1%.

3.2.4 Test Setup

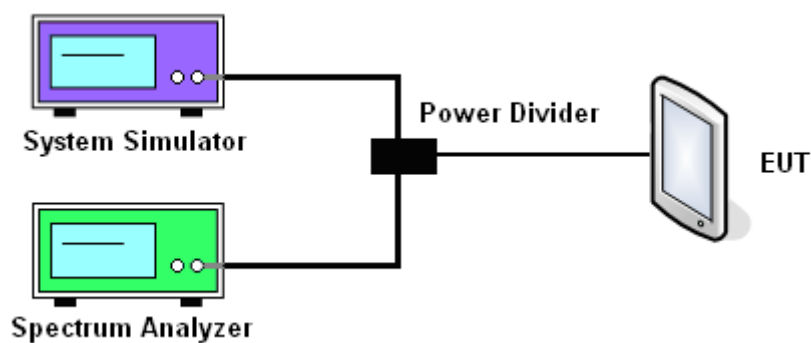

3.2.5 Test Result of Peak-to-Average Ratio

Cellular Band									
Modes	GSM850 (GPRS class 8)			GSM850 (EDGE class 8)			WCDMA Band V (RMC 12.2Kbps)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8	826.4	836.4	846.6
Peak-to-Average Ratio (dB)	0.24	0.24	0.20	3.24	3.04	3.24	3.12	3.00	3.08

PCS Band									
Modes	GSM1900 (GPRS class 8)			GSM1900 (EDGE class 8)			WCDMA Band II (RMC 12.2Kbps)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8	1852.4	1880	1907.6
Peak-to-Average Ratio (dB)	0.28	0.28	0.28	3.16	3.00	3.16	3.24	3.24	3.00


AWS Band			
Modes	WCDMA Band IV (RMC 12.2Kbps)		
Channel	1312(Low)	1413 (Mid)	1513 (High)
Frequency (MHz)	1712.4	1732.6	1752.6
Peak-to-Average Ratio (dB)	2.96	3.08	3.20



3.2.6 Test Result (Plots) of Peak-to-Average Ratio


Band :	GSM 850	Test Mode :	GPRS class 8 Link (GMSK)
--------	---------	-------------	--------------------------

Peak-to-Average Ratio on Channel 128 (824.2 MHz)

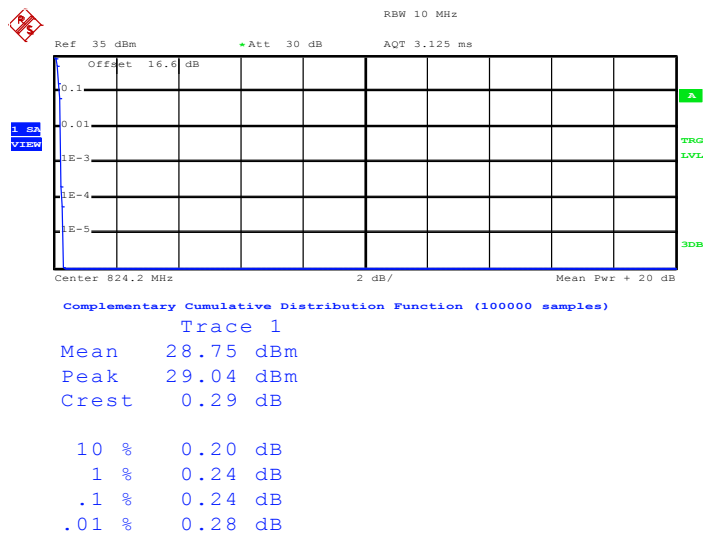

Date: 26.MAY.2014 17:50:19


Peak-to-Average Ratio on Channel 189 (836.4 MHz)

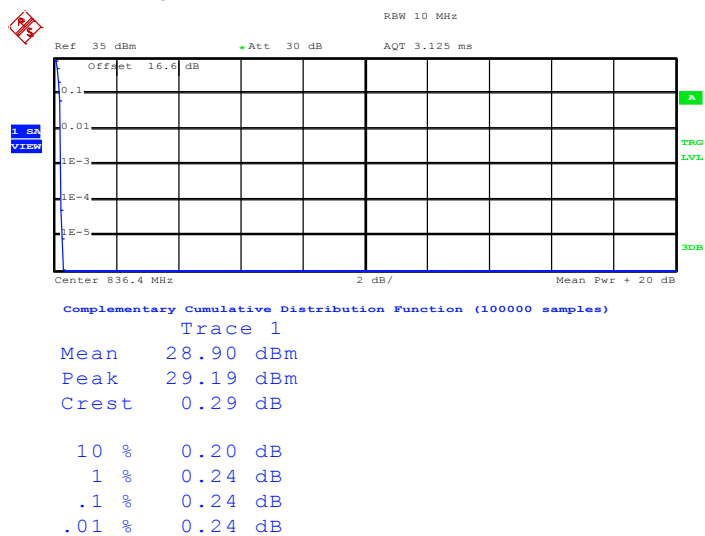

Date: 26.MAY.2014 17:49:53



Peak-to-Average Ratio on Channel 251 (848.8 MHz)

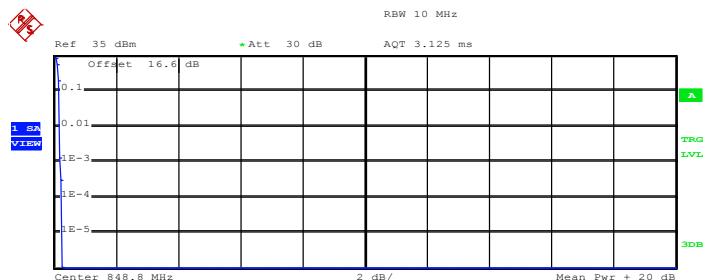

Complementary Cumulative Distribution Function (100000 samples)

Trace 1
Mean 29.36 dBm
Peak 29.61 dBm
Crest 0.25 dB


10 %	0.20 dB
1 %	0.20 dB
.1 %	0.20 dB
.01 %	0.28 dB

Date: 26.MAY.2014 17:50:45




Band :	GSM 850	Test Mode :	EDGE class 8 Link (8PSK)
--------	---------	-------------	--------------------------

Peak-to-Average Ratio on Channel 128 (824.2 MHz)

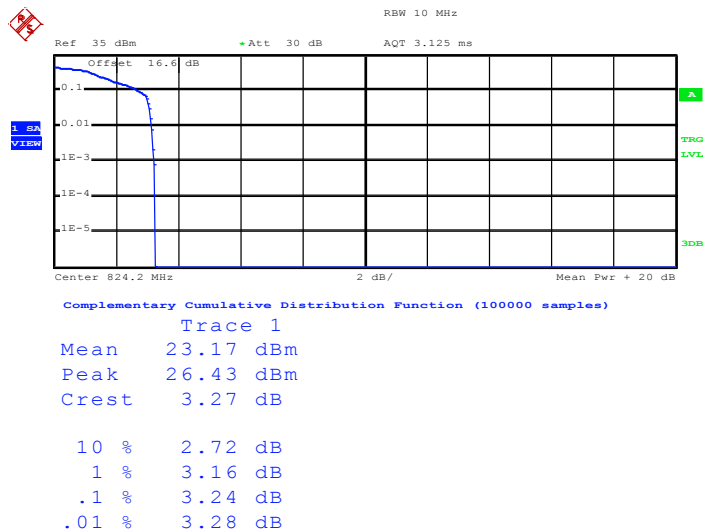

Date: 27.MAY.2014 10:36:14


Peak-to-Average Ratio on Channel 189 (836.4 MHz)

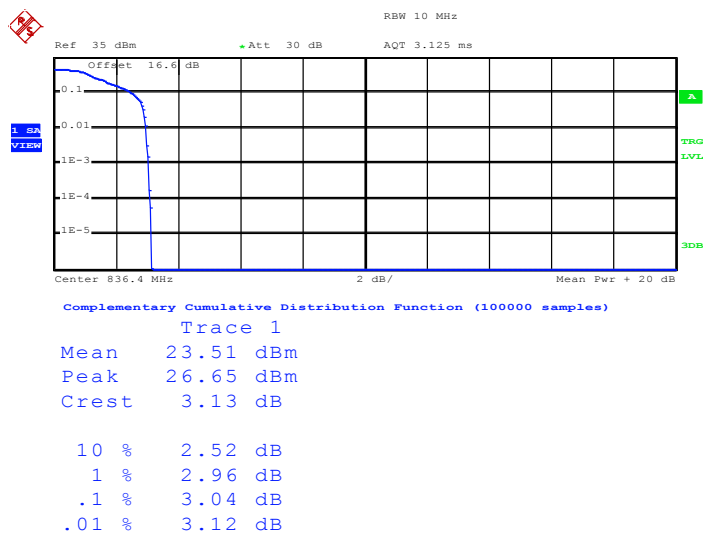

Date: 27.MAY.2014 10:36:45



Peak-to-Average Ratio on Channel 251 (848.8 MHz)

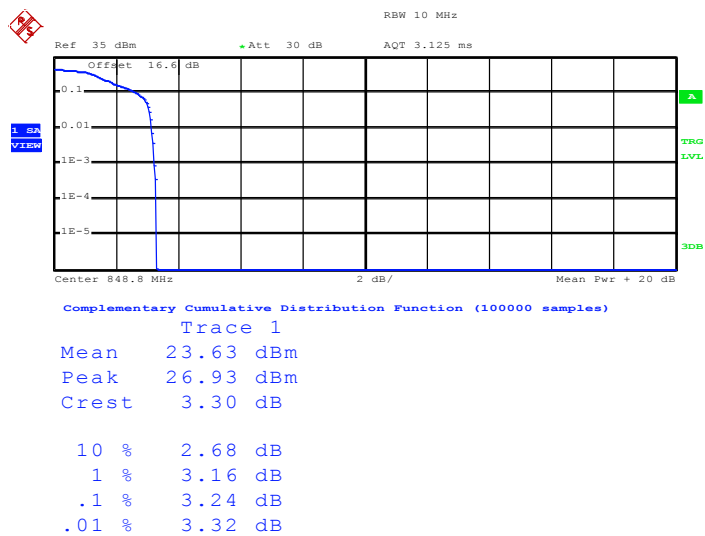


Date: 27.MAY.2014 10:37:09




Band :	GSM 1900	Test Mode :	GPRS class 8 Link (GMSK)
--------	----------	-------------	--------------------------

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

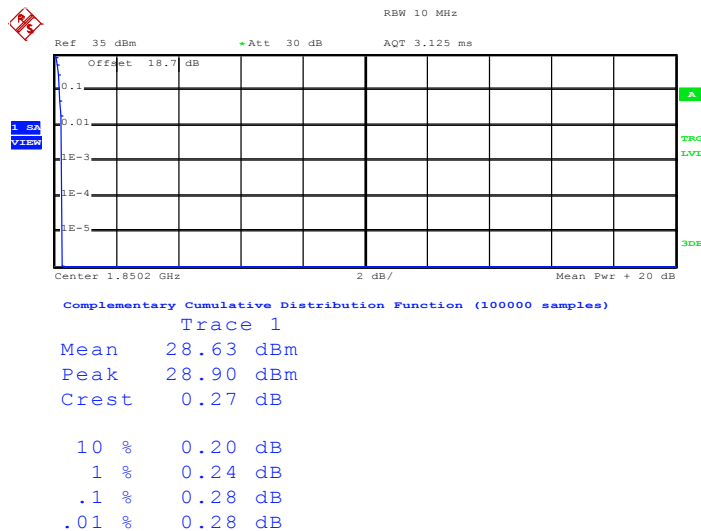

Date: 27.MAY.2014 11:06:19


Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

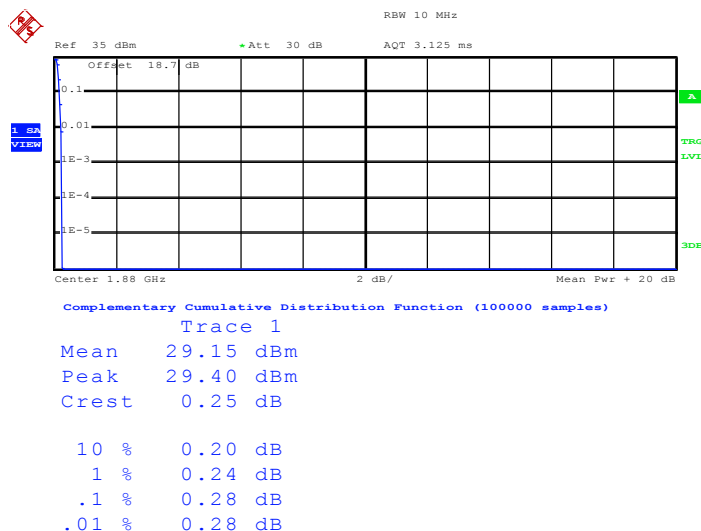

Date: 27.MAY.2014 11:06:51



Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

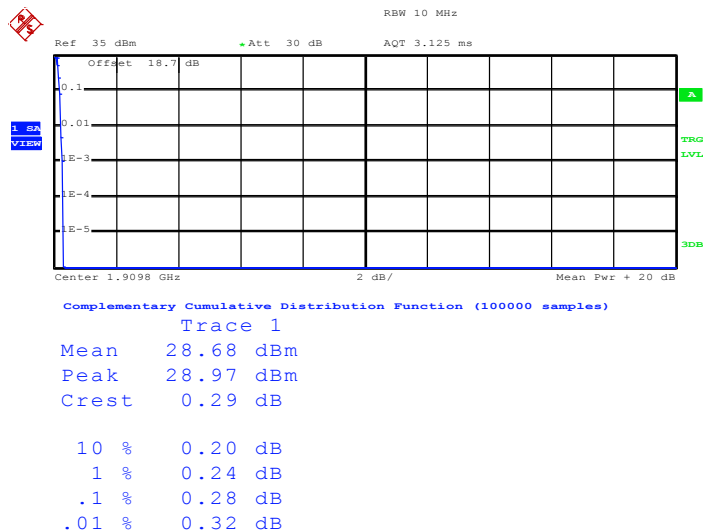


Date: 27.MAY.2014 11:07:17




Band :	GSM 1900	Test Mode :	EDGE class 8 Link (8PSK)
--------	----------	-------------	--------------------------

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

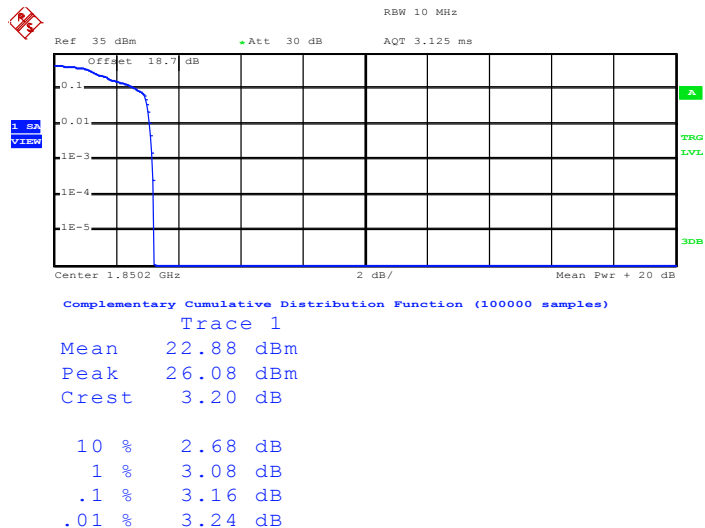

Date: 27.MAY.2014 11:45:20


Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

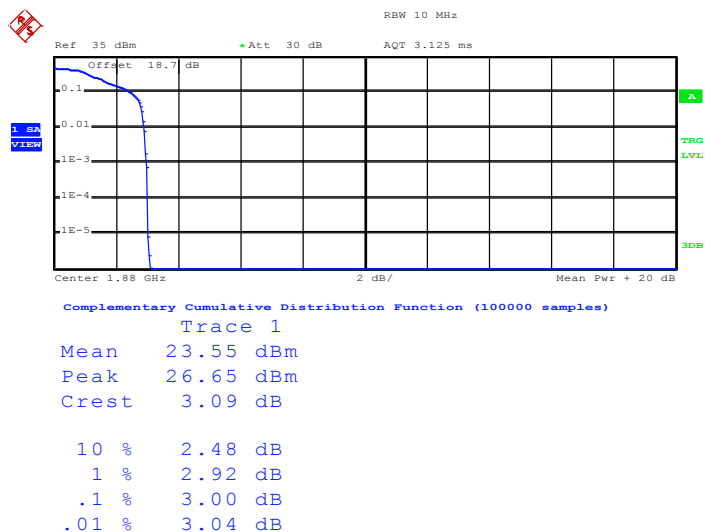

Date: 27.MAY.2014 11:46:20



Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

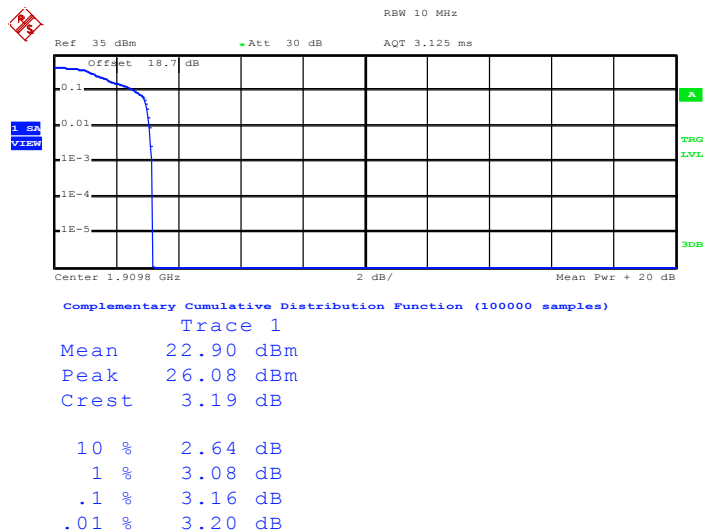


Date: 27.MAY.2014 11:46:58




Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	--------------	-------------	--------------------------

Peak-to-Average Ratio on Channel 4132 (826.4 MHz)

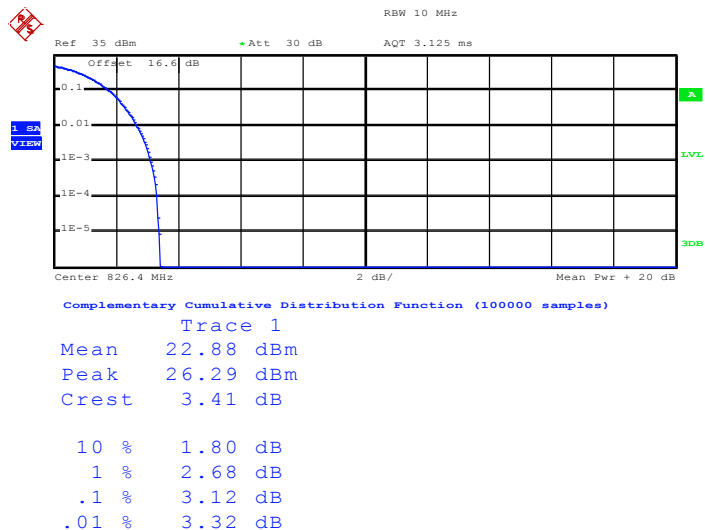

Date: 27.MAY.2014 14:51:57


Peak-to-Average Ratio on Channel 4182 (836.4 MHz)

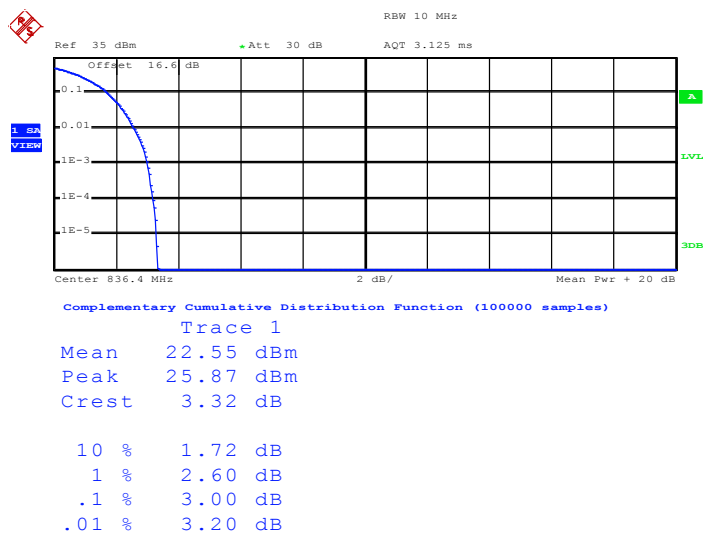

Date: 27.MAY.2014 14:52:33



Peak-to-Average Ratio on Channel 4233 (846.6 MHz)

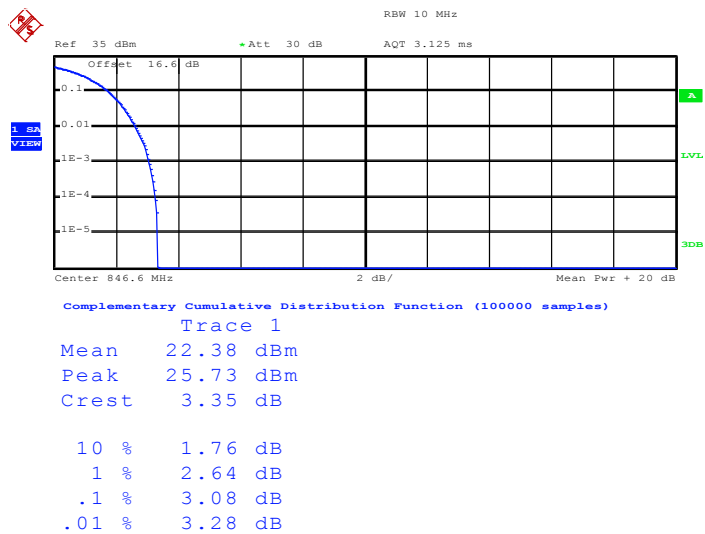


Date: 27.MAY.2014 14:53:41




Band :	WCDMA Band IV	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	---------------	-------------	--------------------------

Peak-to-Average Ratio on Channel 1312 (1712.4 MHz)

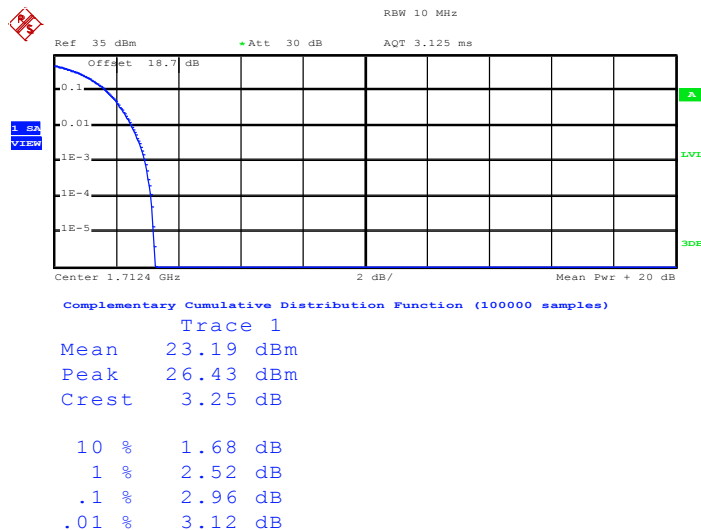

Date: 27.MAY.2014 14:26:37


Peak-to-Average Ratio on Channel 1413 (1732.6 MHz)

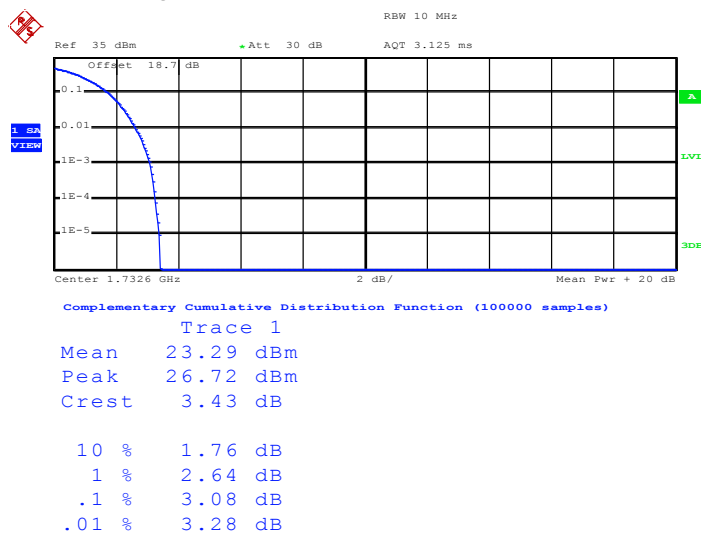

Date: 27.MAY.2014 14:27:16



Peak-to-Average Ratio on Channel 1513 (1752.6 MHz)

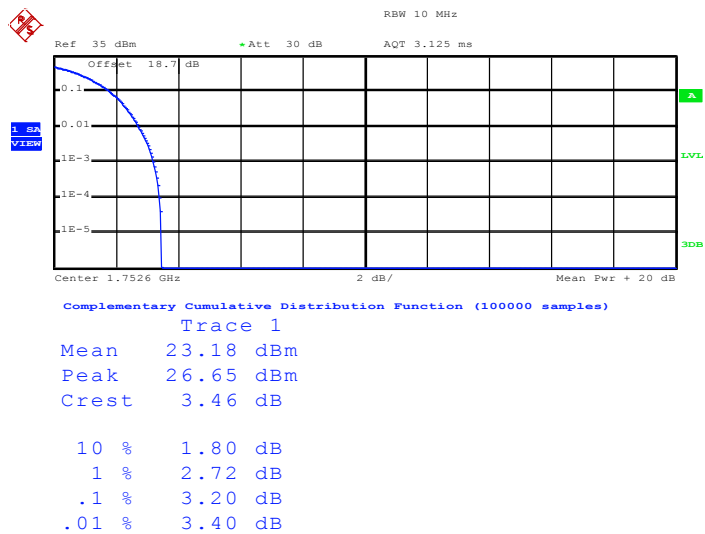


Date: 27.MAY.2014 14:27:55




Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	---------------	-------------	--------------------------

Peak-to-Average Ratio on Channel 9262 (1852.4 MHz)

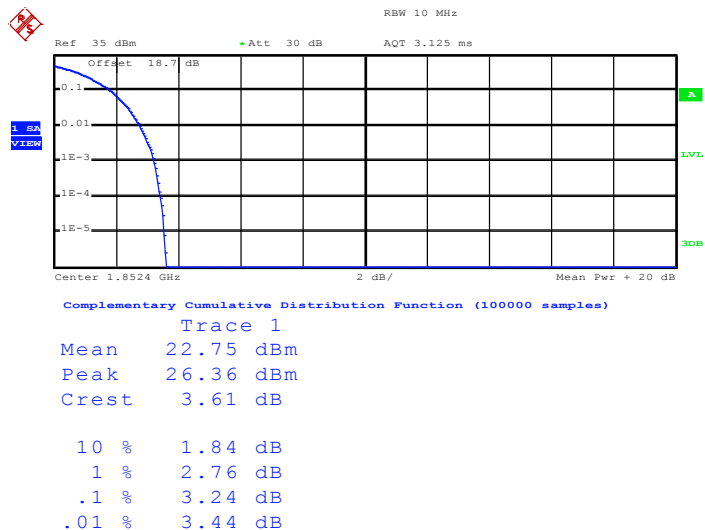

Date: 27.MAY.2014 14:04:32


Peak-to-Average Ratio on Channel 9400 (1880.0 MHz)

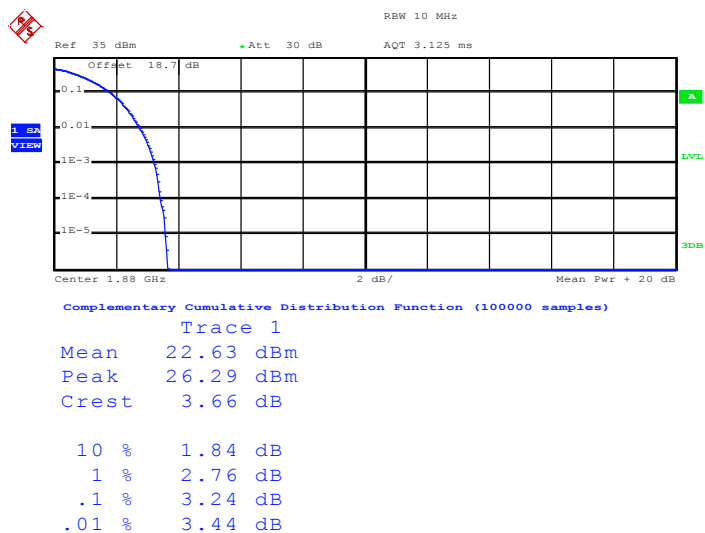

Date: 27.MAY.2014 14:05:04



Peak-to-Average Ratio on Channel 9538 (1907.6 MHz)

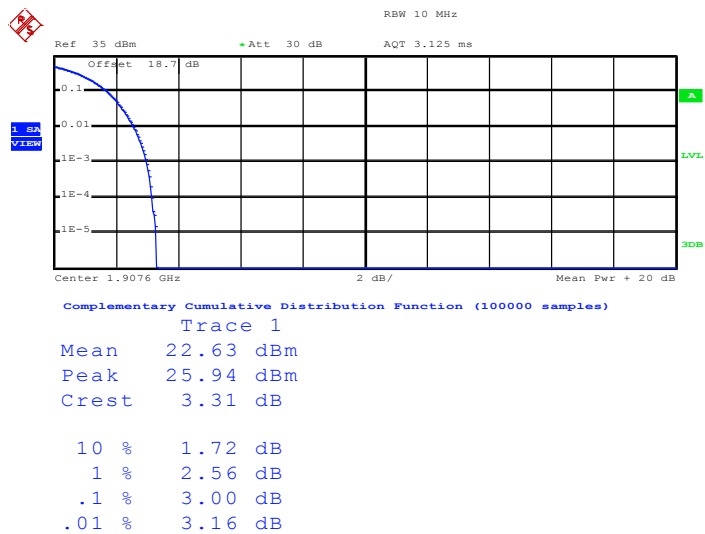

Date: 27.MAY.2014 14:05:39

3.3 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.3.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of the EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The 99% occupied bandwidth were measured, set RBW= 1% of span, VBW= 3*RBW, sample detector, trace maximum hold.
4. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3*RBW, peak detector, trace maximum hold.

3.3.4 Test Setup

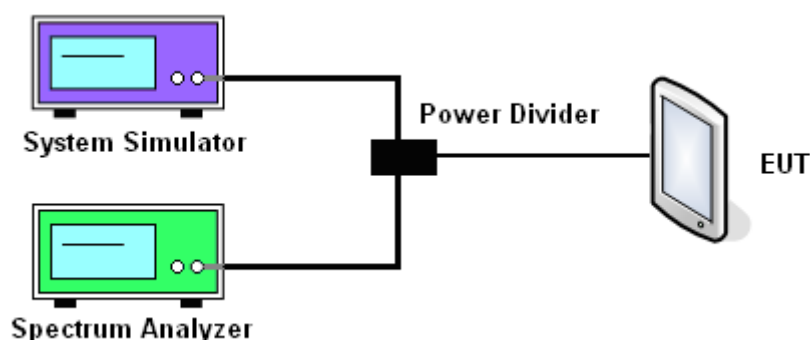

3.3.5 Test Result of Occupied Bandwidth and 26dB Bandwidth

Cellular Band						
Modes	GSM850 (GPRS class 8)			GSM850 (EDGE class 8)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8
99% OBW (kHz)	246.00	244.00	242.00	242.00	242.00	250.00
26dB BW (kHz)	304.00	314.00	312.00	308.00	288.00	286.00

PCS Band						
Modes	GSM1900 (GPRS class 8)			GSM1900 (EDGE class 8)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8
99% OBW (kHz)	242.00	244.00	242.00	244.00	248.00	244.00
26dB BW (kHz)	318.00	316.00	316.00	318.00	292.00	294.00

Cellular Band			
Modes	WCDMA Band V (RMC 12.2Kbps)		
Channel	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	826.4	836.4	846.6
99% OBW (MHz)	4.06	4.08	4.08
26dB BW (MHz)	4.60	4.62	4.60

AWS Band			
Modes	WCDMA Band IV (RMC 12.2Kbps)		
Channel	1312(Low)	1413 (Mid)	1513 (High)
Frequency (MHz)	1712.4	1732.6	1752.6
99% OBW (MHz)	4.06	4.08	4.06
26dB BW (MHz)	4.64	4.62	4.60




PCS Band			
Modes	WCDMA Band II (RMC 12.2Kbps)		
Channel	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1852.4	1880	1907.6
99% OBW (MHz)	4.06	4.06	4.08
26dB BW (MHz)	4.60	4.60	4.62



3.3.6 Test Result (Plots) of Occupied Bandwidth and 26dB Bandwidth


Band :	GSM 850	Test Mode :	GPRS class 8 Link (GMSK)
--------	---------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

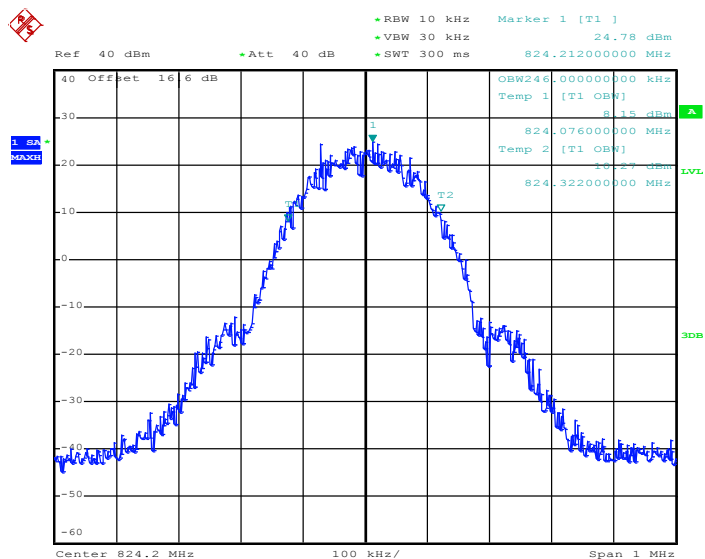

Date: 26.MAY.2014 17:36:48


26dB Bandwidth Plot on Channel 128 (824.2 MHz)

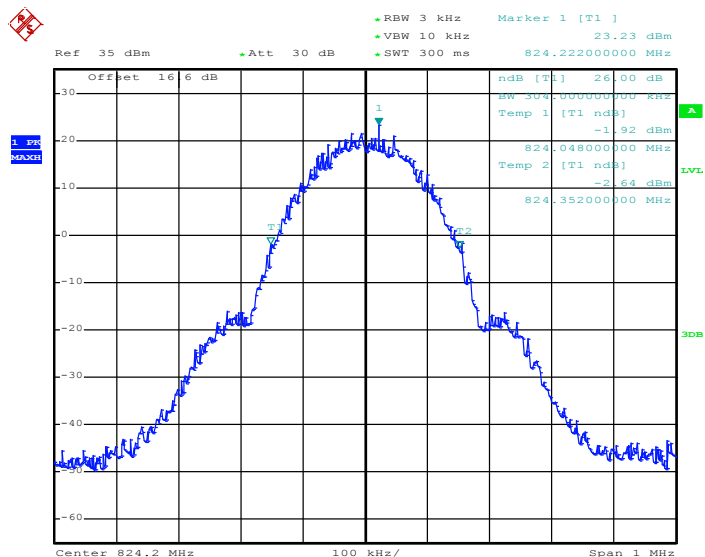

Date: 26.MAY.2014 17:34:34




99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

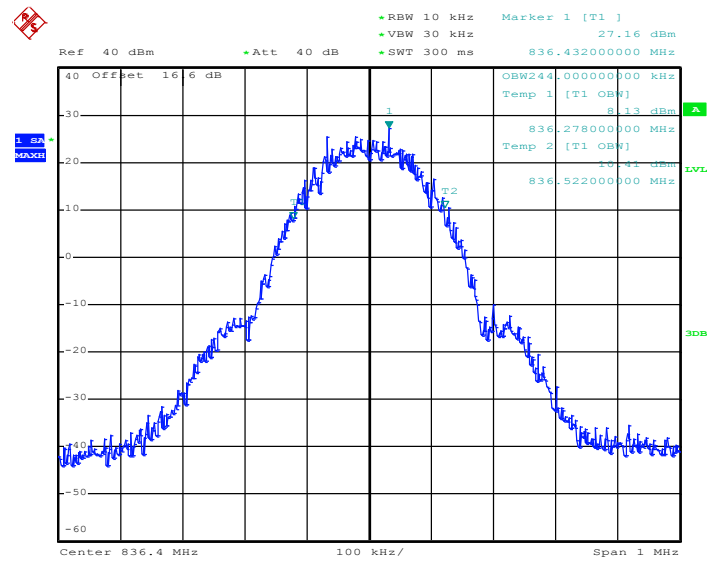

Date: 26.MAY.2014 17:37:17


26dB Bandwidth Plot on Channel 189 (836.4 MHz)

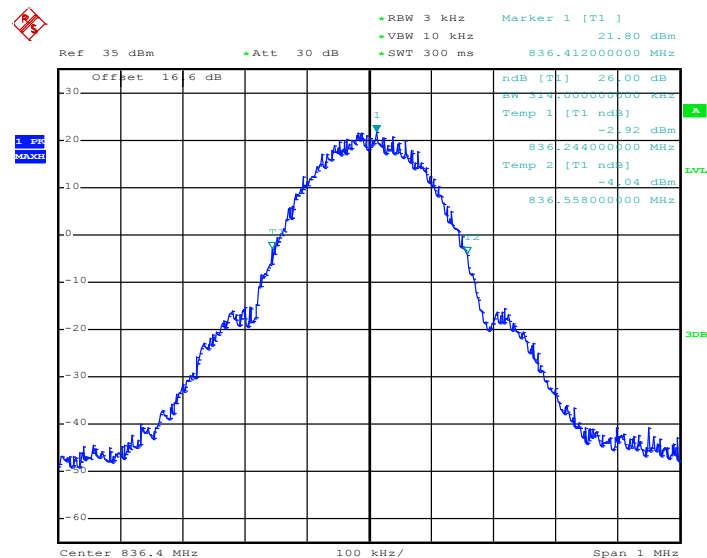

Date: 26.MAY.2014 17:32:39




99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

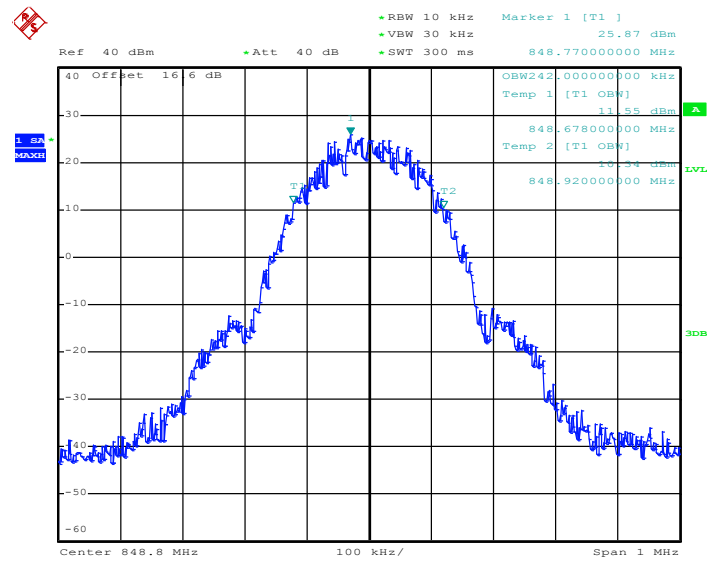

Date: 26.MAY.2014 17:37:45

26dB Bandwidth Plot on Channel 251 (848.8 MHz)

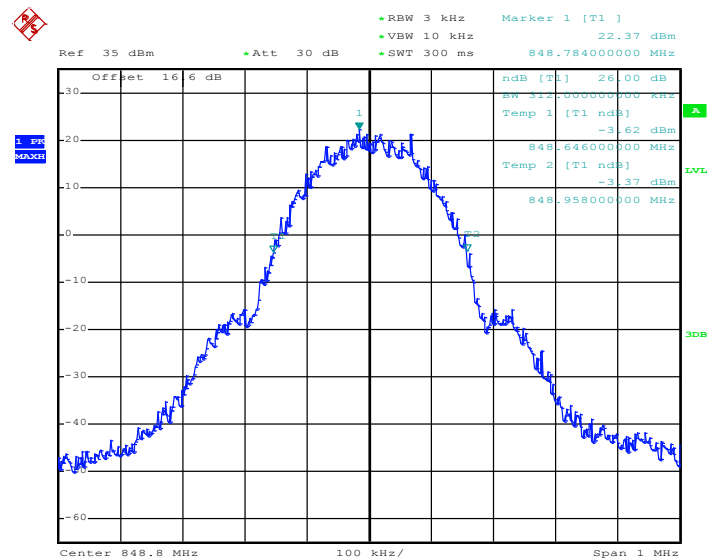


Date: 26.MAY.2014 17:33:08




Band :	GSM 850	Test Mode :	EDGE class 8 Link (8PSK)
--------	---------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

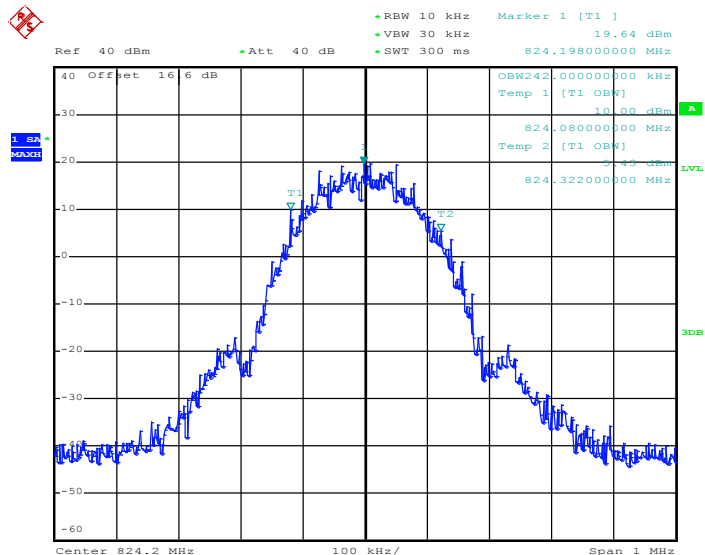

Date: 27.MAY.2014 10:11:28


26dB Bandwidth Plot on Channel 128 (824.2 MHz)

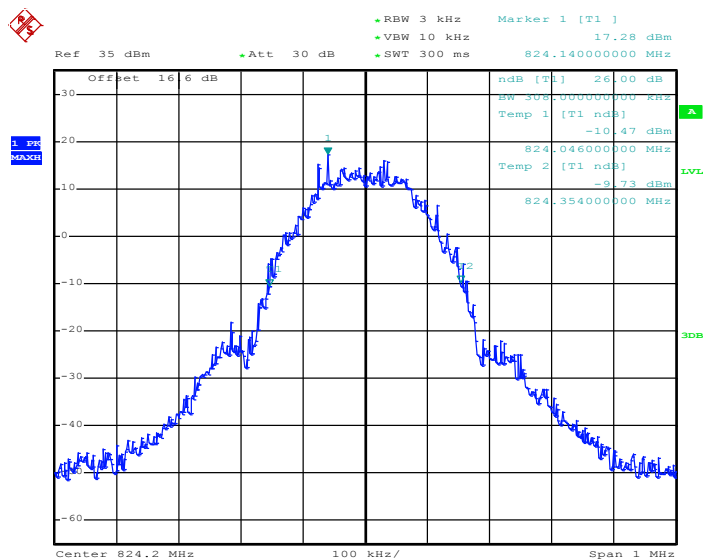

Date: 27.MAY.2014 10:08:56




99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

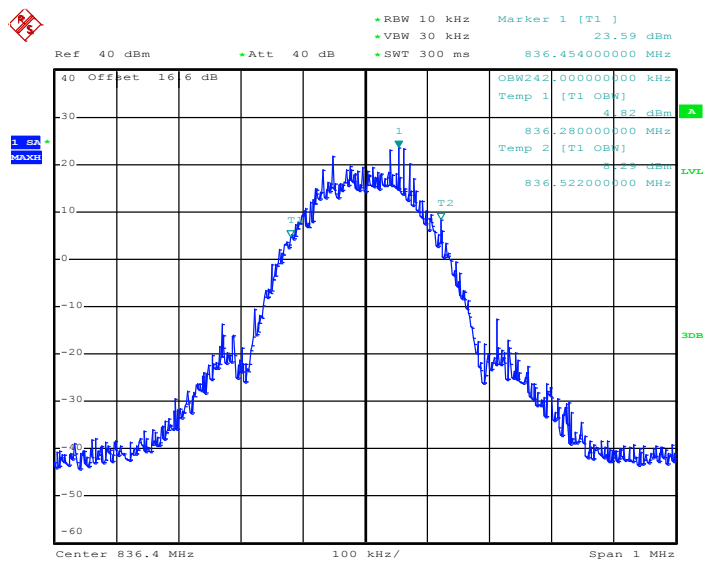

Date: 27.MAY.2014 10:11:56


26dB Bandwidth Plot on Channel 189 (836.4 MHz)

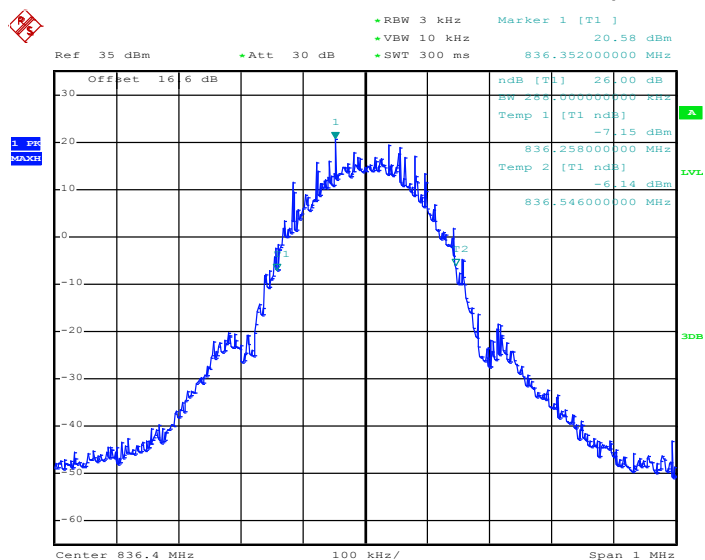

Date: 27.MAY.2014 10:09:25




99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

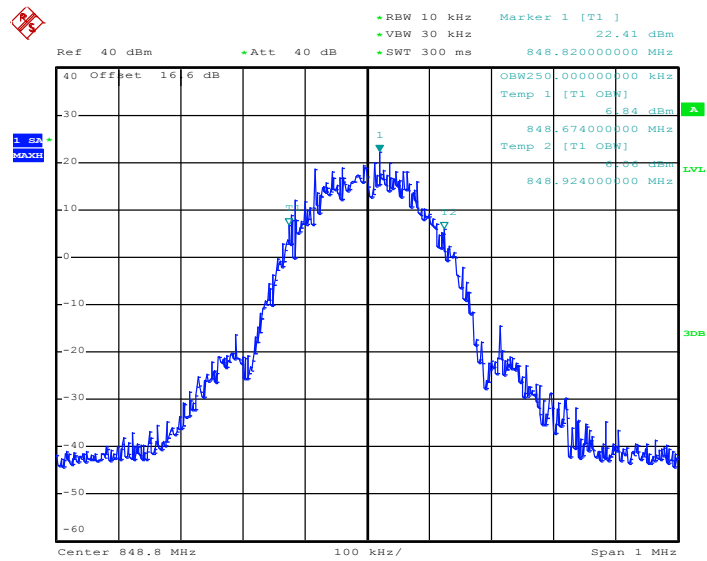

Date: 27.MAY.2014 10:12:25

26dB Bandwidth Plot on Channel 251 (848.8 MHz)

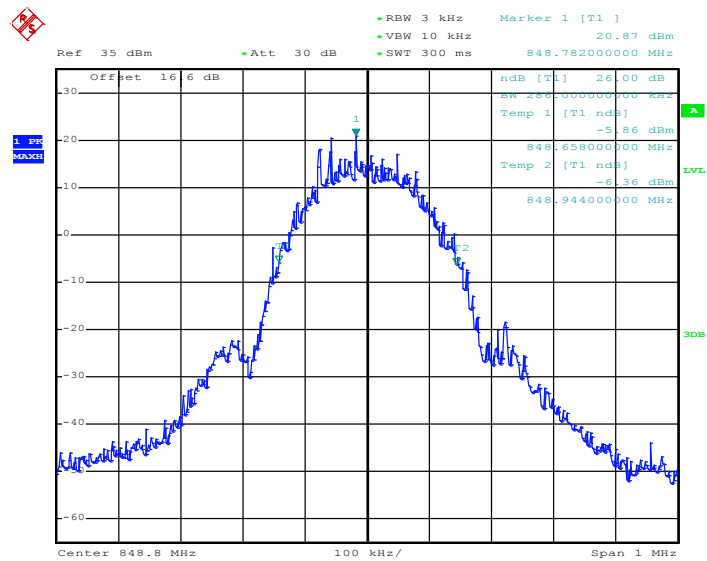


Date: 27.MAY.2014 10:09:53




Band :	GSM 1900	Test Mode :	GPRS class 8 Link (GMSK)
--------	----------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

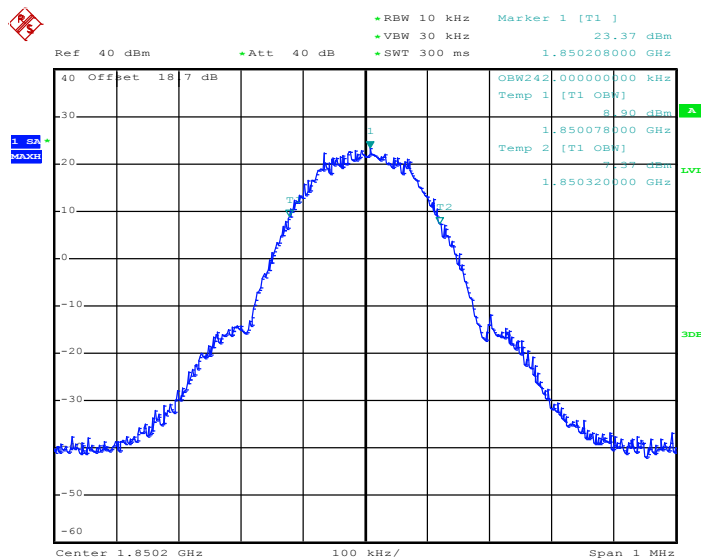

Date: 27.MAY.2014 11:22:17


26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

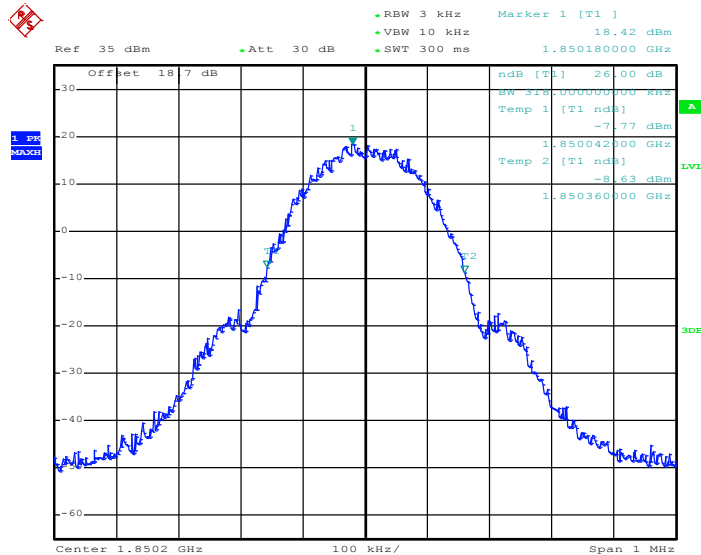

Date: 27.MAY.2014 11:10:49




99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

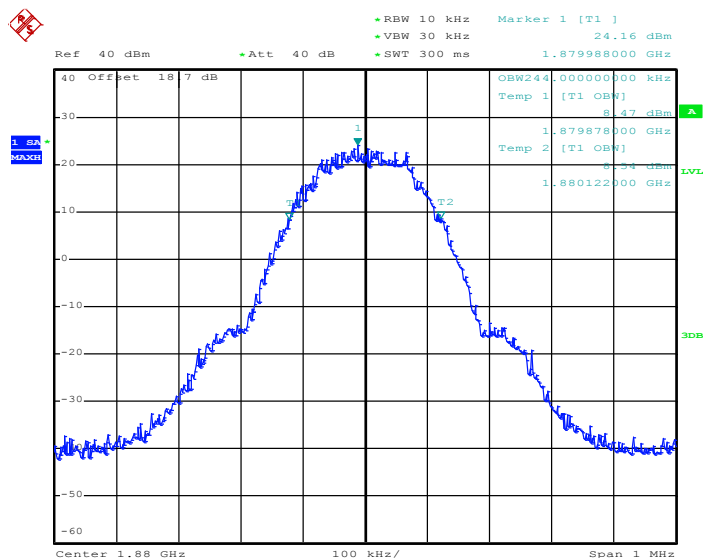

Date: 27.MAY.2014 11:19:23


26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

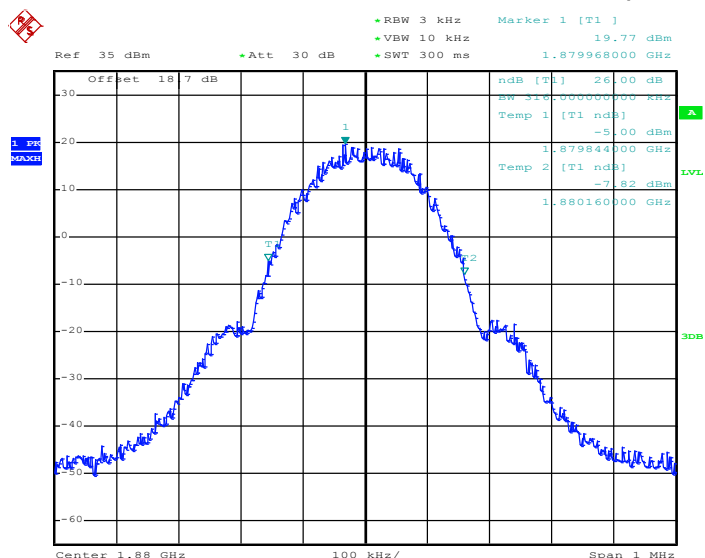

Date: 27.MAY.2014 11:11:21




99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

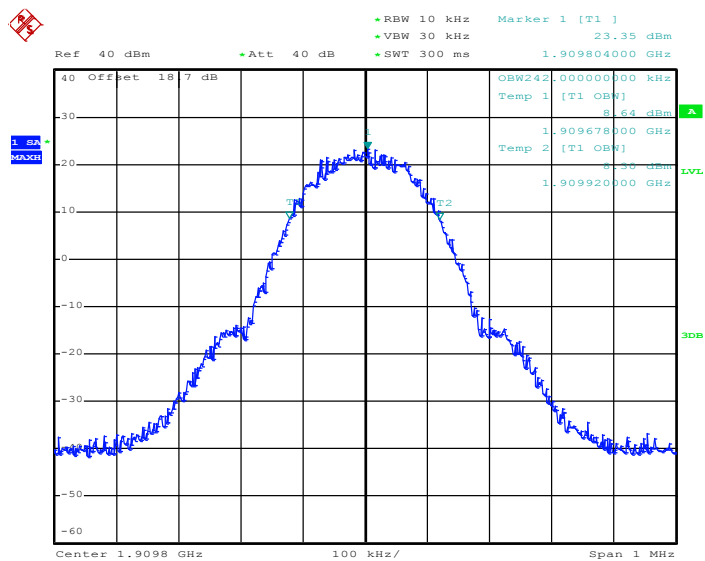

Date: 27.MAY.2014 11:17:39

26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

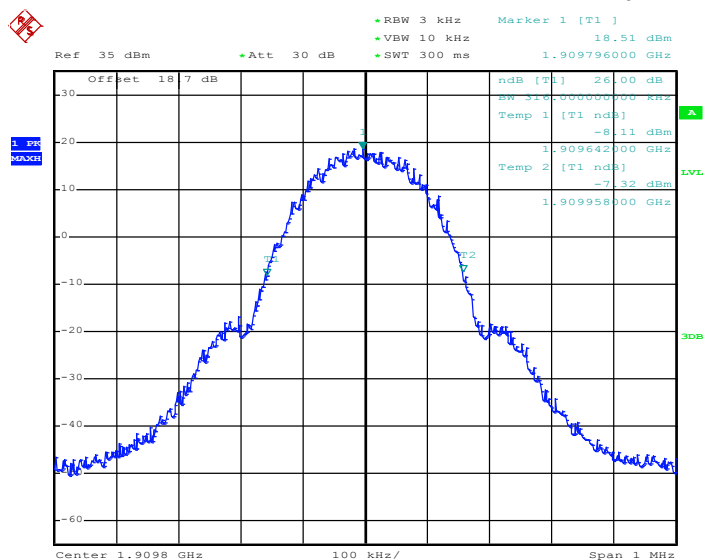


Date: 27.MAY.2014 11:10:01




Band :	GSM 1900	Test Mode :	EDGE class 8 Link (8PSK)
--------	----------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

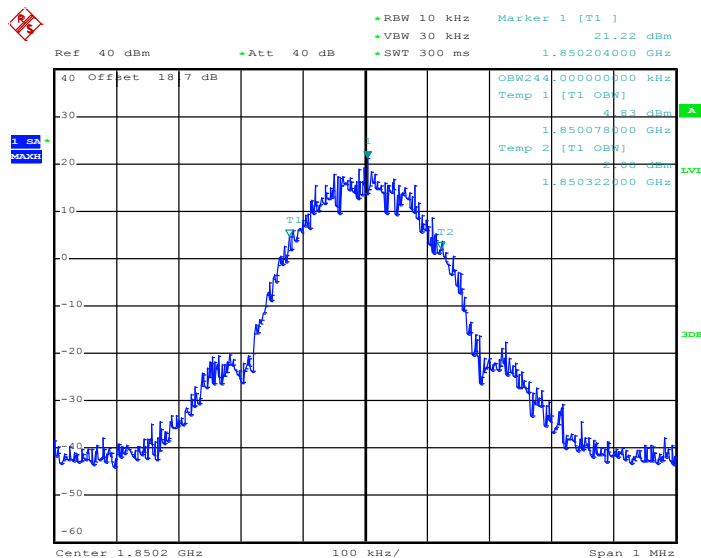

Date: 27.MAY.2014 11:49:42


26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

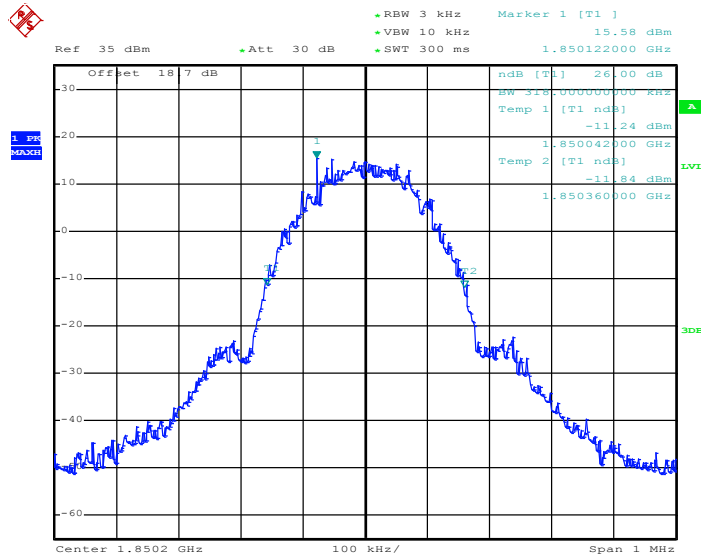

Date: 27.MAY.2014 11:47:47




99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

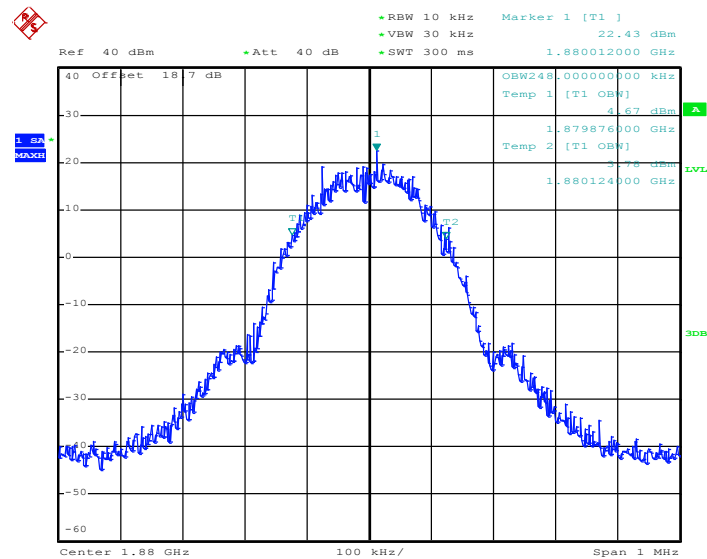

Date: 27.MAY.2014 11:50:10


26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

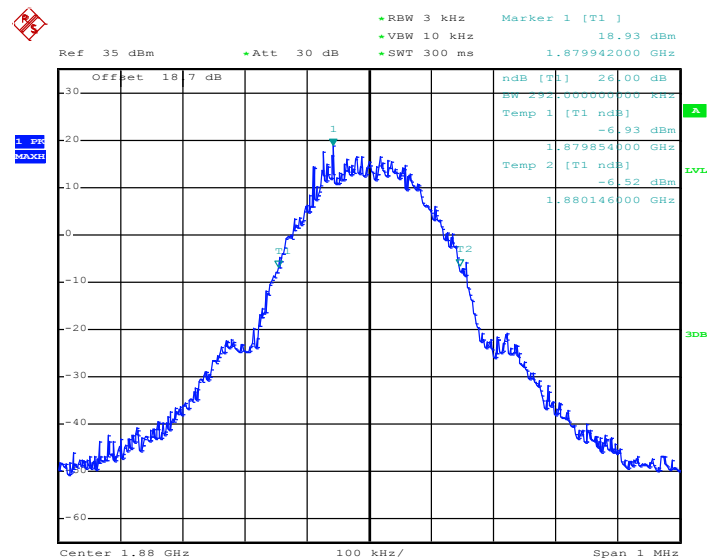

Date: 27.MAY.2014 11:48:15




99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

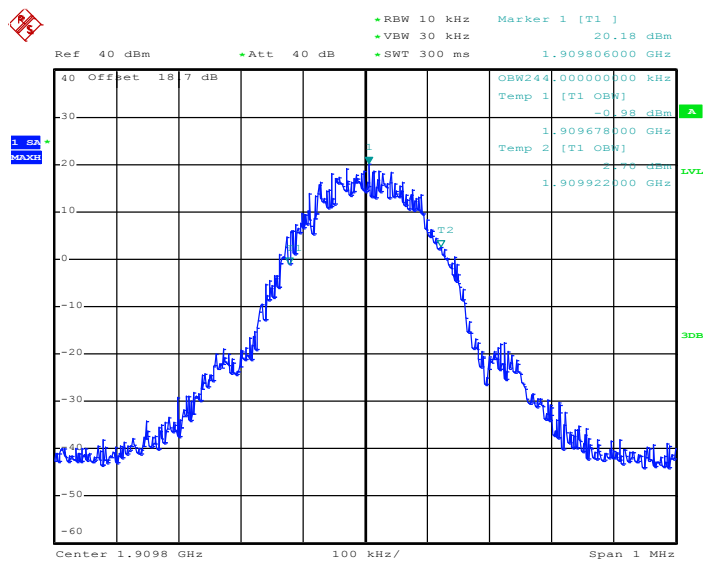

Date: 27.MAY.2014 11:50:39


26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

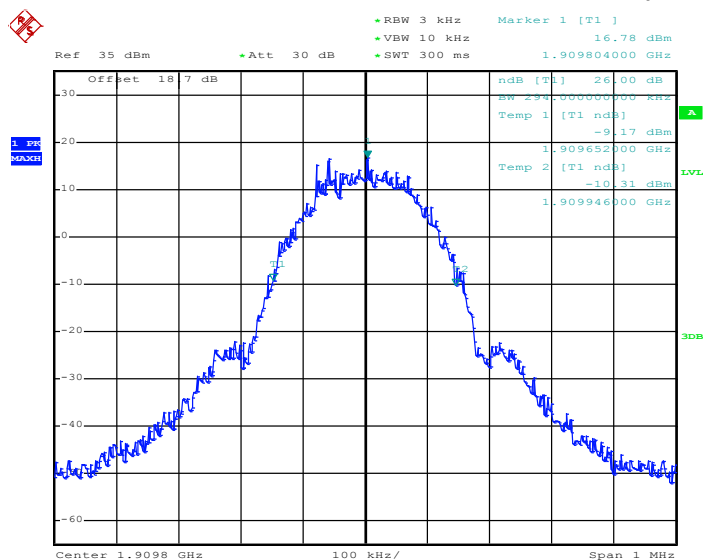


Date: 27.MAY.2014 11:48:44



Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
---------------	--------------	--------------------	--------------------------

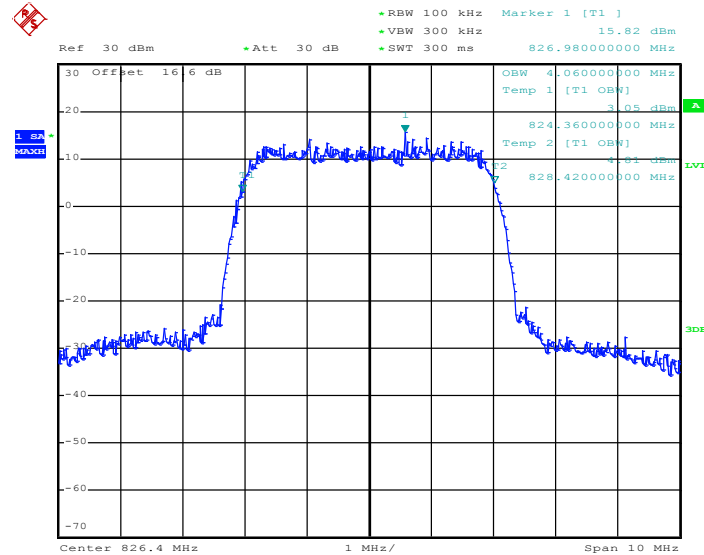99% Occupied Bandwidth Plot on Channel 4132 (826.4 MHz)


Date: 27.MAY.2014 15:01:34

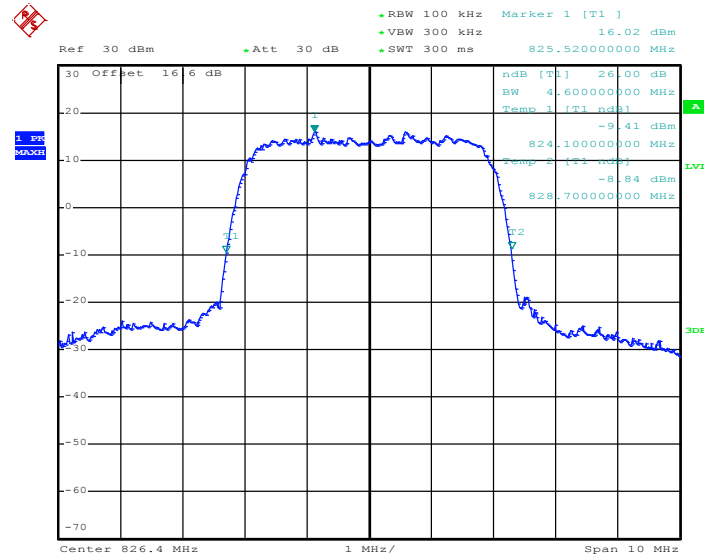26dB Bandwidth Plot on Channel 4132 (826.4 MHz)

Date: 27.MAY.2014 14:59:12




99% Occupied Bandwidth Plot on Channel 4182 (836.4 MHz)

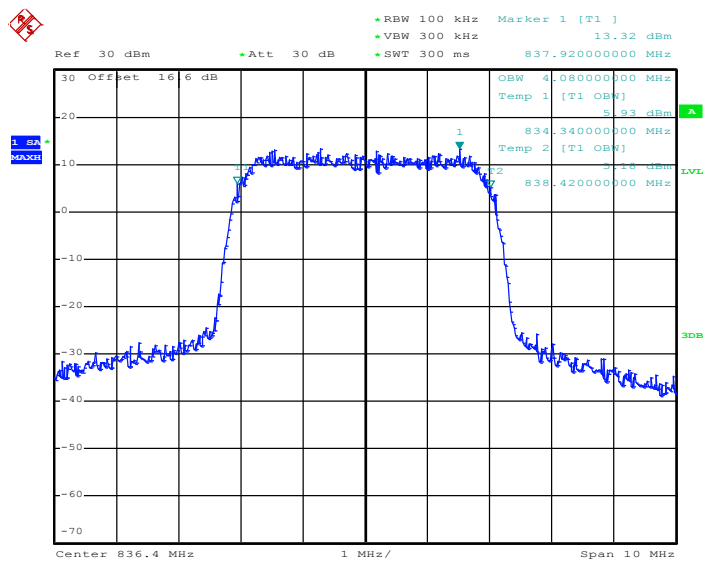

Date: 27.MAY.2014 15:02:02


26dB Bandwidth Plot on Channel 4182 (836.4 MHz)

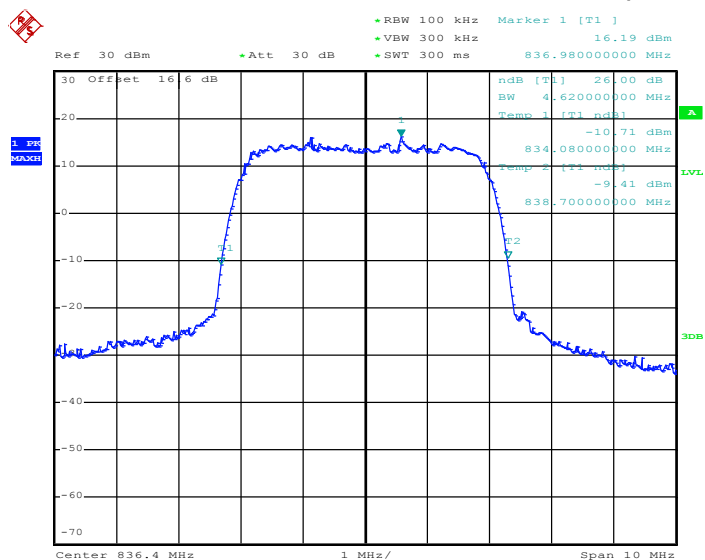

Date: 27.MAY.2014 14:59:41




99% Occupied Bandwidth Plot on Channel 4233 (846.6 MHz)

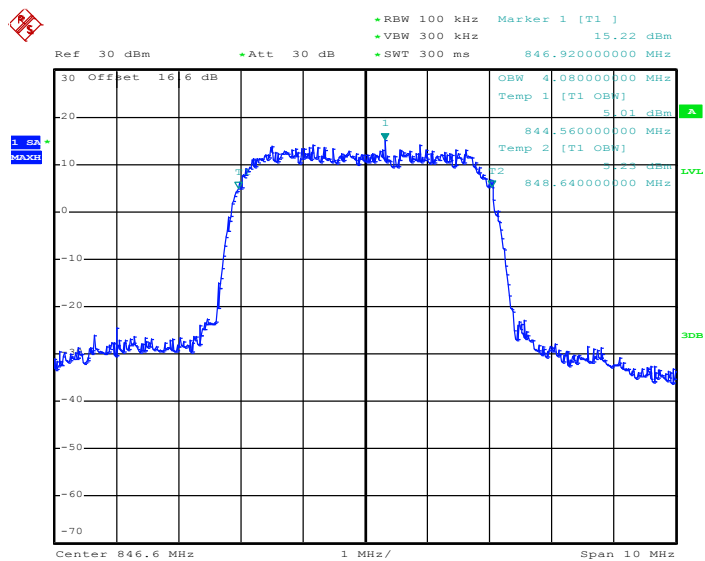

Date: 27.MAY.2014 15:02:31

26dB Bandwidth Plot on Channel 4233 (846.6 MHz)

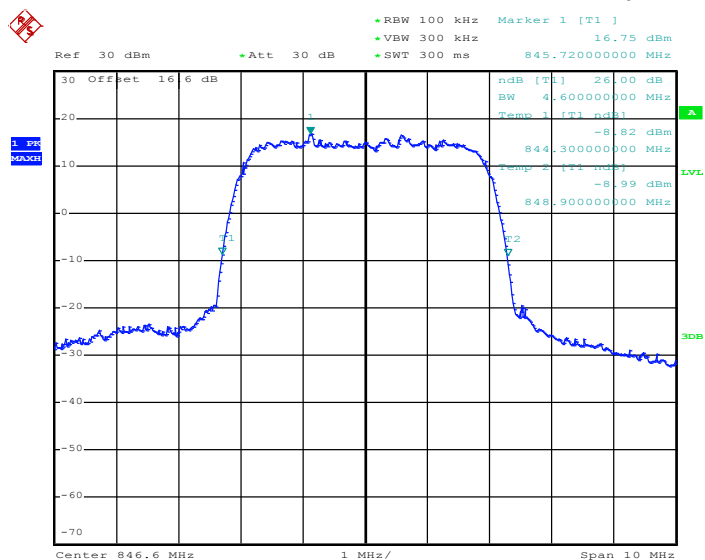


Date: 27.MAY.2014 15:00:09




Band : WCDMA Band IV Test Mode : RMC 12.2Kbps Link (QPSK)

99% Occupied Bandwidth Plot on Channel 1312 (1712.4 MHz)

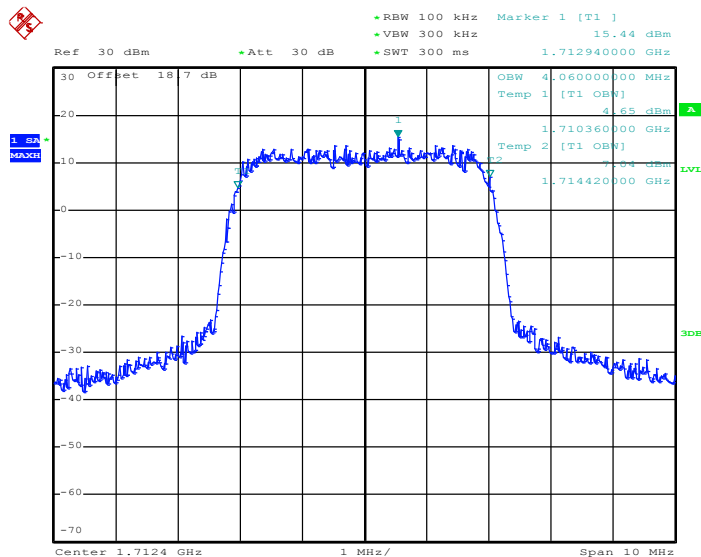

Date: 27.MAY.2014 14:23:00


26dB Bandwidth Plot on Channel 1312 (1712.4 MHz)

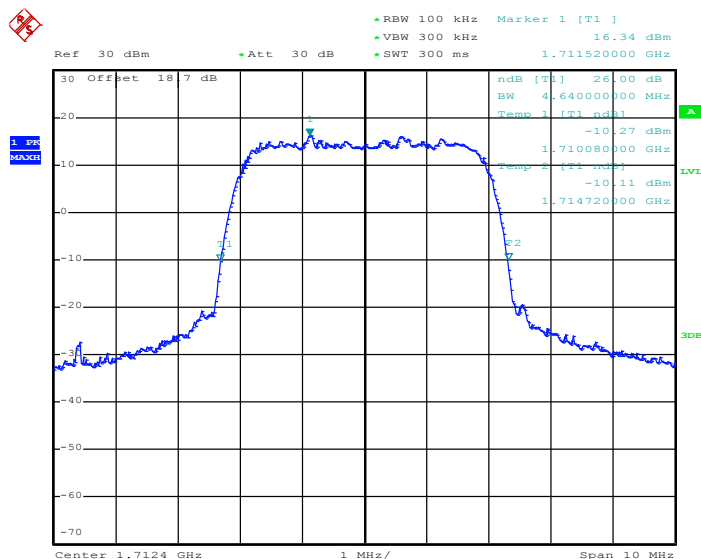

Date: 27.MAY.2014 14:21:04




99% Occupied Bandwidth Plot on Channel 1413 (1732.6 MHz)

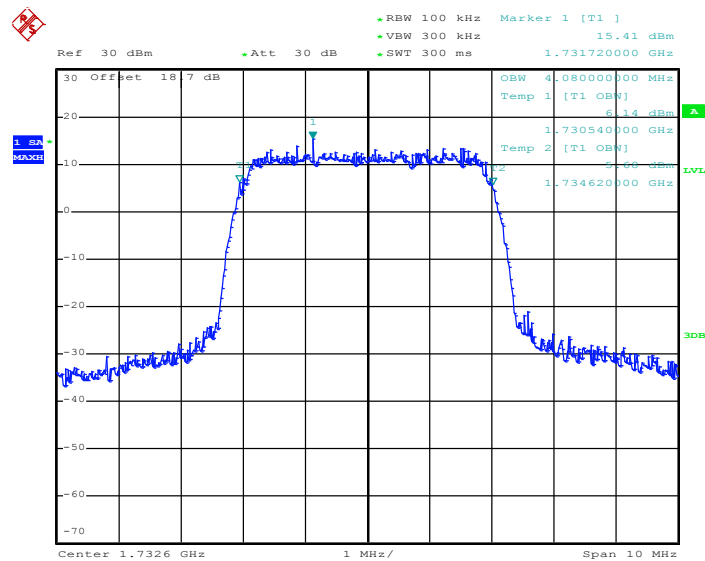

Date: 27.MAY.2014 14:23:29


26dB Bandwidth Plot on Channel 1413 (1732.6 MHz)

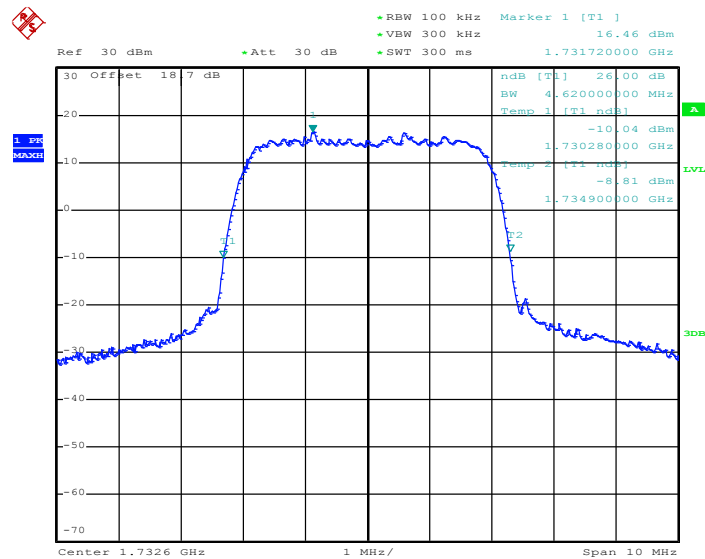

Date: 27.MAY.2014 14:21:33




99% Occupied Bandwidth Plot on Channel 1513 (1752.6 MHz)

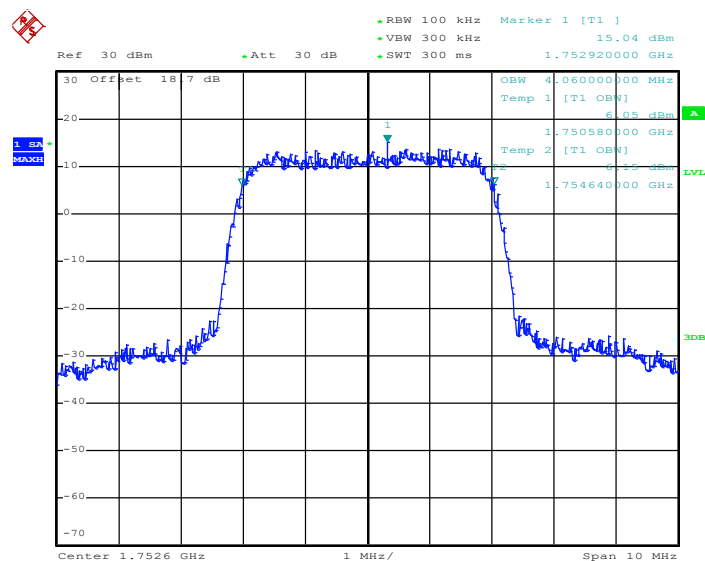

Date: 27.MAY.2014 14:23:58

26dB Bandwidth Plot on Channel 1513 (1752.6 MHz)

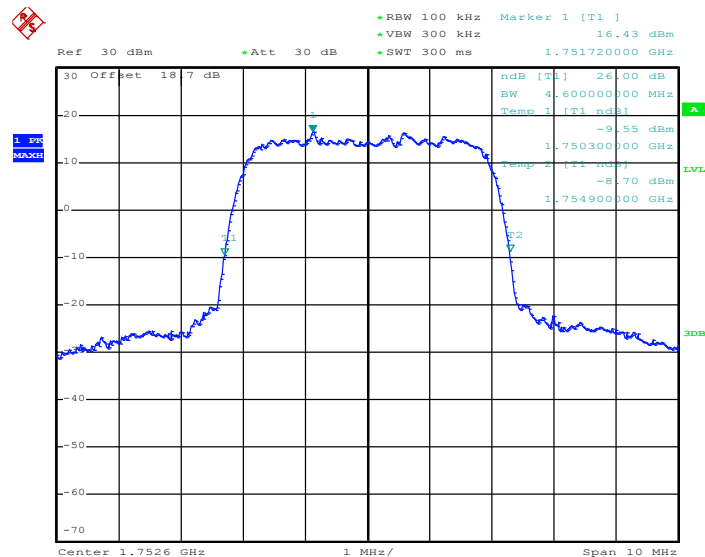


Date: 27.MAY.2014 14:22:01




Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	---------------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 9262 (1852.4 MHz)

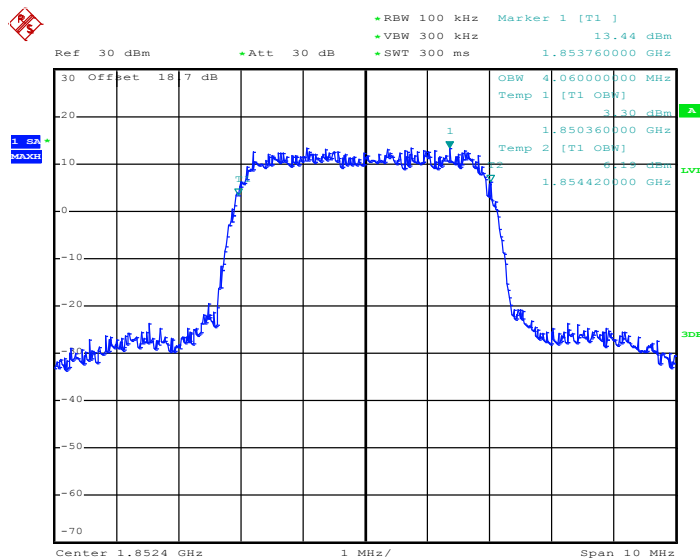

Date: 27.MAY.2014 13:52:14


26dB Bandwidth Plot on Channel 9262 (1852.4 MHz)

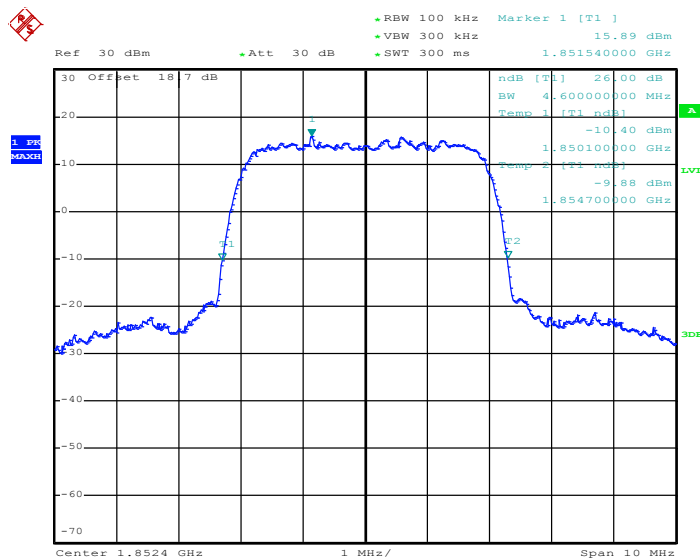

Date: 27.MAY.2014 13:50:29




99% Occupied Bandwidth Plot on Channel 9400 (1880.0 MHz)

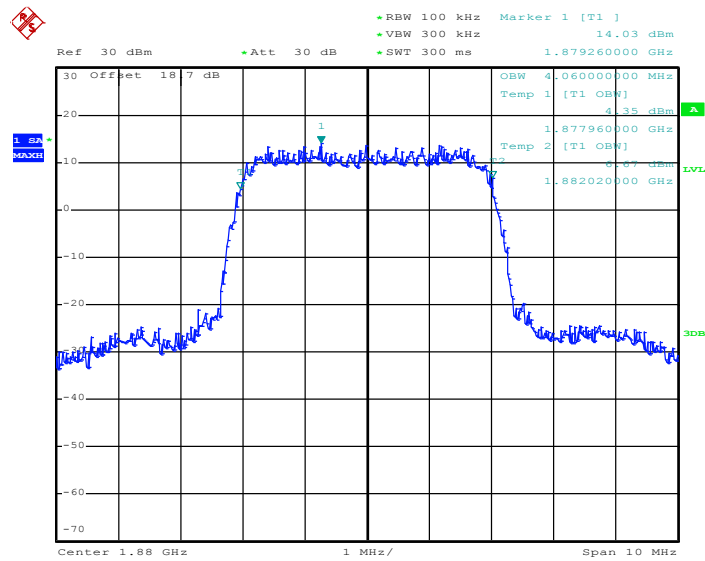

Date: 27.MAY.2014 13:52:42


26dB Bandwidth Plot on Channel 9400 (1880.0 MHz)

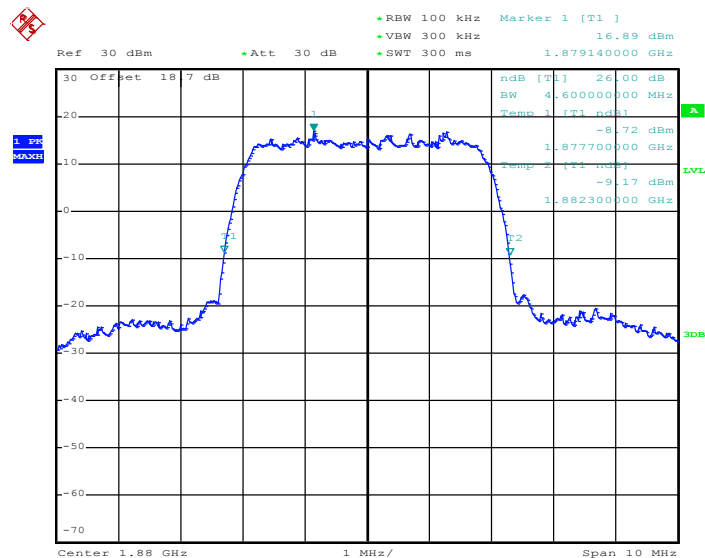

Date: 27.MAY.2014 13:50:58




99% Occupied Bandwidth Plot on Channel 9538 (1907.6 MHz)

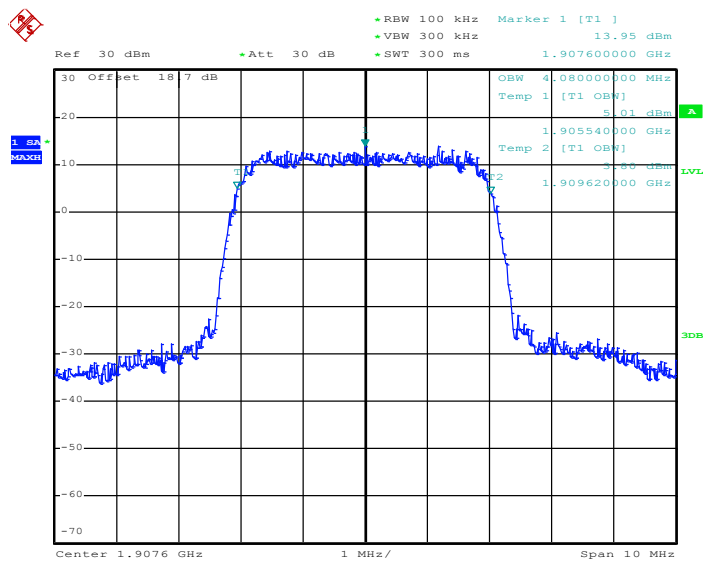

Date: 27.MAY.2014 13:53:11

26dB Bandwidth Plot on Channel 9538 (1907.6 MHz)

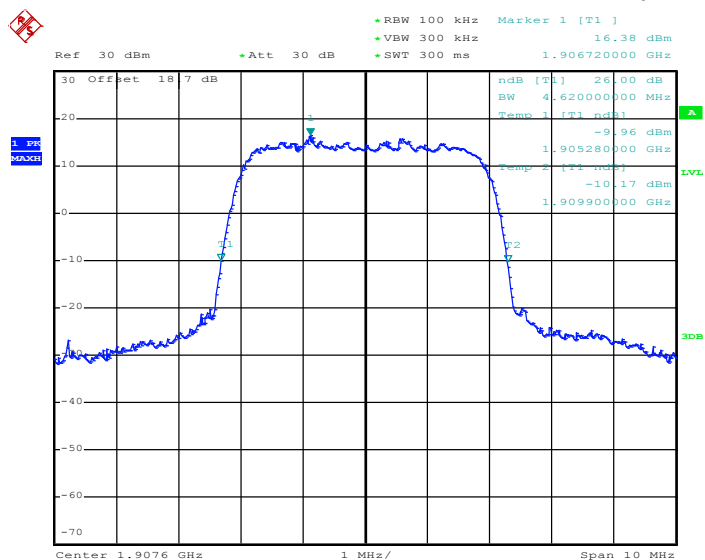

Date: 27.MAY.2014 13:51:26

3.4 Band Edge Measurement

3.4.1 Description of Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The band edges of low and high channels for the highest RF powers were measured.
4. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
5. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13\text{dBm}$.

3.4.4 Test Setup

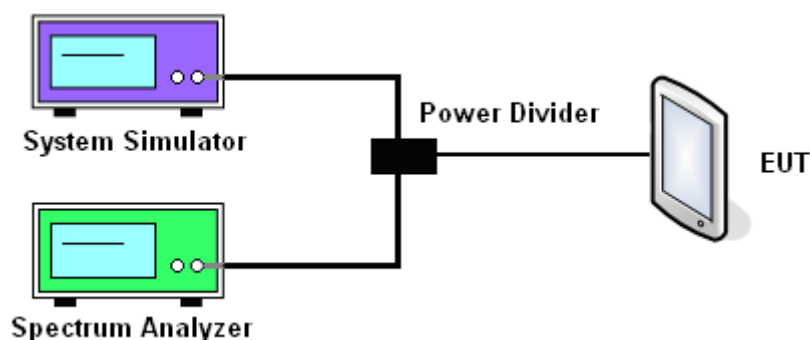




3.4.5 Test Result (Plots) of Conducted Band Edge


Band :	GSM850	Test Mode :	GPRS class 8 Link (GMSK)
--------	--------	-------------	--------------------------

Lower Band Edge Plot on Channel 128 (824.2 MHz)

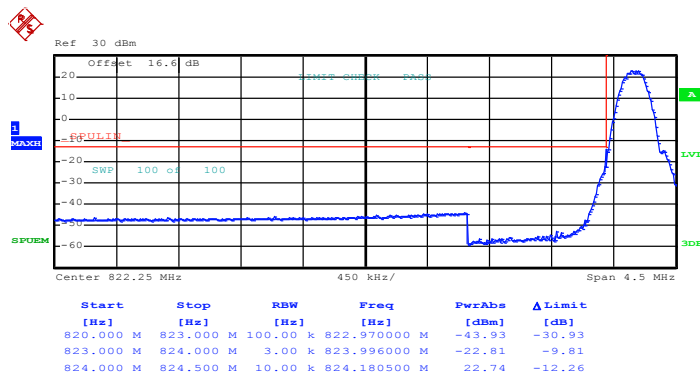

Date: 26.MAY.2014 17:45:53

Higher Band Edge Plot on Channel 251 (848.8 MHz)

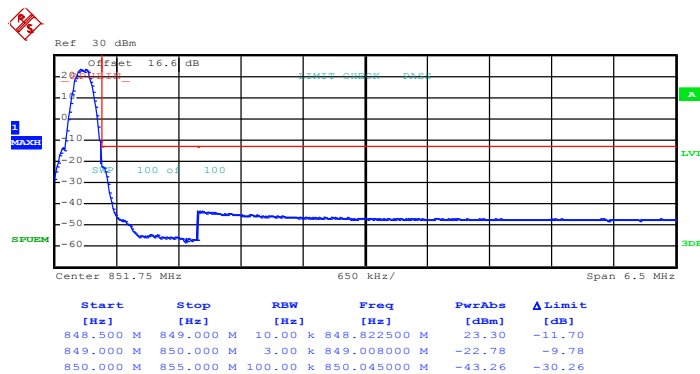


Date: 26.MAY.2014 17:41:59




Band :	GSM850	Test Mode :	EDGE class 8 Link (8PSK)
--------	--------	-------------	--------------------------

Lower Band Edge Plot on Channel 128 (824.2 MHz)

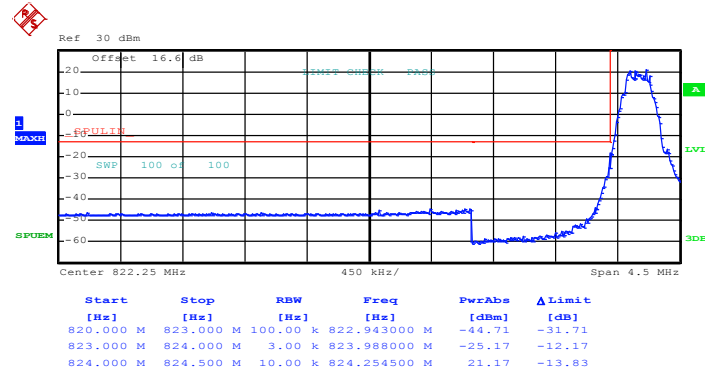

Date: 27.MAY.2014 10:33:34

Higher Band Edge Plot on Channel 251 (848.8 MHz)

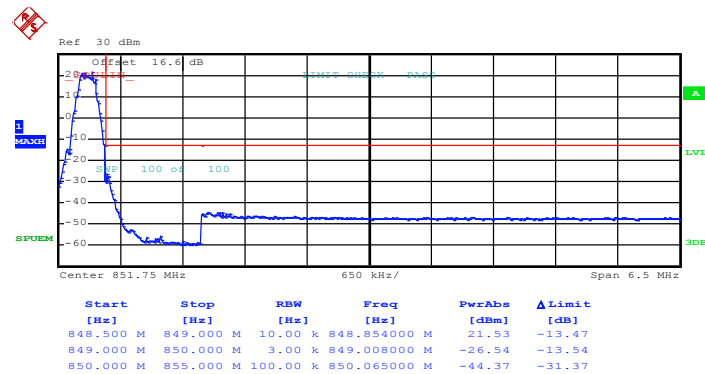


Date: 27.MAY.2014 10:26:36




Band :	GSM1900	Test Mode :	GPRS class 8 Link (GMSK)
--------	---------	-------------	--------------------------

Lower Band Edge Plot on Channel 512 (1850.2 MHz)

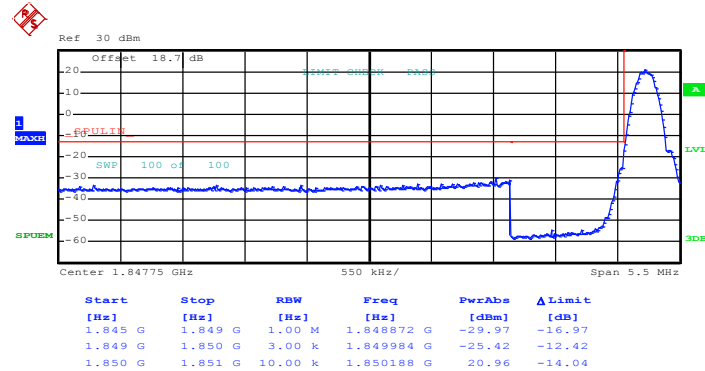

Date: 27.MAY.2014 11:28:04


Higher Band Edge Plot on Channel 810 (1909.8 MHz)

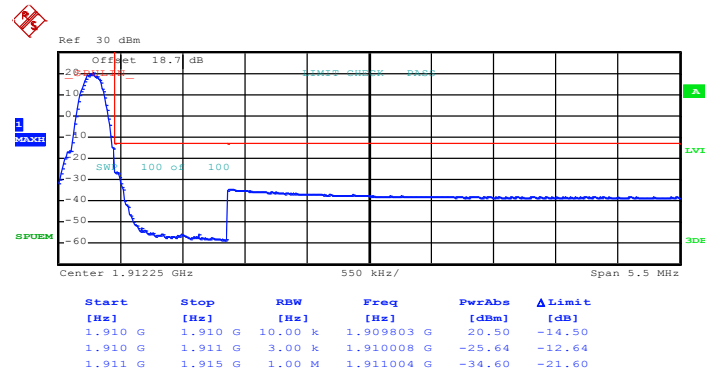

Date: 27.MAY.2014 11:30:46


Band :	GSM1900	Test Mode :	EDGE class 8 Link (8PSK)
---------------	---------	--------------------	--------------------------

Lower Band Edge Plot on Channel 512 (1850.2 MHz)

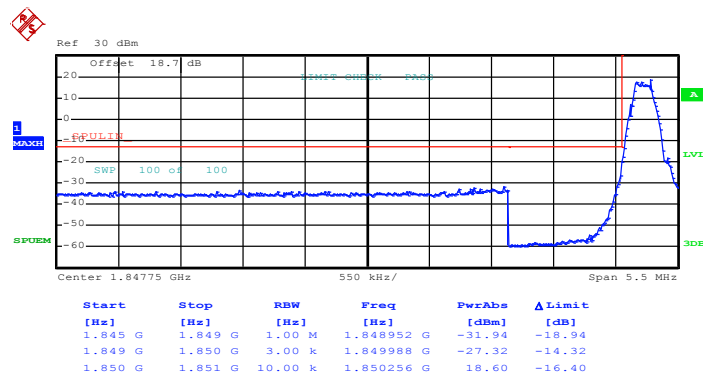

Date: 27.MAY.2014 12:00:59

Higher Band Edge Plot on Channel 810 (1909.8 MHz)

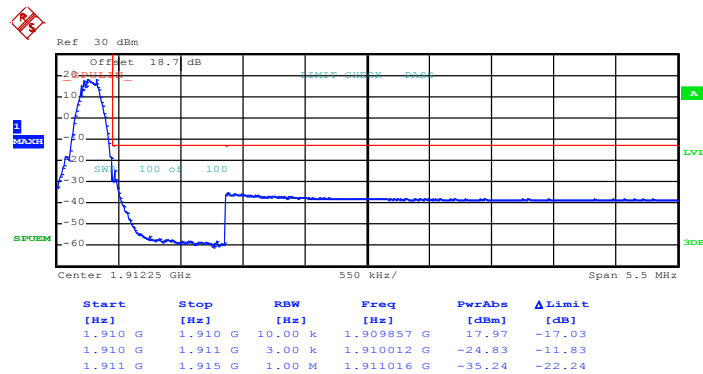


Date: 27.MAY.2014 11:58:34




Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	--------------	-------------	--------------------------

Lower Band Edge Plot on Channel 4132 (826.4 MHz)

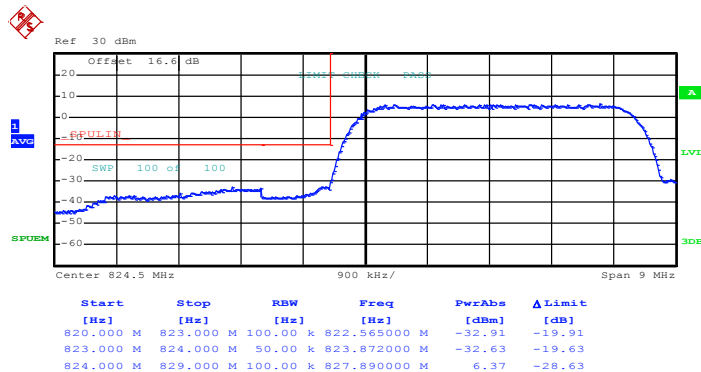

Date: 27.MAY.2014 15:10:12

Higher Band Edge Plot on Channel 4233 (846.6 MHz)

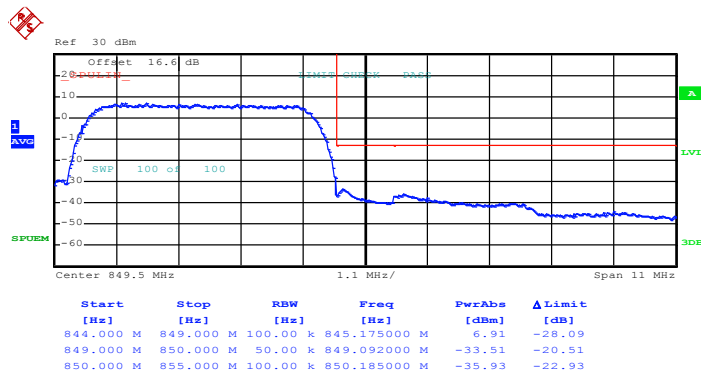


Date: 27.MAY.2014 15:07:04




Band :	WCDMA Band IV	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	---------------	-------------	--------------------------

Lower Band Edge Plot on Channel 1312 (1712.4 MHz)

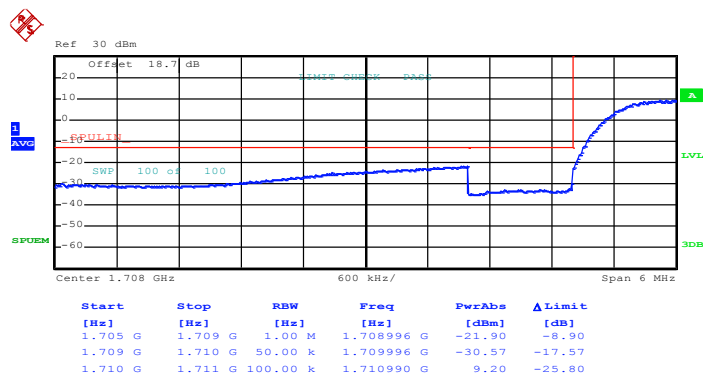

Date: 27.MAY.2014 14:35:00

Higher Band Edge Plot on Channel 1513 (1752.6 MHz)

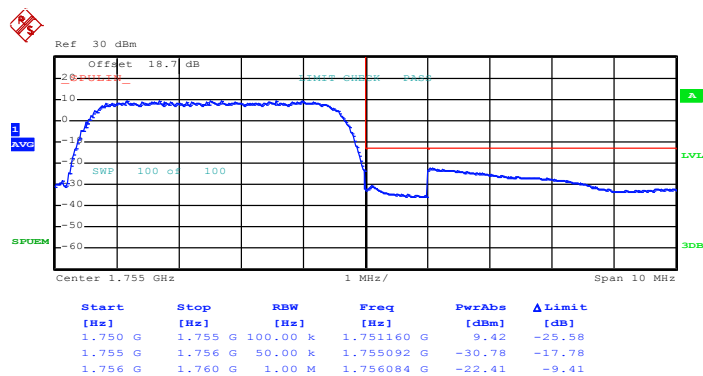


Date: 27.MAY.2014 14:32:02




Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	---------------	-------------	--------------------------

Lower Band Edge Plot on Channel 9262 (1852.4 MHz)

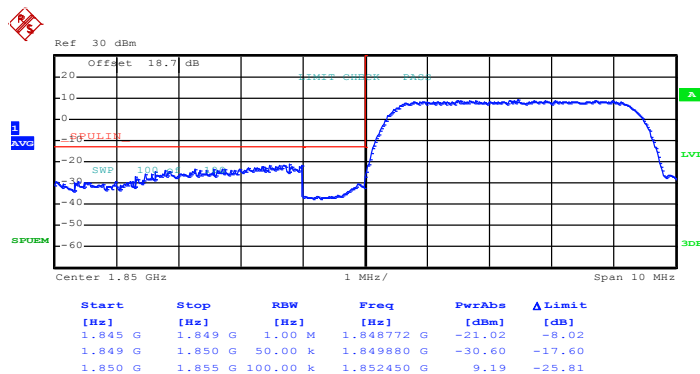

Date: 27.MAY.2014 14:01:04

Higher Band Edge Plot on Channel 9538 (1907.6 MHz)

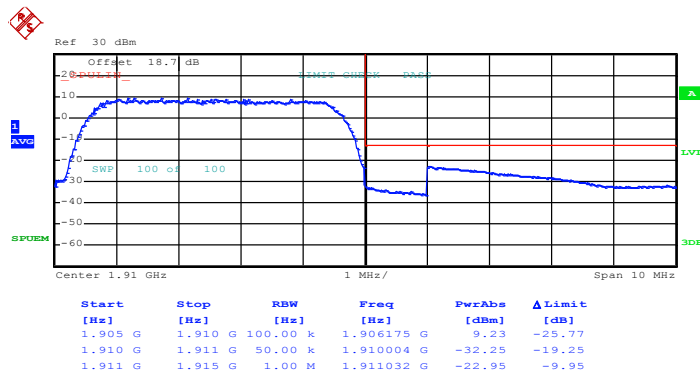

Date: 27.MAY.2014 13:56:53

3.5 Conducted Spurious Emission Measurement

3.5.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$


3.5.4 Test Setup

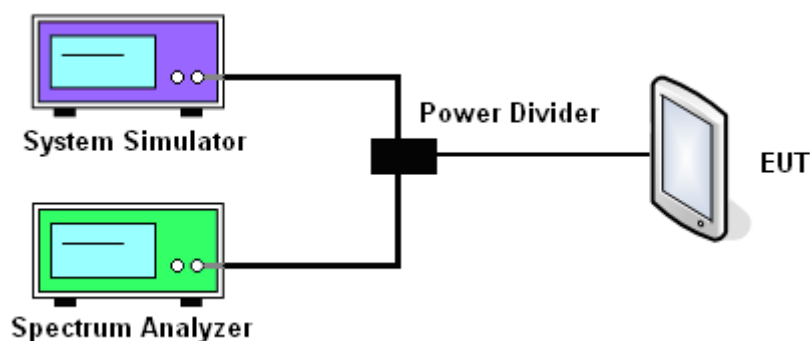

3.5.5 Test Result (Plots) of Conducted Spurious Emission


Band :	GSM850	Channel :	CH128
Test Mode :	GPRS class 8 Link (GMSK)	Frequency :	824.2 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

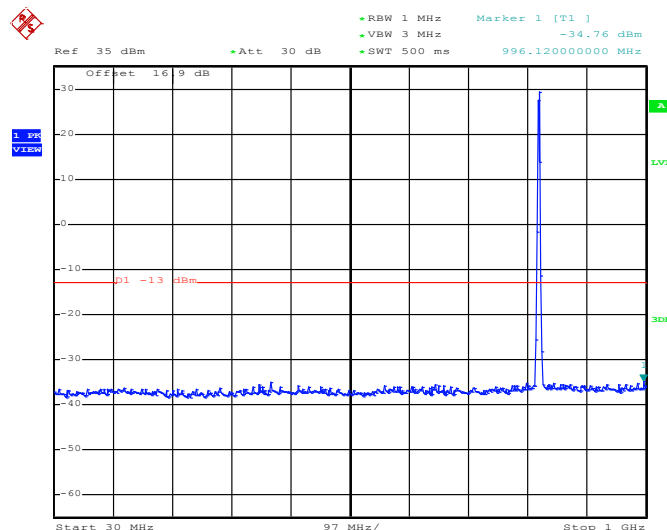

Date: 26.MAY.2014 17:55:30


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

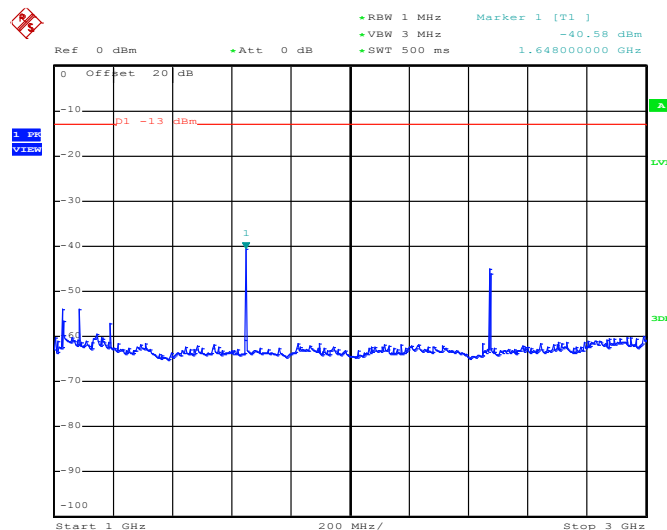

Date: 26.MAY.2014 17:55:41




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

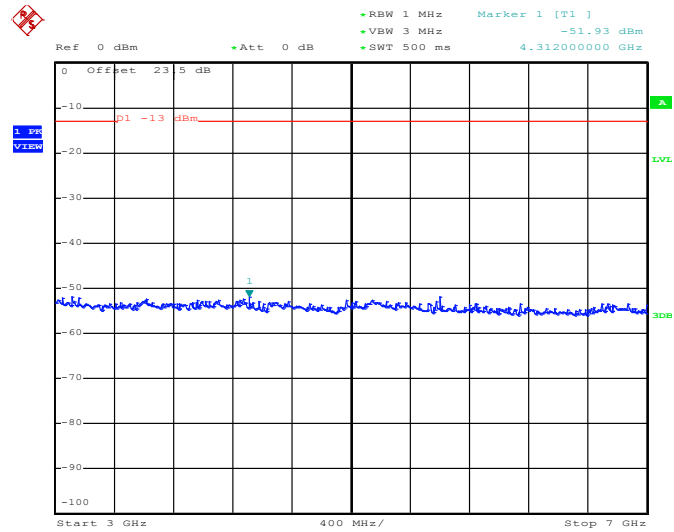

Date: 26.MAY.2014 17:55:49

Conducted Spurious Emission Plot between 7GHz ~ 9GHz

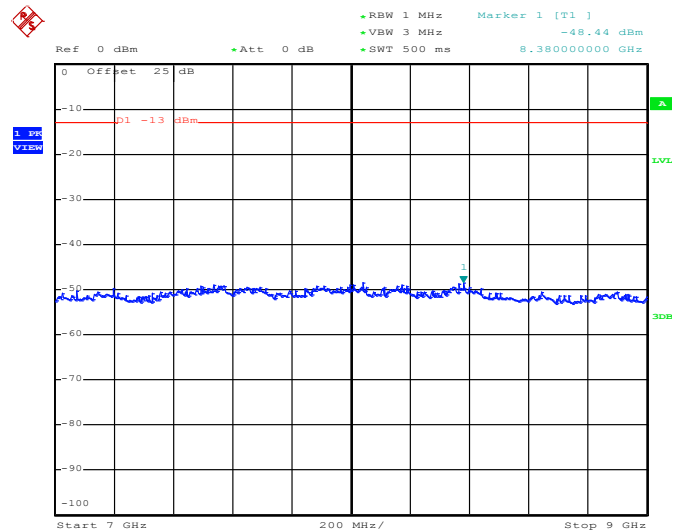


Date: 26.MAY.2014 17:55:58




Band :	GSM850	Channel :	CH189
Test Mode :	GPRS class 8 Link (GMSK)	Frequency :	836.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

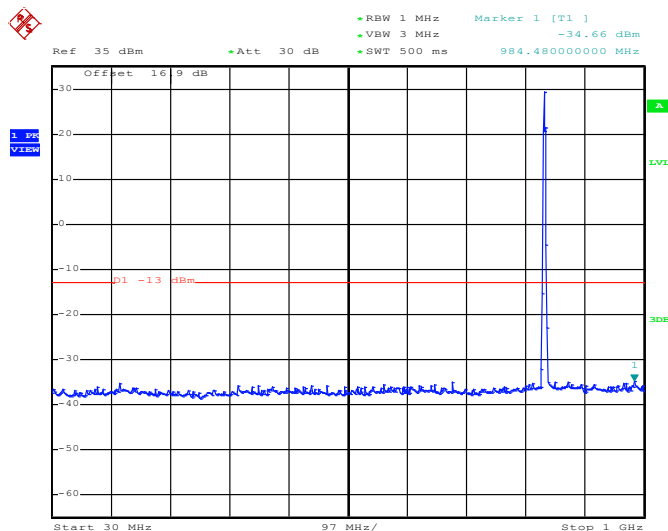

Date: 26.MAY.2014 17:54:02


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

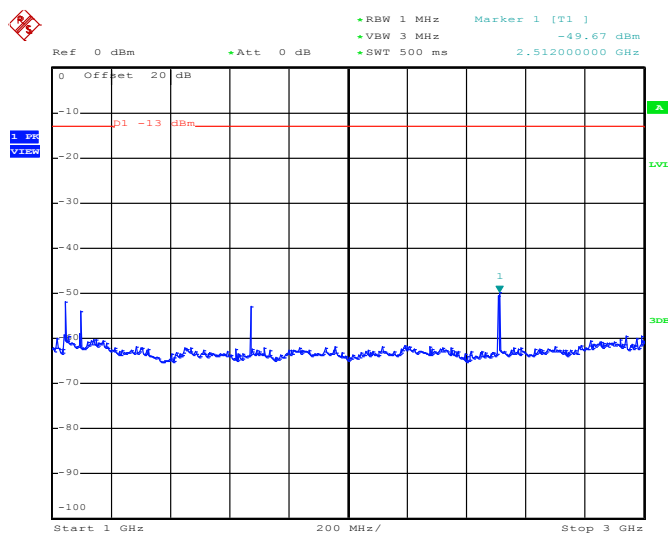

Date: 26.MAY.2014 17:54:12




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

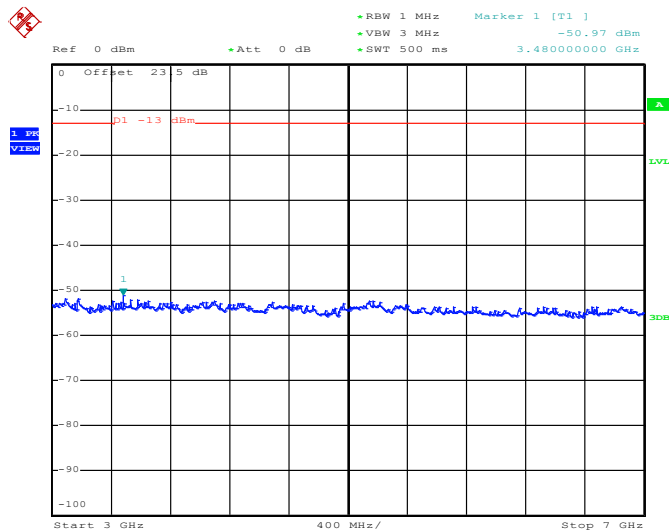

Date: 26.MAY.2014 17:54:21

Conducted Spurious Emission Plot between 7GHz ~ 9GHz

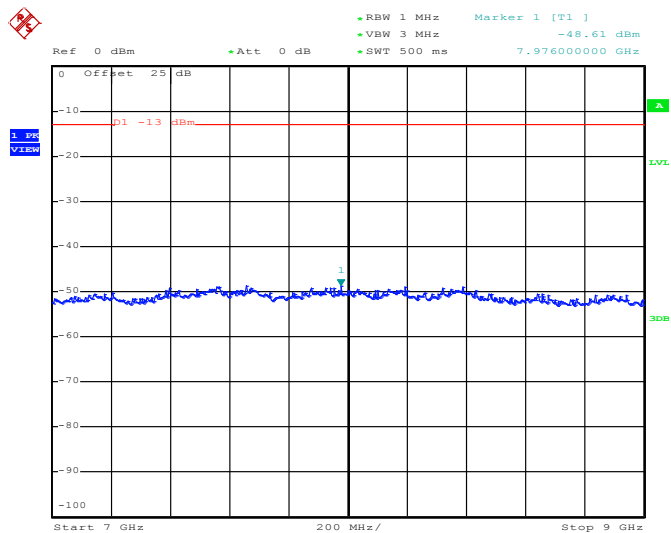


Date: 26.MAY.2014 17:54:29




Band :	GSM850	Channel :	CH251
Test Mode :	GPRS class 8 Link (GMSK)	Frequency :	848.8 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

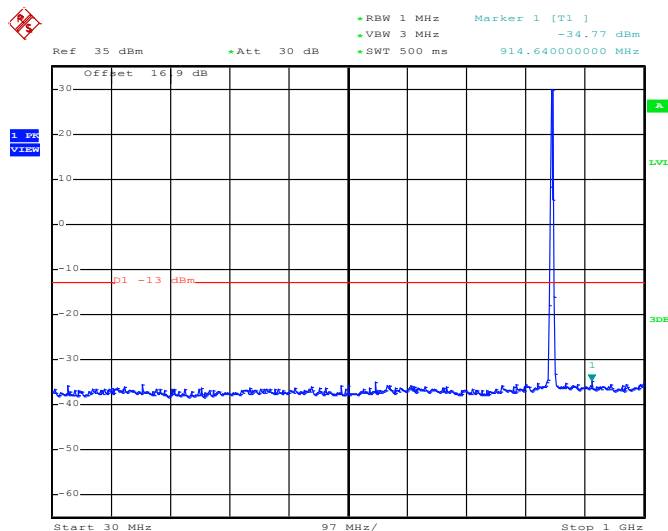

Date: 26.MAY.2014 17:59:46

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

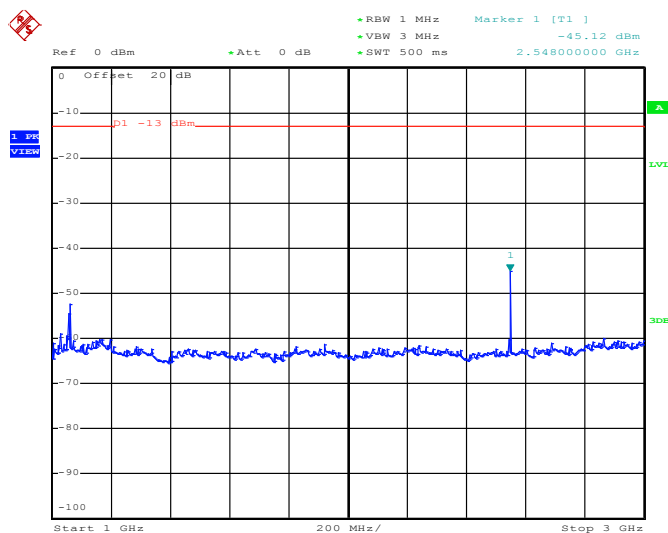

Date: 26.MAY.2014 17:59:56




Conducted Spurious Emission Plot between 7GHz ~ 9GHz






Band :	GSM850	Channel :	CH128
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	824.2 MHz

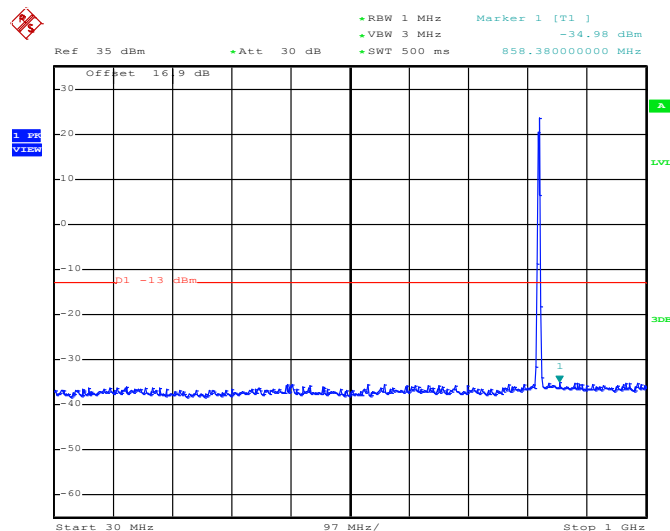Conducted Spurious Emission Plot between 30MHz ~ 1GHz


Date: 27.MAY.2014 10:53:28

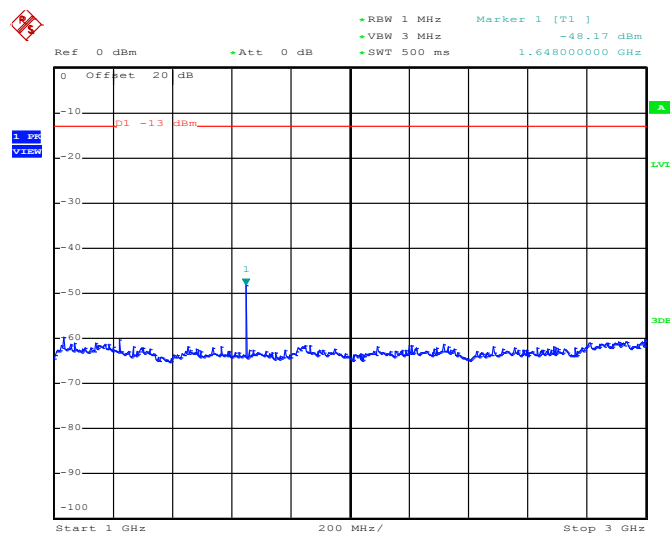Conducted Spurious Emission Plot between 1GHz ~ 3GHz

Date: 27.MAY.2014 10:53:39




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

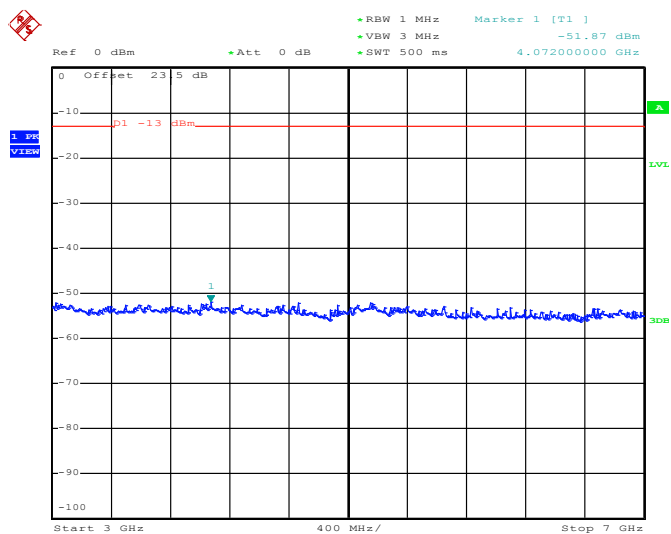

Date: 27.MAY.2014 10:53:47

Conducted Spurious Emission Plot between 7GHz ~ 9GHz

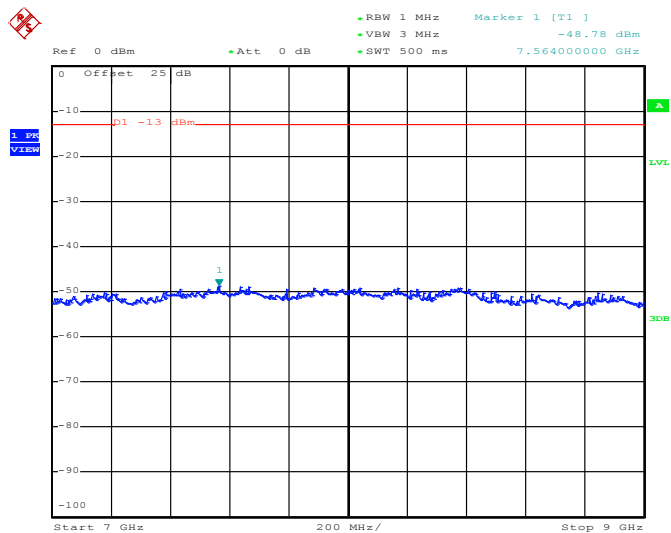


Date: 27.MAY.2014 10:53:56




Band :	GSM850	Channel :	CH189
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	836.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

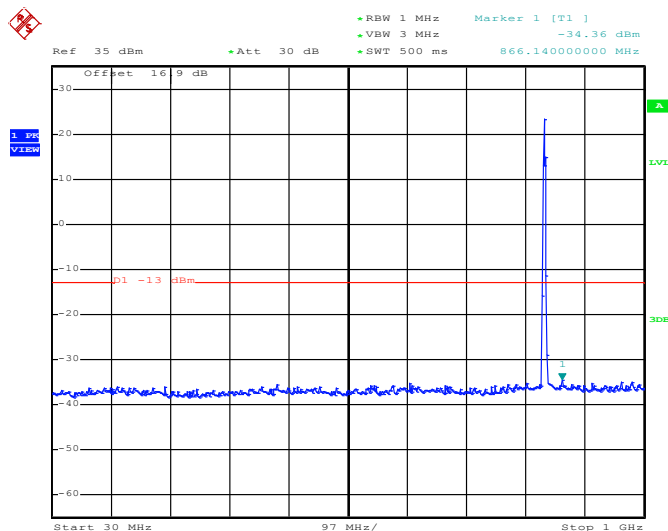

Date: 27.MAY.2014 10:50:49


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

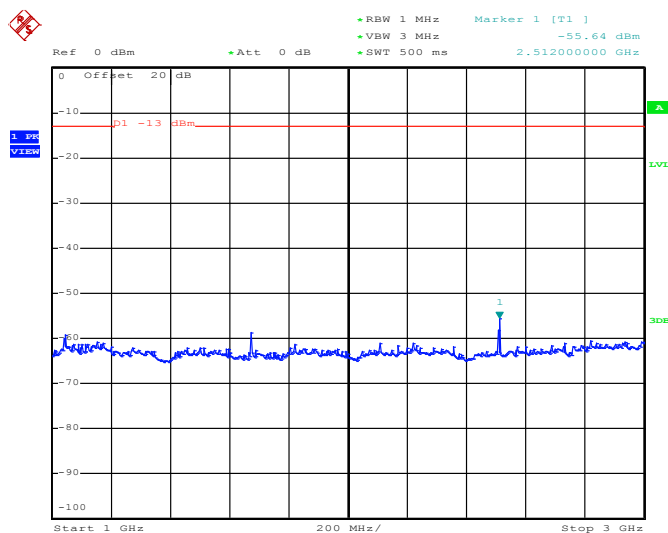

Date: 27.MAY.2014 10:51:00




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

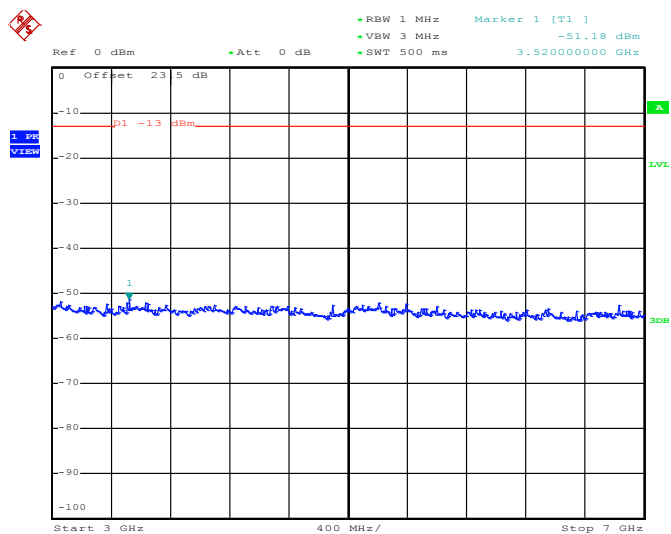

Date: 27.MAY.2014 10:51:09


Conducted Spurious Emission Plot between 7GHz ~ 9GHz

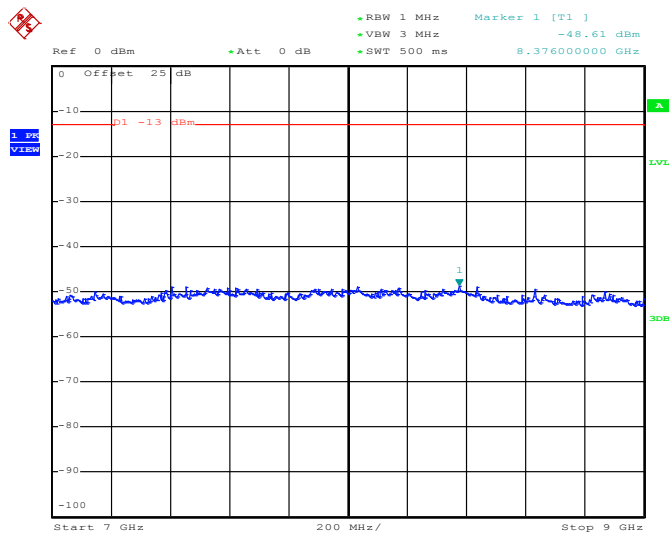


Date: 27.MAY.2014 10:51:17



Band :	GSM850	Channel :	CH251
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	848.8 MHz

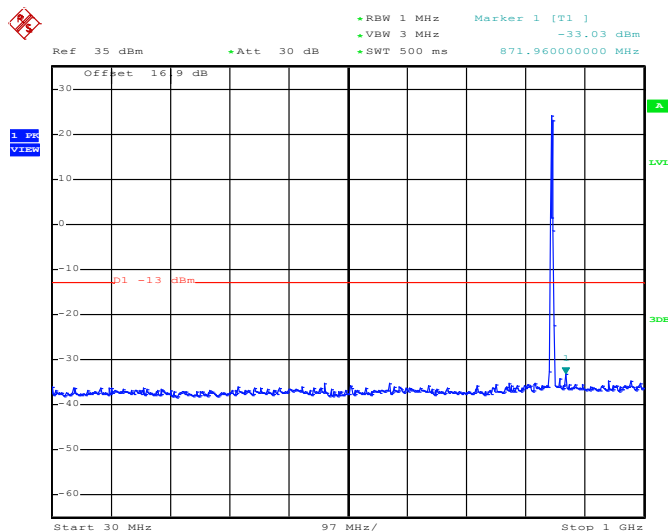Conducted Spurious Emission Plot between 30MHz ~ 1GHz


Date: 27.MAY.2014 10:55:07

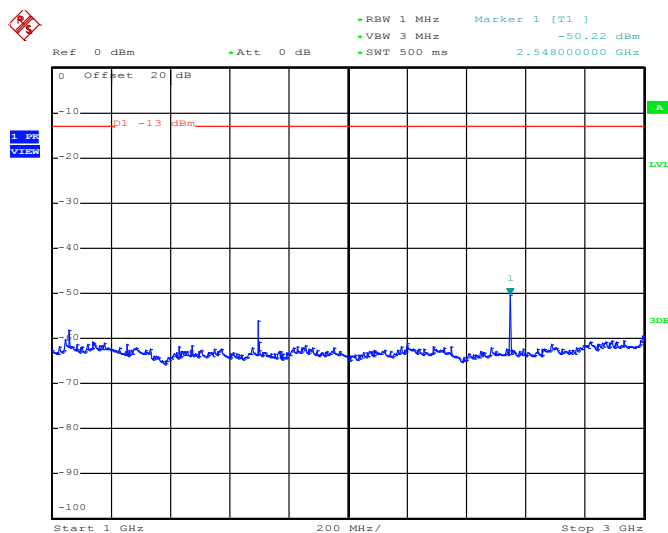Conducted Spurious Emission Plot between 1GHz ~ 3GHz

Date: 27.MAY.2014 10:55:18




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

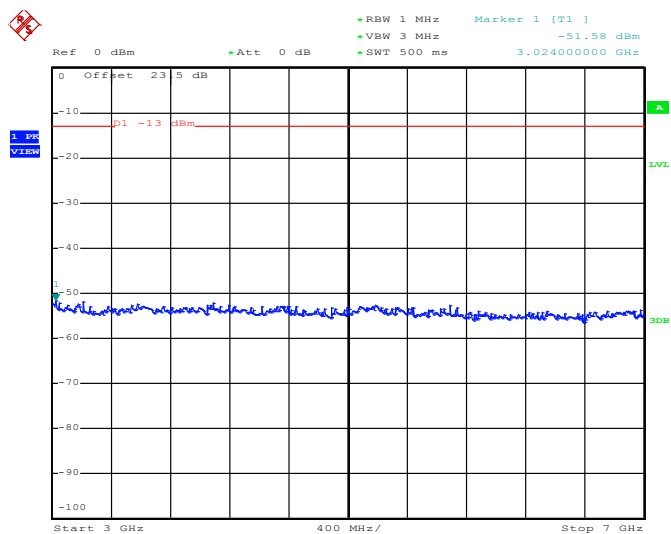

Date: 27.MAY.2014 10:55:27


Conducted Spurious Emission Plot between 7GHz ~ 9GHz

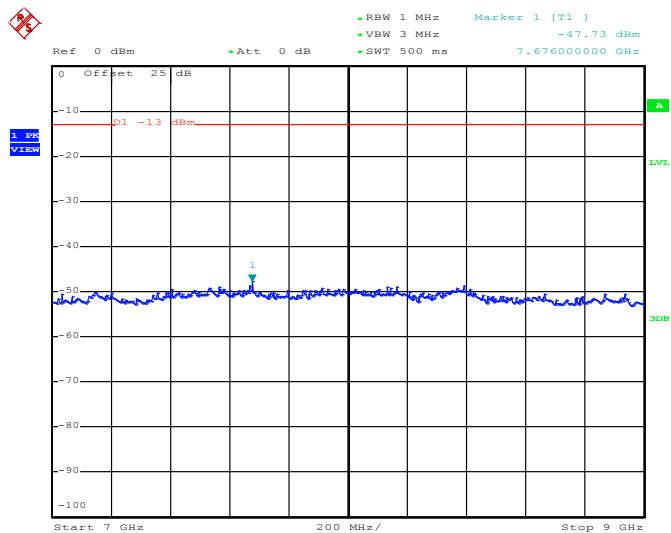


Date: 27.MAY.2014 10:55:35



Band :	GSM1900	Channel :	CH512
Test Mode :	GPRS class 8 Link (GMSK)	Frequency :	1850.2 MHz

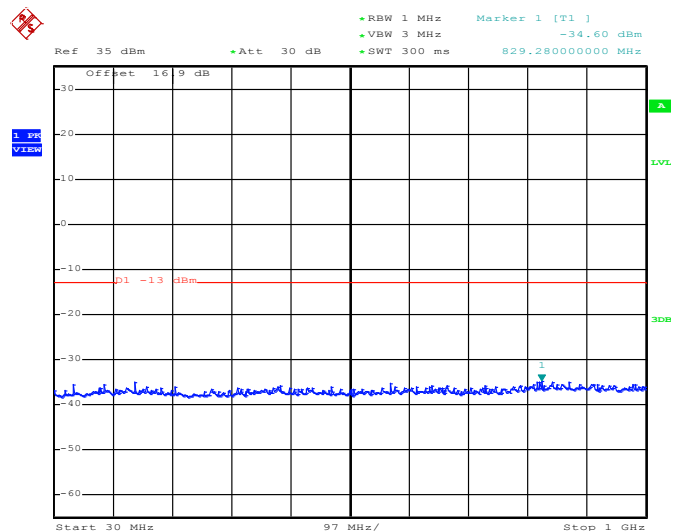Conducted Spurious Emission Plot between 30MHz ~ 1GHz


Date: 27.MAY.2014 11:33:59

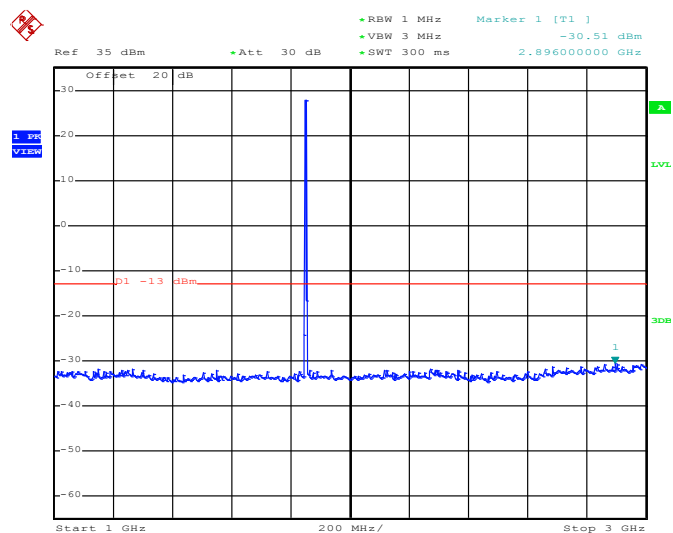Conducted Spurious Emission Plot between 1GHz ~ 3GHz

Date: 27.MAY.2014 11:34:07




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

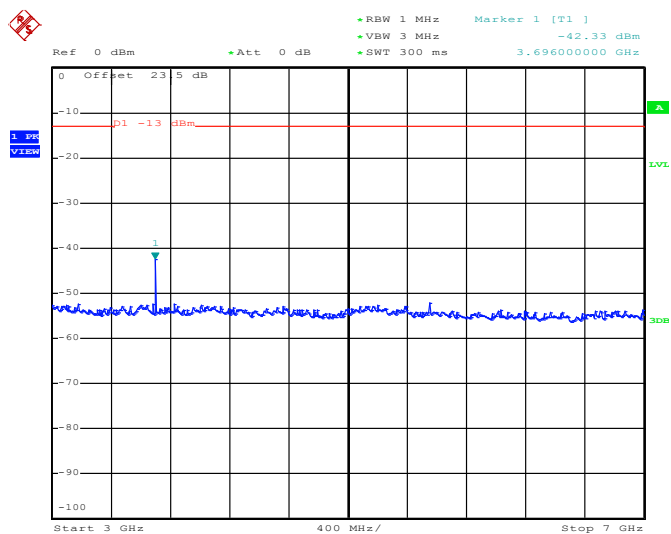

Date: 27.MAY.2014 11:34:18


Conducted Emission Plot between 7GHz ~ 13.6GHz

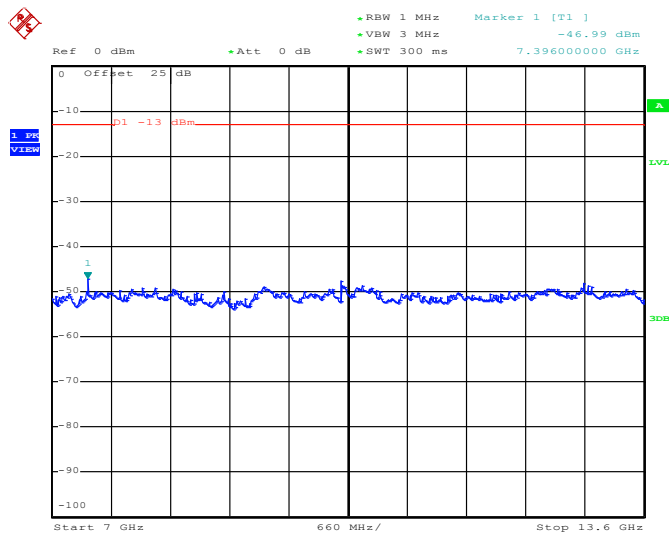

Date: 27.MAY.2014 11:34:27



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

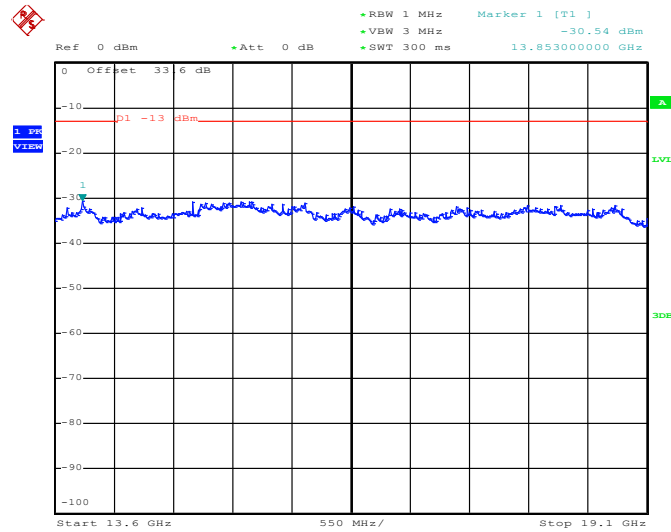


Date: 27.MAY.2014 11:34:35




Band :	GSM1900	Channel :	CH661
Test Mode :	GPRS class 8 Link (GMSK)	Frequency :	1880.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

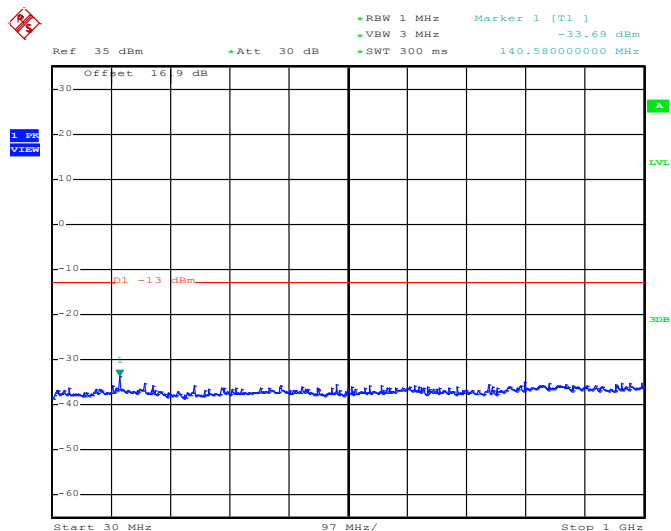

Date: 27.MAY.2014 11:32:36

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

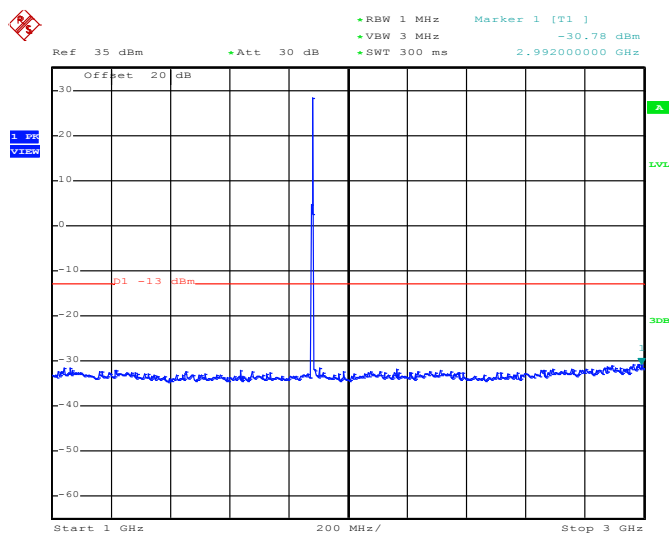

Date: 27.MAY.2014 11:32:44




Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz






Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

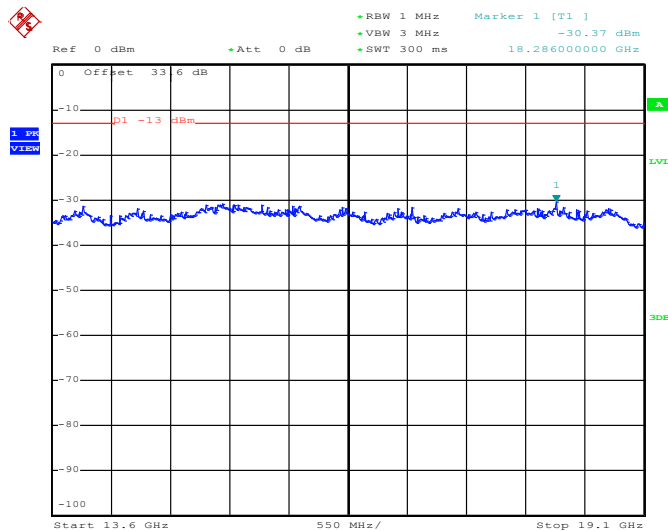


Date: 27.MAY.2014 11:33:12



Band :	GSM1900	Channel :	CH810
Test Mode :	GPRS class 8 Link (GMSK)	Frequency :	1909.8 MHz

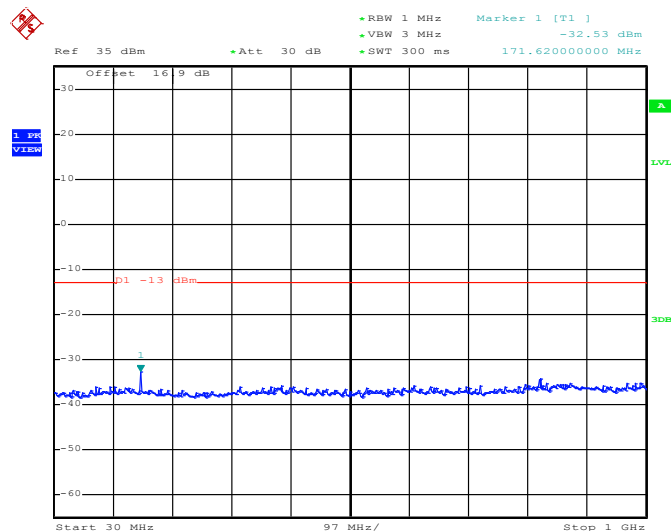Conducted Spurious Emission Plot between 30MHz ~ 1GHz


Date: 27.MAY.2014 11:35:45

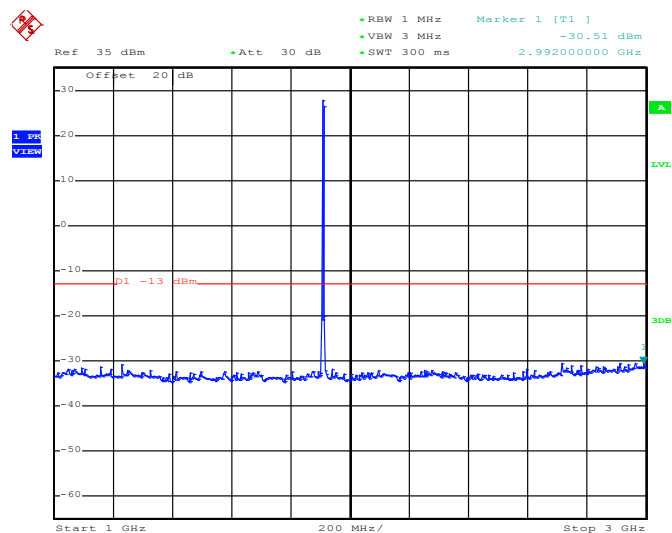Conducted Spurious Emission Plot between 1GHz ~ 3GHz

Date: 27.MAY.2014 11:35:53




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

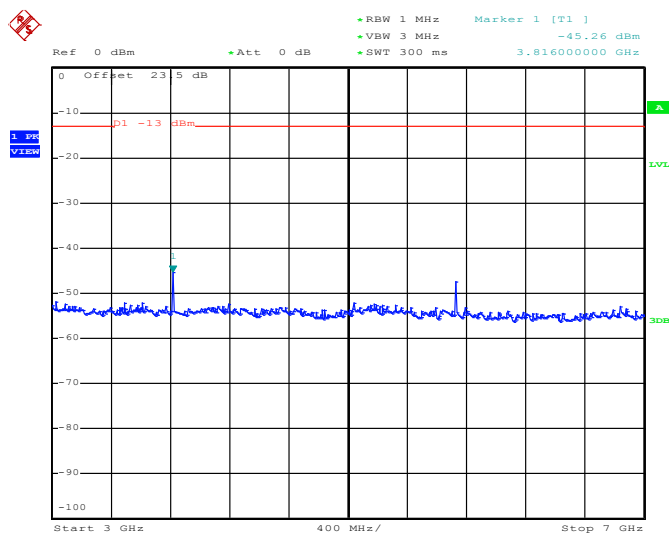

Date: 27.MAY.2014 11:36:04


Conducted Emission Plot between 7GHz ~ 13.6GHz

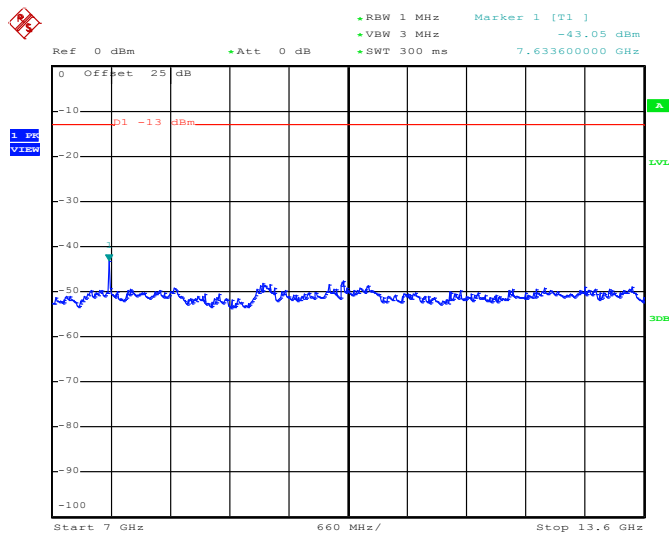

Date: 27.MAY.2014 11:36:13




Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

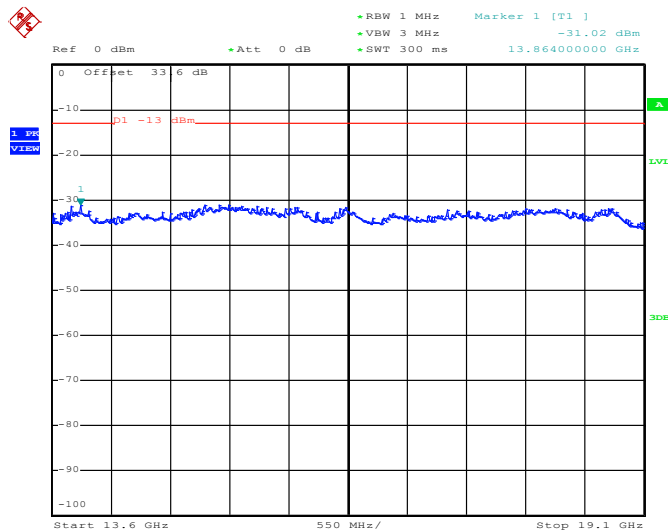


Date: 27.MAY.2014 11:36:21



Band :	GSM1900	Channel :	CH512
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	1850.2 MHz

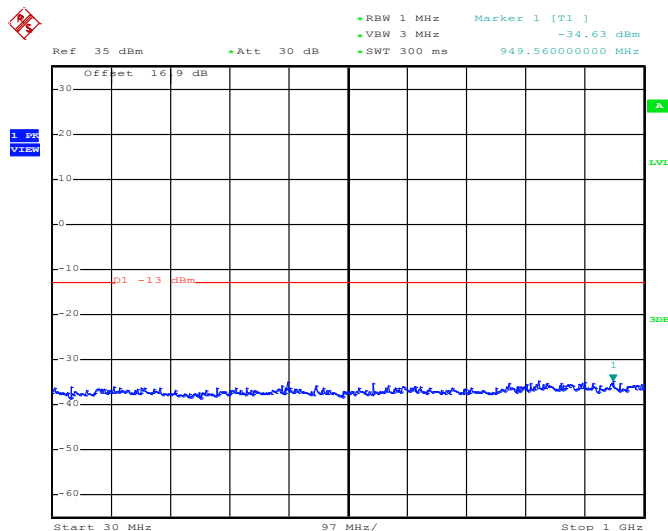Conducted Spurious Emission Plot between 30MHz ~ 1GHz


Date: 27.MAY.2014 13:40:40

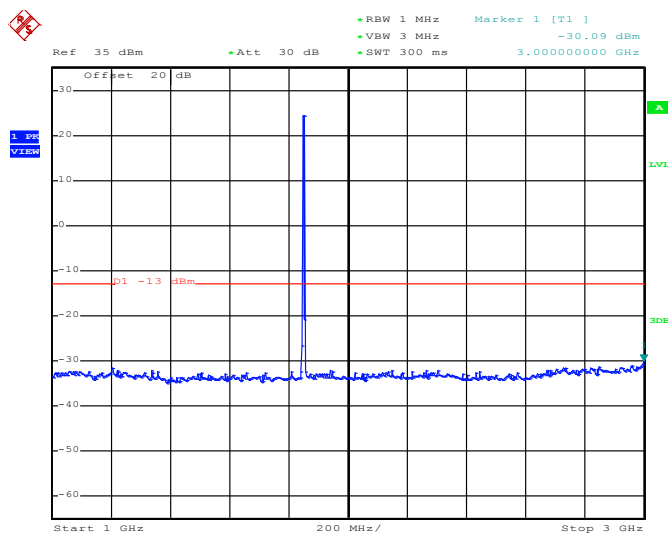Conducted Spurious Emission Plot between 1GHz ~ 3GHz

Date: 27.MAY.2014 13:40:48




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

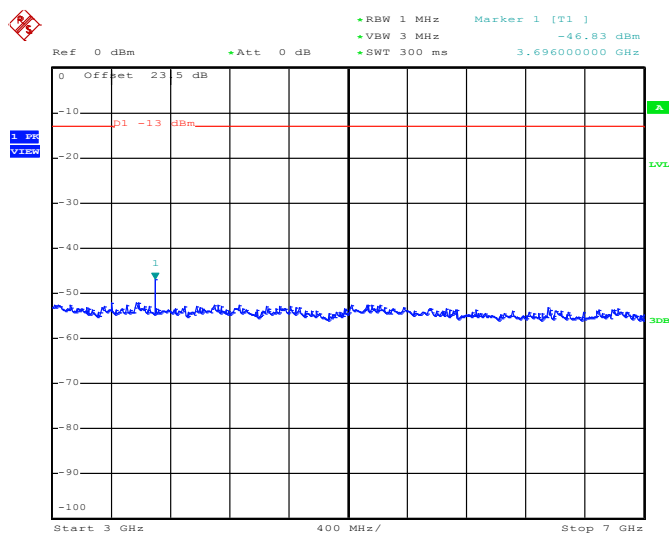

Date: 27.MAY.2014 13:41:00


Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

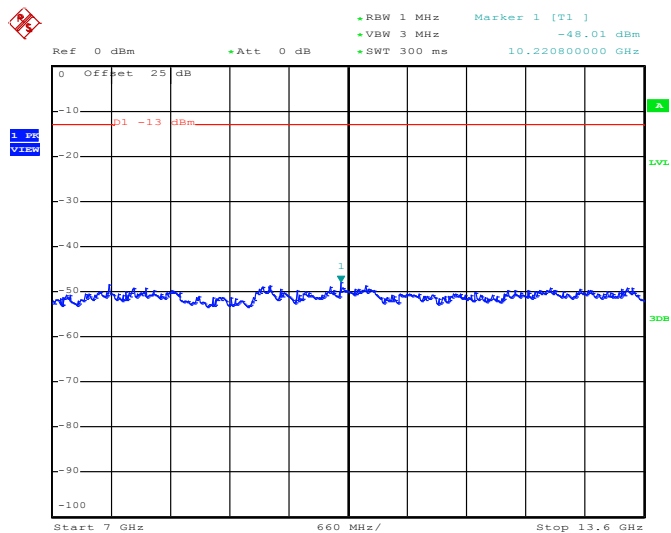

Date: 27.MAY.2014 13:41:09



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

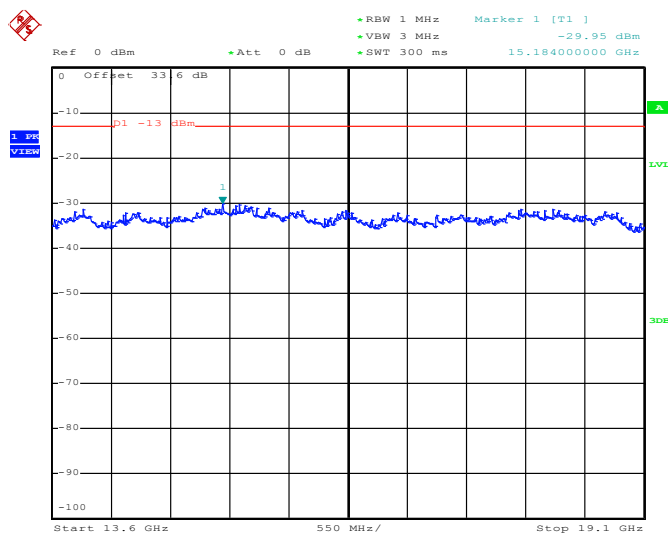


Date: 27.MAY.2014 13:41:17




Band :	GSM1900	Channel :	CH661
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	1880.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

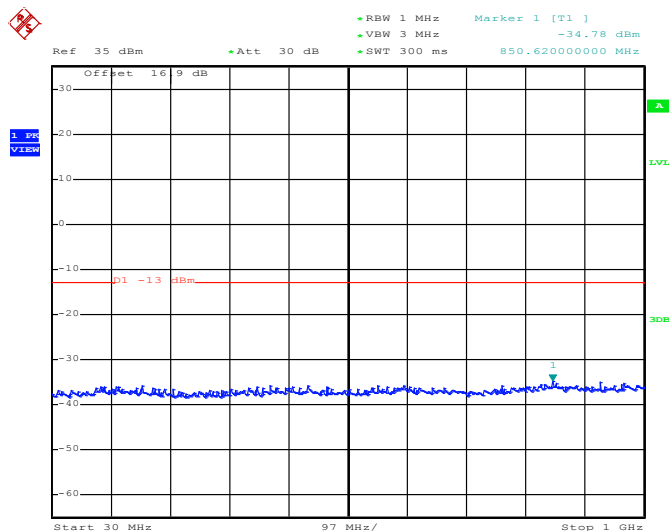

Date: 27.MAY.2014 13:39:17


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

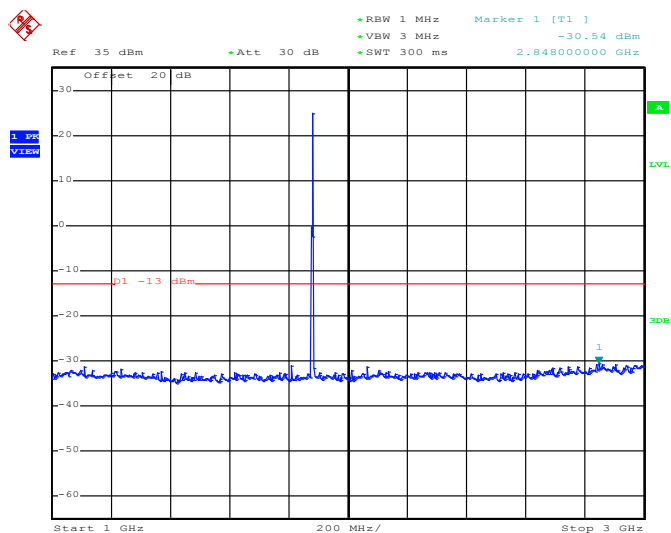

Date: 27.MAY.2014 13:39:25




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

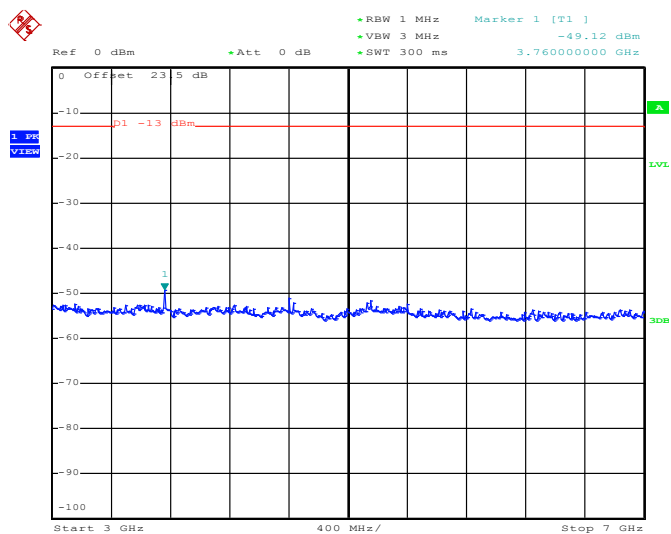

Date: 27.MAY.2014 13:39:36


Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

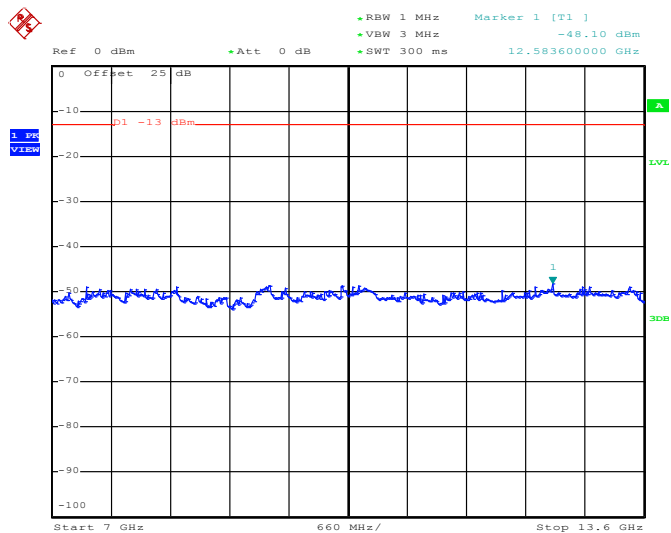

Date: 27.MAY.2014 13:39:45




Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

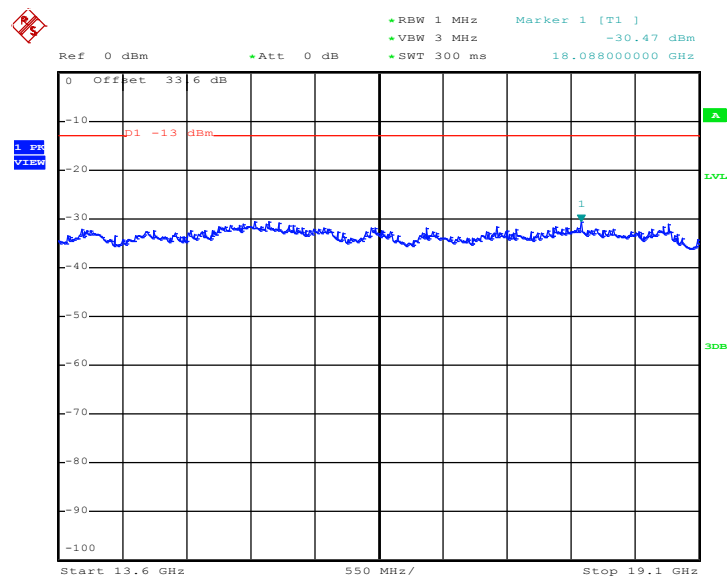


Date: 27.MAY.2014 13:39:53



Band :	GSM1900	Channel :	CH810
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	1909.8 MHz

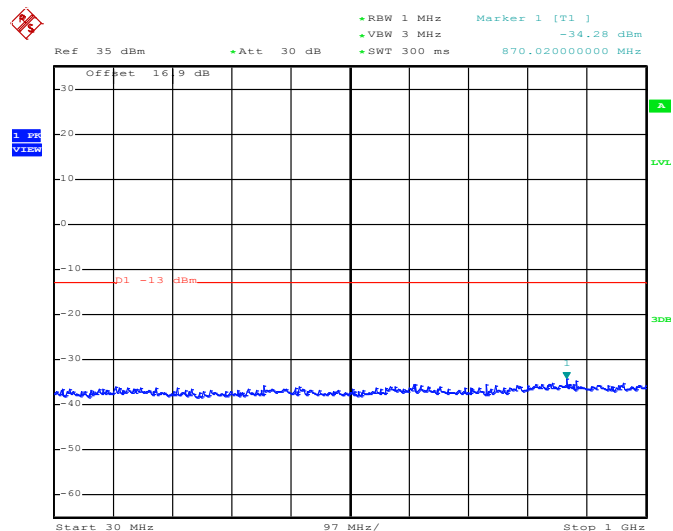Conducted Spurious Emission Plot between 30MHz ~ 1GHz

Date: 27.MAY.2014 13:42:28

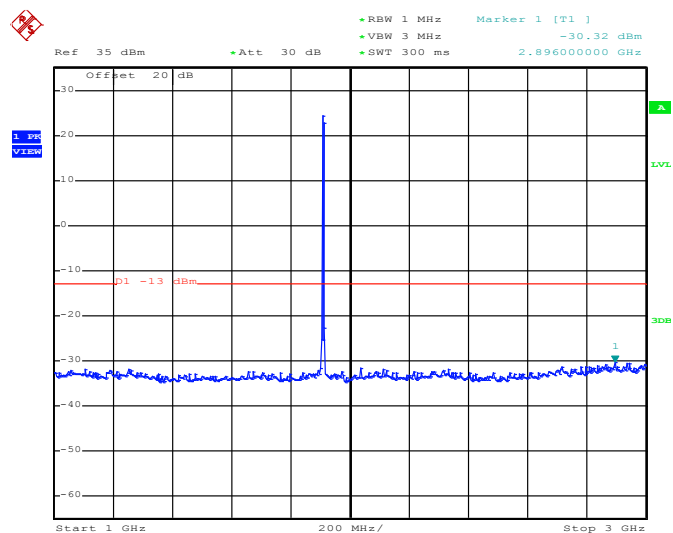Conducted Spurious Emission Plot between 1GHz ~ 3GHz

Date: 27.MAY.2014 13:42:36




Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz






Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

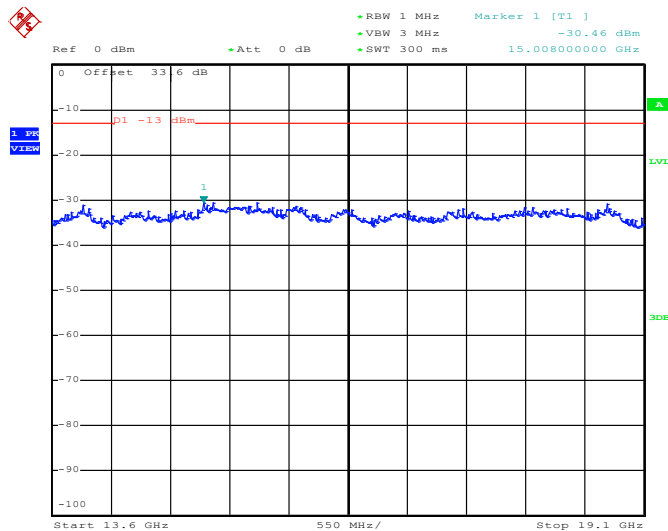


Date: 27.MAY.2014 13:43:04



Band :	WCDMA Band V	Channel :	CH4132
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	826.4 MHz

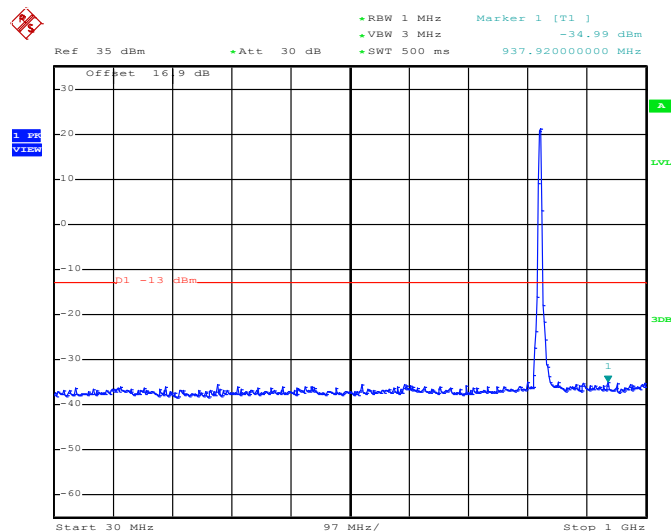Conducted Spurious Emission Plot between 30MHz ~ 1GHz


Date: 27.MAY.2014 15:22:28

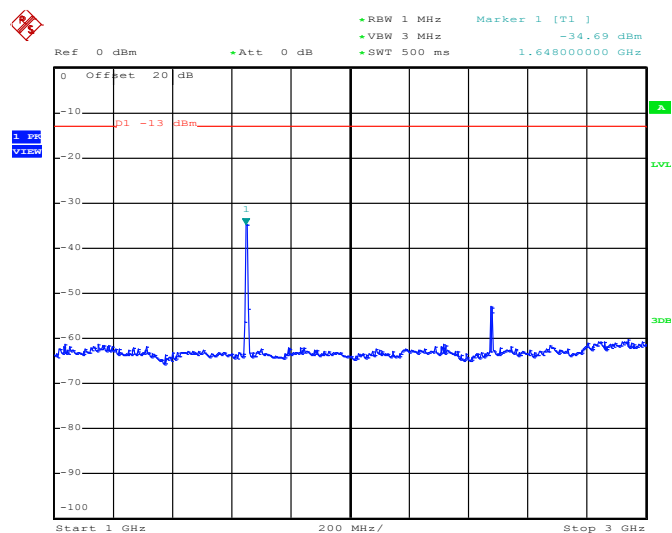Conducted Spurious Emission Plot between 1GHz ~ 3GHz

Date: 27.MAY.2014 15:22:38




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

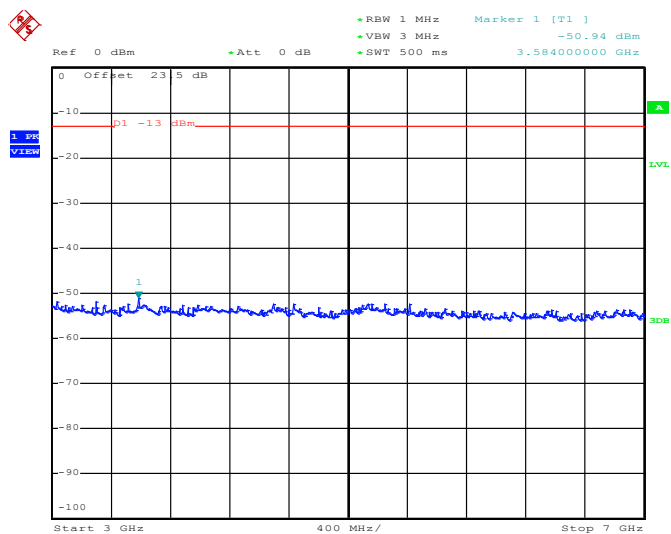

Date: 27.MAY.2014 15:22:47


Conducted Spurious Emission Plot between 7GHz ~ 9GHz

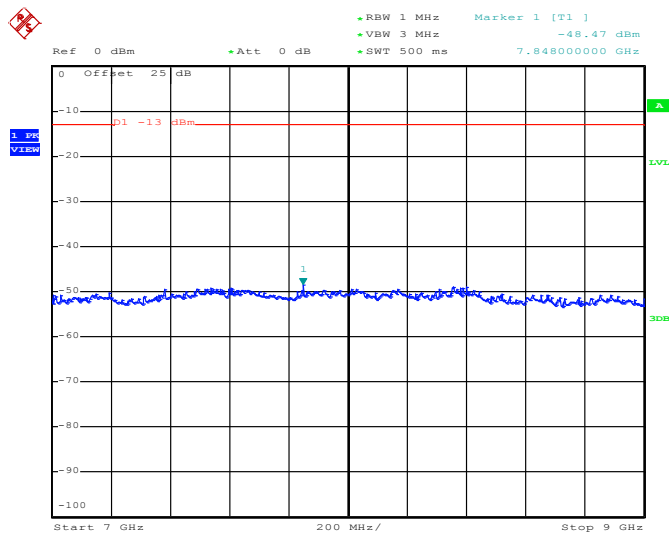


Date: 27.MAY.2014 15:22:55



Band :	WCDMA Band V	Channel :	CH4182
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	836.4 MHz

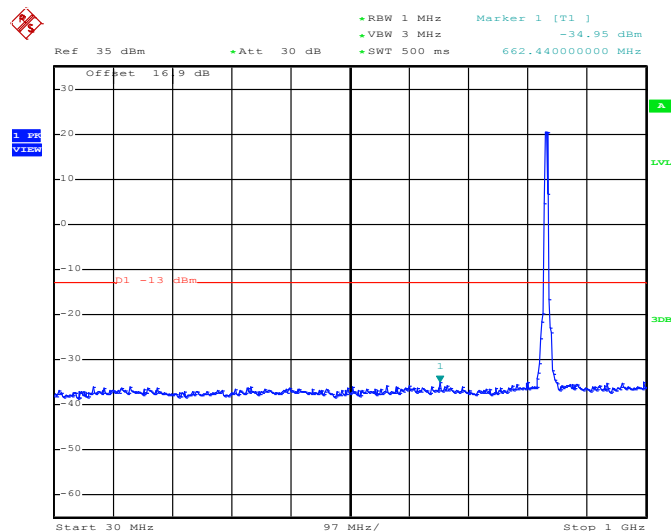Conducted Spurious Emission Plot between 30MHz ~ 1GHz


Date: 27.MAY.2014 15:17:47

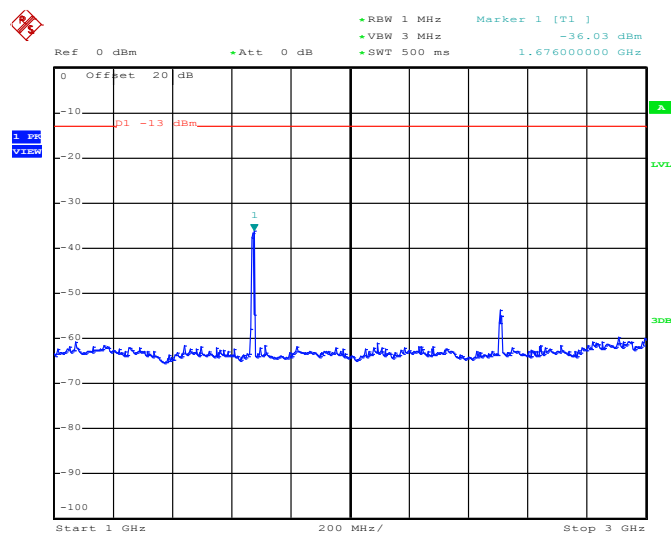Conducted Spurious Emission Plot between 1GHz ~ 3GHz

Date: 27.MAY.2014 15:17:58




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

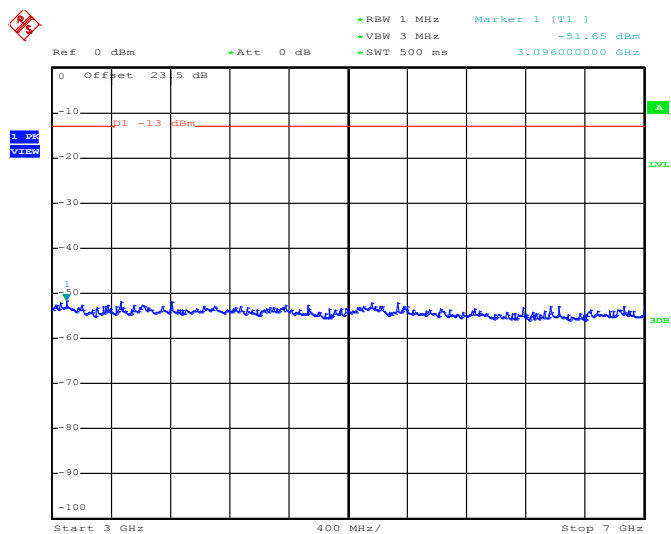

Date: 27.MAY.2014 15:18:07


Conducted Spurious Emission Plot between 7GHz ~ 9GHz

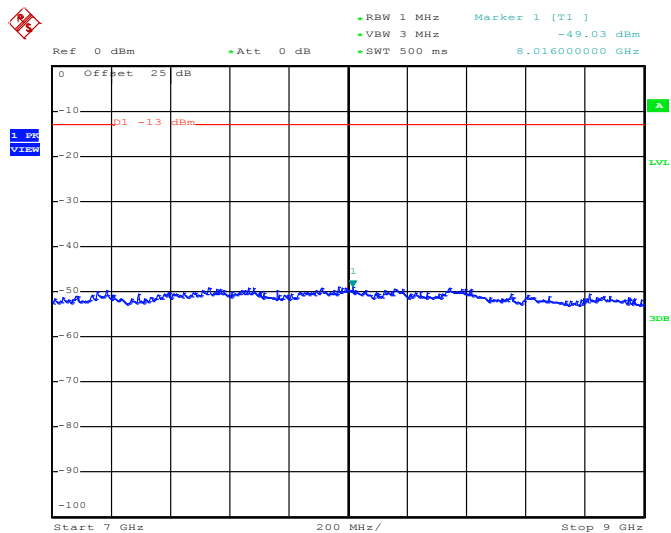


Date: 27.MAY.2014 15:18:15



Band :	WCDMA Band V	Channel :	CH4233
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	846.6 MHz

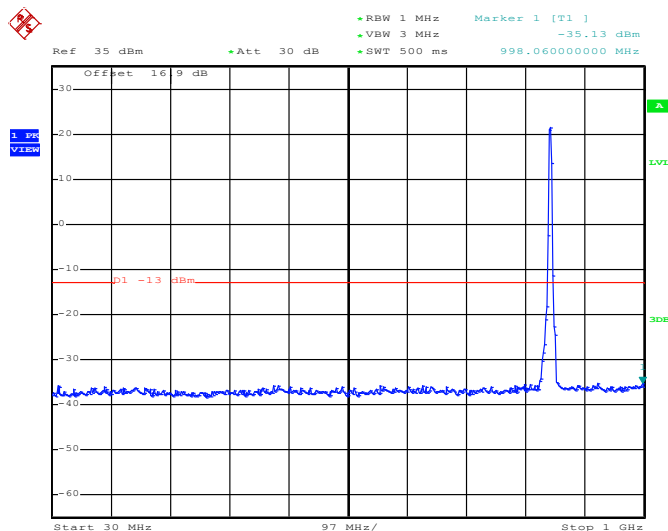Conducted Spurious Emission Plot between 30MHz ~ 1GHz


Date: 27.MAY.2014 15:33:32

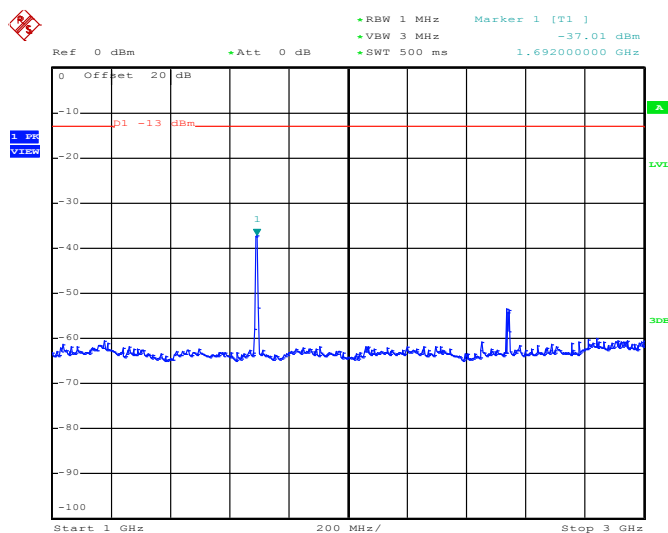Conducted Spurious Emission Plot between 1GHz ~ 3GHz

Date: 27.MAY.2014 15:33:43




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

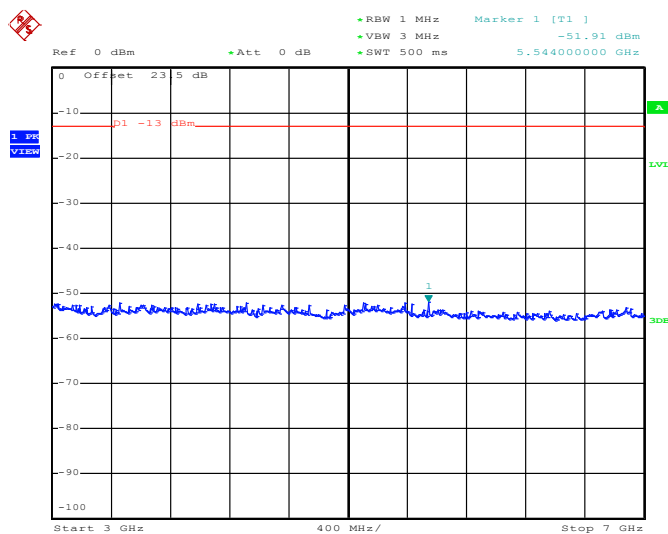

Date: 27.MAY.2014 15:33:51


Conducted Spurious Emission Plot between 7GHz ~ 9GHz

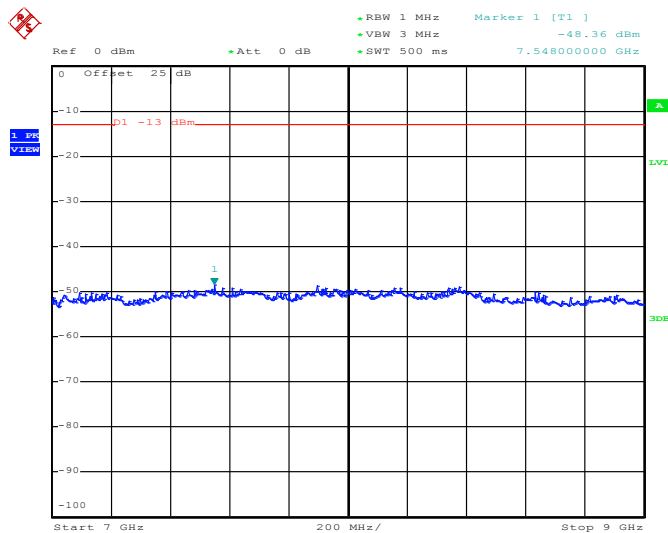


Date: 27.MAY.2014 15:34:00



Band :	WCDMA Band IV	Channel :	CH1312
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1712.4 MHz

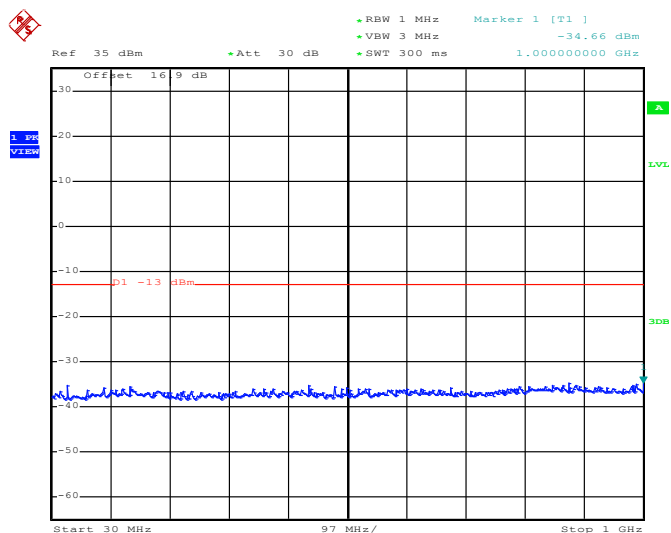Conducted Spurious Emission Plot between 30MHz ~ 1GHz


Date: 27.MAY.2014 14:40:47

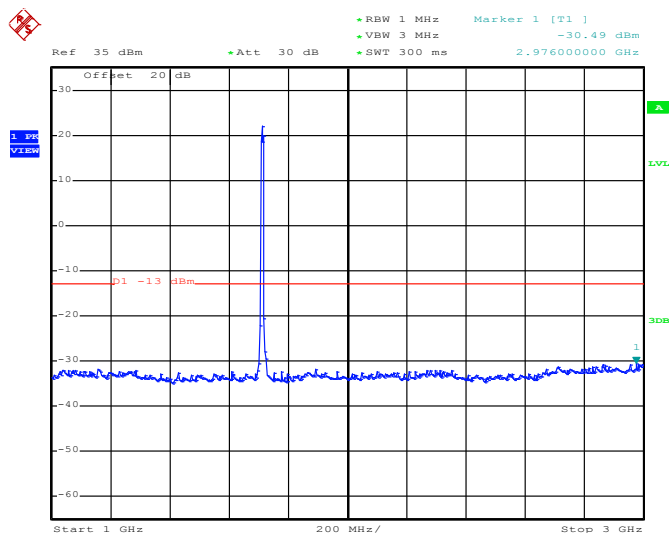Conducted Spurious Emission Plot between 1GHz ~ 3GHz

Date: 27.MAY.2014 14:40:55




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

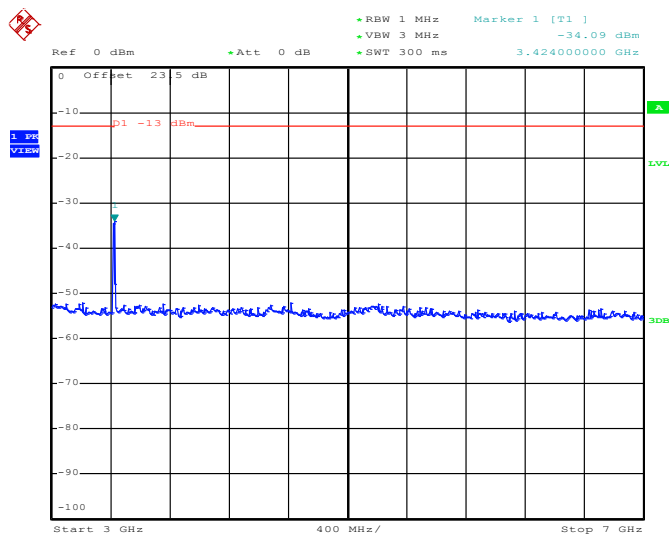

Date: 27.MAY.2014 14:41:05


Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

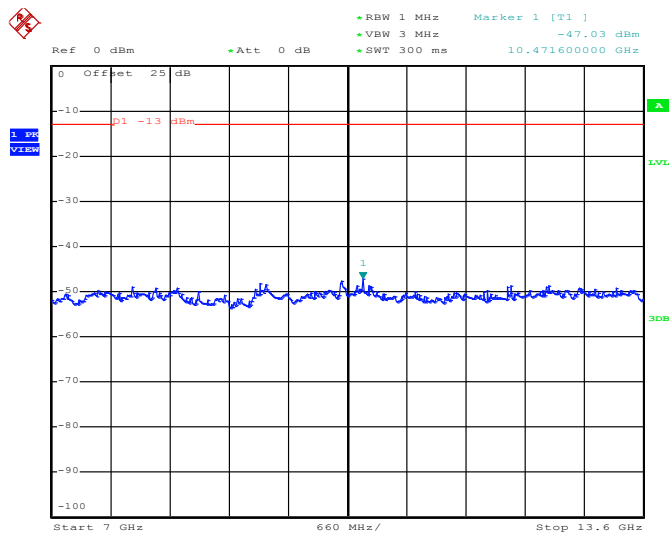

Date: 27.MAY.2014 14:41:14




Conducted Spurious Emission Plot between 13.6GHz ~ 18GHz

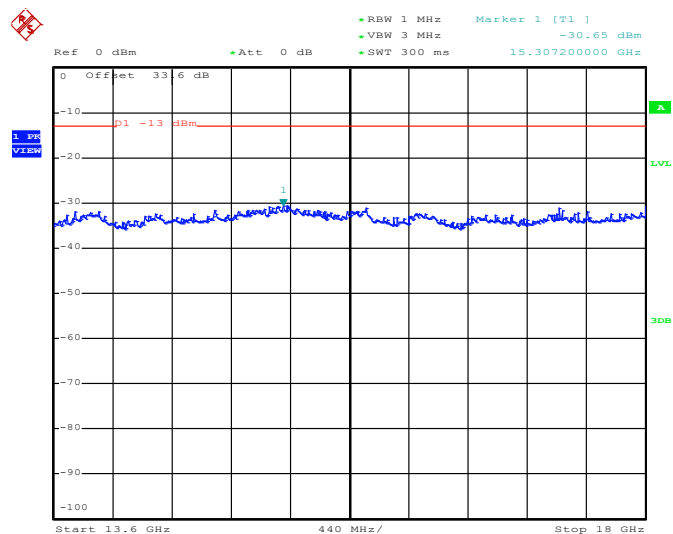


Date: 27.MAY.2014 14:41:22



Band :	WCDMA Band IV	Channel :	CH1413
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1732.6 MHz

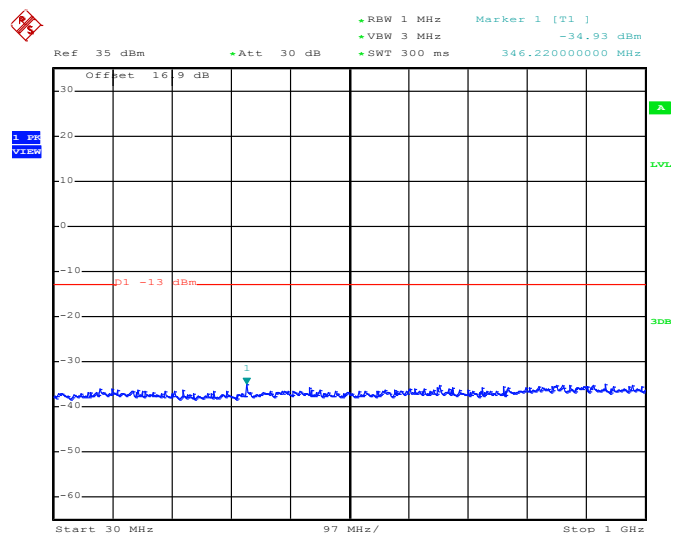Conducted Spurious Emission Plot between 30MHz ~ 1GHz


Date: 27.MAY.2014 14:39:17

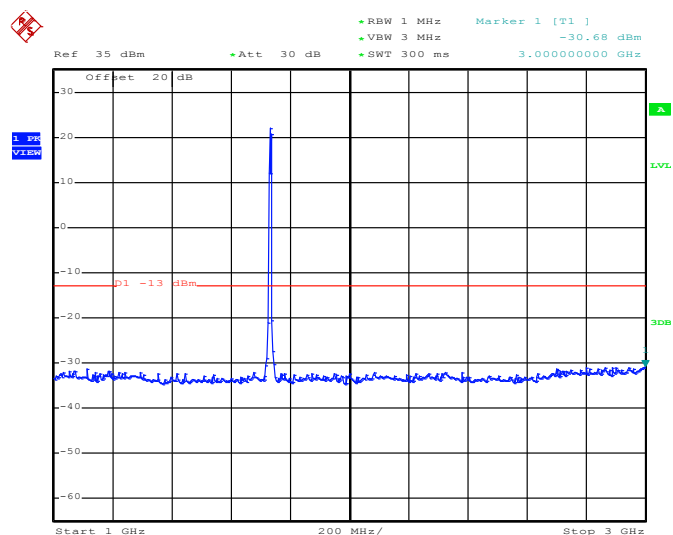Conducted Spurious Emission Plot between 1GHz ~ 3GHz

Date: 27.MAY.2014 14:39:26




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

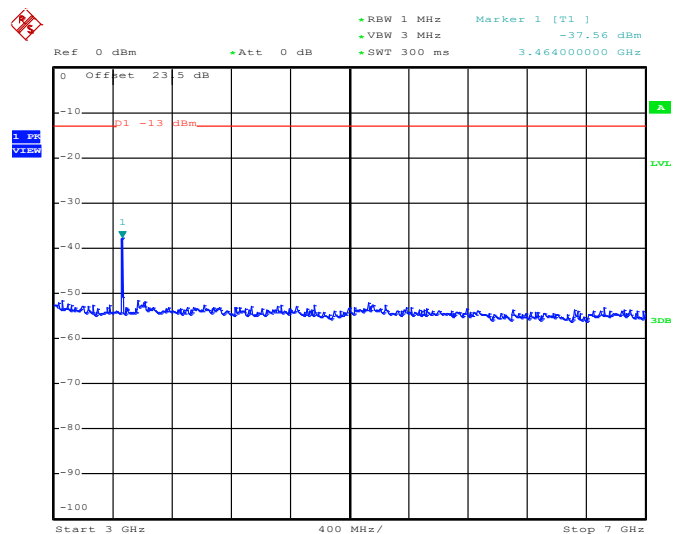


Date: 27.MAY.2014 14:39:40

Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

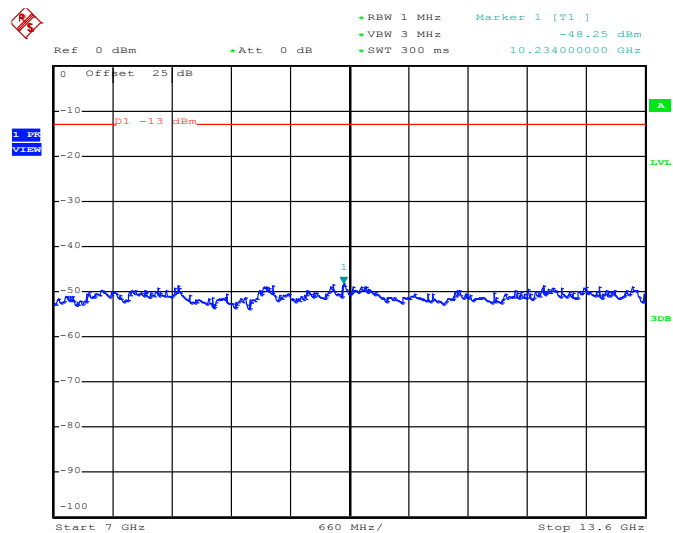

Date: 27.MAY.2014 14:39:48


Conducted Spurious Emission Plot between 13.6GHz ~ 18GHz

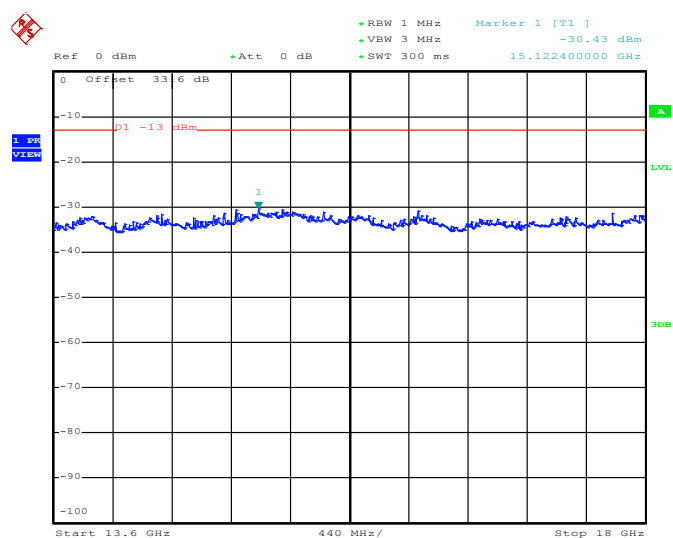


Date: 27.MAY.2014 14:39:57



Band :	WCDMA Band IV	Channel :	CH1513
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1752.6 MHz

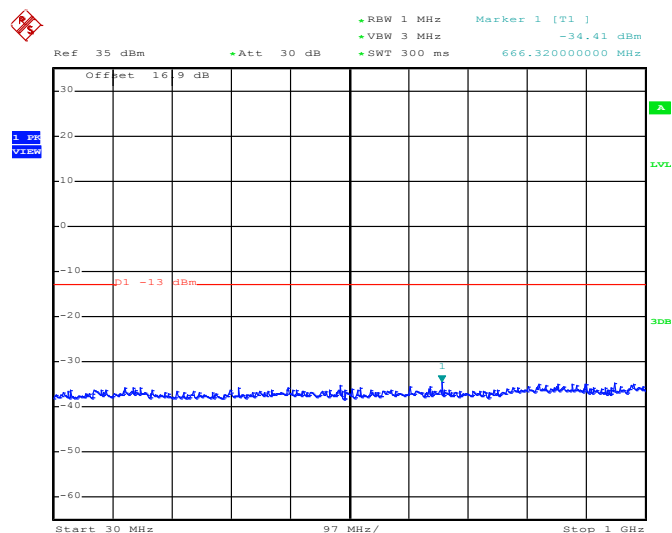Conducted Spurious Emission Plot between 30MHz ~ 1GHz


Date: 27.MAY.2014 14:42:55

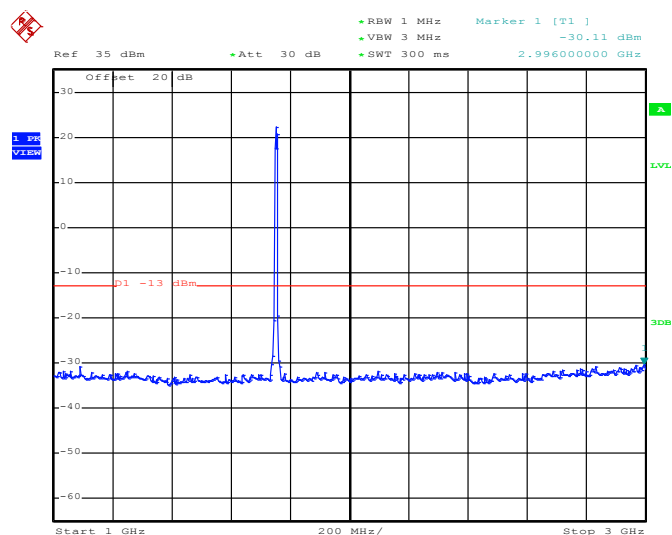Conducted Spurious Emission Plot between 1GHz ~ 3GHz

Date: 27.MAY.2014 14:43:04




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

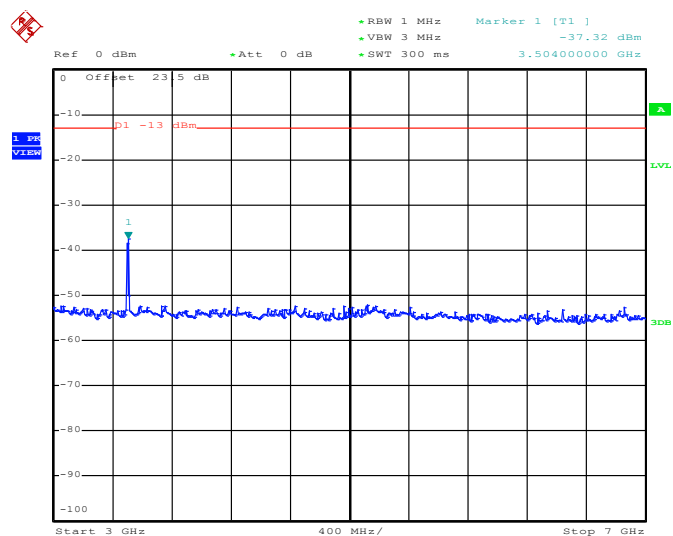

Date: 27.MAY.2014 14:43:16


Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

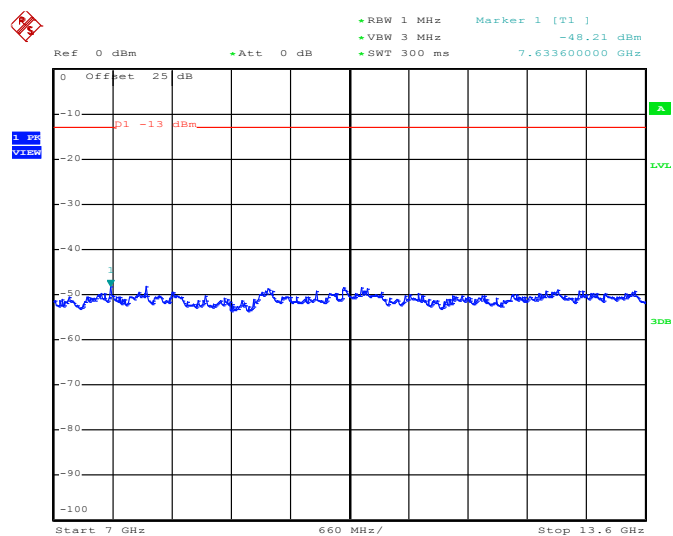

Date: 27.MAY.2014 14:43:24




Conducted Spurious Emission Plot between 13.6GHz ~ 18GHz

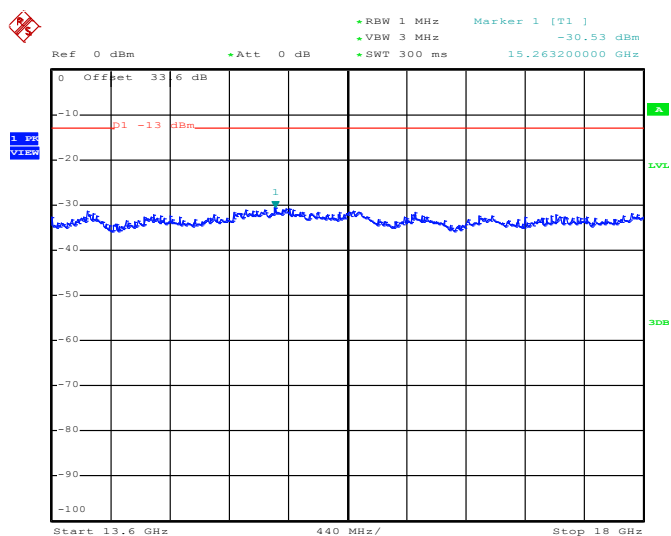


Date: 27.MAY.2014 14:43:33



Band :	WCDMA Band II	Channel :	CH9262
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1852.4 MHz

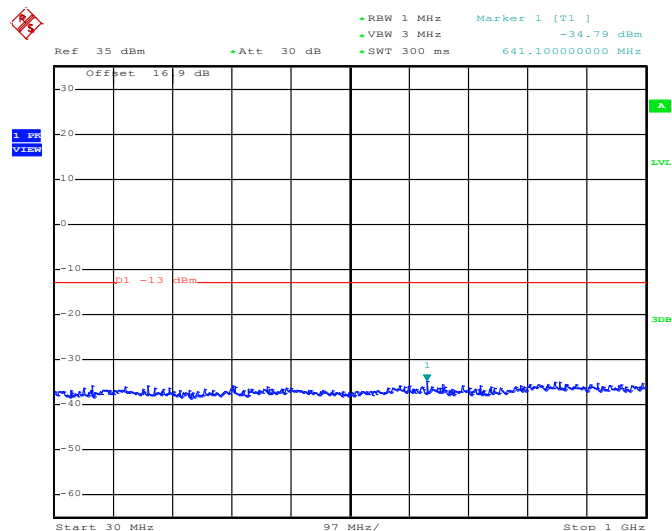Conducted Spurious Emission Plot between 30MHz ~ 1GHz


Date: 27.MAY.2014 14:10:32

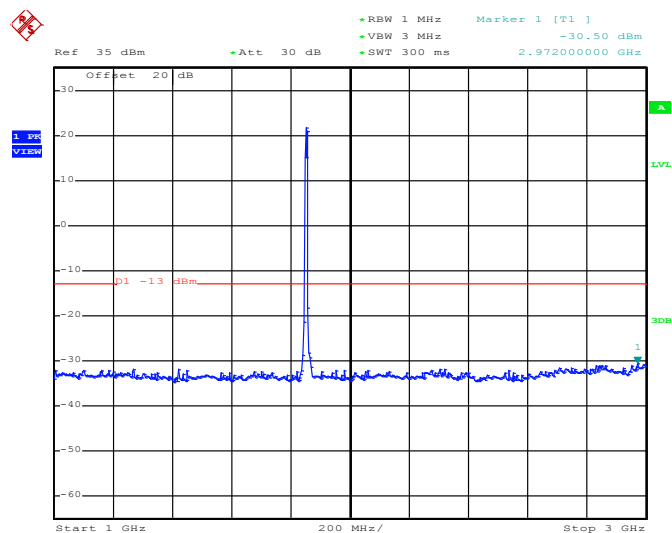Conducted Spurious Emission Plot between 1GHz ~ 3GHz

Date: 27.MAY.2014 14:10:40




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

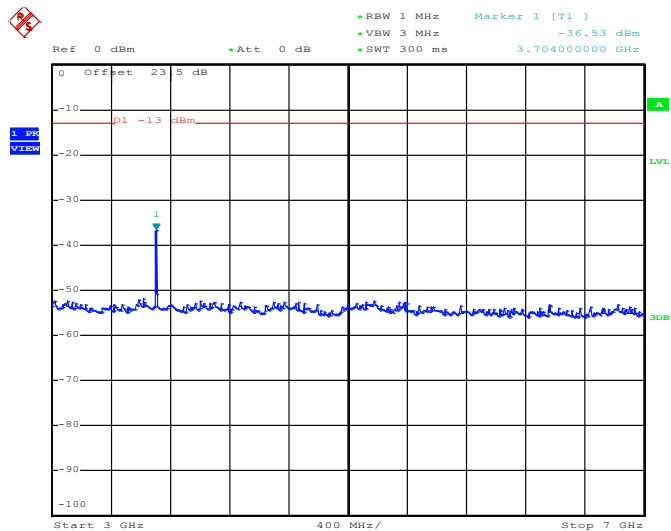

Date: 27.MAY.2014 14:10:54

Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

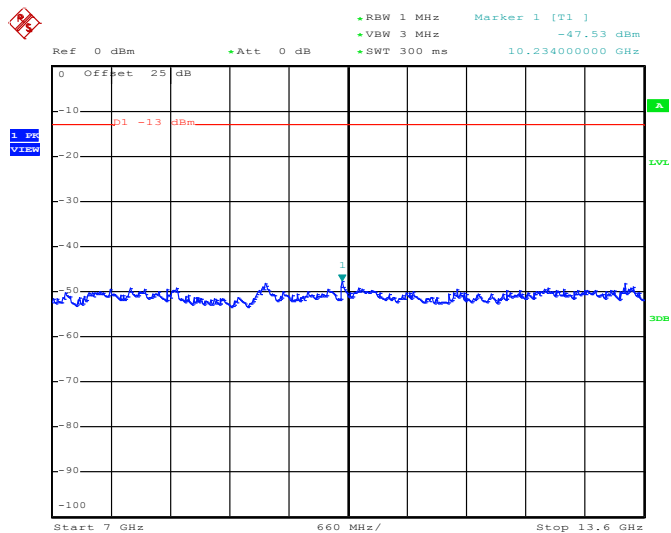


Date: 27.MAY.2014 14:11:03






Band :	WCDMA Band II	Channel :	CH9400
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1880.0 MHz

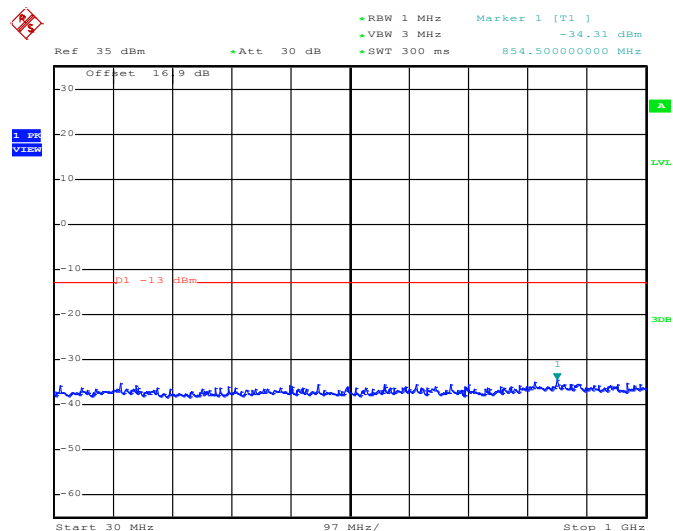Conducted Spurious Emission Plot between 30MHz ~ 1GHz


Date: 27.MAY.2014 14:07:24

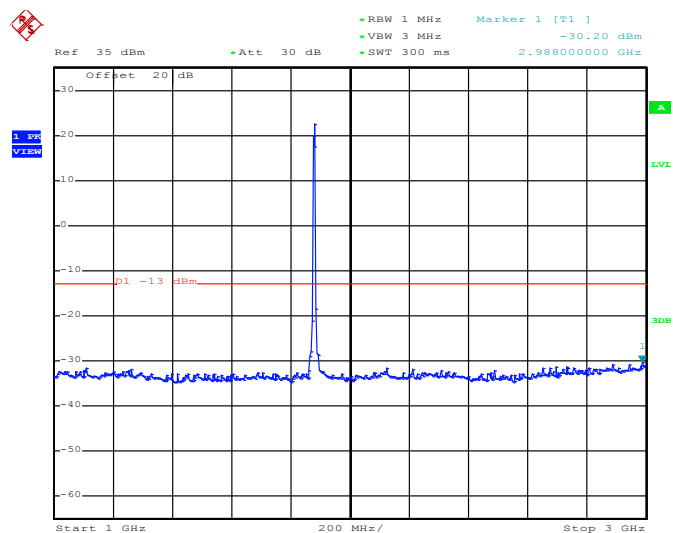Conducted Spurious Emission Plot between 1GHz ~ 3GHz

Date: 27.MAY.2014 14:07:32




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

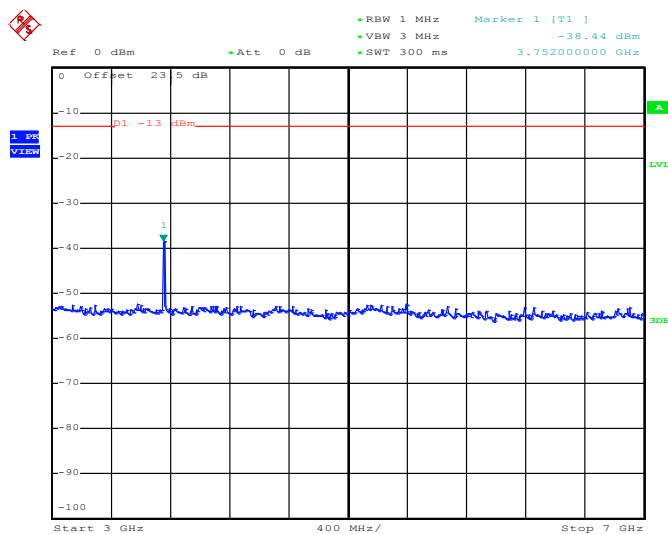

Date: 27.MAY.2014 14:07:43


Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

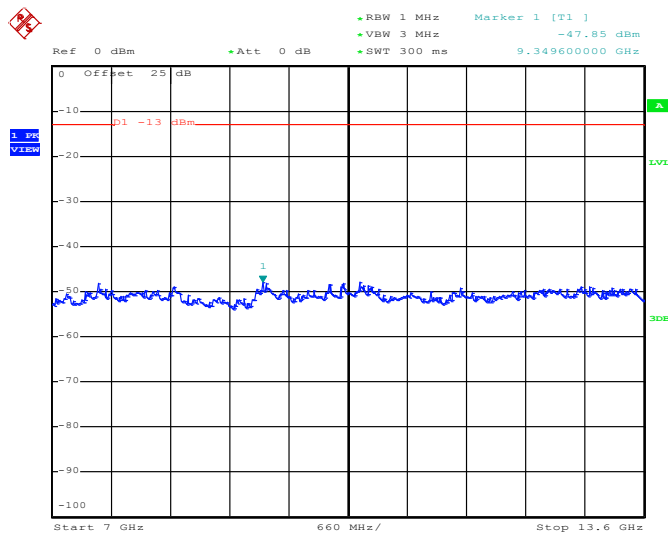

Date: 27.MAY.2014 14:07:51




Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

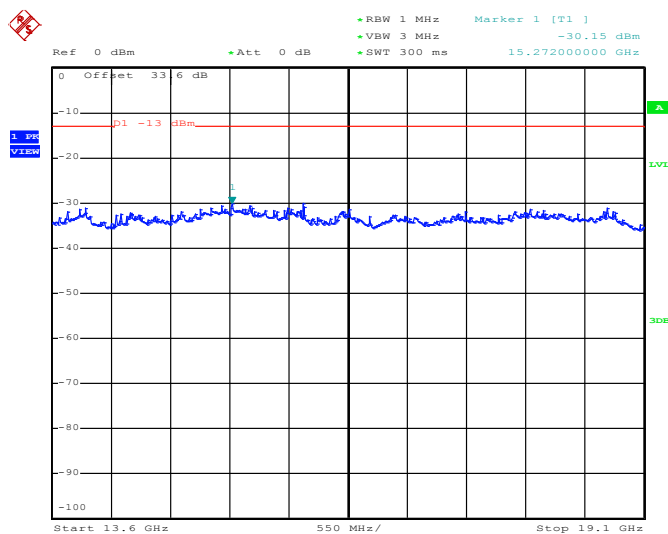


Date: 27.MAY.2014 14:08:00



Band :	WCDMA Band II	Channel :	CH9538
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1907.6 MHz

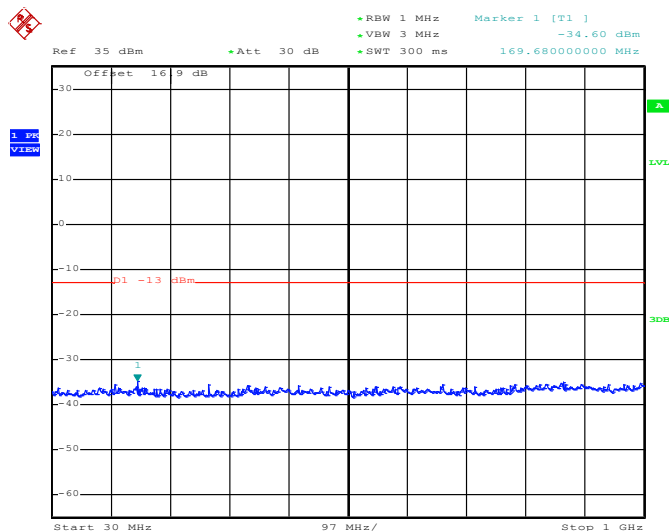Conducted Spurious Emission Plot between 30MHz ~ 1GHz


Date: 27.MAY.2014 14:12:28

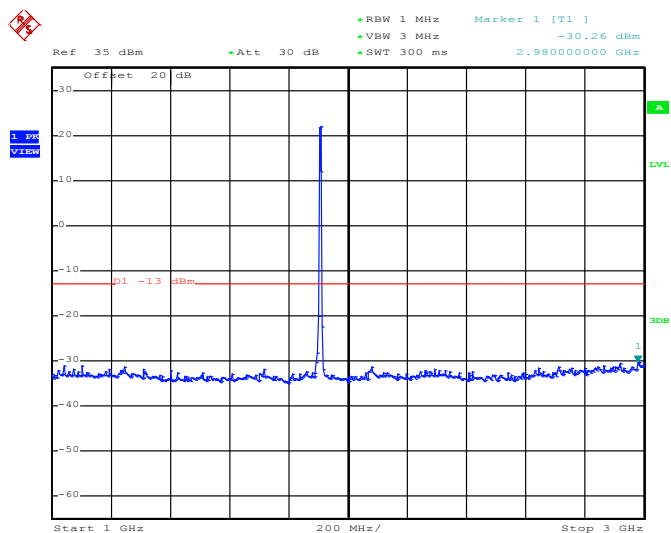Conducted Spurious Emission Plot between 1GHz ~ 3GHz

Date: 27.MAY.2014 14:12:36




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

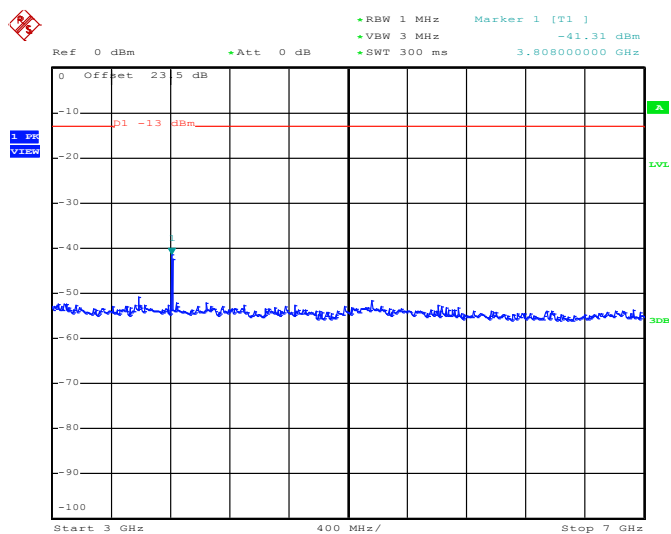

Date: 27.MAY.2014 14:12:47


Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

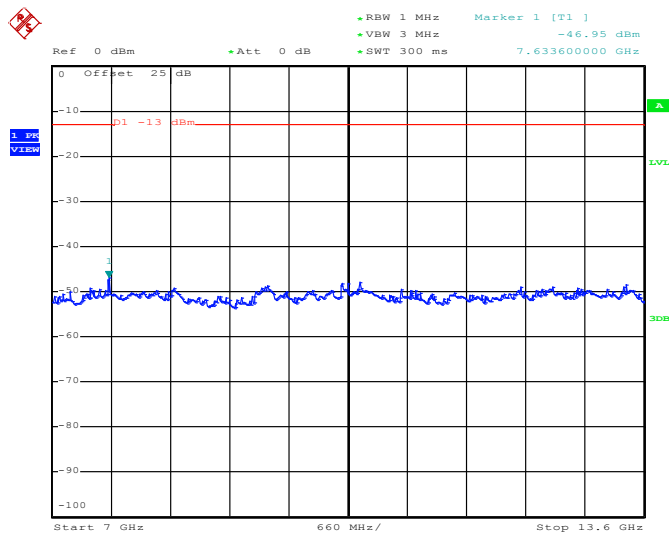

Date: 27.MAY.2014 14:12:55



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

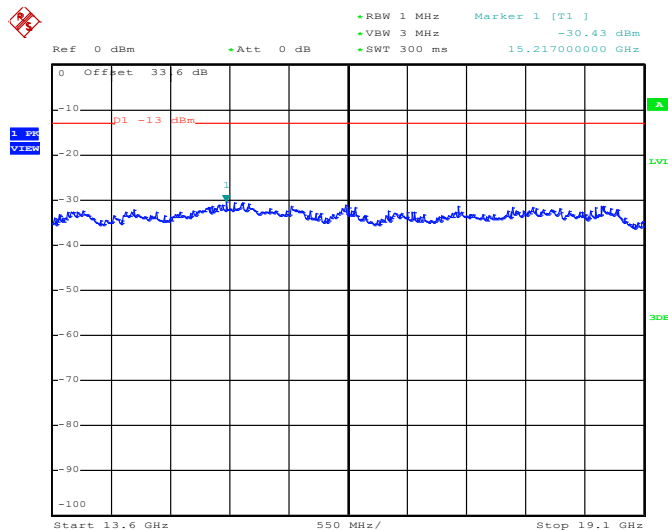

Date: 27.MAY.2014 14:13:04

3.6 Field Strength of Spurious Radiation Measurement

3.6.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.6.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures


1. The EUT was placed on a rotatable wooden table 0.8 meters above the ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
13. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$

3.6.4 Test Setup

For radiated emissions from 30MHz to 1GHz

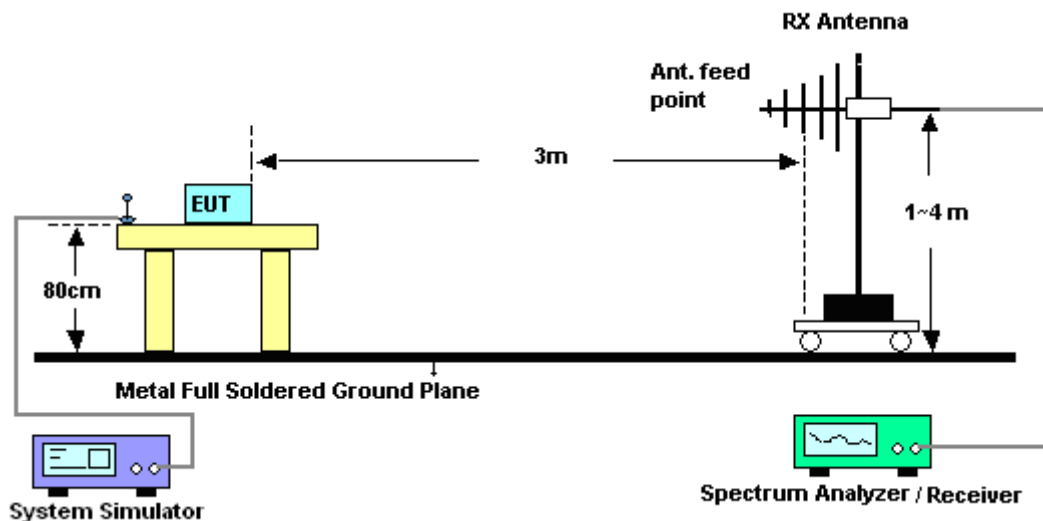


For radiated emissions above 1GHz

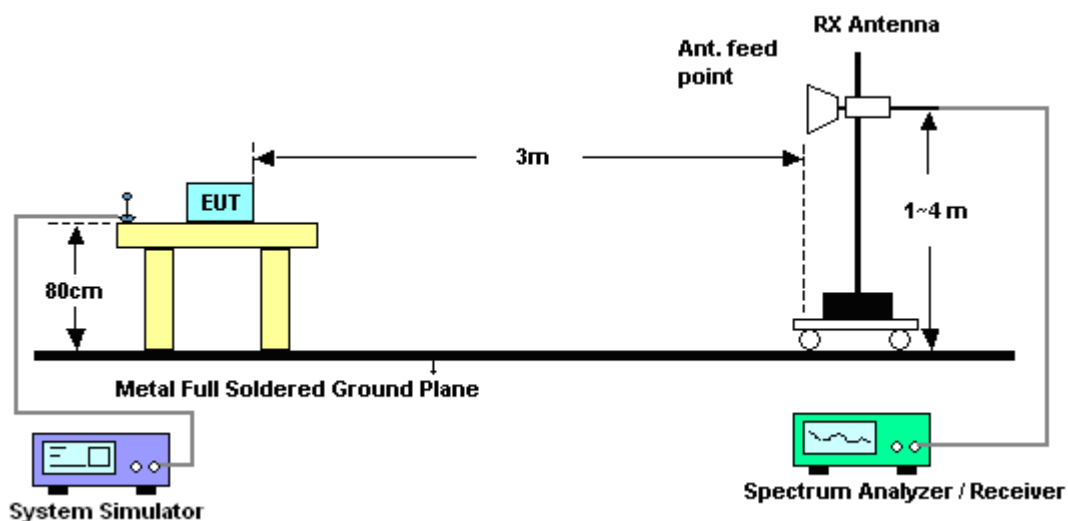

3.6.5 Test Result of Field Strength of Spurious Radiated

<Low Channel>

Band :	GSM850	Temperature :	22~24°C
Test Mode :	GPRS class 8 Link (GMSK)	Relative Humidity :	47~49%
Channel :	128	Polarization :	Horizontal
Test Engineer :	Marlboro Hsu		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

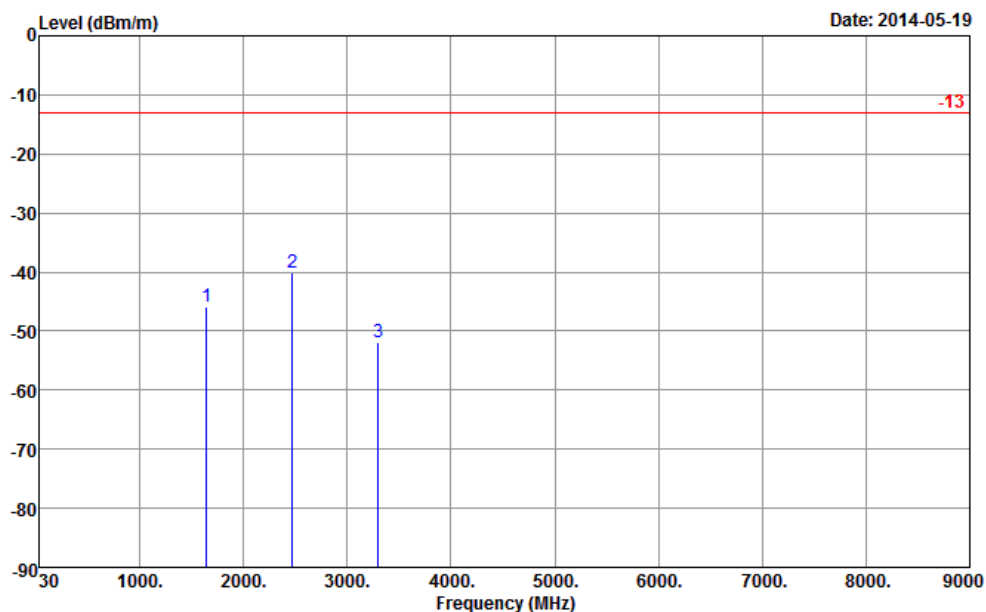


Site : 03CH07-HY
Condition : -13 EIRP_140314_H HORIZONTAL
Project : 441846

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1648	-45.91	-13	-32.91	-52.27	-47.76	1.53	5.53	H	Pass
2472	-39.99	-13	-26.99	-48.94	-41.93	2.06	6.15	H	Pass
3296	-51.79	-13	-38.79	-64.74	-55.09	2.48	7.93	H	Pass



Band :	GSM850	Temperature :	22~24°C
Test Mode :	GPRS class 8 Link (GMSK)	Relative Humidity :	47~49%
Channel :	128	Polarization :	Vertical
Test Engineer :	Marlboro Hsu		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

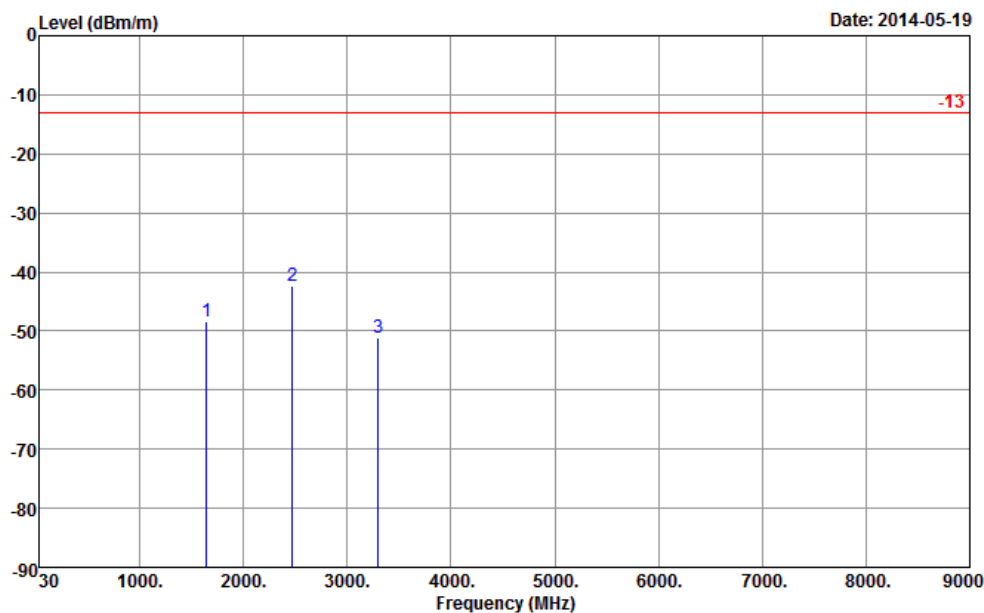


Site : 03CH07-HY
Condition : -13 EIRP_140314_V VERTICAL
Project : 441846

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1648	-48.42	-13	-35.42	-54.31	-50.27	1.53	5.53	V	Pass
2472	-42.44	-13	-29.44	-53.68	-44.38	2.06	6.15	V	Pass
3296	-51.04	-13	-38.04	-63.83	-54.34	2.48	7.93	V	Pass

<Middle Channel>


Band :	GSM850	Temperature :	22~24°C
Test Mode :	GPRS class 8 Link (GMSK)	Relative Humidity :	47~49%
Channel :	189	Polarization :	Horizontal
Test Engineer :	Marlboro Hsu		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

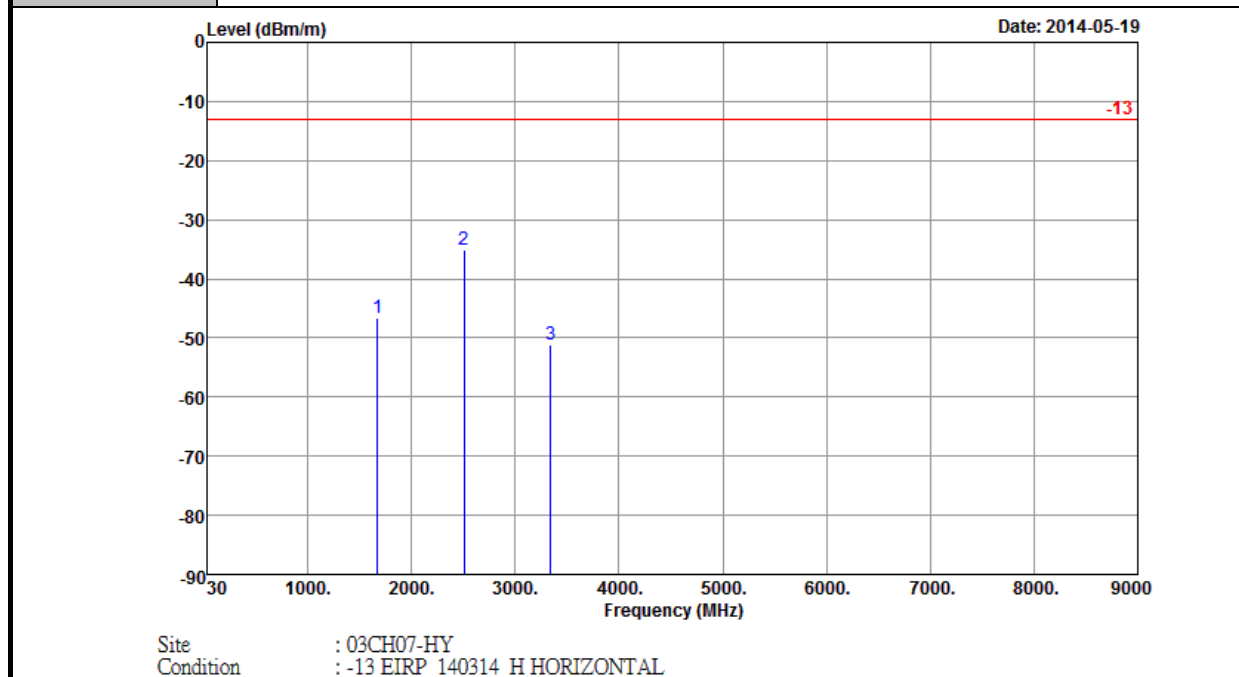

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-46.52	-13	-33.52	-52.82	-48.24	1.62	5.49	H	Pass
2510	-35.09	-13	-22.09	-45.78	-37.06	2.1	6.22	H	Pass
3345	-51.20	-13	-38.20	-64.47	-54.09	3.03	8.07	H	Pass



Band :	GSM850	Temperature :	22~24°C
Test Mode :	GPRS class 8 Link (GMSK)	Relative Humidity :	47~49%
Channel :	189	Polarization :	Vertical
Test Engineer :	Marlboro Hsu		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

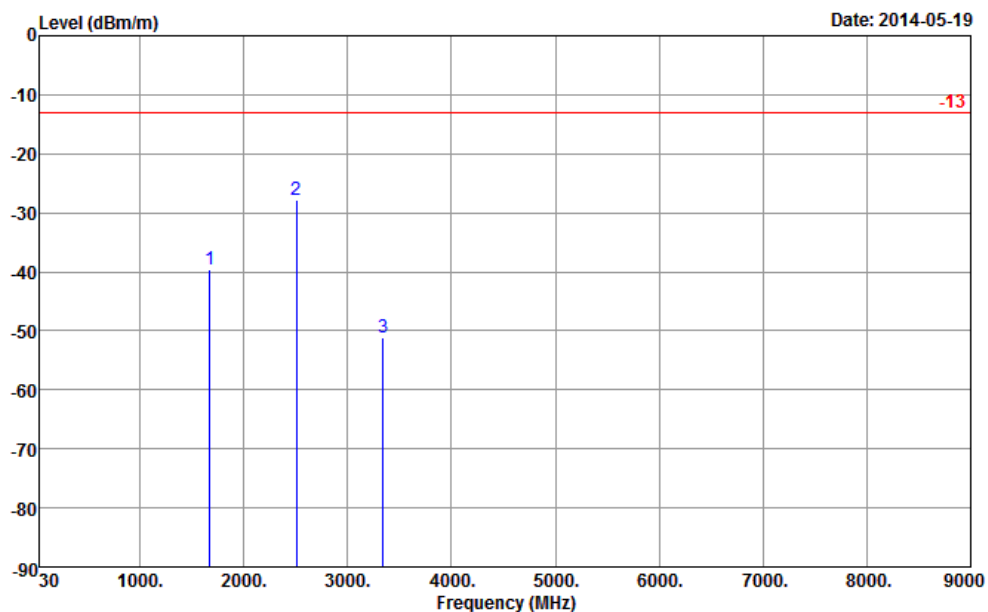


Site : 03CH07-HY
Condition : -13 EIRP_140314_V VERTICAL
Project : 441846

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-39.61	-13	-26.61	-44.93	-41.33	1.62	5.49	V	Pass
2510	-27.71	-13	-14.71	-38.99	-29.68	2.1	6.22	V	Pass
3345	-51.10	-13	-38.10	-63.7	-53.99	3.03	8.07	V	Pass



<High Channel>

Band :	GSM850	Temperature :	22~24°C
Test Mode :	GPRS class 8 Link (GMSK)	Relative Humidity :	47~49%
Channel :	251	Polarization :	Horizontal
Test Engineer :	Marlboro Hsu		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

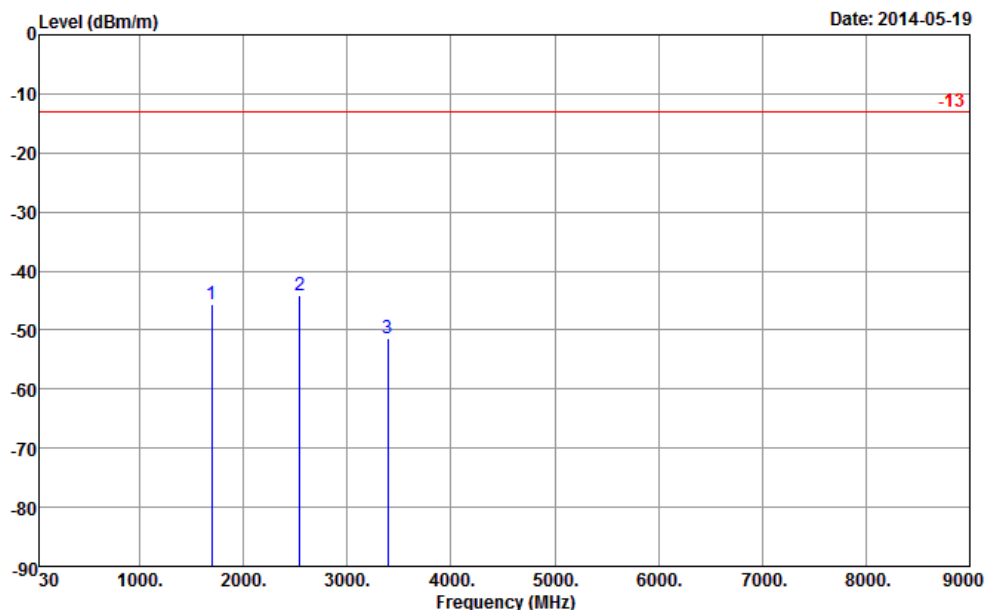


Site : 03CH07-HY
Condition : -13 EIRP_140314_H HORIZONTAL
Project : 441846

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1697	-45.58	-13	-32.58	-52.5	-47.31	1.57	5.45	H	Pass
2546	-44.11	-13	-31.11	-54.33	-46.22	2.02	6.28	H	Pass
3395	-51.28	-13	-38.28	-63.69	-55.03	2.3	8.20	H	Pass



Band :	GSM850	Temperature :	22~24°C
Test Mode :	GPRS class 8 Link (GMSK)	Relative Humidity :	47~49%
Channel :	251	Polarization :	Vertical
Test Engineer :	Marlboro Hsu		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

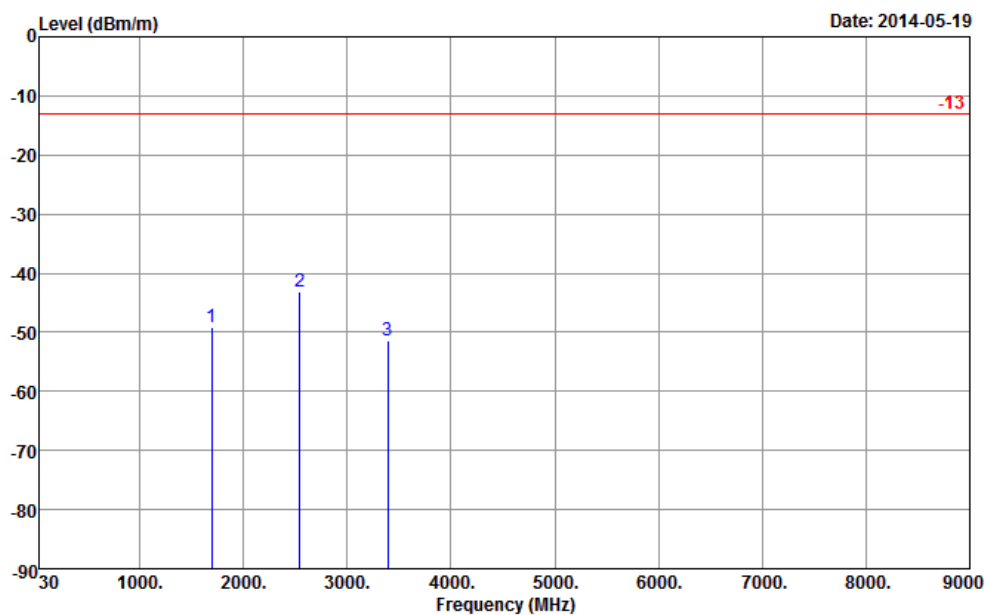


Site : 03CH07-HY
Condition : -13 EIRP_140314_V VERTICAL
Project : 441846

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1697	-49.26	-13	-36.26	-54.75	-50.99	1.57	5.45	V	Pass
2546	-43.18	-13	-30.18	-54.7	-45.29	2.02	6.28	V	Pass
3395	-51.42	-13	-38.42	-64.14	-55.17	2.3	8.20	V	Pass



<Low Channel>

Band :	GSM850	Temperature :	22~24°C
Test Mode :	EDGE class 8 Link (8PSK)	Relative Humidity :	47~49%
Channel :	128	Polarization :	Horizontal
Test Engineer :	Marlboro Hsu		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

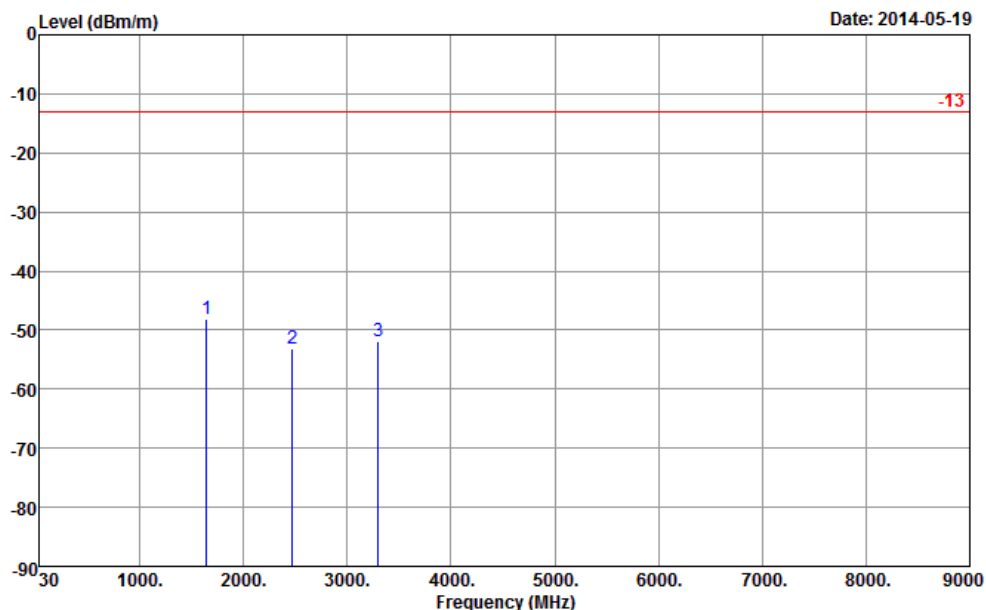


Site : 03CH07-HY
Condition : -13 EIRP_140314_H HORIZONTAL
Project : 441846

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1648	-48.24	-13	-35.24	-55.17	-50.09	1.53	5.53	H	Pass
2472	-53.19	-13	-40.19	-63.54	-55.13	2.06	6.15	H	Pass
3296	-51.81	-13	-38.81	-64.34	-55.11	2.48	7.93	H	Pass



Band :	GSM850	Temperature :	22~24°C
Test Mode :	EDGE class 8 Link (8PSK)	Relative Humidity :	47~49%
Channel :	128	Polarization :	Vertical
Test Engineer :	Marlboro Hsu		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

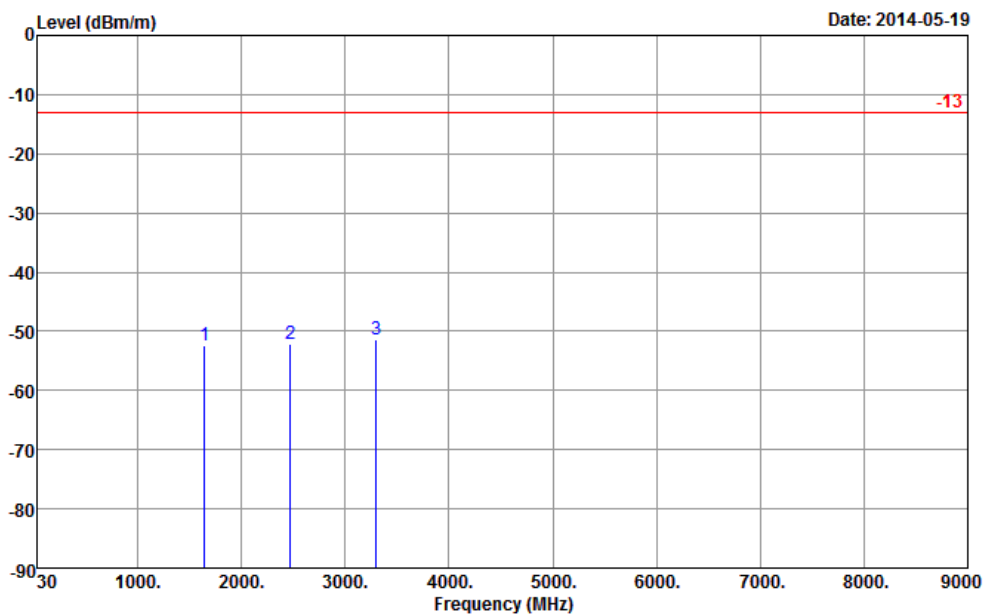


Site : 03CH07-HY
Condition : -13 EIRP_140314_V VERTICAL
Project : 441846

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1648	-52.32	-13	-39.32	-57.56	-54.17	1.53	5.53	V	Pass
2472	-52.13	-13	-39.13	-63.61	-54.07	2.06	6.15	V	Pass
3296	-51.44	-13	-38.44	-64.24	-54.74	2.48	7.93	V	Pass



<Middle Channel>

Band :	GSM850	Temperature :	22~24°C
Test Mode :	EDGE class 8 Link (8PSK)	Relative Humidity :	47~49%
Channel :	189	Polarization :	Horizontal
Test Engineer :	Marlboro Hsu		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

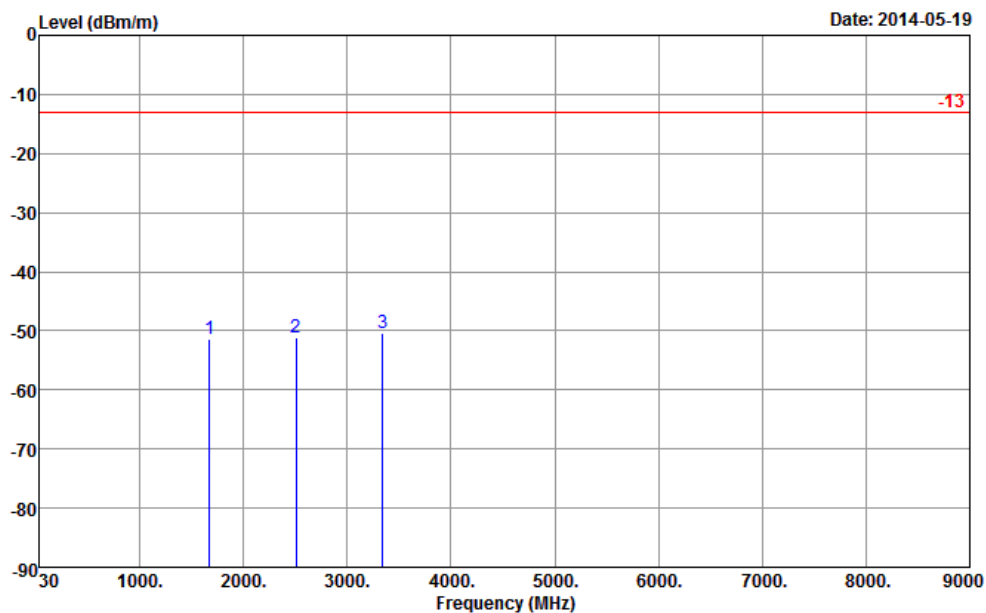


Site : 03CH07-HY
Condition : -13 EIRP_140314_H HORIZONTAL
Project : 441846

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-51.32	-13	-38.32	-59.37	-53.04	1.62	5.49	H	Pass
2510	-51.03	-13	-38.03	-61.97	-53	2.1	6.22	H	Pass
3345	-50.48	-13	-37.48	-63.56	-53.37	3.03	8.07	H	Pass



Band :	GSM850	Temperature :	22~24°C
Test Mode :	EDGE class 8 Link (8PSK)	Relative Humidity :	47~49%
Channel :	189	Polarization :	Vertical
Test Engineer :	Marlboro Hsu		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

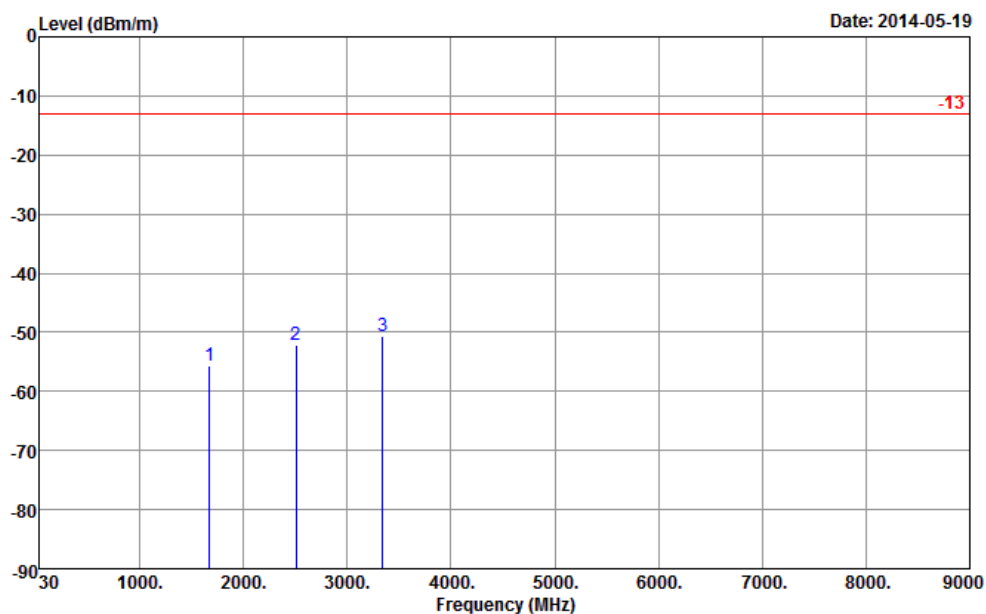


Site : 03CH07-HY
Condition : -13 EIRP_140314_V VERTICAL
Project : 441846

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-55.66	-13	-42.66	-61.05	-57.38	1.62	5.49	V	Pass
2510	-52.02	-13	-39.02	-63.82	-53.99	2.1	6.22	V	Pass
3345	-50.57	-13	-37.57	-63.17	-53.46	3.03	8.07	V	Pass



<High Channel>

Band :	GSM850	Temperature :	22~24°C
Test Mode :	EDGE class 8 Link (8PSK)	Relative Humidity :	47~49%
Channel :	251	Polarization :	Horizontal
Test Engineer :	Marlboro Hsu		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

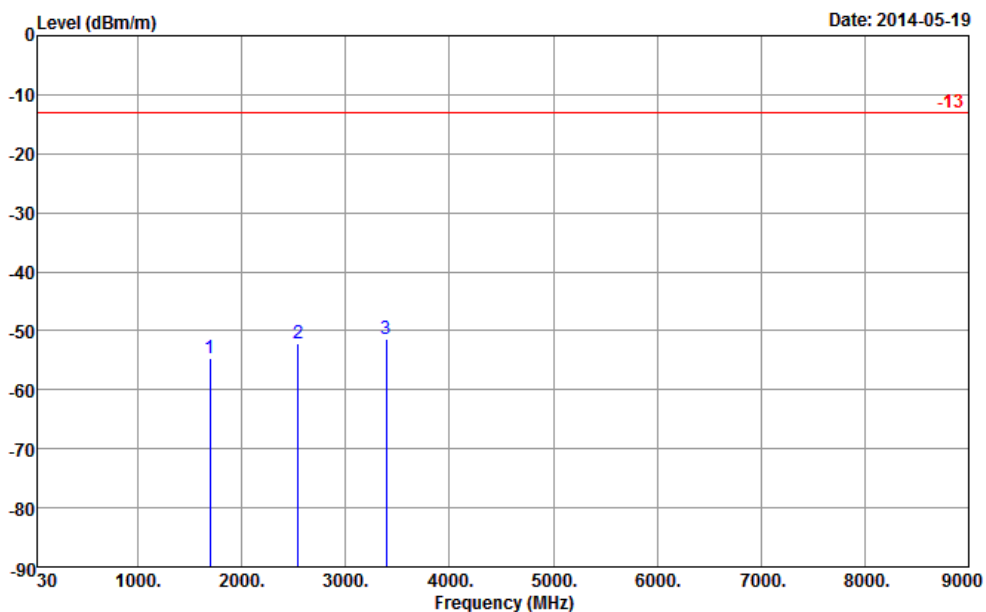


Site : 03CH07-HY
Condition : -13 EIRP_140314_H HORIZONTAL
Project : 441846

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1697	-54.56	-13	-41.56	-60.85	-56.29	1.57	5.45	H	Pass
2546	-52.07	-13	-39.07	-62.47	-54.18	2.02	6.28	H	Pass
3395	-51.34	-13	-38.34	-64.2	-55.09	2.3	8.20	H	Pass



Band :	GSM850	Temperature :	22~24°C
Test Mode :	EDGE class 8 Link (8PSK)	Relative Humidity :	47~49%
Channel :	251	Polarization :	Vertical
Test Engineer :	Marlboro Hsu		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

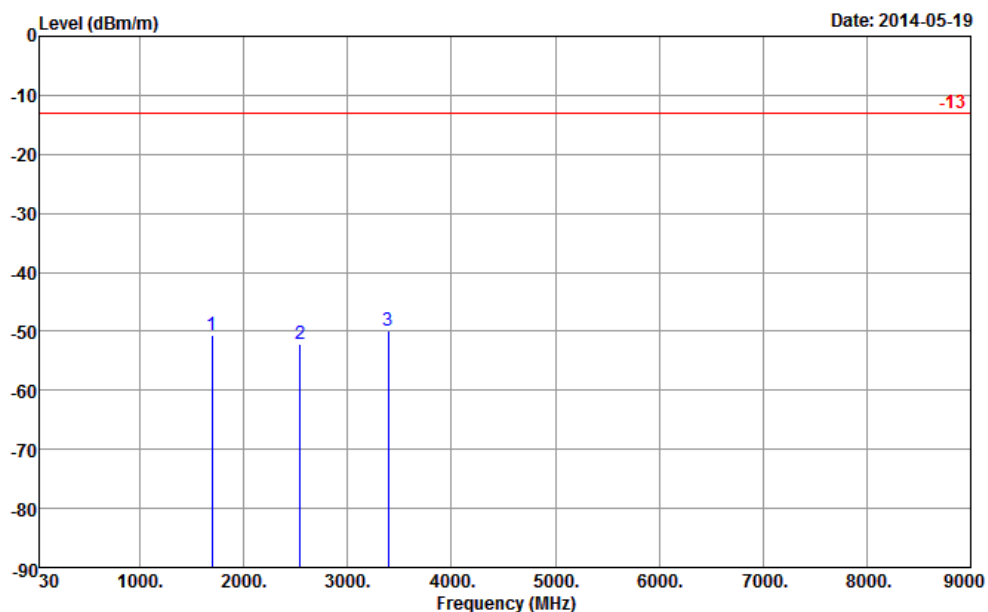


Site : 03CH07-HY
Condition : -13 EIRP_140314_V VERTICAL
Project : 441846

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1697	-50.65	-13	-37.65	-57.48	-52.38	1.57	5.45	V	Pass
2546	-52.18	-13	-39.18	-63.38	-54.29	2.02	6.28	V	Pass
3395	-49.93	-13	-36.93	-62.24	-53.68	2.3	8.20	V	Pass



<Low Channel>

Band :	GSM1900	Temperature :	22~24°C
Test Mode :	GPRS class 8 Link (GMSK)	Relative Humidity :	47~49%
Channel :	512		
Test Engineer :	Marlboro Hsu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

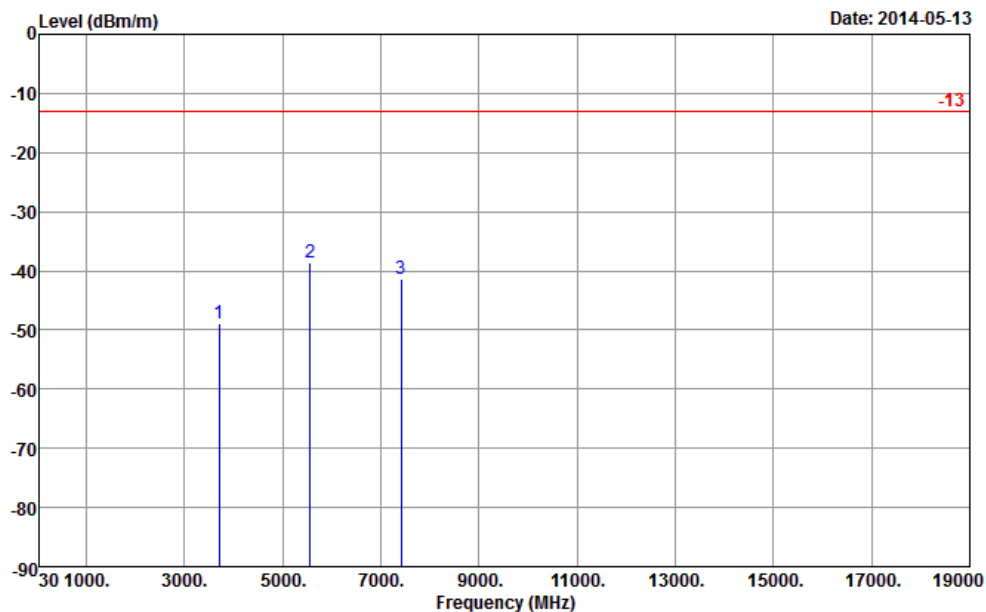


Site : 03CH07-HY
Condition : -13 EIRP_140314_H HORIZONTAL
Project : 441846

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3702	-48.93	-13	-35.93	-62.7	-55.08	2.59	8.74	H	Pass
5553	-38.71	-13	-25.71	-58.56	-46.37	3.04	10.70	H	Pass
7405	-41.33	-13	-28.33	-65.2	-50.07	3.28	12.02	H	Pass



Band :	GSM1900	Temperature :	22~24°C
Test Mode :	GPRS class 8 Link (GMSK)	Relative Humidity :	47~49%
Channel :	512		
Test Engineer :	Marlboro Hsu	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

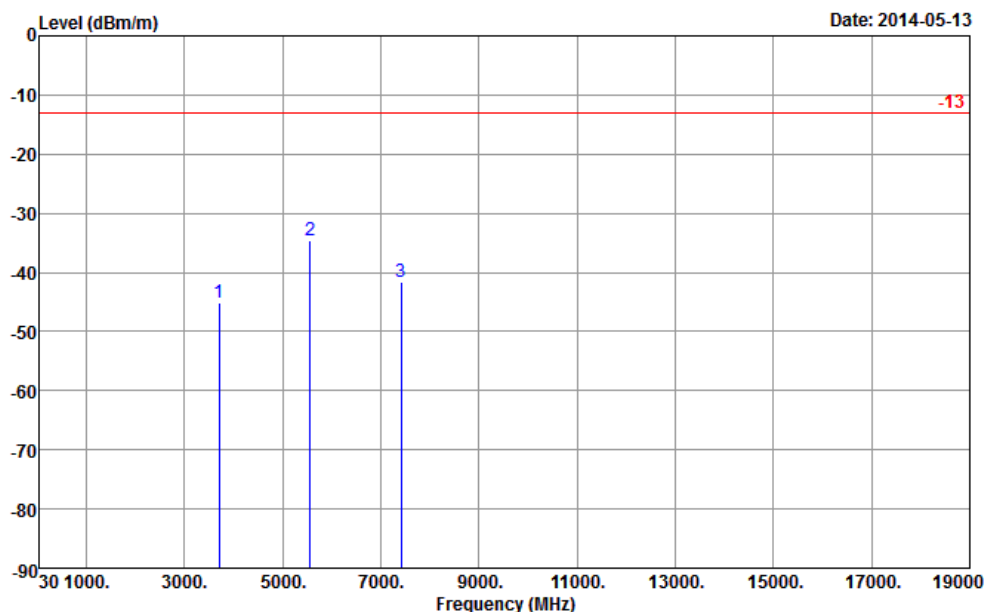


Site : 03CH07-HY
Condition : -13 EIRP_140314_V VERTICAL
Project : 441846

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3702	-45.16	-13	-32.16	-60.23	-51.31	2.59	8.74	V	Pass
5553	-34.57	-13	-21.57	-53.74	-42.23	3.04	10.70	V	Pass
7405	-41.59	-13	-28.59	-64.68	-50.33	3.28	12.02	V	Pass



<Middle Channel>

Band :	GSM1900	Temperature :	22~24°C
Test Mode :	GPRS class 8 Link (GMSK)	Relative Humidity :	47~49%
Channel :	661		
Test Engineer :	Marlboro Hsu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

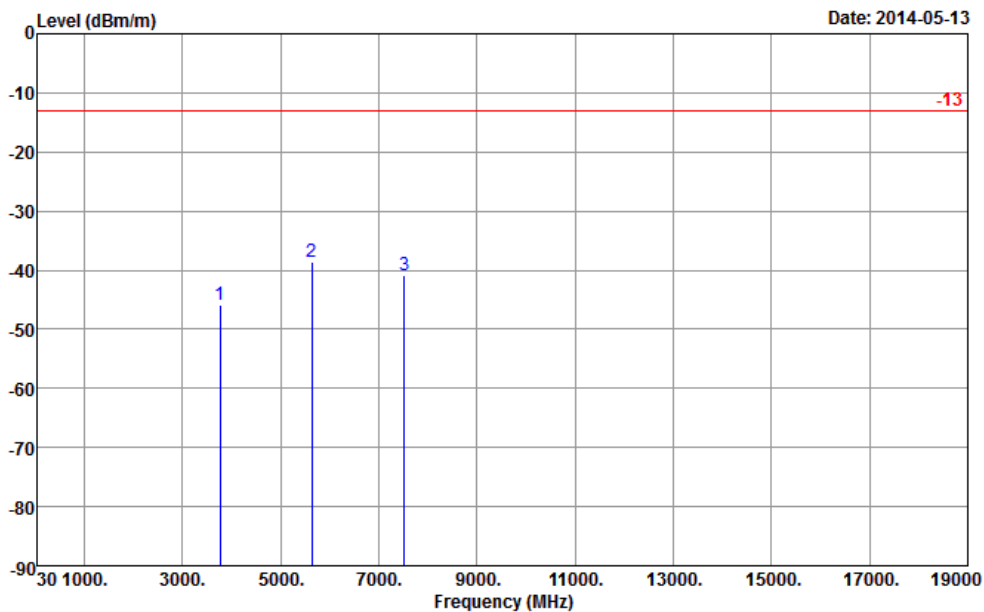


Site : 03CH07-HY
Condition : -13 EIRP_140314_H HORIZONTAL
Project : 441846

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-45.97	-13	-32.97	-59.83	-52.27	2.51	8.81	H	Pass
5639	-38.62	-13	-25.62	-59.15	-46.33	2.99	10.70	H	Pass
7520	-40.98	-13	-27.98	-65.14	-49.51	3.59	12.12	H	Pass



Band :	GSM1900	Temperature :	22~24°C
Test Mode :	GPRS class 8 Link (GMSK)	Relative Humidity :	47~49%
Channel :	661		
Test Engineer :	Marlboro Hsu	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

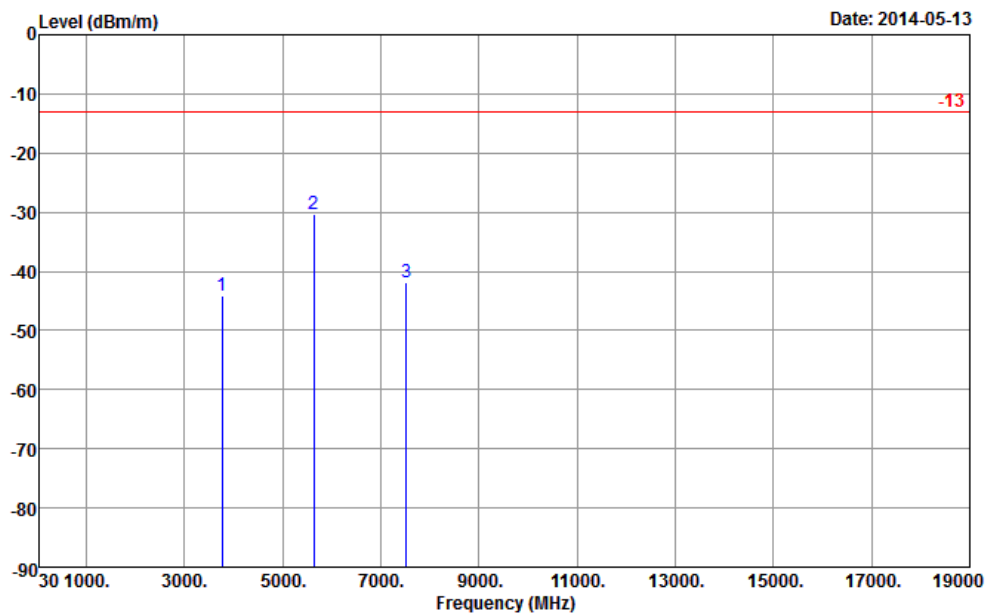


Site : 03CH07-HY
Condition : -13 EIRP_140314_V VERTICAL
Project : 441846

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-44.02	-13	-31.02	-59.45	-50.32	2.51	8.81	V	Pass
5639	-30.23	-13	-17.23	-49.59	-37.94	2.99	10.70	V	Pass
7520	-41.80	-13	-28.80	-64.89	-50.33	3.59	12.12	V	Pass



<High Channel>

Band :	GSM1900	Temperature :	22~24°C
Test Mode :	GPRS class 8 Link (GMSK)	Relative Humidity :	47~49%
Channel :	810		
Test Engineer :	Marlboro Hsu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

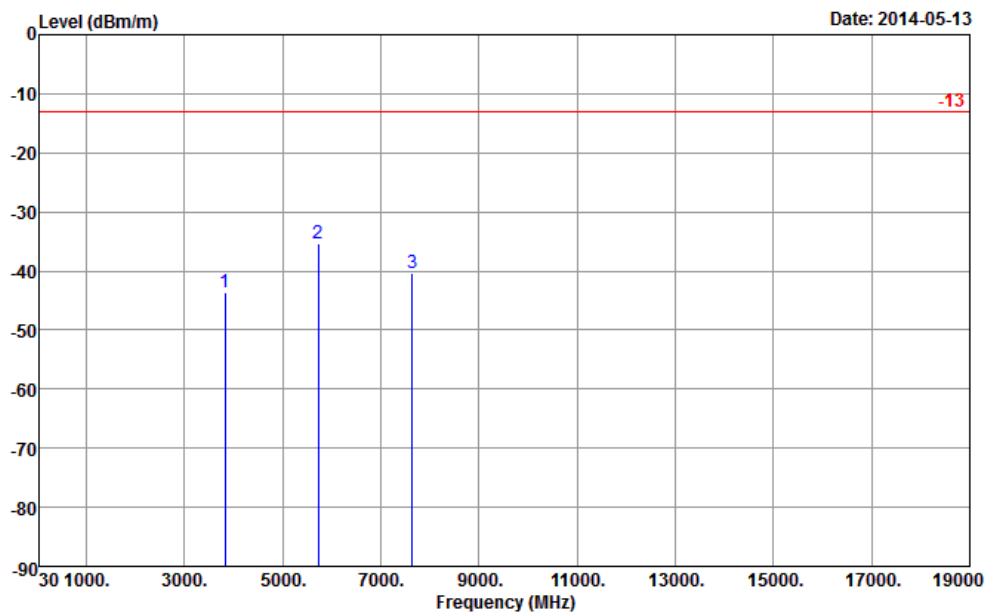


Site : 03CH07-HY
Condition : -13 EIRP_140314_H HORIZONTAL
Project : 441846

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3819	-43.60	-13	-30.60	-58.97	-50.01	2.47	8.88	H	Pass
5730	-35.26	-13	-22.26	-56.19	-42.96	3	10.70	H	Pass
7640	-40.27	-13	-27.27	-64.41	-49.05	3.43	12.21	H	Pass



Band :	GSM1900	Temperature :	22~24°C
Test Mode :	GPRS class 8 Link (GMSK)	Relative Humidity :	47~49%
Channel :	810		
Test Engineer :	Marlboro Hsu	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

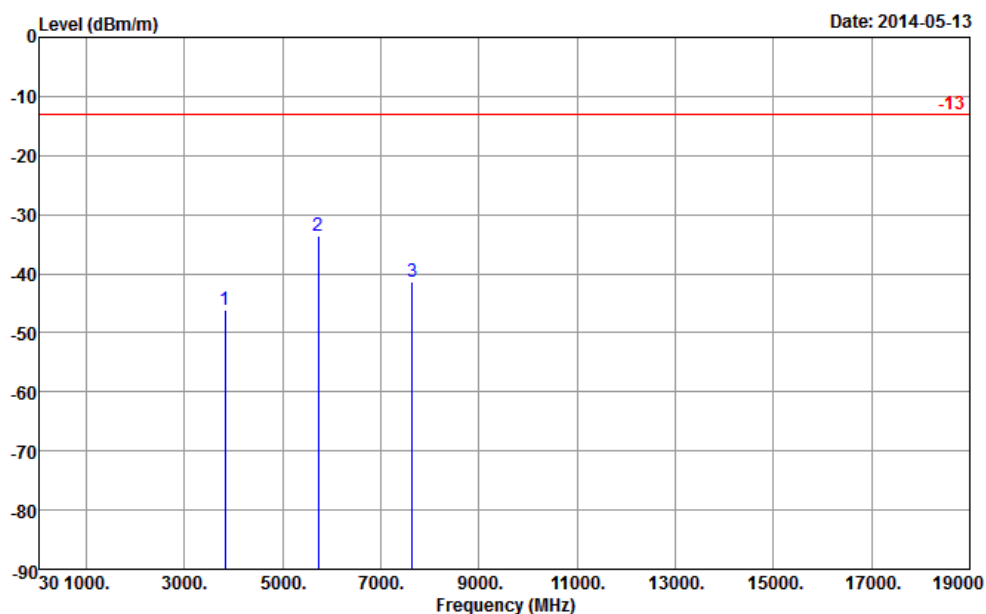


Site : 03CH07-HY
Condition : -13 EIRP_140314_V VERTICAL
Project : 441846

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3819	-46.16	-13	-33.16	-61.25	-52.57	2.47	8.88	V	Pass
5730	-33.48	-13	-20.48	-53.41	-41.18	3	10.70	V	Pass
7640	-41.41	-13	-28.41	-63.92	-50.19	3.43	12.21	V	Pass



<Low Channel>

Band :	GSM1900	Temperature :	22~24°C
Test Mode :	EDGE class 8 Link (8PSK)	Relative Humidity :	47~49%
Channel :	512		
Test Engineer :	Marlboro Hsu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

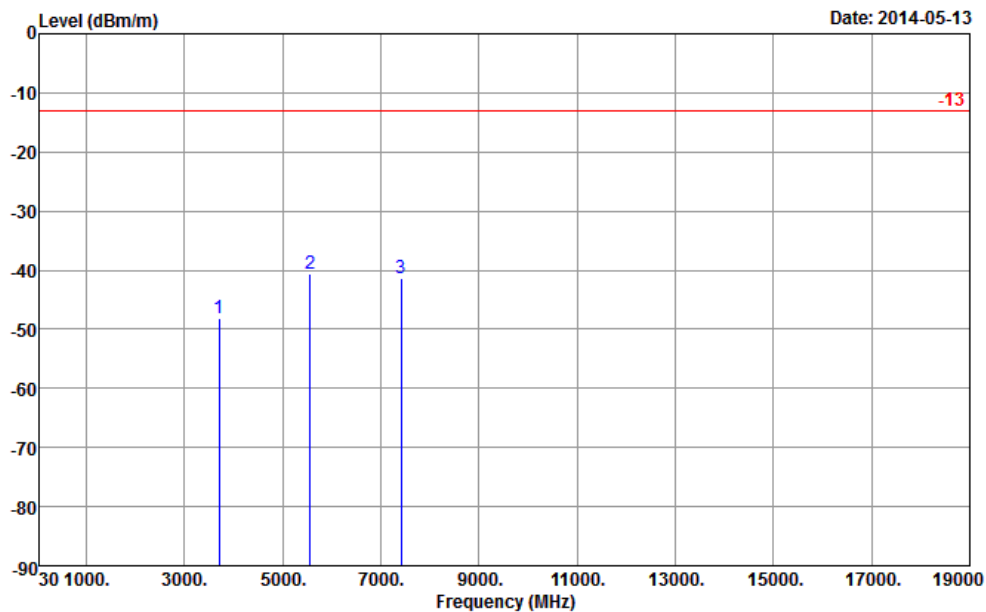


Site : 03CH07-HY
Condition : -13 EIRP_140314_H HORIZONTAL
Project : 441846

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3702	-48.04	-13	-35.04	-63.24	-54.19	2.59	8.74	H	Pass
5553	-40.68	-13	-27.68	-60.59	-48.34	3.04	10.70	H	Pass
7405	-41.39	-13	-28.39	-65.09	-50.13	3.28	12.02	H	Pass



Band :	GSM1900	Temperature :	22~24°C
Test Mode :	EDGE class 8 Link (8PSK)	Relative Humidity :	47~49%
Channel :	512		
Test Engineer :	Marlboro Hsu	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

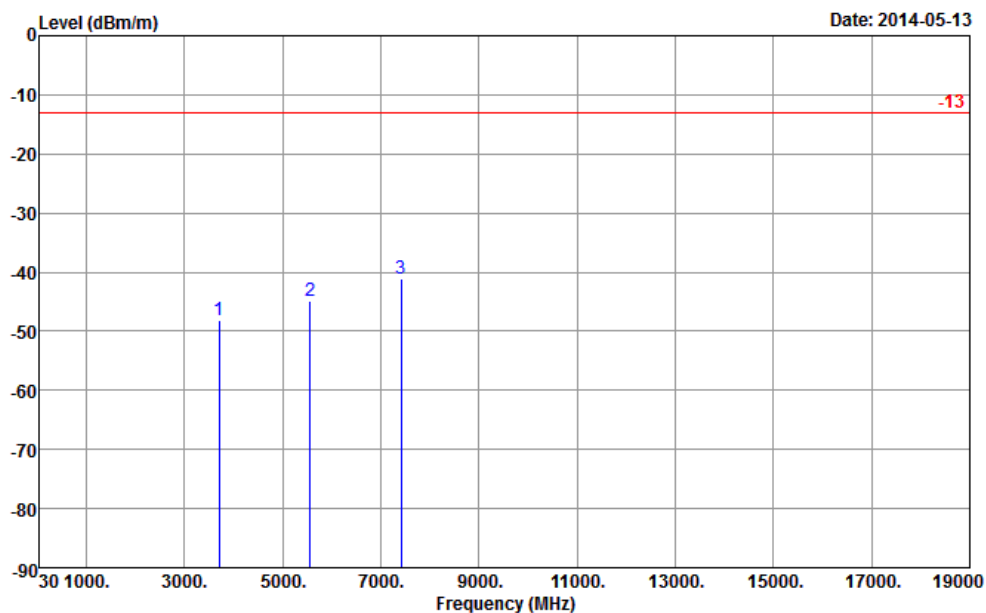


Site : 03CH07-HY
Condition : -13 EIRP_140314_V VERTICAL
Project : 441846

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3702	-48.12	-13	-35.12	-62.88	-54.27	2.59	8.74	V	Pass
5553	-44.78	-13	-31.78	-62.78	-52.44	3.04	10.70	V	Pass
7405	-41.15	-13	-28.15	-64.92	-49.89	3.28	12.02	V	Pass



<Middle Channel>

Band :	GSM1900	Temperature :	22~24°C
Test Mode :	EDGE class 8 Link (8PSK)	Relative Humidity :	47~49%
Channel :	661		
Test Engineer :	Marlboro Hsu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

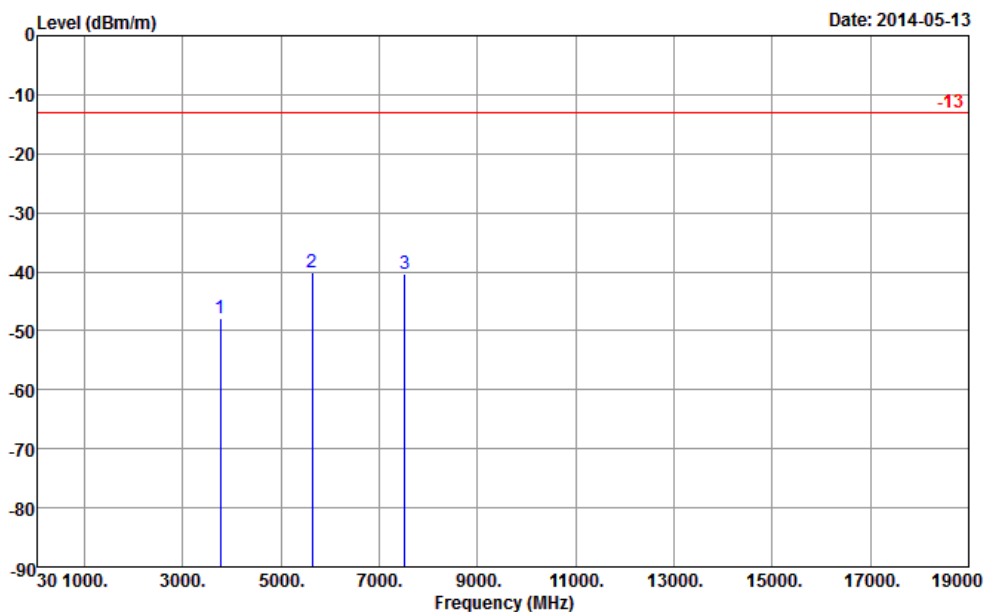


Site : 03CH07-HY
Condition : -13 EIRP_140314_H HORIZONTAL
Project : 441846

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-47.96	-13	-34.96	-62.1	-54.26	2.51	8.81	H	Pass
5639	-40.08	-13	-27.08	-60.61	-47.79	2.99	10.70	H	Pass
7520	-40.29	-13	-27.29	-65.01	-48.82	3.59	12.12	H	Pass



Band :	GSM1900	Temperature :	22~24°C
Test Mode :	EDGE class 8 Link (8PSK)	Relative Humidity :	47~49%
Channel :	661		
Test Engineer :	Marlboro Hsu	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

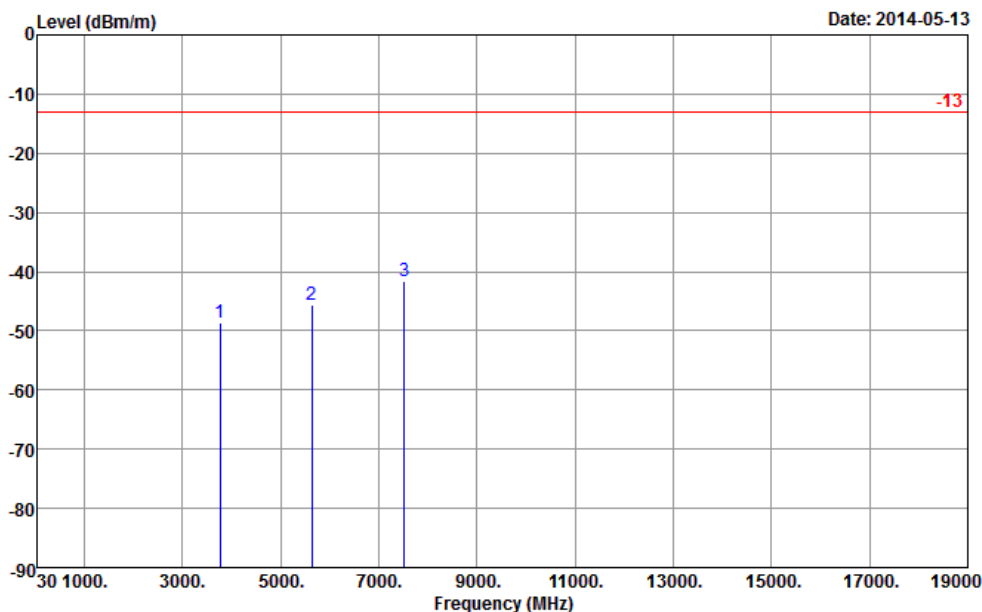


Site : 03CH07-HY
Condition : -13 EIRP_140314_V VERTICAL
Project : 441846

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-48.74	-13	-35.74	-62.99	-55.04	2.51	8.81	V	Pass
5639	-45.63	-13	-32.63	-64.33	-53.34	2.99	10.70	V	Pass
7520	-41.69	-13	-28.69	-64.57	-50.22	3.59	12.12	V	Pass



<High Channel>

Band :	GSM1900	Temperature :	22~24°C
Test Mode :	EDGE class 8 Link (8PSK)	Relative Humidity :	47~49%
Channel :	810		
Test Engineer :	Marlboro Hsu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

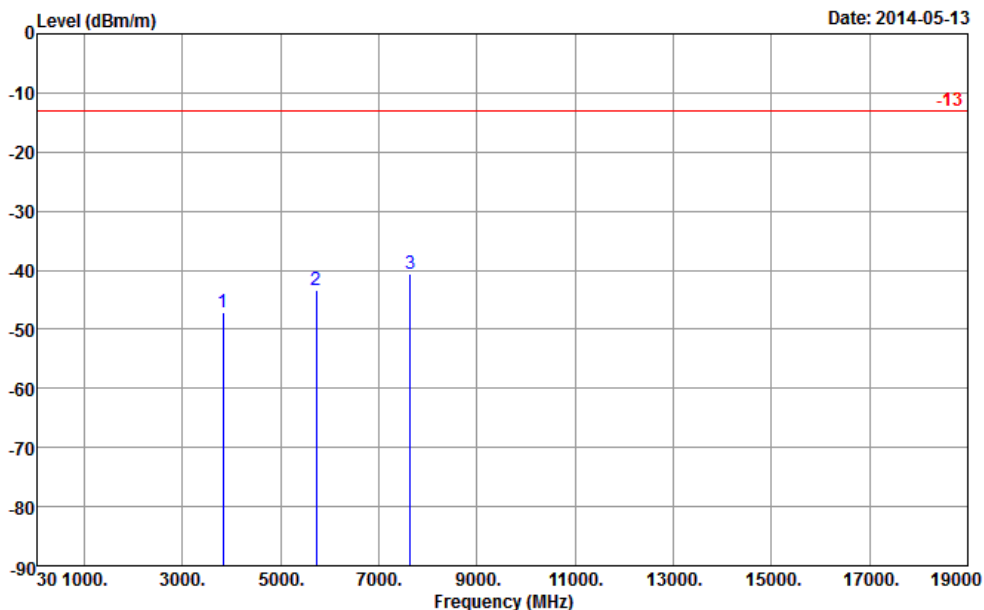


Site : 03CH07-HY
Condition : -13 EIRP_140314_H HORIZONTAL
Project : 441846

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3819	-47.01	-13	-34.01	-63.01	-53.42	2.47	8.88	H	Pass
5730	-43.39	-13	-30.39	-63.64	-51.09	3	10.70	H	Pass
7640	-40.59	-13	-27.59	-64.3	-49.37	3.43	12.21	H	Pass



Band :	GSM1900	Temperature :	22~24°C
Test Mode :	EDGE class 8 Link (8PSK)	Relative Humidity :	47~49%
Channel :	810		
Test Engineer :	Marlboro Hsu	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

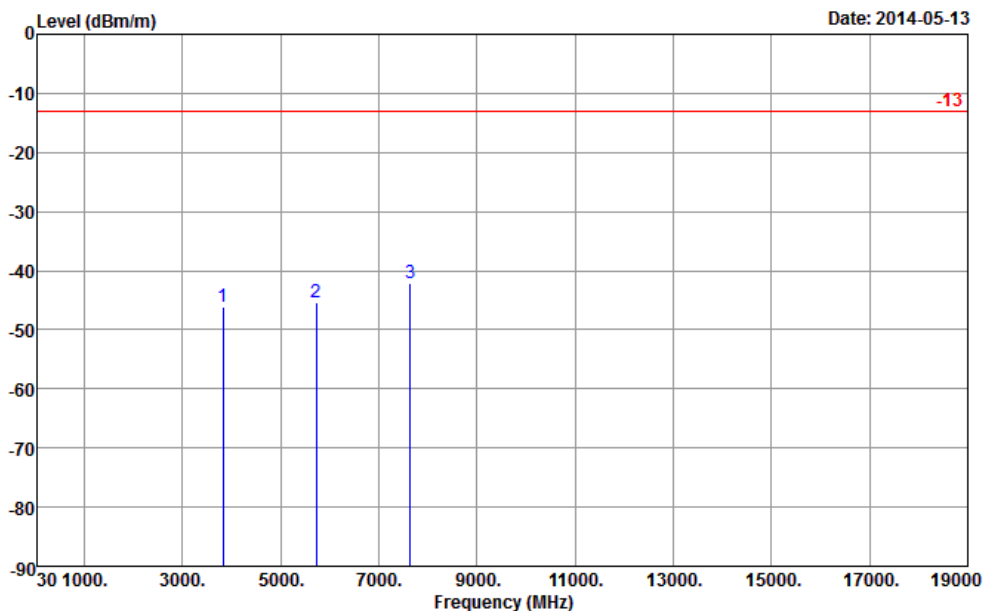


Site : 03CH07-HY
Condition : -13 EIRP_140314_V VERTICAL
Project : 441846

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3819	-46.21	-13	-33.21	-61.64	-52.62	2.47	8.88	V	Pass
5730	-45.29	-13	-32.29	-64.73	-52.99	3	10.70	V	Pass
7640	-42.24	-13	-29.24	-65.29	-51.02	3.43	12.21	V	Pass



<Low Channel>

Band :	WCDMA Band V	Temperature :	22~24°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Channel :	4132	Polarization :	Horizontal
Test Engineer :	Marlboro Hsu		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

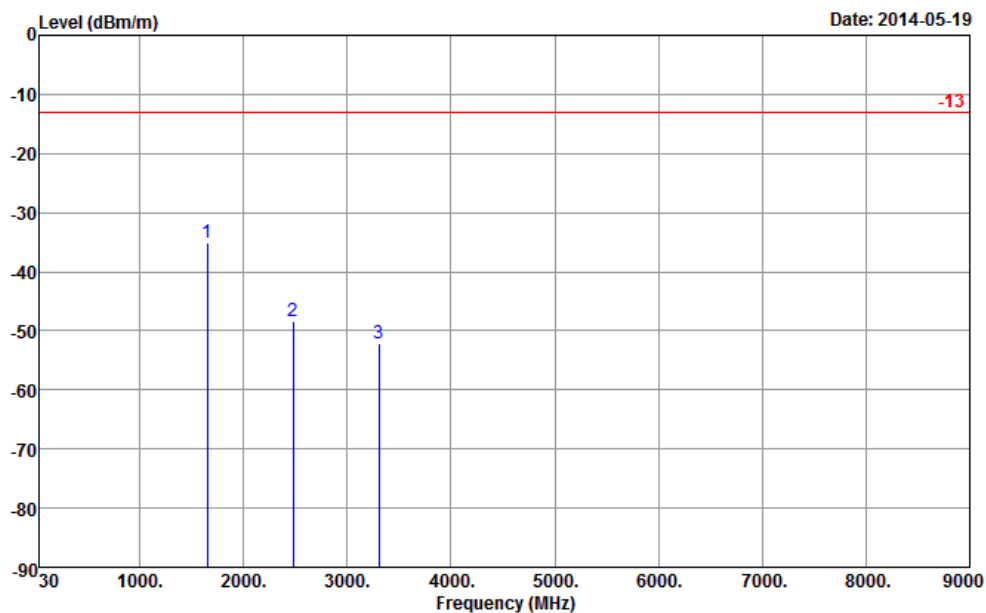


Site : 03CH07-HY
Condition : -13 EIRP_140314_H HORIZONTAL
Project : 441846

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1652	-35.12	-13	-22.12	-42.29	-36.97	1.53	5.53	H	Pass
2480	-48.35	-13	-35.35	-58.5	-50.29	2.06	6.15	H	Pass
3305	-52.21	-13	-39.21	-65.28	-55.51	2.48	7.93	H	Pass



Band :	WCDMA Band V	Temperature :	22~24°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Channel :	4132	Polarization :	Vertical
Test Engineer :	Marlboro Hsu		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

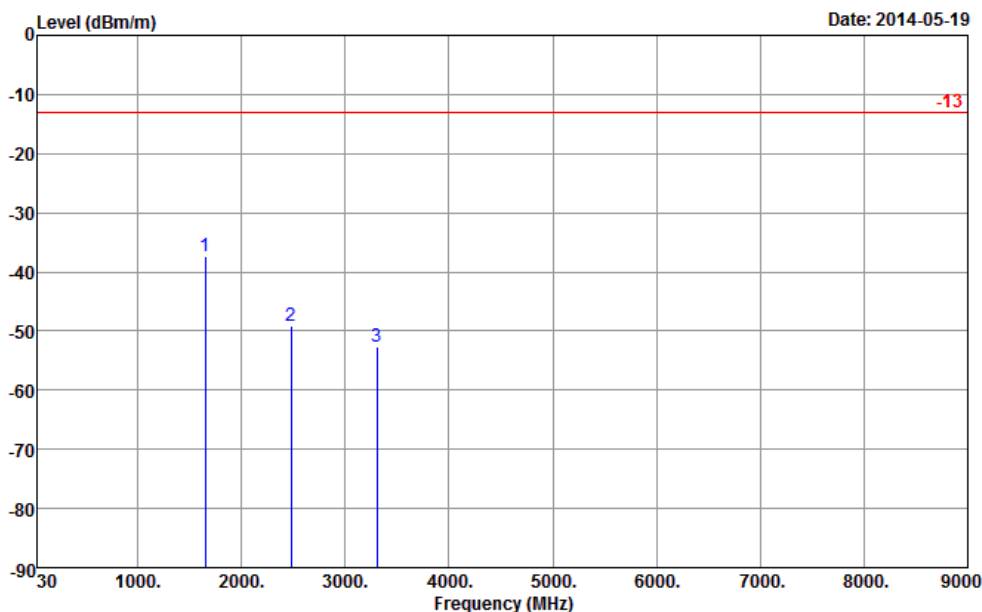


Site : 03CH07-HY
Condition : -13 EIRP_140314_V VERTICAL
Project : 441846

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1652	-37.31	-13	-24.31	-43.31	-39.16	1.53	5.53	V	Pass
2480	-49.14	-13	-36.14	-60.98	-51.08	2.06	6.15	V	Pass
3305	-52.73	-13	-39.73	-64.14	-56.03	2.48	7.93	V	Pass



<Middle Channel>

Band :	WCDMA Band V	Temperature :	22~24°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Channel :	4182	Polarization :	Horizontal
Test Engineer :	Marlboro Hsu		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

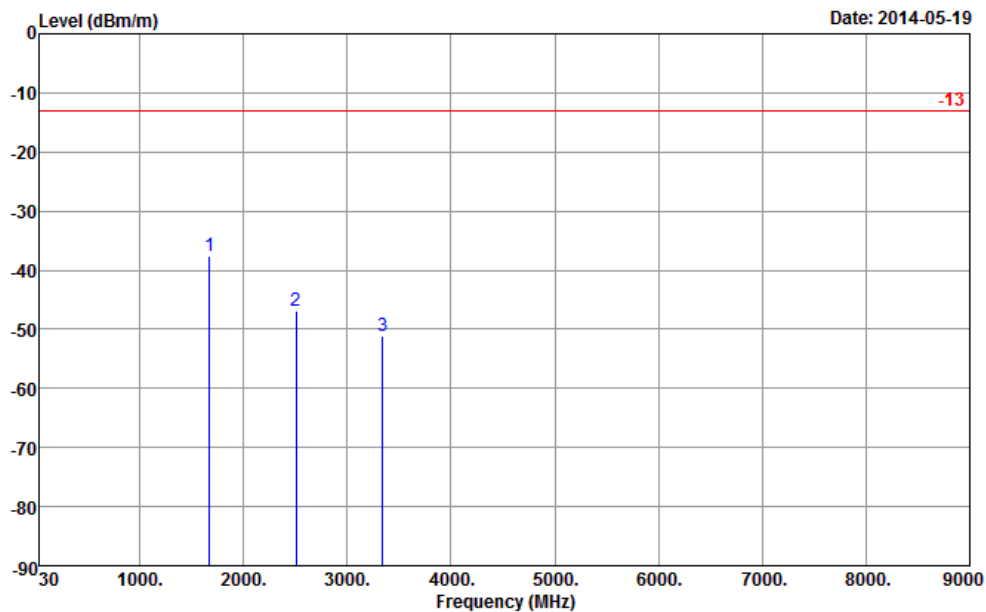


Site : 03CH07-HY
Condition : -13 EIRP_140314_H HORIZONTAL
Project : 441846

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-37.59	-13	-24.59	-44.44	-39.31	1.62	5.49	H	Pass
2510	-46.97	-13	-33.97	-56.33	-48.94	2.1	6.22	H	Pass
3345	-51.20	-13	-38.20	-64.18	-54.09	3.03	8.07	H	Pass



Band :	WCDMA Band V	Temperature :	22~24°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Channel :	4182	Polarization :	Vertical
Test Engineer :	Marlboro Hsu		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

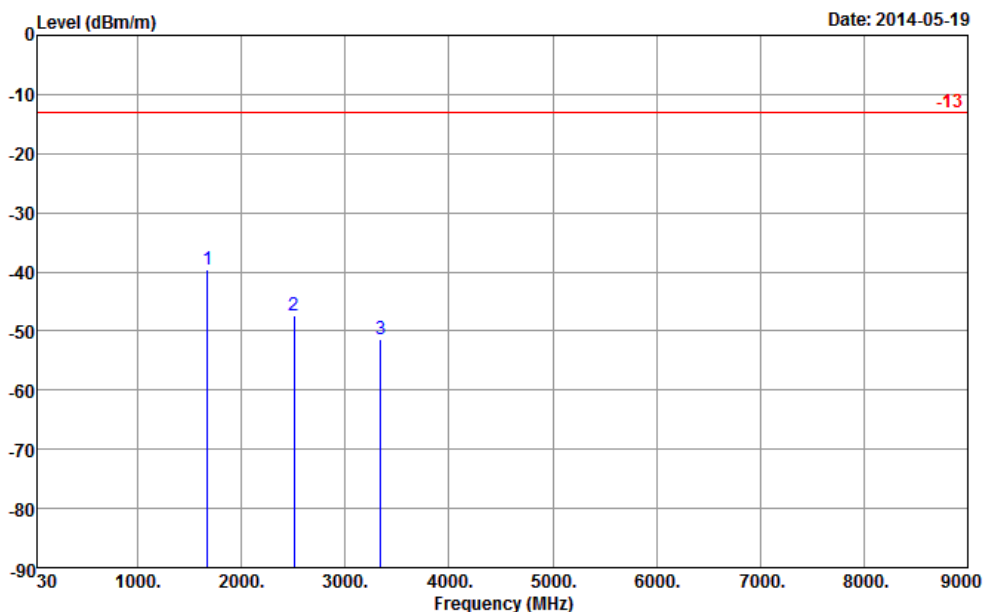


Site : 03CH07-HY
Condition : -13 EIRP_140314_V VERTICAL
Project : 441846

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-39.62	-13	-26.62	-45.57	-41.34	1.62	5.49	V	Pass
2510	-47.36	-13	-34.36	-59.33	-49.33	2.1	6.22	V	Pass
3345	-51.42	-13	-38.42	-63.65	-54.31	3.03	8.07	V	Pass



<High Channel>

Band :	WCDMA Band V	Temperature :	22~24°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Channel :	4233	Polarization :	Horizontal
Test Engineer :	Marlboro Hsu		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

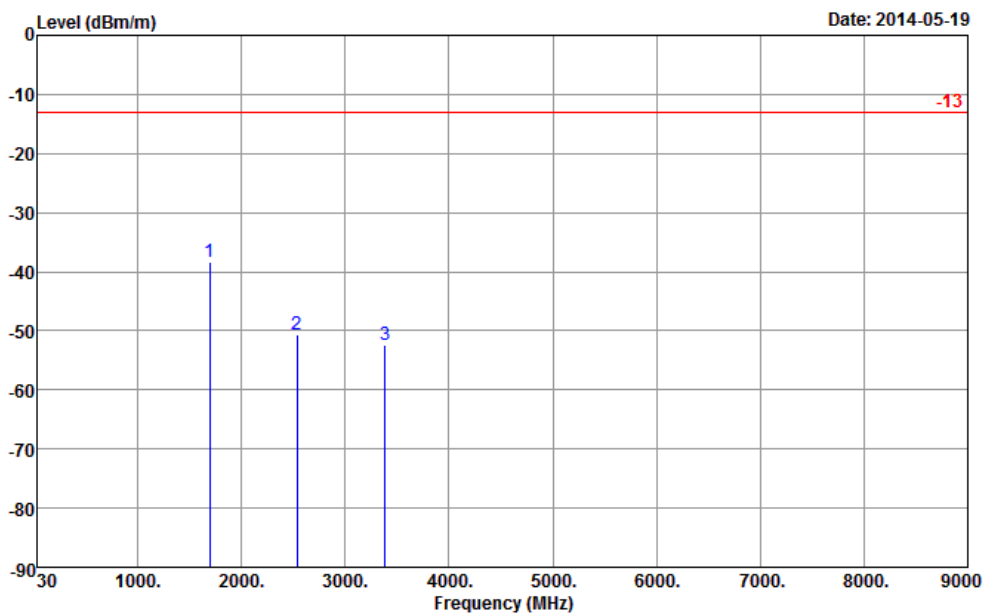


Site : 03CH07-HY
Condition : -13 EIRP_140314_H HORIZONTAL
Project : 441846

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1693	-38.35	-13	-25.35	-45.5	-40.08	1.57	5.45	H	Pass
2539	-50.73	-13	-37.73	-60.55	-52.84	2.02	6.28	H	Pass
3386	-52.52	-13	-39.52	-64.7	-56.27	2.3	8.20	H	Pass



Band :	WCDMA Band V	Temperature :	22~24°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Channel :	4233	Polarization :	Vertical
Test Engineer :	Marlboro Hsu		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

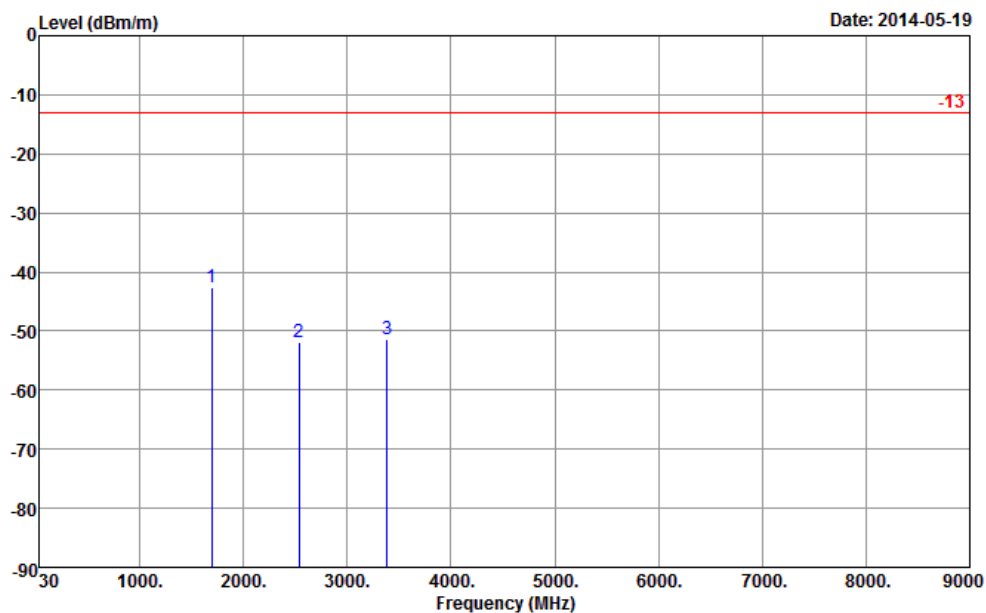


Site : 03CH07-HY
Condition : -13 EIRP_140314_V VERTICAL
Project : 441846

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1693	-42.66	-13	-29.66	-48.4	-44.39	1.57	5.45	V	Pass
2539	-51.98	-13	-38.98	-63.04	-54.09	2.02	6.28	V	Pass
3386	-51.31	-13	-38.31	-64.26	-55.06	2.3	8.20	V	Pass



<Low Channel>

Band :	WCDMA Band IV	Temperature :	22~24°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Channel :	1312	Polarization :	Horizontal
Test Engineer :	Marlboro Hsu		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

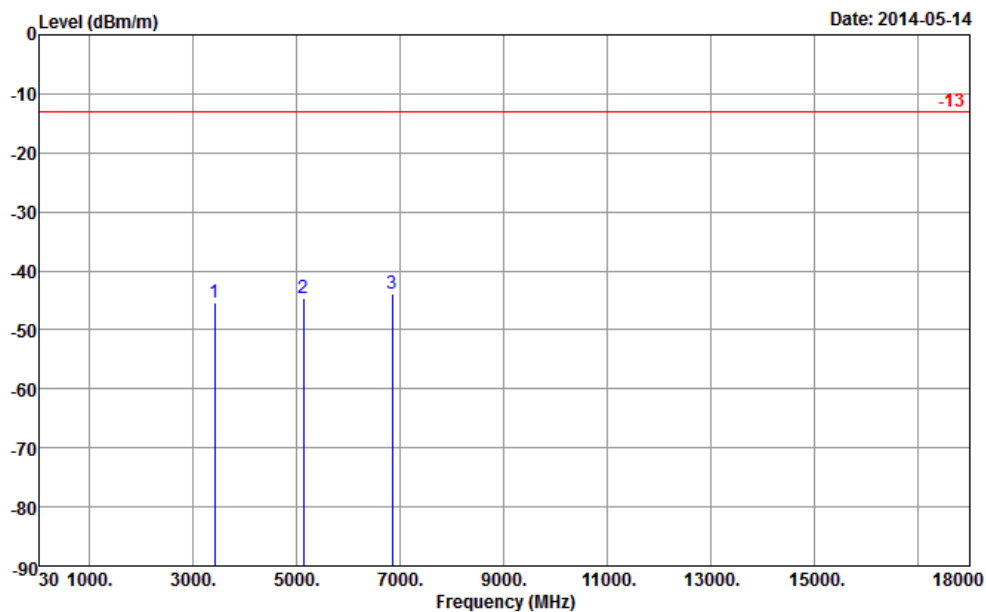


Site : 03CH07-HY
Condition : -13 EIRP_140314_H HORIZONTAL
Project : 441846

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3424	-45.49	-13	-32.49	-58.39	-49.32	4.48	8.31	H	Pass
5137	-44.64	-13	-31.64	-63.59	-49.28	5.332	9.98	H	Pass
6850	-43.79	-13	-30.79	-66.53	-49.03	6.1	11.34	H	Pass



Band :	WCDMA Band IV	Temperature :	22~24°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Channel :	1312	Polarization :	Vertical
Test Engineer :	Marlboro Hsu		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

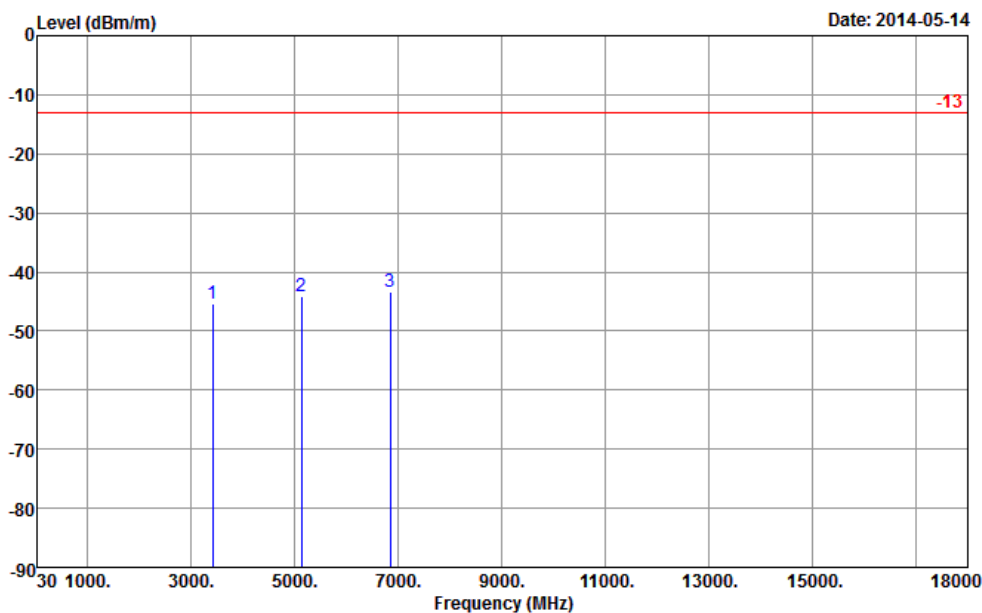


Site : 03CH07-HY
Condition : -13 EIRP_140314_V VERTICAL
Project : 441846

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3424	-45.40	-13	-32.40	-58.11	-49.23	4.48	8.31	V	Pass
5137	-44.11	-13	-31.11	-63.28	-48.75	5.332	9.98	V	Pass
6850	-43.44	-13	-30.44	-65.29	-48.68	6.1	11.34	V	Pass



<Middle Channel>

Band :	WCDMA Band IV	Temperature :	22~24°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Channel :	1413	Polarization :	Horizontal
Test Engineer :	Marlboro Hsu		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

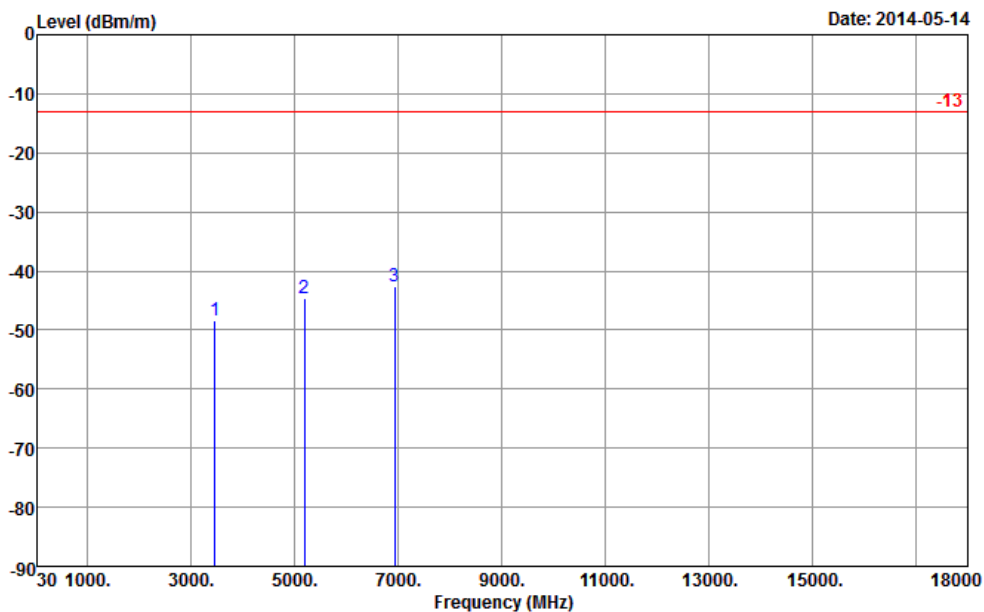


Site : 03CH07-HY
Condition : -13 EIRP_140314_H HORIZONTAL
Project : 441846

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3465	-48.40	-13	-35.40	-60.74	-52.23	4.48	8.31	H	Pass
5198	-44.74	-13	-31.74	-63.52	-49.38	5.332	9.98	H	Pass
6930	-42.51	-13	-29.51	-65.51	-47.75	6.1	11.34	H	Pass



Band :	WCDMA Band IV	Temperature :	22~24°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Channel :	1413	Polarization :	Vertical
Test Engineer :	Marlboro Hsu		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

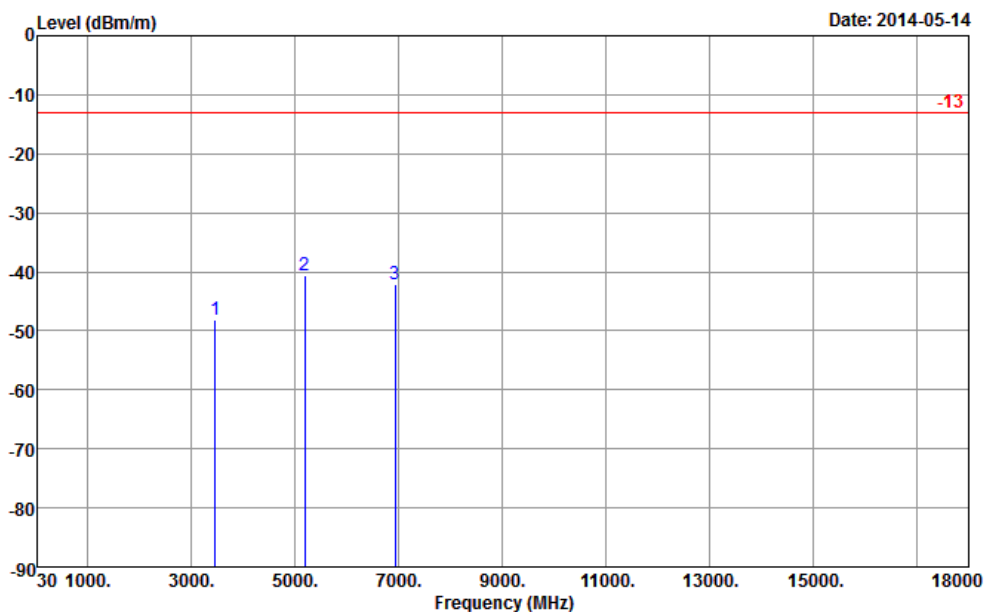


Site : 03CH07-HY
Condition : -13 EIRP_140314_V VERTICAL
Project : 441846

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3465	-48.16	-13	-35.16	-61.7	-51.99	4.48	8.31	V	Pass
5198	-40.73	-13	-27.73	-58.93	-45.37	5.332	9.98	V	Pass
6930	-42.11	-13	-29.11	-65.39	-47.35	6.1	11.34	V	Pass



<High Channel>

Band :	WCDMA Band IV	Temperature :	22~24°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Channel :	1513	Polarization :	Horizontal
Test Engineer :	Marlboro Hsu		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

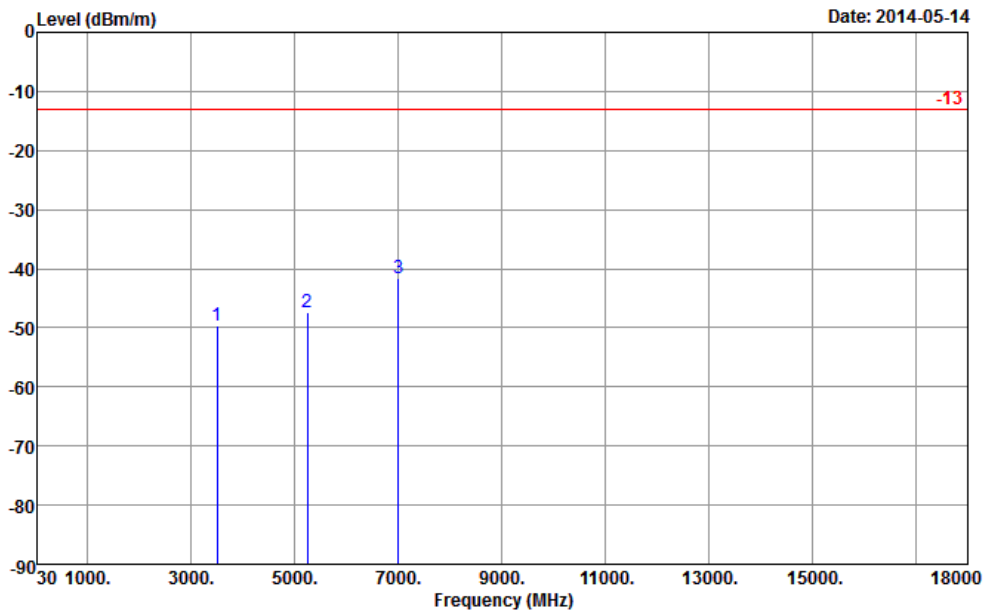


Site : 03CH07-HY
Condition : -13 EIRP_140314_H HORIZONTAL
Project : 441846

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3505	-49.58	-13	-36.58	-62.57	-53.85	4.16	8.43	H	Pass
5258	-47.33	-13	-34.33	-66.27	-52.29	5.13	10.09	H	Pass
7010	-41.66	-13	-28.66	-65.64	-46.94	6.15	11.43	H	Pass



Band :	WCDMA Band IV	Temperature :	22~24°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Channel :	1513	Polarization :	Vertical
Test Engineer :	Marlboro Hsu		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

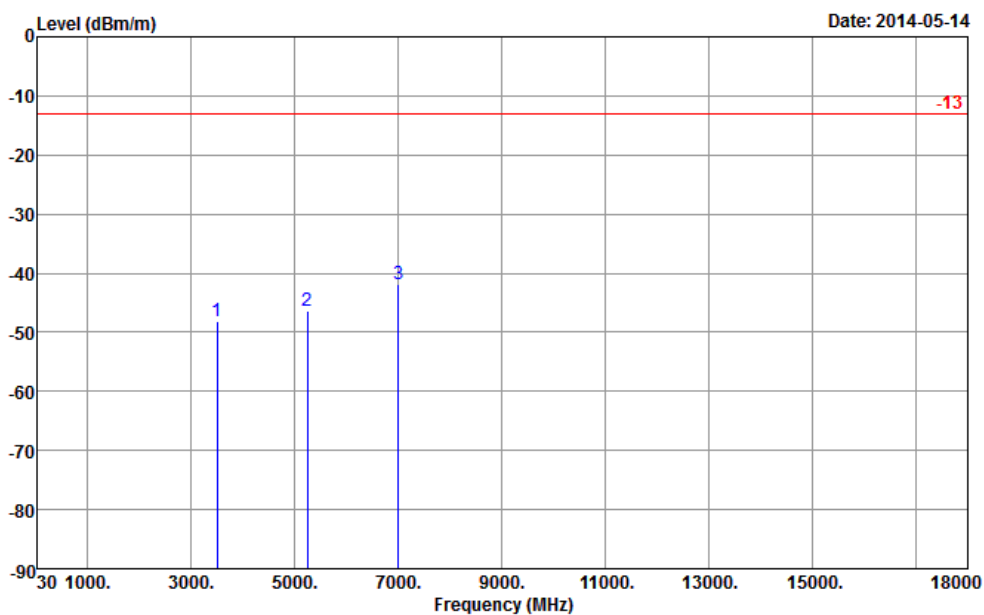


Site : 03CH07-HY
Condition : -13 EIRP_140314_V VERTICAL
Project : 441846

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3505	-48.20	-13	-35.20	-62.32	-52.47	4.16	8.43	V	Pass
5258	-46.36	-13	-33.36	-64.99	-51.32	5.13	10.09	V	Pass
7010	-41.76	-13	-28.76	-64.38	-47.04	6.15	11.43	V	Pass



<Low Channel>

Band :	WCDMA Band II	Temperature :	22~24°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Channel :	9262	Polarization :	Horizontal
Test Engineer :	Marlboro Hsu		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

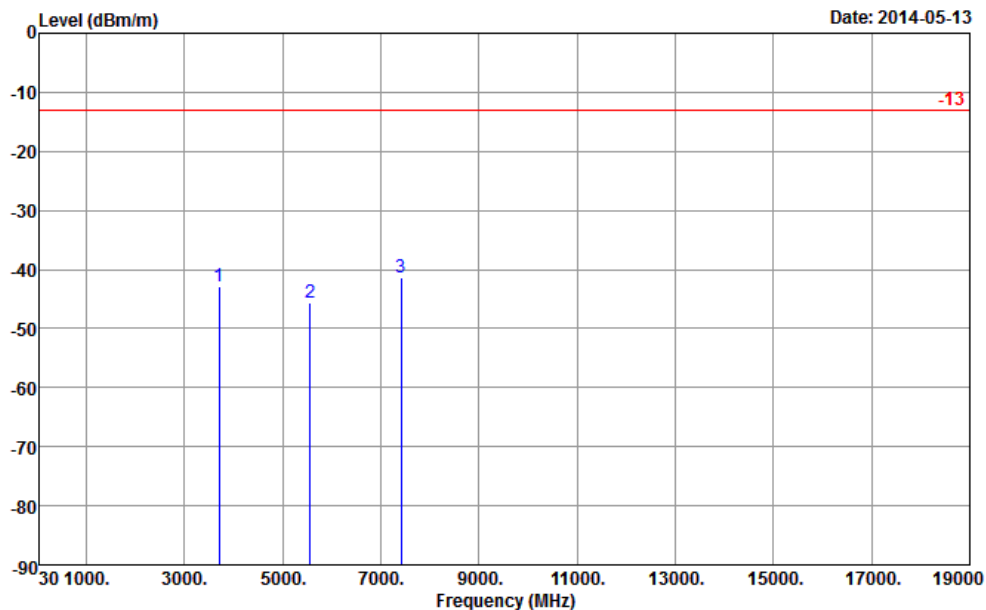


Site : 03CH07-HY
Condition : -13 EIRP_140314_H HORIZONTAL
Project : 441846

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3705	-42.93	-13	-29.93	-56.99	-49.08	2.59	8.74	H	Pass
5557	-45.60	-13	-32.60	-65.36	-53.26	3.04	10.70	H	Pass
7410	-41.37	-13	-28.37	-65.21	-50.11	3.28	12.02	H	Pass



Band :	WCDMA Band II	Temperature :	22~24°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Channel :	9262	Polarization :	Vertical
Test Engineer :	Marlboro Hsu		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

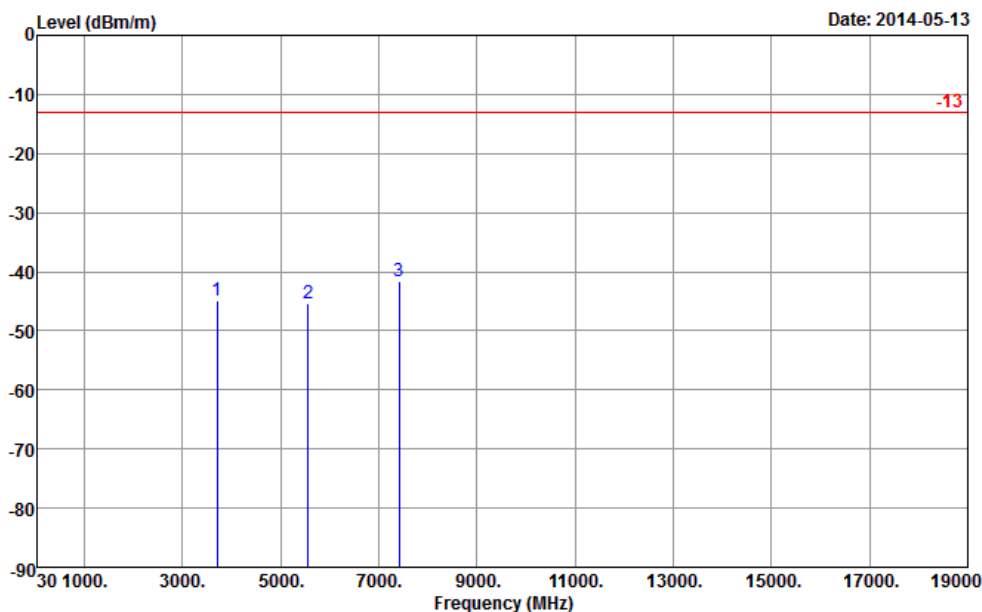


Site : 03CH07-HY
Condition : -13 EIRP_140314_V VERTICAL
Project : 441846

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3705	-44.96	-13	-31.96	-60.27	-51.11	2.59	8.74	V	Pass
5557	-45.33	-13	-32.33	-64.26	-52.99	3.04	10.70	V	Pass
7410	-41.67	-13	-28.67	-64.3	-50.41	3.28	12.02	V	Pass



<Middle Channel>

Band :	WCDMA Band II	Temperature :	22~24°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Channel :	9400	Polarization :	Horizontal
Test Engineer :	Marlboro Hsu		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

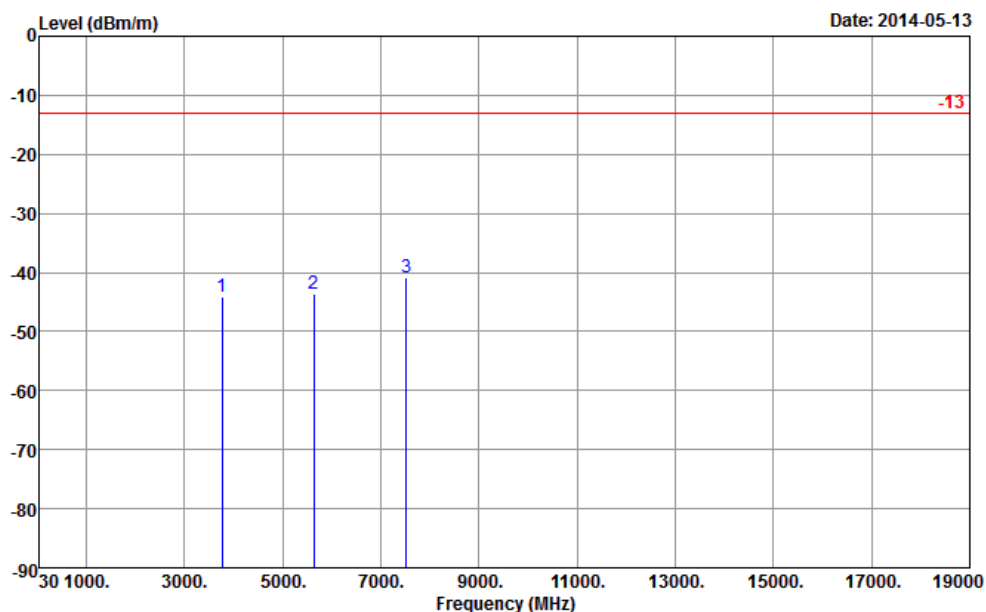


Site : 03CH07-HY
Condition : -13 EIRP_140314_H HORIZONTAL
Project : 441846

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-44.17	-13	-31.17	-59.3	-50.47	2.51	8.81	H	Pass
5639	-43.68	-13	-30.68	-63.6	-51.39	2.99	10.70	H	Pass
7520	-40.75	-13	-27.75	-65.11	-49.28	3.59	12.12	H	Pass



Band :	WCDMA Band II	Temperature :	22~24°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Channel :	9400	Polarization :	Vertical
Test Engineer :	Marlboro Hsu		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

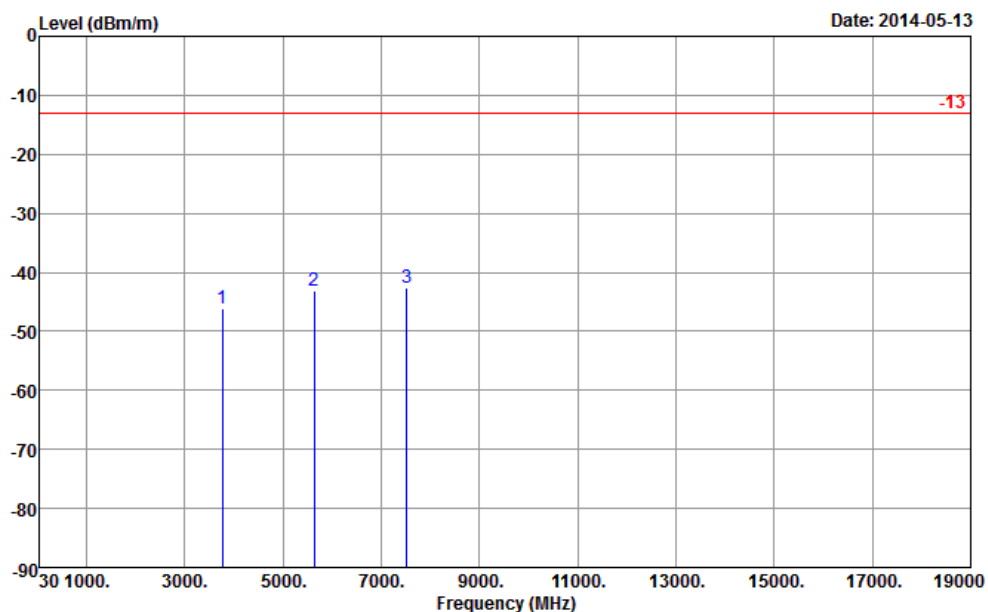


Site : 03CH07-HY
Condition : -13 EIRP_140314_V VERTICAL
Project : 441846

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-46.03	-13	-33.03	-61.23	-52.33	2.51	8.81	V	Pass
5639	-43.11	-13	-30.11	-62.02	-50.82	2.99	10.70	V	Pass
7520	-42.64	-13	-29.64	-65.36	-51.17	3.59	12.12	V	Pass



<High Channel>

Band :	WCDMA Band II	Temperature :	22~24°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Channel :	9538	Polarization :	Horizontal
Test Engineer :	Marlboro Hsu		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

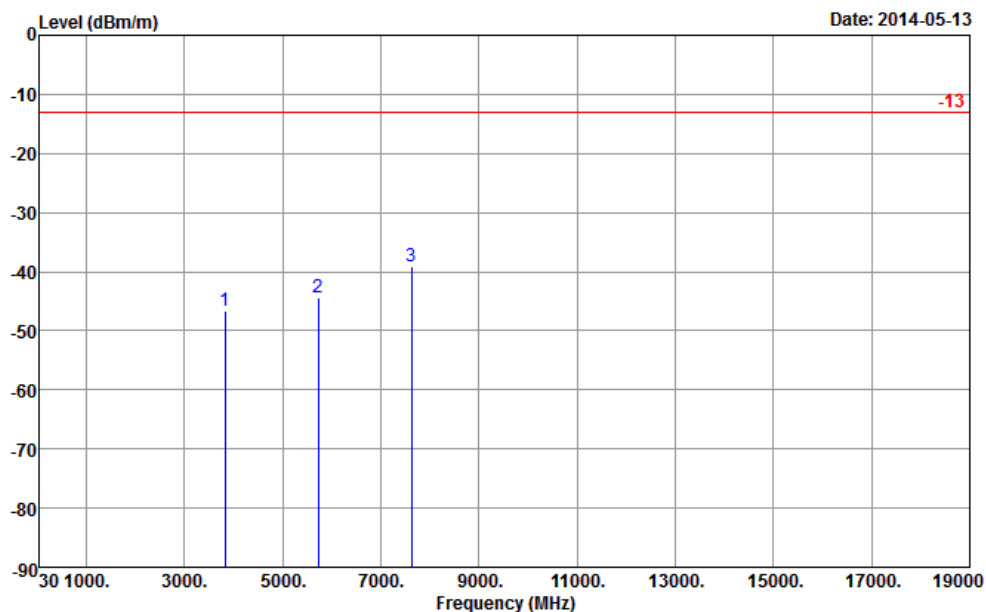


Site : 03CH07-HY
Condition : -13 EIRP_140314_H HORIZONTAL
Project : 441846

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3815	-46.65	-13	-33.65	-61.75	-53.06	2.47	8.88	H	Pass
5723	-44.47	-13	-31.47	-64.96	-52.17	3	10.70	H	Pass
7630	-39.18	-13	-26.18	-63.64	-47.96	3.43	12.21	H	Pass



Band :	WCDMA Band II	Temperature :	22~24°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Channel :	9538	Polarization :	Vertical
Test Engineer :	Marlboro Hsu		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

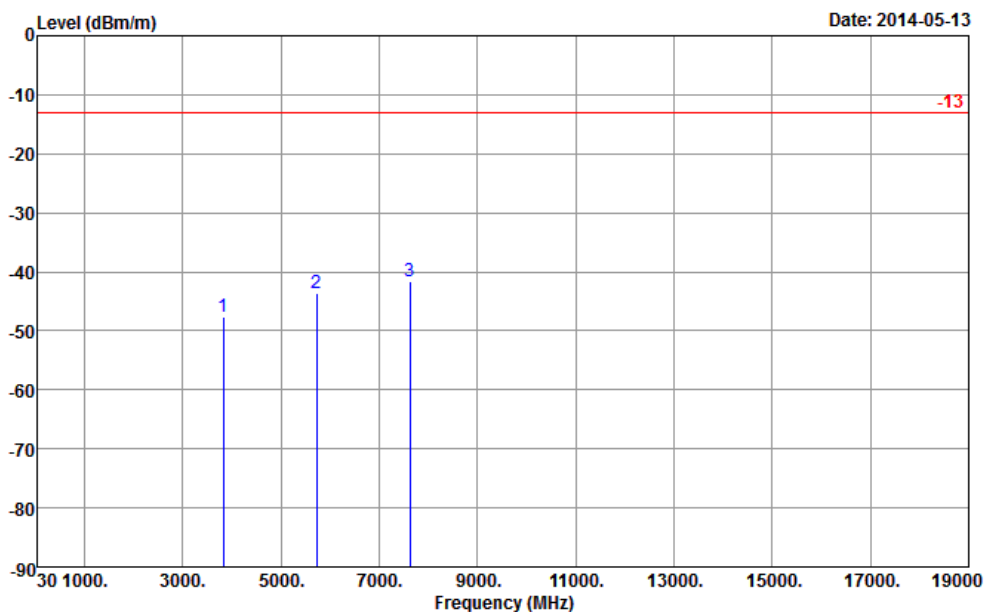

Site : 03CH07-HY
Condition : -13 EIRP_140314_V VERTICAL
Project : 441846

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3815	-47.57	-13	-34.57	61.99	-53.98	2.47	8.88	V	Pass
5723	-43.69	-13	-30.69	63.49	-51.39	3	10.70	V	Pass
7630	-41.55	-13	-28.55	64.67	-50.33	3.43	12.21	V	Pass

3.7 Frequency Stability Measurement

3.7.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.7.3 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C steps up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at $25 \pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

3.7.5 Test Setup

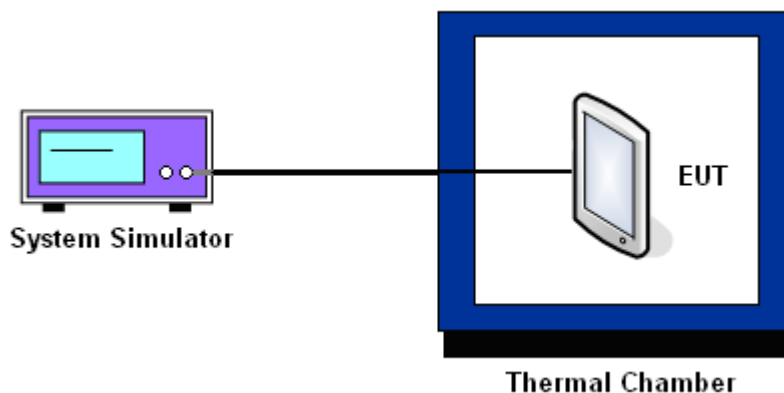

3.7.6 Test Result of Temperature Variation

Band :	GSM 850	Channel :	189
Limit (ppm) :	2.5	Frequency :	836.4 MHz

Temperature (°C)	GPRS class 8	EDGE class 8	Result
	Deviation (ppm)	Deviation (ppm)	
50	0.0263	0.0239	PASS
40	0.0227	0.0203	
30	0.0251	0.0167	
20	0.0215	0.0143	
10	0.0179	0.0155	
0	0.0191	0.0179	
-10	0.0215	0.0227	
-20	0.0203	0.0191	
-30	0.0239	0.0215	

Band :	GSM 1900	Channel :	661
Limit (ppm) :	2.5	Frequency :	1880.0 MHz

Temperature (°C)	GPRS class 8	EDGE class 8	Result
	Deviation (ppm)	Deviation (ppm)	
50	0.0165	0.0170	PASS
40	0.0128	0.0160	
30	0.0112	0.0154	
20	0.0101	0.0128	
10	0.0106	0.0138	
0	0.0133	0.0133	
-10	0.0117	0.0144	
-20	0.0149	0.0176	
-30	0.0138	0.0149	



Band :	WCDMA Band V	Channel :	4182
Limit (ppm) :	2.5	Frequency :	836.4 MHz

Temperature (°C)	RMC 12.2Kbps	Result
	Deviation (ppm)	
50	0.0155	PASS
40	0.0120	
30	0.0084	
20	0.0072	
10	0.0096	
0	0.0108	
-10	0.0132	
-20	0.0167	
-30	0.0143	

Band :	WCDMA Band IV	Channel :	1413
Limit (ppm) :	2.5	Frequency :	1732.6 MHz

Temperature (°C)	RMC 12.2Kbps	Result
	Deviation (ppm)	
50	0.0121	PASS
40	0.0133	
30	0.0104	
20	0.0081	
10	0.0087	
0	0.0110	
-10	0.0092	
-20	0.0098	
-30	0.0104	



Band :	WCDMA Band II	Channel :	9400
Limit (ppm) :	2.5	Frequency :	1880.0 MHz

Temperature (°C)	RMC 12.2Kbps	Result
	Deviation (ppm)	
50	0.0154	PASS
40	0.0138	
30	0.0117	
20	0.0090	
10	0.0080	
0	0.0101	
-10	0.0122	
-20	0.0128	
-30	0.0133	

**3.7.7 Test Result of Voltage Variation**

Band & Channel	Mode	Voltage (Volt)	Deviation (ppm)	Limit (ppm)	Result
GSM 850 CH189	GPRS class 8	132.00	0.0239	2.5	PASS
		120.00	0.0191		
		BEP	0.0263		
	EDGE class 8	132.00	0.0179		
		120.00	0.0143		
		BEP	0.0191		
GSM 1900 CH661	GPRS class 8	132.00	0.0112		
		120.00	0.0122		
		BEP	0.0128		
	EDGE class 8	132.00	0.0149		
		120.00	0.0133		
		BEP	0.0122		
WCDMA Band V CH4182	RMC 12.2Kbps	132.00	0.0060		
		120.00	0.0084		
		BEP	0.0096		
WCDMA Band IV CH1413	RMC 12.2Kbps	132.00	0.0087		
		120.00	0.0081		
		BEP	0.0104		
WCDMA Band II CH9400	RMC 12.2Kbps	132.00	0.0112		
		120.00	0.0101		
		BEP	0.0133		

Note:

1. Normal Voltage = 132.00V.
2. Battery End Point (BEP) = 108.00 V.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
System Simulator	Rohde & Schwarz	CMU200	117995	N/A	Aug. 01, 2013	May 26, 2014~ May 27, 2014	Jul. 31, 2014	Conducted (TH02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 07, 2013	May 26, 2014~ May 27, 2014	Jun. 06, 2014	Conducted (TH02-HY)
Thermal Chamber	Ten Billion	TTH-D3SP	TBN-930701	N/A	Jul. 19, 2013	May 26, 2014~ May 27, 2014	Jul. 18, 2014	Conducted (TH02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV30	101749	10Hz ~ 30GHz	Feb. 10, 2014	May 12, 2014~ May 19, 2014	Feb. 09, 2015	Radiation (03CH07-HY)
Bilog Antenna	Schaffner	CBL6111C	2726	30MHz ~ 1GHz	Oct. 10, 2013	May 12, 2014~ May 19, 2014	Oct. 09, 2014	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	75962	1GHz~18GHz	Aug. 22, 2013	May 12, 2014~ May 19, 2014	Aug. 21, 2014	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10 MHz ~ 1000MHz	Mar. 17, 2014	May 12, 2014~ May 19, 2014	Mar. 16, 2015	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1 GHz~26.5 GHz	Nov. 29, 2013	May 12, 2014~ May 19, 2014	Nov. 28, 2014	Radiation (03CH07-HY)
Turn Table	ChainTek	ChainTek 3000	N/A	0 ~ 360 degree	N/A	May 12, 2014~ May 19, 2014	N/A	Radiation (03CH07-HY)
Antenna Mast	ChainTek	M-400-0	114/8000604/L	N/A	N/A	May 12, 2014~ May 19, 2014	N/A	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	15GHz- 40GHz	Oct. 03, 2013	May 12, 2014~ May 19, 2014	Oct. 02, 2014	Radiation (03CH07-HY)



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.50
---	------