

## RF Exposure report

The following samples were submitted and identified on behalf of the client as:

|                            |                                                        |
|----------------------------|--------------------------------------------------------|
| <b>EUT Description</b>     | Notebook Computer                                      |
| <b>Brand Name</b>          | HP                                                     |
| <b>Model No.</b>           | HSN-I66C-4                                             |
| <b>Applicant</b>           | HP Inc.<br>1501 PAGE MILL ROAD PALO ALTO, CA 94304 USA |
| <b>Standards</b>           | IEEE/ANSI C95.1-1992, IEEE 1528-2013                   |
| <b>FCC ID</b>              | B94HNI66C4SPY                                          |
| <b>Date of EUT Receipt</b> | Nov. 05, 2025                                          |
| <b>Date of Test(s)</b>     | Dec. 01, 2025 ~ Jan. 01, 2026                          |
| <b>Date of Issue</b>       | Jan. 15, 2026                                          |

Approved By /

John Teh

John Yeh

In the configuration tested, the EUT complied with the standards specified above.

### Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan Ltd. Central RF Lab or testing done by SGS Taiwan Ltd. Central RF Lab in connection with distribution or use of the product described in this report must be approved by SGS Taiwan Ltd. Central RF Lab in writing.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

[www.sgs.com.tw](http://www.sgs.com.tw)

Member of SGS Group

## Revision History

| Report Number    | Revision | Description                      | Issue Date    | Revised By | Remark |
|------------------|----------|----------------------------------|---------------|------------|--------|
| TESA2511000875EN | 00       | Initial creation of the document | Jan. 07, 2026 | Cindy Chou |        |
| TESA2511000875EN | 01       | Modify comment                   | Jan. 15, 2026 | Cindy Chou | *      |
|                  |          |                                  |               |            |        |
|                  |          |                                  |               |            |        |
|                  |          |                                  |               |            |        |
|                  |          |                                  |               |            |        |
|                  |          |                                  |               |            |        |
|                  |          |                                  |               |            |        |
|                  |          |                                  |               |            |        |
|                  |          |                                  |               |            |        |

Note:

1. The mark " \* " is the revised version of the report due to comments submitted by the certification.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

[www.sgs.com.tw](http://www.sgs.com.tw)

Member of SGS Group

# Contents

|      |                                                                                |     |
|------|--------------------------------------------------------------------------------|-----|
| 1    | GENERAL INFORMATION .....                                                      | 4   |
| 1.1  | Description of EUT.....                                                        | 4   |
| 1.2  | Test Facility .....                                                            | 7   |
| 2    | Introduction.....                                                              | 8   |
| 3    | Qualcomm Smart Transmit Operation Description.....                             | 9   |
| 3.2  | Feature description.....                                                       | 9   |
| 3.3  | Basic concept of the feature .....                                             | 10  |
| 4    | Validation strategy .....                                                      | 12  |
| 5    | Sub-6 Validation Test Plan .....                                               | 14  |
| 5.2  | Test sequence determination for validation .....                               | 14  |
| 5.3  | Test configuration selection criteria for validating Smart Transmit feature .. | 15  |
| 5.4  | Test procedures for conducted power measurements.....                          | 21  |
| 5.5  | Test procedure for SAR measurements.....                                       | 29  |
| 6    | Test Configurations .....                                                      | 31  |
| 6.2  | WWAN (sub-6) transmission.....                                                 | 31  |
| 7    | Conducted Power Test Results for Sub-6 Smart Transmit Feature Validation ....  | 35  |
| 7.2  | Measurement setup .....                                                        | 35  |
| 7.3  | Plimit and Pmax measurement results .....                                      | 37  |
| 7.4  | Plimit and Pmax measurement results .....                                      | 38  |
| 7.5  | Change in Call Test Results .....                                              | 63  |
| 7.6  | Change in technology/band test results.....                                    | 65  |
| 7.7  | Change in Time window / antenna switch test results .....                      | 67  |
| 7.8  | Switch in SAR exposure test results.....                                       | 69  |
| 7.9  | Switch in SAR exposure test results.....                                       | 71  |
| 8    | SAR Test Results for Sub-6 Smart Transmit Feature Validation.....              | 73  |
| 8.2  | Measurement setup .....                                                        | 73  |
| 8.3  | SAR measurement results for time-varying Tx power transmission scenario        | 74  |
| 9    | Conclusions .....                                                              | 87  |
|      | Appendix A. Test Sequences .....                                               | 88  |
|      | Appendix B. Validation for sub6 simultaneous transmission scenarios .....      | 91  |
|      | B.1 Time-varying Tx power test for sub6 NR in NSA mode.....                    | 91  |
|      | B.2 Switch in SAR exposure between LTE vs. Sub6 NR during transmission ....    | 91  |
|      | Appendix C. cDASY6 System Verification .....                                   | 93  |
|      | Appendix D. INSTRUMENTS LIST .....                                             | 95  |
|      | Appendix E. SAR SYSTEM VERIFICATION .....                                      | 96  |
| 10   | SAR SYSTEM CHECK RESULTS .....                                                 | 99  |
| 11   | APPENDIXES .....                                                               | 102 |
| 11.2 | SAR_Appendix F Photographs .....                                               | 102 |
| 11.3 | SAR_Appendix G DAE & Probe Cal. Certificate .....                              | 102 |
| 11.4 | SAR_Appendix H Phantom Description & Dipole Cal. Certificate .....             | 102 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 1 GENERAL INFORMATION

### 1.1 Description of EUT

|                                            |                                                  |           |
|--------------------------------------------|--------------------------------------------------|-----------|
| EUT Description                            | Notebook Computer                                |           |
| Brand Name                                 | HP                                               |           |
| Model No.                                  | HSN-I66C-4                                       |           |
| Integrated WWAN Module                     | Brand Name: Foxconn<br>Model Name: DP25-42843-47 |           |
| Integrated WLAN Module                     | Brand Name: Qualcomm<br>Model Name: QCNCM825     |           |
| Duty Cycle                                 | WCDMA                                            | 1         |
|                                            | LTE TDD Power Class 3                            | 0.633     |
|                                            | LTE TDD Power Class 2                            | 0.433     |
|                                            | 5G NR                                            | 1         |
| Supported radios (TX Frequency Range, MHz) | WCDMA Band II                                    | 1850-1910 |
|                                            | WCDMA Band IV                                    | 1710-1755 |
|                                            | WCDMA Band V                                     | 824-849   |
|                                            | LTE FDD Band 2                                   | 1850-1910 |
|                                            | LTE FDD Band 4                                   | 1710-1755 |
|                                            | LTE FDD Band 5                                   | 824-849   |
|                                            | LTE FDD Band 7                                   | 2500-2570 |
|                                            | LTE FDD Band 12                                  | 699-716   |
|                                            | LTE FDD Band 13                                  | 777-787   |
|                                            | LTE FDD Band 14                                  | 788-798   |
|                                            | LTE FDD Band 17                                  | 704-716   |
|                                            | LTE FDD Band 25                                  | 1850-1915 |
|                                            | LTE FDD Band 26                                  | 814-849   |
|                                            | LTE FDD Band 30                                  | 2305-2315 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

|                                            |                                 |                        |
|--------------------------------------------|---------------------------------|------------------------|
| Supported radios (TX Frequency Range, MHz) | LTE TDD Band 38 Power Class 2/3 | 2570-2620              |
|                                            | LTE TDD Band 41 Power Class 2/3 | 2496-2690              |
|                                            | LTE TDD Band 42 Power Class 2/3 | 3400-3600              |
|                                            | LTE TDD Band 43                 | 3600-3700              |
|                                            | LTE TDD Band 48 Power Class 2/3 | 3550-3700              |
|                                            | LTE FDD Band 66                 | 1710-1780              |
|                                            | LTE FDD Band 70                 | 1695-1710              |
|                                            | LTE FDD Band 71                 | 663-698                |
|                                            | n2                              | 1850-1910              |
|                                            | n5                              | 824-849                |
|                                            | n7                              | 2500-2570              |
|                                            | n12                             | 699-716                |
|                                            | n13                             | 777-787                |
|                                            | n14                             | 788-798                |
|                                            | n25                             | 1850-1915              |
|                                            | n26                             | 814-849                |
|                                            | n30                             | 2305-2315              |
|                                            | n38                             | 2570-2620              |
|                                            | n41                             | 2496-2690              |
|                                            | n48                             | 3550-3700              |
|                                            | n66                             | 1710-1780              |
|                                            | n70                             | 1695-1710              |
|                                            | n71                             | 663-698                |
|                                            | n77/78                          | 3450-3550<br>3700-3980 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

|                                            |                       |                                                                                                                                                              |
|--------------------------------------------|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Supported radios (TX Frequency Range, MHz) | 802.11 b/g/n/ac/ax/be | 2.4GHz (2400.0 – 2483.5 MHz)                                                                                                                                 |
|                                            | 802.11a/n/ac/ax/be    | 5.2GHz (5150.0 – 5250.0 MHz)<br>5.3GHz (5250.0 – 5350.0 MHz)<br>5.6GHz (5470.0 – 5725.0 MHz)<br>5.8GHz (5725.0 – 5850.0 MHz)<br>5.9GHz (5850.0 – 5895.0 MHz) |
|                                            | 802.11a/ax/be         | 6.2GHz (5925.0 – 6425.0 MHz)<br>6.5GHz (6425.0 – 6525.0 MHz)<br>6.7GHz (6525.0 – 6875.0 MHz)<br>7.0GHz (6875.0 – 7125.0 MHz)                                 |
|                                            | Bluetooth             | 2.4GHz (2400.0 – 2483.5 MHz)                                                                                                                                 |

This device has WLAN module QCNCM825(FCC ID: J9C-QCNCM825) integrated into the device for this model. The antennas for WLAN module QCNCM825 located at the top of panel which the distance of antenna to human body is over 20cm (refer to antenna location) and according to FCC regulation, it is SAR exclusion.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

## 1.2 Test Facility

| Laboratory                                            | Test Site Address                                                                                    | Test Site Name | Test Engineer     | Project Manager | FCC Designation number/<br>Registration Number | IC CAB identifier/<br>Company Number |
|-------------------------------------------------------|------------------------------------------------------------------------------------------------------|----------------|-------------------|-----------------|------------------------------------------------|--------------------------------------|
| SGS Taiwan Ltd.<br>Central RF Lab.<br>(TAF code 3702) | <b>1F, No. 8, Alley 15, Lane 120, Sec. 1, NeiHu Road, NeiHu District, Taipei City, 11493, Taiwan</b> | <b>SAR 2</b>   | <b>Allen Chen</b> | <b>Afu Chen</b> | TW0029/<br>150169                              | TW3702/<br>23862                     |
|                                                       |                                                                                                      | SAR 6          | -                 | -               |                                                |                                      |
|                                                       |                                                                                                      | SAR 8          | -                 | -               |                                                |                                      |
|                                                       | No. 2, Keji 1st Rd., Guishan Township, Taoyuan County, 33383, Taiwan                                 | SAR 1          | -                 | -               | TW0028/<br>200037                              | TW3702/<br>4620E                     |
|                                                       |                                                                                                      | SAR 4          | -                 | -               |                                                |                                      |
|                                                       | No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan             | SAR 3          | -                 | -               | TW0027/<br>891563                              | TW3702/<br>4620A                     |
|                                                       |                                                                                                      | SAR 7          | -                 | -               |                                                |                                      |

**Note:** Test site name is remarked on a bolded mark as an indication where measurements occurred in specific test site and address.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

[www.sgs.com.tw](http://www.sgs.com.tw)

Member of SGS Group

## 2 INTRODUCTION

The equipment under test (EUT) is a Notebook, it contains supports 3G/4G/5G bands. These modems are enabled with Qualcomm Smart Transmit feature to control and manage transmitting power in real time and to ensure at all times the time-averaged RF exposure is in compliance with the FCC requirement.

This purpose of the Part 2 report is to demonstrate the EUT complies with FCC RF exposure requirement under Tx varying transmission scenarios, thereby validity of Qualcomm Smart Transmit feature for FCC equipment authorization.

The device used a particular algorithm version/generation along with the EFS version:

| Qualcomm Marketing<br>Snapdragon Feature | Smart Transmit GEN#   | Smart Transmit<br>EFS version |
|------------------------------------------|-----------------------|-------------------------------|
| Qualcomm<br>Smart Transmit 4.0 (GEN4)    | GEN2 phase V (GEN2.5) | v21                           |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

[www.sgs.com.tw](http://www.sgs.com.tw)

Member of SGS Group

### 3 QUALCOMM SMART TRANSMIT OPERATION DESCRIPTION

#### 3.2 Feature description

The FCC RF exposure limit is defined based on time-averaged RF exposure. When running in a wireless device, Qualcomm Smart Transmit feature enables more elegant power control mechanisms for RF exposure management.

It ensures at all times the wireless device is in compliance with the FCC limit of RF exposure averaged over a defined time window:

Denoted as TSAR for specific absorption rate (SAR for Tx frequency < 6 GHz)

The Smart Transmit feature not only ensures the wireless device complies with RF exposure requirement, but also improves the user experience and network performance.

For a given wireless device, RF exposure is proportional to the transmitting power.

Once the SAR of the wireless device is characterized at a transmit power level by SAR measurements, RF exposure at a different power level for the characterized configurations can be scaled by the change in the corresponding power level.

Therefore, for a characterized device, RF exposure compliance is achieved through transmit power control and management.

The Smart Transmit feature incorporated in Qualcomm modems reliably controls the transmit power of the wireless device in real time to maintain the time-averaged transmit power, in turn, time-averaged RF exposure, below the threshold predefined for a given technology and band.

This predefined average power limit, denoted as Plimit, is determined, so the wireless device continuously transmitting at Plimit level complies with the FCC RF exposure limit.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

### 3.3 Basic concept of the feature

The Smart Transmit feature is configured to manage the instantaneous transmit power (Tx) to keep the time-averaged power and not exceed Plimit.

If time-averaged transmit power approaches the Plimit, then the modem needs to limit instantaneous transmit power to ensure the time-averaged transmit power does not exceed the Plimit in any TSAR time windows (i.e., the time-averaged RF exposure complies with the FCC RF exposure limit in any time window).

The wireless device can instantaneously transmit at high transmit powers and exceed the Plimit for a short duration before limiting the power to maintain the time-averaged transmit power under the Plimit.

If the wireless device transmits at high power for a long duration, then the radio link needs to be dropped to be compliant with time-averaged Tx power requirement (see Figure 3-1).

To avoid dropping the radio link, Smart Transmit feature starts the power limiting enforcement earlier in time to back off the Tx power to a reserve level (denoted as Preserve), so the wireless device can maintain the radio link at a minimum reserve power level for as long as needed, and at the same time ensure the time-averaged Tx power over any predefined time window is less than Plimit at all times (see Figure 3-2). At all times, Smart Transmit meets the below equation (1):


$$\text{time avg. Tx power} = \frac{1}{T} \int_t^{t+T} \text{inst. Tx power}(t) dt \leq P_{\text{limit}} \quad (1)$$

where, time avg. Tx power is the power averaged between t and t+T time period;

T is predefined time window defined by the regulator for time-averaging RF exposure; inst. Tx power (t) is the instantaneous transmit power at t time instant; Plimit is the predefined time averaged power limit.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

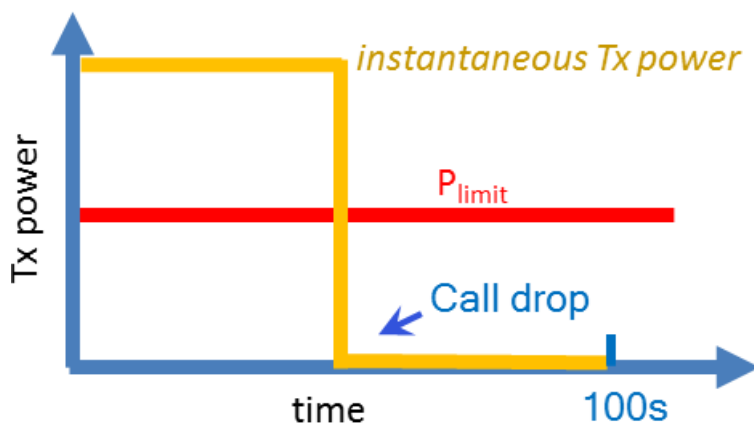

(a)

Figure 3-1 Transmit at high power when needed and permitted

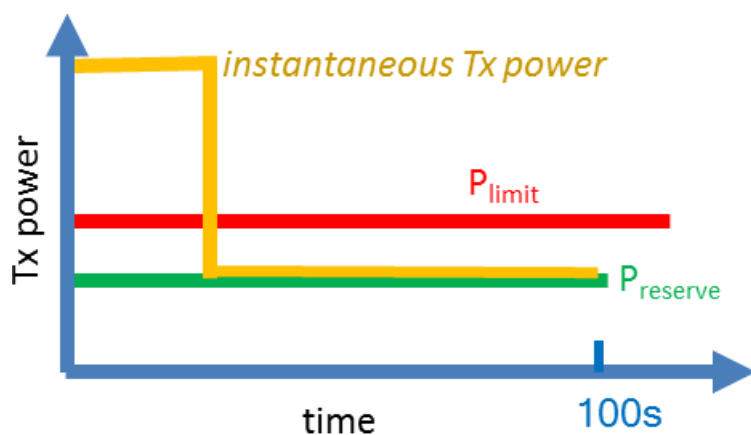

(b)

Figure 3-2 Transmit with reserve power to support continuous transmission at a minimum power level (Preserve)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 4 VALIDATION STRATEGY

The following scenarios cover validation of time-averaging algorithm.

1. During a time-varying Tx power transmission: To prove that the Smart Transmit feature accounts for Tx power variations in time accurately.
2. During a call disconnect and re-establish scenario: To prove that the Smart Transmit feature accounts for history of past Tx power transmissions accurately.
3. During technology/band handover: To prove that the Smart Transmit feature functions correctly during transitions in technology/band.
4. During antenna switch: To prove that the Smart Transmit feature functions correctly during transitions in antenna (AsDiv scenario).
5. During change in device state: To prove that the Smart Transmit feature functions correctly during transitions in device state.
6. During time window switch: To prove that the Smart Transmit feature correctly handles the transition from one time window to another specified by FCC, and maintains the normalized time-averaged RF exposure to be less than FCC limit of 1.0 at all times.
7. SAR exposure switching between two active radios (radio1 and radio2): To prove that the Smart Transmit feature functions correctly and ensures total RF exposure compliance when exposure varies among SAR\_radio1 only, SAR\_radio1 + SAR\_radio2, and SAR\_radio2 only scenarios.

Note:

1. Since this device supports only one standalone Tx antenna, Item 4 is not required.
2. Since this device doesn't support multiple device states. Item 5 is not required.

As described in Part 0 SAR Char report, the RF exposure is proportional to the Tx power for a SAR-characterized wireless device. Thus, time-averaging algorithm validation can be effectively performed through conducted power measurement.

To have high confidence in this validation, but also be practical, the strategy for the validation including both power measurement and RF exposure measurement is outlined as follows:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488

[www.sgs.com.tw](http://www.sgs.com.tw)

Member of SGS Group

## Conducted power measurement:

### ■ Measure conducted Tx power for $f < 6\text{GHz}$

Convert it into RF exposure and divide by respective FCC limits to get normalized exposure

### ■ Perform time-averaging over predefined time windows

■ Demonstrate that the total normalized time-averaged RF exposure is less than 1 for all transmission scenarios (i.e., previous scenarios 1 to 8); For sub-6 transmission only:

$$1g\_or\_10gSAR(t) = \frac{\text{conducted\_Tx\_power}(t)}{\text{conducted\_Tx\_power\_P}_{limit}} * 1g\_or\_10gSAR\_P_{limit} \quad (3a)$$

$$\frac{\frac{1}{T_{SAR}} \int_{t-T_{SAR}}^t 1g\_or\_10gSAR(t) dt}{FCC\ SAR_{limit}} \leq 1 \quad (3b)$$

where, conducted\_Tx\_power(t), conducted\_Tx\_power(t)\_Plimit, and 1g\_SAR\_Plimit correspond to the measured instantaneous conducted Tx power, measured conducted Tx power at Plimit, and measured 1g\_SAR values at Plimit for the worst-case radio configuration within the tested technology/band/Antenna/DSI. **RF Exposure measurement:** ■ Demonstrate the total RF exposure averaged over predefined time windows does not exceed FCC' s SAR limit, through time-averaged SAR measurements for only scenario 1 to add confidence in the Smart Transmit feature validation, while avoiding the complexity in SAR measurement (in particular, for scenario 3 requiring change in SAR probe calibration file to accommodate different bands and/or tissue simulating liquid). □ For  $f < 6$  transmission only (Scenario 1): measure instantaneous SAR versus time and demonstrate total time-averaged RF exposure is less than 1.0 at all times.

$$1g\_or\_10gSAR(t) = \frac{\text{pointSAR}(t)}{\text{pointSAR}_{P_{limit}}} * 1g\_or\_10gSAR\_P_{limit} \quad (5a)$$

$$\frac{\frac{1}{T_{SAR}} \int_{t-T_{SAR}}^t 1g\_or\_10gSAR(t) dt}{FCC\ SAR_{limit}} \leq 1 \quad (5b)$$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 5 SUB-6 VALIDATION TEST PLAN

This chapter provides the test plan for validating Qualcomm Smart Transmit feature for sub-6 transmission. The 100 seconds time window for operating  $f < 3\text{GHz}$  is used as an example to detail the test procedures. The same test plan and test procedures described in this chapter apply to 60 seconds time window for  $3\text{GHz} \leq f < 6\text{GHz}$ .

### 5.2 Test sequence determination for validation

Following the FCC recommendation, two test sequences having time-variation in Tx power are predefined for sub-6 ( $f < 6\text{GHz}$ ) validation:

Test sequence 1: Requesting EUT to transmit at maximum power, measured  $P_{\text{max}}$ , for 80s, then requesting for half of the maximum power, i.e., measured  $P_{\text{max}}/2$ , for the rest of the time.

Test sequence 2: requesting EUT to transmit at time-varying Tx power levels. This sequence is generated relative to measured  $P_{\text{max}}$ , measured  $P_{\text{limit}}$  and calculated Preserve (= measured  $P_{\text{limit}}$  - Reserve\_power\_margin) of EUT based on measured  $P_{\text{limit}}$ .

For an easier computation of the 100s running average, 0 dBm for 100s is added at the beginning of the test sequences, so the 100s running average can be directly performed starting with the first 100-seconds data using excel spreadsheet.

The details for generating these two test sequences is described and listed in Appendix A.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

[www.sgs.com.tw](http://www.sgs.com.tw)

Member of SGS Group

### 5.3 Test configuration selection criteria for validating Smart Transmit feature

For validating Smart Transmit feature, this section provides a general guidance to select test cases. In practice, an adjustment can be made in test case selection. The justification/clarification may be provided.

#### 5.2.1 Test configuration selection for time-varying Tx power transmission

The Smart Transmit time averaging operation is independent of bands, modes, and channels for a given technology. Hence, validation of Smart Transmit in one band/mode/channel per technology is sufficient. Two bands per technology are proposed and selected for this testing to provide high confidence in this validation.

Note this test is designed for single radio transmission scenario. If UE supports sub6 NR in both non-standalone (NSA) and standalone (SA) modes, then validation in time-varying Tx power transmission scenario described in this section needs to be performed in SA mode. Otherwise, it needs to be performed in NSA mode with LTE anchor set to low power. The choice between SA and NSA mode needs to also take into account the selection criteria described below. In general, one mode out of the two modes (NSA or SA) is sufficient for this test.

The criteria for the selection is based on the Plimit values determined in Part 0 SAR Char report, select two bands\* in each supported technology that correspond to least\*\* and highest\*\*\* Plimit values for validating Smart Transmit, where  $P_{limit} < P_{max}$ .

Note:

1.  $P_{max}$  refers to maximum Tx power configured for this device in this technology/band (not rated  $P_{max}$ ). This  $P_{max}$  definition applies throughout this Part 2 report.
2. If  $P_{limit} > P_{max}$ , the validation test with time-varying test sequences is not needed as no power enforcement will be required in this condition.

\* If one  $P_{limit}$  level applies to all the bands within a technology or if only one band within a technology has  $P_{limit} < P_{max}$ , then only one band needs to be tested. In this case, select one band/radio configuration for this test. Use the highest measured 1g SAR shown in Part 1 SAR Test Report for the selected tech/band/antenna/DSI out of all radio configurations and device positions in Equation (3a), (4a), (5a) and (6a) to calculate time-varying SAR.

\*\* In case of multiple bands having the same least  $P_{limit}$  within the technology, then select any one band out of these bands.

\*\*\* The band having a higher  $P_{limit}$  (meaning lower SAR at  $P_{max}$ ) needs to be properly selected so that the power limiting enforced by Smart Transmit can be validated using the pre-defined test sequences. If the highest  $P_{limit}$  in a technology is too high (i.e.,  $> P_{max}$ ) where the power limiting enforcement is not needed when testing with the pre-defined test sequences, then the next highest level should be checked. This process should be continued within the technology until the second band for validation testing is determined.

Note if possible for this selection, delta ( $P_{max} - P_{limit}$ ) should be 1dB or higher.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

### 5.2.2 Test configuration selection for change in call

The criteria to select a test configuration for call-drop measurement is:

Select technology/band with least  $P_{limit}$  among all supported technologies/bands and  $P_{limit} < P_{max}$ , then select one radio configuration within the selected band for this test. Use the highest measured  $1g\_SAR$  listed in Part 1 SAR Test Report for the selected tech/band/antenna/DSI out of all radio configurations and device positions in Equation (3a), (4a), (5a) and (6a) to calculate time-varying SAR.

In case of multiple bands having same least  $P_{limit}$ , then select one band/radio configuration for this test.

Test for change in call is not required if all  $P_{limit} > P_{max}$

This test is performed with the EUT being requested to transmit at maximum power, the above band selection will result in Tx power enforcement (i.e., EUT forced to transmit at Preserve) for longest duration, at that time, call change (call drop/reestablish) is performed. One test is sufficient as the feature operation is independent of technology and band.

### 5.2.3 Test configuration selection for change in technology/band

The selection criteria for this measurement is to have EUT switch from a technology/band with lowest (or highest)  $P_{limit}$  within the technology group to a technology/band with highest (or lowest)  $P_{limit}$  within the technology group, or vice versa.

The selection order is:

First select both technology/band configurations having  $P_{limit} < P_{max}$ . In case of multiple bands having the same  $P_{limit}$ , select one band/radio configuration for this test. If this can not be found, then,

Select at least one technology/band configuration having  $P_{limit} < P_{max}$ . If all  $P_{limit} > P_{max}$ , then, test for change in technology/band is not required.

Use the highest measured  $1g\_SAR$  at  $P_{limit}$  ( $P_{limit} < P_{max}$ ) shown in Part 1 SAR Test Report for the selected tech/band/antenna/DSI out of all radio configurations and device positions in Equation (3a), (4a), (5a) and (6a) to calculate time-varying SAR. However, in the case of  $P_{limit} > P_{max}$ , the SAR measured in Part 1 report for the corresponding radio configuration selected and tested in Part 2 should be applied in Equation (3a), (4a), (5a) and (6a).

This test is performed with the EUT being requested to transmit at maximum power, the technology/band switch is performed during Tx power enforcement (i.e., EUT forced to transmit at Preserve). One test is sufficient as the feature operation is independent of technology and band.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

#### 5.2.4 Test configuration selection for change in antenna

The criteria to select a test configuration for antenna switch (between primary and diversity antennas) measurement is:

Whenever possible and supported by the EUT, first select antenna switch configuration within the same technology/band/DSI (i.e., same technology, band and DSI combination), and having different Plimit, and having both  $Plimit < P_{max}$  where possible. Otherwise, select at least one antenna having  $Plimit < P_{max}$ .

If the EUT does not support antenna switch within the same technology/band, but has multiple transmitting antennas to support different frequency bands, then antenna switch test should be performed in combination with technology and/or band switch. Note in this case, if possible, antenna switch test may be included as part of either change in technology and band (Section 5.2.3) or change in time window (Section 5.2.6).

Test for change in antenna is not required if all  $Plimit > P_{max}$

Use the highest measured  $1g\_SAR$  at  $Plimit$  ( $Plimit < P_{max}$ ) shown in Part 1 SAR Test report for the selected tech/band/antenna/DSI out of all radio configurations and device positions in Equation (3a), (4a), (5a) and (6a) to calculate time-varying SAR. However, in the case of  $Plimit > P_{max}$ , the SAR measured in Part 1 report for the corresponding radio configuration selected and tested in Part 2 should be applied in Equation (3a), (4a), (5a) and (6a).

This test is performed with the EUT being requested to transmit in selected technology/band at maximum power out of antenna, the antenna switch is performed during Tx power enforcement (i.e., EUT forced to transmit at Preserve). One test is sufficient as the feature operation is independent of technology and band.

#### 5.2.5 Test configuration selection for change in device state

The criteria to select a test configuration for device state switch measurement is:

Select a technology/band having the  $Plimit < P_{max}$  within any technology and DSI group, and for the same technology/band having a different  $Plimit$  ( $Plimit < P_{max}$ ) and in any other DSI group. Both the selected DSIs should have  $Plimit < P_{max}$  where possible. Otherwise, select at least one DSI having  $Plimit < P_{max}$ . Note that the selected DSI transition need to be supported by the device.

Test for change in device state is not required if all  $Plimit > P_{max}$ .

Use the highest measured  $1g\_SAR$  at  $Plimit$  ( $Plimit < P_{max}$ ) shown in Part 1 report for the selected tech/band/antenna/DSI out of all radio configurations and device positions in Equation (3a), (4a), (5a) and (6a) to calculate time-varying SAR. However, in the case of  $Plimit > P_{max}$ , the SAR measured in Part 1 report for the corresponding radio configuration selected and tested in Part 2 should be applied in Equation (3a), (4a), (5a) and (6a).

This test is performed with the EUT being requested to transmit at maximum power in selected technology/band/antenna/device-state. The change in device state is performed during Tx power enforcement (i.e., EUT forced to transmit at Preserve). One test is sufficient as the feature operation is independent of technology, band, antenna and device state.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

### 5.2.6 Test configuration selection for change in time window

FCC specifies different time window for time averaging based on operation frequency. The criteria to select a test configuration for validating Smart Transmit feature and demonstrating the compliance during the change in time window is

Select any technology/band that has operation frequency classified in one time window defined by FCC (such as 100s time window), and its corresponding  $P_{limit}$  is less than  $P_{max}$  if possible.

Select the 2<sup>nd</sup> technology/band that has operation frequency classified in a different time window defined by FCC (such as 60s time window), and its corresponding  $P_{limit}$  is less than  $P_{max}$  if possible.

It is preferred both  $P_{limit}$  values of two selected technology/bands are less than corresponding  $P_{max}$ , but if not possible or due to limitation of test setup, then at least one of technologies/bands has its  $P_{limit}$  less than  $P_{max}$ .

Else, if all  $P_{limit} > P_{max}$ , then,

first select both technologies/bands (one is in 100s time window, another is in 60s time window) having  $(P_{limit} - P_{max}) < 2.2\text{dB}$ ; if it is not available, then

select at least one technology/band in 60s time window having  $(P_{limit} - P_{max}) < 2.2\text{dB}$ ; if it not available, then

Test for change in time window is not required.

Use the highest measured 1g\_SAR at  $P_{limit}$  ( $P_{limit} < P_{max}$ ) shown in Part 1 report for the selected tech/band/antenna/DSI out of all radio configurations and device positions in Equation (3a), (4a), (5a) and (6a) to calculate time-varying SAR. However, in the case of  $P_{limit} > P_{max}$ , the SAR measured in Part 1 report for the corresponding radio configuration selected and tested in Part 2 should be applied in Equation (3a), (4a), (5a) and (6a).

This test is performed with the EUT being requested to transmit at maximum power in selected technology/band. Test for one pair of time windows selected is sufficient as the feature operation is the same.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

### 5.2.7 Test configuration selection for SAR exposure switching

If supported, the test configuration for SAR exposure switching should cover

1. SAR exposure switch when two active radios are in the same time window. The following radio configurations need to be covered if the device supports:

- a. LTE + sub6 NR: LTE is protected as it is anchor in NR call. However, Sub6 NR can sustain the link if LTE is at low power
- b. Interband ULCA: PCC is protected as it is primary in interband ULCA call. SCC will drop the link if SCC is requested to transmit continuously at or above  $P_{limit}$  regardless of PCC transmitting power level.

Note that Smart Transmit treats intraband ULCA as single Tx, so, this test is not needed for intraband ULCA.

2. SAR exposure switch when two active radios are in different time windows. Note that one test with two active radios in any two different time windows is sufficient as Smart Transmit operation is the same for RF exposure switch in any combination of two different time windows. For device supporting LTE + mmW NR, this test (i.e., Scenario 2) is covered in SAR vs PD exposure switch validation.

The Smart Transmit time averaging operation ensures total time-averaged RF exposure compliance independent of the source of SAR exposure (for example, LTE vs. Sub6 NR). Hence, validation of Smart Transmit in any one band combination for each simultaneous SAR transmission scenario (i.e., one band combination for LTE + Sub6 NR transmission, and one band combination for interband ULCA) is sufficient, where the SAR exposure varies among SARradio1 only, SARradio1 + SARradio2, and SARradio2 only scenarios.

The criteria to select a test configuration for validating Smart Transmit feature during SAR exposure switching scenarios is

Following the above two test requirements, select the required configuration(s) for the EUT supported simultaneous transmission scenario(s).

Among all supported simultaneous transmission configurations, the selection order is

1. Select one configuration where both  $P_{limit}$  of radio1 and radio2 is less than their corresponding  $P_{max}$ , preferably, with different  $P_{limits}$ . If this configuration is not available, then,
2. Select one configuration that has  $P_{limit}$  less than its  $P_{max}$  for at least one radio. If this can not be found, then,
3. The test for SAR exposure switch when two active radios are in the same time window is not required. For SAR exposure switch when two active radios are in the different time windows, the selection order is:

Select both configurations that has  $P_{limit}$  of radio1 and radio2 greater than  $P_{max}$  but having  $(P_{limit} - P_{max}) < 2.2\text{dB}$ .

If this can't be found, then,

Select at least one configuration in 60s window that has  $(P_{limit} - P_{max}) < 2.2\text{dB}$ .

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

If all  $(P_{limit} - P_{max}) > 2.2\text{dB}$ , then,

Test for SAR exposure switch when two active radios are in the different time windows is not required.

Use the highest measured 1g\_ SAR at  $P_{limit}$  ( $P_{limit} - P_{max}$ ) shown in Part 1 report for the selected tech/band/antenna/DSI out of all radio configurations and device positions in Equation (3a), (4a), (5a) and (6a) to calculate time-varying SAR. However, in the case of  $P_{limit} > P_{max}$ , the SAR measured in Part 1 report for the corresponding radio configuration selected and tested in Part 2 should be applied in Equation (3a), (4a), (5a) and (6a).

Test for one band combination per each simultaneous transmission technology is sufficient as the feature operation is the same. Additional details for testing LTE+Sub6 NR non-standalone are provided in Appendix B.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 5.4 Test procedures for conducted power measurements

This section provides general conducted power measurement procedures to perform compliance test under dynamic transmission scenarios described in Section 2. In practice, an adjustment can be made in these procedures. The justification/clarification may be provided.

Perform conducted power measurement to validate Smart Transmit time averaging feature in the transmission scenarios described in Section 4.2. Refer to Appendix B for detailed test procedures for LTE+Sub6 NR transmission.

### 5.3.1 Time-varying Tx power transmission scenario

This test is performed with the two pre-defined test sequences described in Section 5.1 for all the technologies and bands selected in Section 5.2.1. The purpose of the test is to demonstrate the effectiveness of power limiting enforcement and that the time averaged transmit power when converted into 1gSAR values does not exceed the regulatory limit at all times (see Eq. (3a) and (3b)).

#### Test procedure

1. Measure  $P_{max}$ , measure  $P_{limit}$  and calculate  $P_{reserve}$  (= measured  $P_{limit}$  in dBm – Reserve\_power\_margin in dB) and follow Section 5.1 to generate the test sequences for all the technologies and bands selected in Section 5.2.1. Both test sequence 1 and test sequence 2 are created based on measured Pmax and measured Plimit of the EUT. Test condition to measure Pmax and Plimit is:

Measure  $P_{max}$  with Smart Transmit disabled and callbox set to request maximum power.

Measure  $P_{limit}$  with Smart Transmit enabled and Reserve\_power\_margin set to 0 dB, callbox set to request maximum power.

2. Set Reserve\_power\_margin to actual (intended) value, with callbox requesting the EUT to transmit at pre-defined test sequence 1 (generated in Step 1), measure and record Tx power versus time. Once the measurement is done, extract instantaneous Tx power versus time, and convert the conducted Tx power into 1g\_SAR value (see Eq. (3a)) using Step 1.b result, and then perform 100s running average to determine time-averaged 1g\_SAR versus time as illustrated in below Figure 5-1.

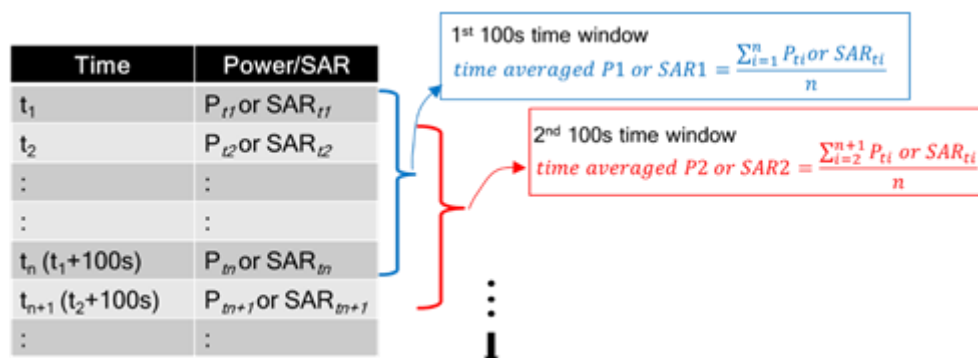


Figure 5-1 100s running average illustration

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。  
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

# NOTE:

In Eq.(3a), instantaneous Tx power is converted into instantaneous 1g\_ SAR value by applying the worst-case 1g\_or\_10gSAR value for each technology/band at  $P_{limit}$  as reported in *Part 1 SAR test report*.

3. Make one plot containing:

- a. Instantaneous Tx power versus time measured in Step 2, and
- b. Requested transmit power used in Step 2 (test sequence 1).

4. Make another plot containing:

- a. Instantaneous 1g\_ SAR versus time determined in Step 2
- b. Computed time-averaged 1g\_ SAR versus time determined in Step 2
- c. Corresponding regulatory 1g\_ SAR limit.

5. Repeat Steps 2~4 for pre-defined test sequence 2 and replace the requested Tx power (test sequence 1) in Step 3b with test sequence 2.

6. Repeat Steps 2~5 for all the selected technologies and bands.

The validation criteria is, at all times, the time-averaged 1g\_ SAR versus time determined in Step 2 (and plotted in Step 4) shall not exceed the regulatory 1g\_ SAR limit.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

### 5.3.2 Change in call scenario

This test is to demonstrate that Smart Transmit feature accurately accounts for the past Tx powers during time-averaging when a new call is established.

The call drop and re-establishment needs to be performed during power limit enforcement, i.e., when the EUT transmits at Preserve level (i.e., during Tx power enforcement) to demonstrate the continuity of RF exposure management and limiting in call change scenario. In other words, the RF exposure averaged over any 100s-time window (including the time windows containing the call change) doesn't exceed the corresponding regulatory 1g\_SAR limit.

#### Test procedure

1. Measure Plimit for the technology/band selected in Section 5.2.2. Measure Plimit with Smart Transmit enabled and Reserve\_power\_margin set to 0 dB, callbox set to request maximum power.
2. Set Reserve\_power\_margin to actual (intended) value and enable Smart Transmit
3. Establish radio link with callbox in technology/band selected in Section 5.2.2.
4. Request EUT to transmit at 0 dBm for at least 100 seconds, followed by requesting EUT to transmit at maximum Tx power for about ~60 seconds, and then drop the call for ~10 seconds. Afterwards, reestablish another call in the same radio configuration (i.e., same technology/band/channel) and continue callbox requesting EUT to transmit at maximum Tx power for the remaining time for a total test time of 500 seconds. Measure and record Tx power versus time.
5. Once the measurement is done, extract instantaneous Tx power versus time, and convert the conducted Tx power into 1g\_SAR value (see Eq. (3a)) using Step 1 result, and then perform 100s running average to determine time-averaged 1g\_SAR versus time as illustrated in Figure 5-1.

NOTE: In Eq.(3a), instantaneous Tx power is converted into instantaneous 1g\_SAR value by applying the worst-case 1g\_SAR value of the technology/band at Plimit as reported in Part 1 SAR Test Report.

6. Make one plot containing: (a) instantaneous Tx power versus time measured in Step 3.
7. Make another plot containing: (a) instantaneous 1g\_SAR versus time determined in Step 4, (b) computed time-averaged 1g\_SAR versus time determined in Step 4, and (c) corresponding regulatory 1g\_SAR limit.

The validation criteria is, at all times, the time-averaged 1g\_SAR versus time determined in Step 4 (and plotted in Step 6) shall not exceed the regulatory 1g\_SAR limit.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

### 5.3.3 Change in technology and band

This test is to demonstrate the correct power control by Smart Transmit during technology switches and/or band handovers.

Similar to the change in call test in Section 5.3.2, to validate the continuity of RF exposure limiting during the transition, the technology and band handover needs to be performed when EUT's Tx power is at Preserve level (i.e., during Tx power enforcement) to make sure that the EUT's Tx power from previous Preserve level to the new Preserve level (corresponding to new technology/band). Since the Plimit could vary with technology and band, Eq. (1a) can be written as follows to convert the instantaneous Tx power in 1gSAR exposure for the two given radios, respectively:

$$1g\_or\_10gSAR_1(t) = \frac{conducted\_Tx\_power\_1(t)}{conducted\_Tx\_power\_Plimit\_1} * 1g\_or\_10gSAR\_Plimit\_1 \quad (7a)$$

$$1g\_or\_10gSAR_2(t) = \frac{conducted\_Tx\_power\_2(t)}{conducted\_Tx\_power\_Plimit\_2} * 1g\_or\_10gSAR\_Plimit\_2 \quad (7b)$$

$$\frac{\frac{1}{T_{SAR}} \left[ \int_{t-T_{SAR}}^{t_1} 1g\_or\_10gSAR_1(t) dt + \int_{t-T_{SAR}}^t 1g\_or\_10gSAR_2(t) dt \right]}{1g\_or\_10gSAR_{limit}} \leq 1 \quad (7c)$$

where, conducted\_Tx\_power\_1(t), conducted\_Tx\_power\_Plimit\_1, and 1g\_SAR\_Plimit\_1 correspond to the measured instantaneous conducted Tx power, measured conducted Tx power at Plimit, and measured 1gSAR SAR value at Plimit of technology1/band1; conducted\_Tx\_power\_2(t), conducted\_Tx\_power\_Plimit\_2(t), and 1g\_SAR\_Plimit\_2 correspond to the measured instantaneous conducted Tx power, measured conducted Tx power at Plimit, and measured 1gSAR value at Plimit of technology2/band2. Transition from technology1/band1 to the technology2/band2 happens at time-instant 't1'.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

## Test procedure

1. Measure  $P_{limit}$  for both the technologies and bands selected in Section 5.2.3. Measure  $P_{limit}$  with Smart Transmit enabled and *Reserve\_power\_margin* set to 0 dB, callbox set to request maximum power.
  2. Set *Reserve\_power\_margin* to actual (intended) value and reset power on EUT to enable Smart Transmit
  3. Establish radio link with callbox in first technology/band selected in Section 5.2.3.
  4. Request EUT to transmit at 0 dBm for at least 100 seconds, followed by requesting EUT to transmit at maximum Tx power for about ~60 seconds, and then switch to second technology/band selected in Section 5.2.3. Continue with callbox requesting EUT to transmit at maximum Tx power for the remaining time for a total test time of 500 seconds. Measure and record Tx power versus time for the entire duration of the test.
  5. Once the measurement is done, extract instantaneous Tx power versus time, and convert the conducted Tx power into 1g\_SAR value (see Eq. (7a) and (7b)) using corresponding technology/band Step 1 result, and then perform 100s running average to determine time-averaged 1gSAR versus time as illustrated in Figure 5-1. Note that in Eq.(7a) & (7b), instantaneous Tx power is converted into instantaneous 1g\_SAR value by applying the worst-case 1gSAR value for the selected technologies/bands at  $P_{limit}$  as reported in Part 1 SAR Test Report.
  6. Make one plot containing: (a) instantaneous Tx power versus time measured in Step 4.
  7. Make another plot containing: (a) instantaneous 1gSAR versus time determined in Step 5, (b) computed time-averaged 1g\_SAR versus time determined in Step 5, and (c) corresponding regulatory 1g\_SAR limit.
- The validation criteria is, at all times, the time-averaged 1g\_SAR versus time shall not exceed the regulatory 1g\_SAR limit.

### 5.3.4 Change in antenna

This test is to demonstrate the correct power control by Smart Transmit during antenna switches from primary to diversity. The test procedure is identical to Section 5.3.3, with switching antenna instead of technology/band. The validation criteria is, at all times, the time-averaged 1g\_SAR versus time shall not exceed the regulatory 1g\_SAR limit.

### 5.3.5 Change in DSI

This test is to demonstrate the correct power control by Smart Transmit during device state transitions from one device state to another. The test procedure is identical to Section 5.3.3, with changing device state instead of technology/band. The validation criteria is, at all times, the time-averaged 1g\_SAR versus time shall not exceed the regulatory 1g\_SAR limit.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

### 5.3.6 Change in time window

This test is to demonstrate the correct power control by Smart Transmit during the change in averaging time window when a specific band handover occurs. FCC specifies time-averaging windows of 100s for Tx frequency < 3GHz, and 60s for Tx frequency between 3GHz and 6GHz.

Similar to the change in technology and band test in Section 5.3.3, to validate the continuity of RF exposure limiting during the transition, the band handover test needs to be performed when EUT handovers from operation band less than 3GHz to greater than 3GHz or vice versa. The equations (3a) and (3b) in Section 4.1 can be written as follows for transmission scenario having change in time window,

$$1g\_or\_10gSAR_1(t) = \frac{conducted\_Tx\_power\_1(t)}{conducted\_Tx\_power\_P_{limit\_1}} * 1g\_or\_10gSAR\_P_{limit\_1} \quad (8a)$$

$$1g\_or\_10gSAR_2(t) = \frac{conducted\_Tx\_power\_2(t)}{conducted\_Tx\_power\_P_{limit\_2}} * 1g\_or\_10gSAR\_P_{limit\_2} \quad (8b)$$

$$\frac{\frac{1}{T1_{SAR}} \left[ \int_{t-T1_{SAR}}^{t1} 1g\_or\_10gSAR_1(t) dt \right] + \frac{1}{T2_{SAR}} \left[ \int_{t-T2_{SAR}}^t 1g\_or\_10gSAR_2(t) dt \right]}{1g\_or\_10gSAR_{limit}} \leq 1 \quad (8c)$$

where, conducted\_Tx\_power\_1(t), conducted\_Tx\_power\_Plimit\_1, and 1g\_SAR

\_Plimit\_1 correspond to the instantaneous Tx power, conducted Tx power at Plimit, and compliance 1g\_SAR values of band1 at Plimit\_1; conducted\_Tx\_power\_2(t), conducted\_Tx\_power\_Plimit\_2, and 1g\_SAR\_Plimit\_2 correspond to the instantaneous Tx power, conducted Tx power at Plimit, and compliance 1g\_SAR values of band2 at Plimit\_2. One of the two bands is less than 3GHz, another is greater than 3GHz. Transition from first band with time-averaging window 'T1 SAR' to the second band with time-averaging window 'T2 SAR' happens at time-instant 't1'.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## Test procedure

1. Measure  $P_{limit}$  for both the technologies and bands selected in Section 5.2.6. Measure  $P_{limit}$  with Smart Transmit enabled and *Reserve\_power\_margin* set to 0 dB, callbox set to request maximum power.
2. Set *Reserve\_power\_margin* to actual (intended) value and enable Smart Transmit.

## Transition from 100s time window to 60s time window, and vice versa

3. Establish radio link with callbox in the technology/band having 100s time window selected in Section 5.2.6.
4. Request EUT to transmit at 0 dBm for at least 100 seconds, followed by requesting EUT to transmit at maximum Tx power for about ~140 seconds, and then switch to second technology/band (having 60s time window) selected in Section 5.2.6. Continue with callbox requesting EUT to transmit at maximum Tx power for about ~60s in this second technology/band, and then switch back to the first technology/ band. Continue with callbox requesting EUT to transmit at maximum Tx power for at least another 100s. Measure and record Tx power versus time for the entire duration of the test.
5. Once the measurement is done, extract instantaneous Tx power versus time, and convert the conducted Tx power into  $1g\_SAR$  value (see Eq. (8a) and (8b)) using corresponding technology/band Step 1 result, and then perform 100s running average to determine time-averaged  $1g\_SAR$  versus time as illustrated in Figure 5-1. Note that in Eq.(8a) & (8b), instantaneous Tx power is converted into instantaneous  $1g\_SAR$  value by applying the worst-case  $1g\_SAR$  value for the selected technologies/bands at  $P_{limit}$ .
6. Make one plot containing: (a) instantaneous Tx power versus time measured in Step 4.
7. Make another plot containing: (a) instantaneous  $1g\_SAR$  versus time determined in Step 5, (b) computed time-averaged  $1g\_SAR$  versus time determined in Step 5, and (c) corresponding regulatory  $1g\_SAR$  limit.

## Transition from 60s time window to 100s time window, and vice versa

8. Establish radio link with callbox in the technology/band having 60s time window selected in Section 5.2.6.
9. Request EUT to transmit at 0 dBm for at least 60 seconds, followed by requesting EUT to transmit at maximum Tx power for about ~80 seconds, and then switch to second technology/band (having 100s time window) selected in Section 5.2.6. Continue with callbox requesting EUT to transmit at maximum Tx power for about ~100s in this second technology/band, and then switch back to the first technology/band. Continue with callbox requesting EUT to transmit at maximum Tx power for the remaining time for a total test time of 500 seconds. Measure and record Tx power versus time for the entire duration of the test.
10. Repeat above Step 5~7 to generate the plots

The validation criteria is, at all times, the time-averaged  $1g\_SAR$  versus time shall not exceed the regulatory  $1g\_SAR$  limit.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

### 5.3.7 SAR exposure switching

This test is to demonstrate that Smart Transmit feature is accurately accounts for switching in exposures among SAR from radio1 only, SAR from both radio1 and radio2, and SAR from radio2 only scenarios, and ensures total time-averaged RF exposure complies with the FCC limit. The detailed test procedure for SAR exposure switching in the case of LTE+Sub6 NR non-standalone mode transmission scenario is provided in Appendix B.

#### Test procedure

1. Measure conducted Tx power corresponding to  $P_{limit}$  for radio1 and radio2 in selected band. Test condition to measure conducted  $P_{limit}$  is:

Establish device in call with the callbox for radio1 technology/band. Measure conducted Tx power corresponding to radio1  $P_{limit}$  with Smart Transmit enabled and *Reserve\_power\_margin* set to 0 dB, callbox set to request maximum power.

Repeat above step to measure conducted Tx power corresponding to radio2  $P_{limit}$ . If radio2 is dependent on radio1 (for example, non-standalone mode of Sub6 NR requiring radio1 LTE as anchor), then establish radio1 + radio2 call with callbox, and request all down bits for radio1 LTE. In this scenario, with callbox requesting maximum power from radio2 Sub6 NR, measured conducted Tx power corresponds to radio2  $P_{limit}$  (as radio1 LTE is at all-down bits)

2. Set *Reserve\_power\_margin* to actual (intended) value, with EUT setup for radio1 + radio2 call. In this description, it is assumed that radio2 has lower priority than radio1. Establish device in radio1+radio2 call, and request all-down bits or low power on radio1, with callbox requesting UE to transmit at maximum power in radio2 for at least one time window. After one time window, set callbox to request UE to transmit at maximum power on radio1, i.e., all-up bits. Continue radio1+radio2 call with both radios at maximum power for at least one time window, and drop (or request all-down bits) radio2. Continue radio1 at maximum power for at least one time window. Record the conducted Tx power for both radio1 and radio2 for the entire duration of this test.

3. Once the measurement is done, extract instantaneous Tx power versus time for both radio1 and radio2 links. Similar to technology/band switch test in Section 5.3.3, convert the conducted Tx power for both these radios into  $1g\_SAR$  value (see Eq. (7a) and (7b)) using corresponding technology/band  $P_{limit}$  measured in Step 1, and then perform 100s running average to determine time-averaged  $1g\_SAR$  versus time as illustrated in Figure 5-1. Note that here it is assumed both radios have Tx frequencies < 3GHz, otherwise, 60s running average should be performed for radios having Tx frequency between 3GHz and 6GHz.

4. Make one plot containing: (a) instantaneous Tx power versus time measured in Step 2.

5. Make another plot containing: (a) instantaneous  $1gSAR$  versus time determined in Step 3, (b) computed time-averaged  $1gSAR$  versus time determined in Step 3, and (c) corresponding regulatory  $1g\_SAR$  limit.

The validation criteria is, at all times, the time-averaged  $1g\_SAR$  versus time shall not exceed the regulatory  $1g\_SAR$  limit.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 5.5 Test procedure for SAR measurements

This section provides general conducted power measurement procedures to perform compliance test under dynamic transmission scenarios described in Section 2. In practice, an adjustment can be made in these procedures. The justification/clarification may be provided.

To validate time averaging algorithm through SAR measurement, the “path loss” between callbox antenna and EUT needs to be calibrated to ensure that the EUT Tx power reacts to the requested power from callbox in a radiated call. It should be noted that when signaling in closed loop mode, protocol-level power control is in play, resulting in EUT not solely following callbox TPC (transmit power control) commands. In other words, EUT response has many dependencies (RSSI, quality of signal, path loss variation, fading, etc.,) other than just TPC commands. These dependencies have less impact in conducted setup (as it is a controlled environment and the path loss can be very well calibrated) but have significant impact on radiated testing in an uncontrolled environment, such as SAR test setup. Therefore, the deviation in EUT Tx power from callbox requested power is expected.

The following steps are for time averaging algorithm validation through SAR measurement:

1. “Path Loss” calibration: Place the EUT against the flat section of the SAM Twin phantom in the worst-case position determined based on Section 5.2.1. For each band selected, prior to SAR measurement, perform “path loss” calibration between callbox antenna and EUT. Since the SAR test environment is not controlled, extreme care needs to be taken to avoid the influence from reflections.

2. Time averaging algorithm validation:

- i For a given radio configuration (technology/band) selected in Section 5.2.1, enable Smart Transmit and set Reserve\_power\_margin to 0 dB, with callbox to request maximum power, perform area scan, conduct pointSAR measurement at peak location of the area scan. This pointSAR value, pointSAR\_Plimit corresponds to pointSAR at the measured Plimit obtained in Step 1 of Section 5.3.1.

- ii Set Reserve\_power\_margin to actual (intended) value, with callbox requesting the EUT to transmit at power levels described by test sequence 1 in Step 1 of Section 5.3.1, conduct pointSAR measurement versus time at peak location of the area scan determined in this section Step 2.i. Once the measurement is done, extract instantaneous pointSAR vs time data, pointSAR(t), and convert it into instantaneous 1gSAR vs. time by using equation (5a):

$$1g\_or\_10gSAR(t) = \frac{pointSAR(t)}{pointSAR\_P_{limit}} * 1g\_or\_10gSAR\_P_{limit} \quad (5a)$$

where, pointSAR\_Plimit corresponds to the value determined in Step 2.i, and pointSAR(t) corresponds to instantaneous pointSAR determined in Step 2.ii.

- iii Perform 100s running average to determine time-averaged 1gSAR versus time.

- iv Make one plot containing (a) instantaneous pointSAR versus time measured in this section Step 2.ii, and (b) requested Tx power (test sequence 1 using secondary Y-axis scale) versus time.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

- v Make another plot containing (a) 1g\_SAR versus time determined in this section Step 2.ii, (b) time-averaged 1g\_SAR versus time determined in this section Step 2.iii, (c) regulatory 1g\_SAR limit.
- vi Repeat 2.ii ~ 2.v for test sequence 2 generated in Step 1 of Section 5.3.1
- vii Repeat 2.i ~ 2.vi for all the technologies and bands selected in Section 5.2.1.

The time-averaging validation criteria for SAR measurement is that, at all times, the time-averaged 1g\_SAR versus time shall not exceed the regulatory 1g\_SAR limit.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 6 TEST CONFIGURATIONS

### 6.2 WWAN (sub-6) transmission

The Plimit values, corresponding to SAR\_design\_target, for technologies and bands supported by EUT are derived in Part 0 report and summarized in Table 6-1. Note all Plimit power levels entered in Table 6-1 correspond to average power levels after accounting for duty cycle in the case of TDD modulation schemes (for e.g., LTE TDD).

**Table 6-1  $P_{limit}$  for supported technologies and bands ( $P_{limit}$  in EFS file)**

| Generation | Antenna | Band      | $P_{limit}^{**}$ (dBm) | $P_{max}^*$ (dBm) |
|------------|---------|-----------|------------------------|-------------------|
| WCDMA      | 5       | WCDMA II  | 16.5                   | 23.5              |
| WCDMA      | 5       | WCDMA IV  | 17                     | 23.5              |
| WCDMA      | 5       | WCDMA V   | 20                     | 23.5              |
| LTE        | 5       | 2         | 16.5                   | 23.5              |
| LTE        | 5       | 4         | 17                     | 23.5              |
| LTE        | 5       | 5         | 16.5                   | 23.5              |
| LTE        | 5       | 7         | 17                     | 23.5              |
| LTE        | 5       | 12        | 18.5                   | 23.5              |
| LTE        | 5       | 13        | 20                     | 23.5              |
| LTE        | 5       | 14        | 20                     | 23.5              |
| LTE        | 5       | 17        | 18.5                   | 23.5              |
| LTE        | 5       | 25        | 16.5                   | 23.5              |
| LTE        | 5       | 26        | 20                     | 23.5              |
| LTE        | 5       | 30        | 18                     | 22                |
| LTE        | 5       | 66        | 17                     | 23.5              |
| LTE        | 5       | 70        | 17                     | 23.5              |
| LTE        | 5       | 71        | 19                     | 23.5              |
| LTE        | 5       | 38        | 17.5                   | 23.5              |
| LTE        | 5       | 41_PC3    | 17.5                   | 24                |
| LTE        | 5       | 41_PC2    | 19.1                   | 26                |
| LTE        | 5       | 42        | 18                     | 23.5              |
| LTE        | 5       | 43        | 17.5                   | 23.5              |
| LTE        | 5       | 48        | 17.5                   | 20.8              |
| NR         | 5       | 2         | 16.5                   | 23.6              |
| NR         | 5       | 5         | 20                     | 23.5              |
| NR         | 5       | 7         | 17                     | 23.5              |
| NR         | 5       | 12        | 18.5                   | 23.5              |
| NR         | 5       | 13        | 20                     | 23.5              |
| NR         | 5       | 14        | 20                     | 23.5              |
| NR         | 5       | 25        | 16.5                   | 23.6              |
| NR         | 5       | 26        | 20                     | 23.5              |
| NR         | 5       | 30        | 18                     | 22                |
| NR         | 5       | 66        | 17                     | 23.5              |
| NR         | 5       | 70        | 17                     | 23.6              |
| NR         | 5       | 71        | 19                     | 23.5              |
| NR         | 5       | 38        | 17.5                   | 23.7              |
| NR         | 5       | 41_PC3    | 17.5                   | 24                |
| NR         | 5       | 41_PC2    | 17.5                   | 26                |
| NR         | 5       | 48        | 17.5                   | 20.8              |
| NR         | 5       | 77/78_PC3 | 15.34                  | 24.1              |
| NR         | 5       | 77/78_PC2 | 15.34                  | 25                |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| Generation | Antenna | Band      | Plimit** (dBm) | Pmax* (dBm) |
|------------|---------|-----------|----------------|-------------|
| LTE        | 8       | 2         | 14.5           | 23.5        |
| LTE        | 8       | 4         | 15.5           | 23.5        |
| LTE        | 8       | 7         | 13.5           | 23.5        |
| LTE        | 8       | 25        | 14.5           | 23.5        |
| LTE        | 8       | 30        | 15             | 22          |
| LTE        | 8       | 66        | 14.5           | 23.5        |
| LTE        | 8       | 70        | 14.5           | 23.5        |
| LTE        | 8       | 38        | 12.5           | 23.5        |
| LTE        | 8       | 41_PC3    | 12             | 24          |
| LTE        | 8       | 41_PC2    | 13.6           | 26          |
| LTE        | 8       | 42        | 10.5           | 23.5        |
| LTE        | 8       | 43        | 10.5           | 23.5        |
| LTE        | 8       | 48        | 10.5           | 20.8        |
| NR         | 8       | 2         | 14.5           | 23.6        |
| NR         | 8       | 7         | 13.5           | 23.5        |
| NR         | 8       | 25        | 14.5           | 23.6        |
| NR         | 8       | 30        | 15             | 22          |
| NR         | 8       | 66        | 14.5           | 23.5        |
| NR         | 8       | 70        | 14.5           | 23.6        |
| NR         | 8       | 38        | 12.5           | 23.7        |
| NR         | 8       | 41_PC3    | 12             | 24          |
| NR         | 8       | 41_PC2    | 12             | 26          |
| NR         | 8       | 48        | 10.5           | 20.8        |
| NR         | 8       | 77/78_PC3 | 10             | 24.1        |
| NR         | 8       | 77/78_PC2 | 10             | 25          |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

[www.sgs.com.tw](http://www.sgs.com.tw)

Member of SGS Group

\*Pmax is used for RF tune up procedure. The maximum allowed output power is equal to Pmax + device uncertainty.

\*All Plimit power levels entered in the Table correspond to average power levels after accounting for duty cycle in the case TDD modulation schemes (for e.g., LTE TDD). Based on selection criteria described in Section 3.2.1, the selected technologies/bands for testing time-varying test sequences are listed in Table 6-2, the *Reserve\_power\_margin* (dB) for N7NEM91 is set to 2 dB in EFS, and is used in Part 2 test.

The radio configurations used in Part 2 test for selected technologies, bands, DSIs and antennas are listed in Table 6-2. The corresponding worst-case radio configuration 1gSAR values for selected technology/band are extracted from Part 1 report and are listed in the last column of Table 6-2.

Based on equations (1a), (2a), (3a) and (4a), it is clear that Part 2 testing outcome is normalized quantity, which implies that it can be applied to any radio configuration within a selected technology/band. Thus, as long as applying the worst-case SAR obtained from the worst radio configuration in Part 1 testing to calculate time-varying SAR exposure in equations (1a), (2a), (3a) and (4a), the accuracy in compliance demonstration remains the same.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Table 6-2 Radio configurations selected for Part 2 test

| Radio configurations selected for Part 2 test |                                    |          |      |     |     |         |            |           |                  |                |               |                                                                      |
|-----------------------------------------------|------------------------------------|----------|------|-----|-----|---------|------------|-----------|------------------|----------------|---------------|----------------------------------------------------------------------|
| Part 2 test configurations                    |                                    |          |      |     |     |         |            |           |                  |                |               | Part 1 worst-case radio config 1g SAR measured at $P_{limit}$ (W/kg) |
| Test case#                                    | Test scenario                      | Tech     | Band | Ant | DSI | Channel | Freq (MHz) | RB/offset | mode             | position       | Distance (mm) |                                                                      |
| 1                                             | Time-varying Tx power transmission | WCDMA    | B5   | 0   | 0   | 4183    | 836.6      | n/a       | 3GPP Rel99       | Bottom Surface | 0             | 0.372                                                                |
| 2                                             |                                    | WCDMA    | B2   | 0   | 0   | 9262    | 1852.4     | n/a       | 3GPP Rel99       | Bottom Surface | 0             | 0.758                                                                |
| 3                                             |                                    | LTE      | B26  | 0   | 0   | 26765   | 821.5      | 1-0       | QPSK             | Bottom Surface | 0             | 0.299                                                                |
| 4                                             |                                    | LTE      | B2   | 0   | 0   | 18700   | 1860       | 1-0       | QPSK             | Bottom Surface | 0             | 0.736                                                                |
| 5                                             |                                    | sub6 NR  | N77  | 2   | 0   | 645000  | 3750       | 1-1       | DFT-s-OFDM, BPSK | Bottom Surface | 0             | 0.119                                                                |
| 6                                             |                                    | sub6 NR  | N26  | 0   | 0   | 26765   | 821.5      | 1-0       | DFT-s-OFDM, BPSK | Bottom Surface | 0             | 0.418                                                                |
| 7                                             | Call Drop                          | sub6 NR  | N77  | 2   | 0   | 645000  | 3750       | 1-1       | DFT-s-OFDM, BPSK | Bottom Surface | 0             | 0.119                                                                |
| 8                                             | Tech/band switch                   | WCDMA B2 | B5   | 0   | 0   | 4183    | 836.6      | n/a       | 3GPP Rel99       | Bottom Surface | 0             | 0.372                                                                |
|                                               |                                    | LTE      | B2   | 0   | 0   | 18700   | 1860       | 1-0       | QPSK             | Bottom Surface | 0             | 0.736                                                                |
| 9                                             | Time Window Switch                 | LTE      | B2   | 0   | 0   | 18700   | 1860       | 1-0       | QPSK             | Bottom Surface | 0             | 0.736                                                                |
|                                               |                                    | LTE      | B43  | 0   | 0   | 44215   | 3662.5     | 1-0       | QPSK             | Bottom Surface | 0             | 0.559                                                                |
| 10                                            | SAR exposure switch                | LTE      | B2   | 0   | 0   | 18700   | 1860       | 1-0       | QPSK             | Bottom Surface | 0             | 0.736                                                                |
|                                               |                                    | sub6 NR  | N77  | 2   | 0   | 645000  | 3750       | 1-0       | DFT-s-OFDM, BPSK | Bottom Surface | 0             | 0.119                                                                |
| 11                                            | SAR exposure switch                | LTE      | B5   | 0   | 0   | 20525   | 836.5      | 1-0       | QPSK             | Bottom Surface | 0             | 0.190                                                                |
|                                               |                                    | ub6 NR   | N2   | 2   | 0   | 378500  | 1892.5     | 1-1       | DFT-s-OFDM, BPSK | Bottom Surface | 0             | 0.798                                                                |

Based on the selection criteria described before, the radio configurations for the Tx varying transmission test cases listed in Section 4 are:

1. Technologies and bands for time-varying Tx power transmission: The test case 1~6 listed in Table 6-2 are selected to test with the test sequences 1/2 in both time-varying conducted power measurement and time-varying SAR measurement.
2. Technology and band for change in call test: The test case 7 listed in Table 6-2 are selected for performing the call drop test in conducted power setup.
3. Technologies and bands for change in technology/band test: The test case 8 listed in Table 6-2 is selected for handover test from a technology/band to another technology/band, in conducted power setup.
4. Technologies and bands for change in time-window/antenna: The test case 9 listed in Table 6-2 is selected for time window switch between 60s window and 100s window in conducted power setup.
5. Technologies and bands for switch in SAR exposure: The test cases 10~11 listed in Table 6-2 are selected for SAR exposure switching test in one of the supported simultaneous WWAN transmission scenario, i.e., LTE + Sub6 NR active in conducted power setup.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488


[www.sgs.com.tw](http://www.sgs.com.tw)

Member of SGS Group

## 7 CONDUCTED POWER TEST RESULTS FOR SUB-6 SMART TRANSMIT FEATURE VALIDATION

### 7.2 Measurement setup


The Rohde & Schwarz CMW500 callbox is used in this test. The test setup schematic are shown in Figures 7-1. For single antenna measurement, one port (RF1 COM) of the callbox is connected to the RF port of the EUT using a directional coupler. For antenna & technology switch measurement, two ports (RF1 COM and RF3 COM) of the callbox used for signaling two different technologies are connected to a combiner, which is in turn connected to a directional coupler. The other end of the directional coupler is connected to a splitter to connect to two RF ports of the EUT corresponding to the two antennas of interest. In both the setups, power meter is used to tap the directional coupler for measuring the conducted output power of the EUT. For time averaging validation test, call drop test, and DSI switch test, only RF1 COM port of the callbox is used to communicate with the EUT. For technology/band switch measurement, both RF1 COM and RF3 COM port of callbox are used to switch from one technology communicating on RF1 COM port to another technology communicating on RF3 COM port. All the path losses from RF port of EUT to the callbox RF COM port and to the power meter are calibrated and automatically entered as offsets in the callbox and the power meter via test scripts on the PC used to control callbox and power meter.

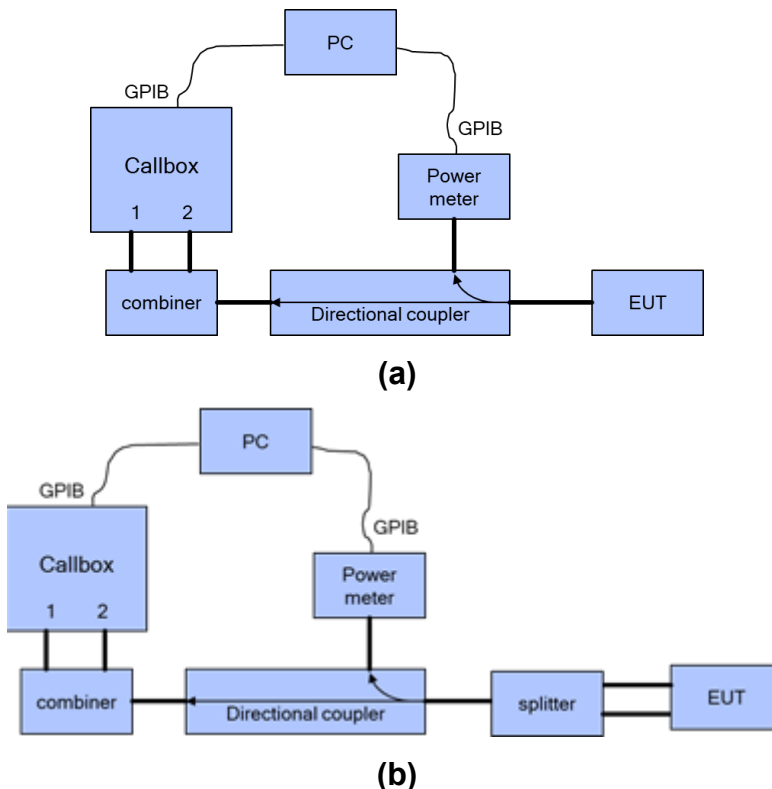

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

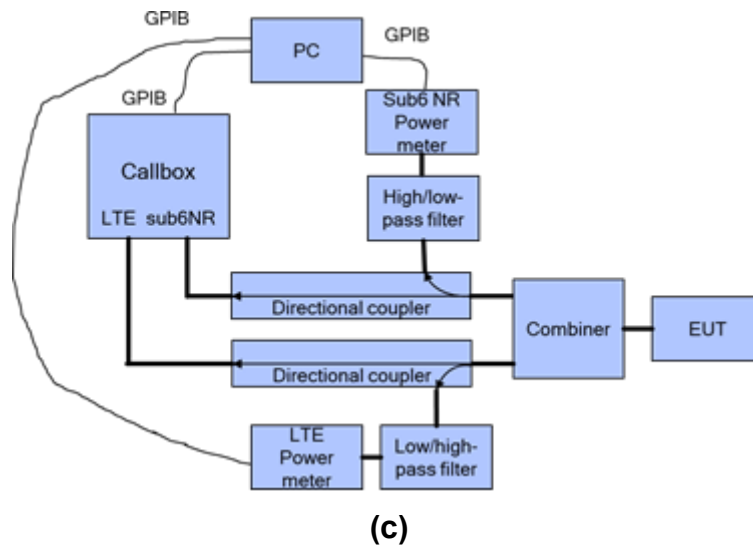

**Figure 7-1 Conducted power measurement setup**

Both the callbox and power meter are connected to the PC using GPIB cables. Two test scripts are custom made for automation, and the test duration set in the test scripts is 500 seconds.

For time-varying Tx power measurement, the PC runs the 1st test script to send GPIB commands to control the callbox's requested power versus time, while at the same time to record the conducted power measured at EUT RF port using the power meter. The commands sent to the callbox to request power are:

- 0dBm for 100 seconds
- test sequence 1 or test sequence 2, for 360 seconds
- stay at the last power level of test sequence 1 or test sequence 2 for the remaining time.

Power meter readings are periodically recorded every 100ms. A running average of this measured Tx power over 100 seconds is performed in the post-data processing to determine the 100s-time averaged power.

For call drop, technology/band/antenna switch, and DSI switch tests, after the call is established, the callbox is set to request the EUT's Tx power at 0dBm for 100 seconds while simultaneously starting the 2nd test script runs at the same time to start recording the Tx power measured at EUT RF port using the power meter. After the initial 100 seconds since starting the Tx power recording, the callbox is set to request maximum power from the EUT for the rest of the test. Note that the call drop/re-establish, or technology/band/antenna switch or DSI switch is manually performed when the Tx power of EUT is at Preserve level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

### 7.3 Plimit and Pmax measurement results

The measured Plimit for all the selected radio configurations given in Table 6-2 are listed in below Table 7-1. Pmax was also measured for radio configurations selected for testing time-varying Tx power transmission scenarios in order to generate test sequences following the test procedures.

**Table 7-1 Measured  $P_{limit}$  and  $P_{max}$  of selected radio configurations**

| Measured $P_{limit}$ and $P_{max}$ of selected radio configurations |                                            |         |      |     |     |                |                         |                                    |       | FCC                                                             |
|---------------------------------------------------------------------|--------------------------------------------|---------|------|-----|-----|----------------|-------------------------|------------------------------------|-------|-----------------------------------------------------------------|
| Test case#                                                          | Test scenario                              | Tech    | Band | Ant | DSI | position       | Plimit EFS setting(dBm) | target power pmax (dBm)(avg power) | P-max | Part 1 worst-case radio config 1g SAR measured at Plimit (W/kg) |
| 1                                                                   | Tim-varying Tx power transmission          | WCDMA   | B5   | 0   | 0   | Bottom Surface | 20                      | 23.5                               | 23.5  | 0.372                                                           |
| 2                                                                   |                                            | WCDMA   | B2   | 0   | 0   | Bottom Surface | 16.5                    | 23.5                               | 23.5  | 0.758                                                           |
| 3                                                                   |                                            | LTE     | B26  | 0   | 0   | Bottom Surface | 20                      | 23.5                               | 23.5  | 0.299                                                           |
| 4                                                                   |                                            | LTE     | B2   | 0   | 0   | Bottom Surface | 16.5                    | 23.5                               | 23.5  | 0.736                                                           |
| 5                                                                   |                                            | sub6 NR | N77  | 2   | 0   | Bottom Surface | 10                      | 24.1                               | 24.1  | 0.119                                                           |
| 6                                                                   |                                            | sub6 NR | N26  | 0   | 0   | Bottom Surface | 20                      | 23.5                               | 23.5  | 0.418                                                           |
| 7                                                                   | Call Drop                                  | sub6 NR | N77  | 2   | 0   | Bottom Surface | 10                      | 24.1                               | 24.1  | 0.119                                                           |
| 8                                                                   | Teah/band switch                           | WCDMA   | B5   | 0   | 0   | Bottom Surface | 20                      | 23.5                               | 23.5  | 0.372                                                           |
|                                                                     |                                            | LTE     | B2   | 0   | 0   | Bottom Surface | 16.5                    | 23.5                               | 23.5  | 0.736                                                           |
| 9                                                                   | Time Window Switch                         | LTE     | B2   | 0   | 0   | Bottom Surface | 16.5                    | 23.5                               | 23.5  | 0.736                                                           |
|                                                                     |                                            | LTE     | B43  | 0   | 0   | Bottom Surface | 17.5                    | 23.5                               | 23.5  | 0.559                                                           |
| 10                                                                  | SAR exposure switch                        | LTE     | B2   | 0   | 0   | Bottom Surface | 16.5                    | 23.5                               | 23.5  | 0.736                                                           |
|                                                                     |                                            | sub6 NR | N77  | 2   | 0   | Bottom Surface | 10                      | 24.1                               | 24.1  | 0.119                                                           |
| 11                                                                  | SAR exposure switch (The same time window) | LTE     | B5   | 0   | 0   | Bottom Surface | 16.5                    | 24.5                               | 24.6  | 0.190                                                           |
|                                                                     |                                            | sub6 NR | N2   | 2   | 0   | Bottom Surface | 16.5                    | 24.6                               | 24.5  | 0.596                                                           |

Note: the device uncertainty of  $P_{max}$  is +1.0dB/-1.0dB as provided by manufacturer.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

#### 7.4 Plimit and Pmax measurement results

The measurement setup is shown in Figures 7-1(a) and 7-1(c). The purpose of the time- varying Tx power measurement is to demonstrate the effectiveness of power limiting enforcement and that the time-averaged Tx power when represented in time-averaged 1gSAR values does not exceed FCC limit as shown in Eq. (3a) and (3b), rewritten below:

$$1g\_or\_10gSAR(t) = \frac{\text{conducted\_Tx\_power}(t)}{\text{conducted\_Tx\_power\_Plimit}} * 1g\_or\_10gSAR\_Plimit \quad (3a)$$

$$\frac{\frac{1}{T_{SAR}} \int_{t-T_{SAR}}^t 1g\_or\_10gSAR(t) dt}{FCC\ SAR_{limit}} \leq 1 \quad (3b)$$

where, *conducted\_Tx\_power(t)*, *conducted\_Tx\_power\_Plimit*, and *1g\_SAR\_Plimit* correspond to the measured instantaneous conducted Tx power, measured conducted Tx power at Plimit, and measured 1gSAR values at Plimit reported in Part 1 test (listed in Table 6-2 of this report as well).

Following the test procedure, the conducted Tx power measurement for all selected configurations are reported in this section. In all the conducted Tx power plots, the dotted line represents the requested power by callbox (test sequence 1 or test sequence 2), the blue curve represents the instantaneous conducted Tx power measured using power meter, the green curve represents time-averaged power and red line represents the conducted power limit that corresponds to FCC limit of 1.6 W/kg for 1gSAR.


Similarly, in all the 1g SAR plots (when converted using Eq. (3a)), the green curve represents the 100s/60s-time averaged 1gSAR value calculated based on instantaneous 1gSAR; and the red line limit represents the FCC limit of 1.6 W/kg for 1gSAR.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

### 7.3.1 WCDMA Band 5

#### Test result for test sequence 1:

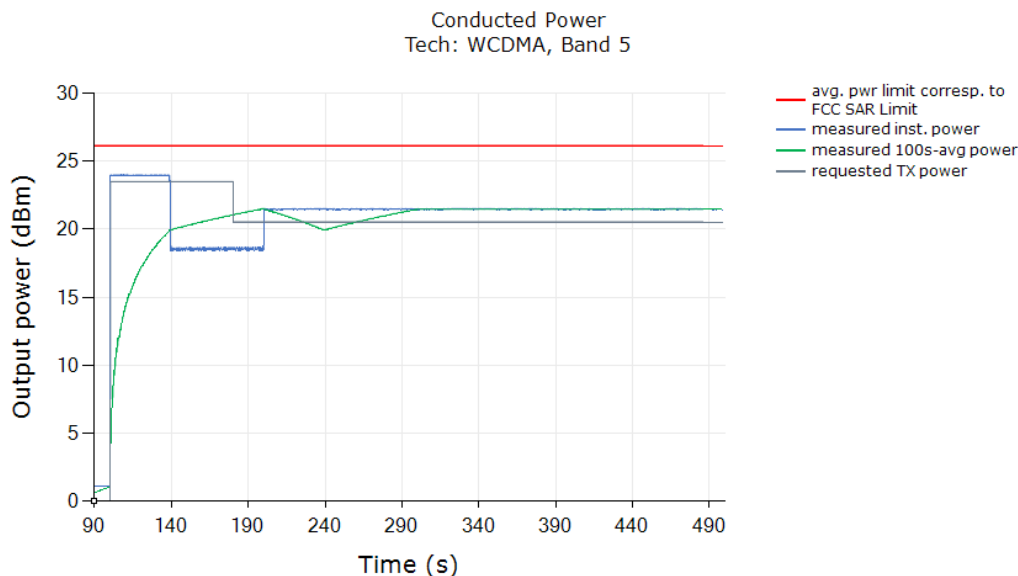


Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (3a) and plotted below to demonstrate that the time-averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

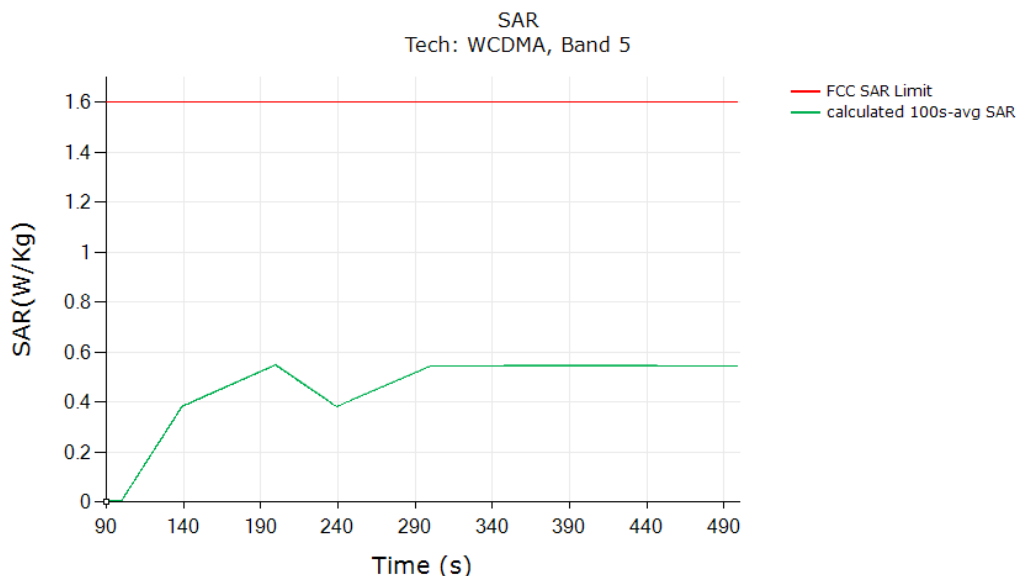

|                                                                                                                        | W/Kg  |
|------------------------------------------------------------------------------------------------------------------------|-------|
| FCC 1gSAR limit                                                                                                        | 1.6   |
| Max 100s-time averaged 10gSAR (green curve)                                                                            | 0.549 |
| <b>Validated:</b> Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +1.0dB device uncertainty |       |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司


t (886-2) 2299-3279

f (886-2) 2298-0488

[www.sgs.com.tw](http://www.sgs.com.tw)

Member of SGS Group


## Test result for test sequence 2:

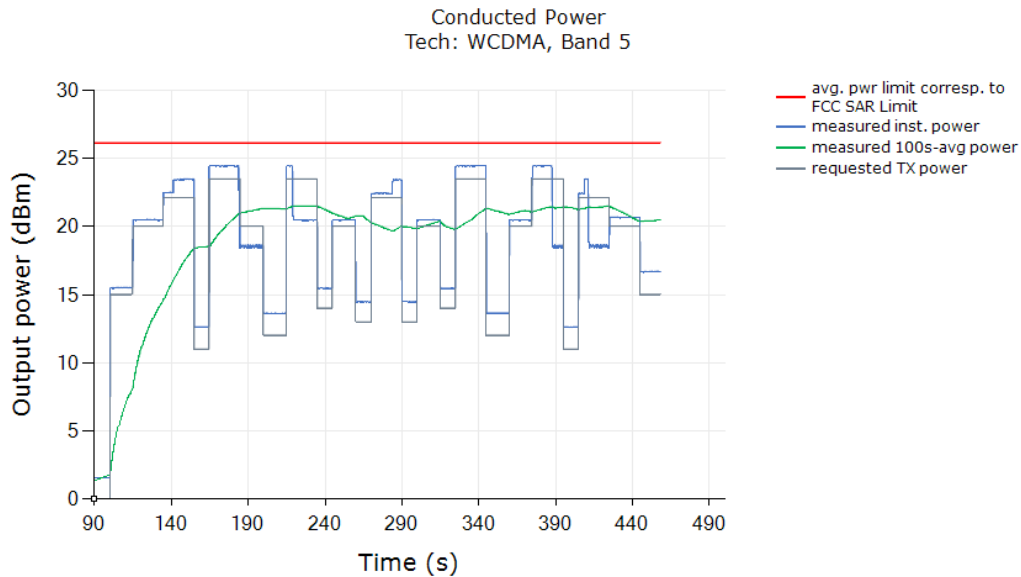

Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (3a) and plotted below to demonstrate that the time-averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

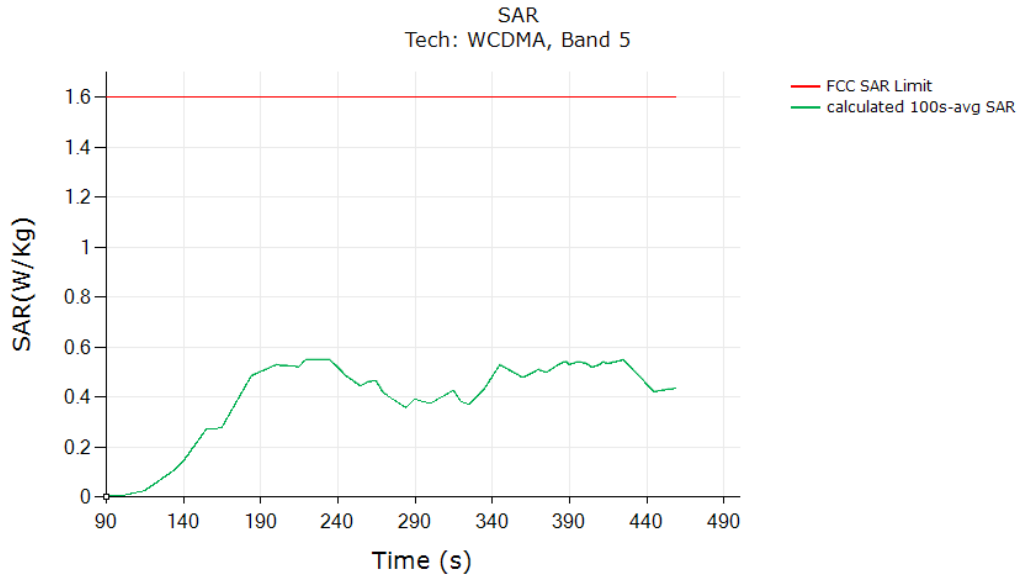


|                                                                                                                        | W/Kg  |
|------------------------------------------------------------------------------------------------------------------------|-------|
| FCC 1gSAR limit                                                                                                        | 1.6   |
| Max 100s-time averaged 1gSAR (green curve)                                                                             | 0.548 |
| <b>Validated:</b> Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +1.0dB device uncertainty |       |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

### 7.3.2 WCDMA Band 2


#### Test result for test sequence 1:

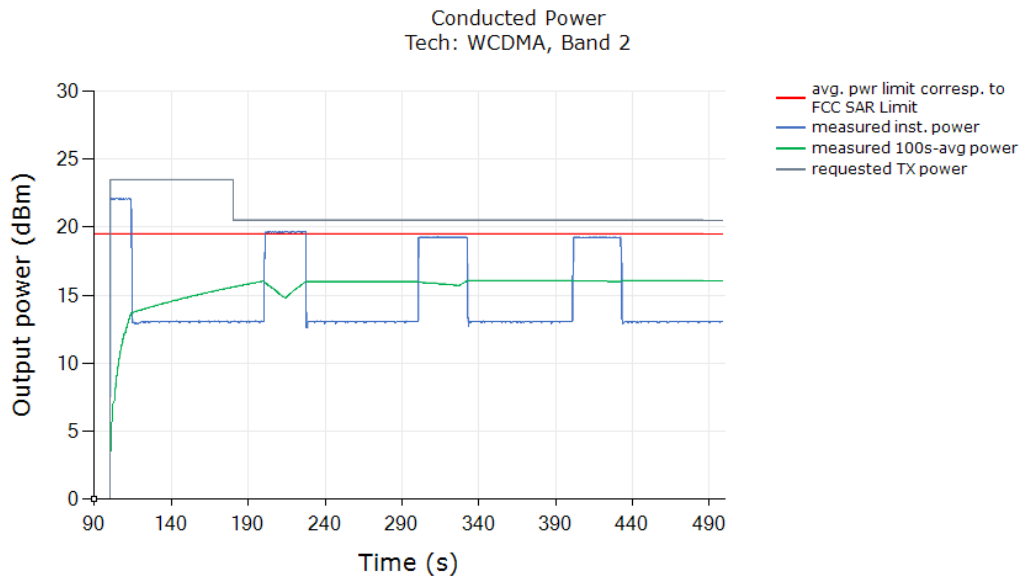

Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (3a) and plotted below to demonstrate that the time-averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

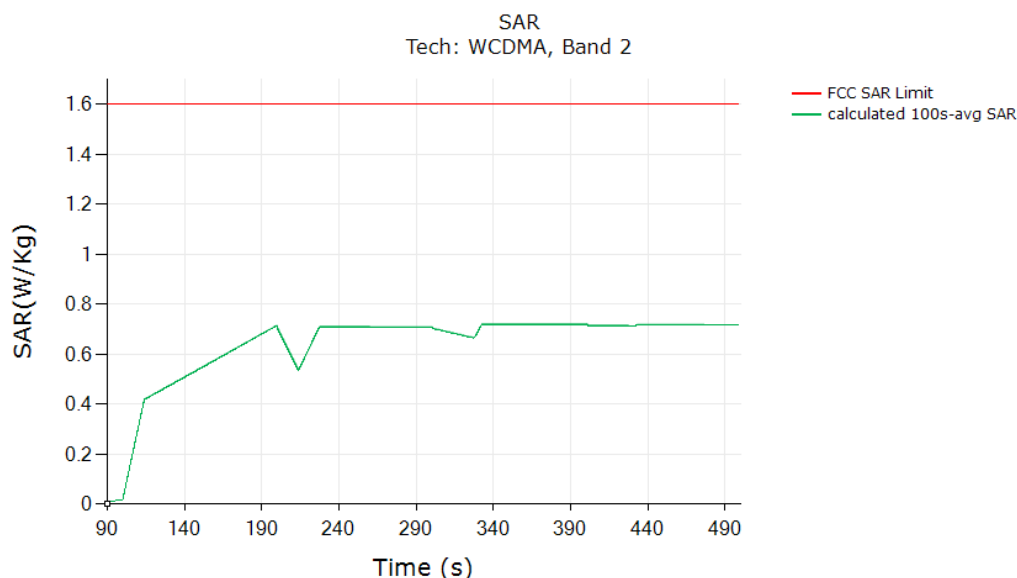


|                                                                                                                        | W/Kg  |
|------------------------------------------------------------------------------------------------------------------------|-------|
| FCC 1gSAR limit                                                                                                        | 1.6   |
| Max 100s-time averaged 10gSAR (green curve)                                                                            | 0.719 |
| <b>Validated:</b> Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +1.0dB device uncertainty |       |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


## Test result for test sequence 2:

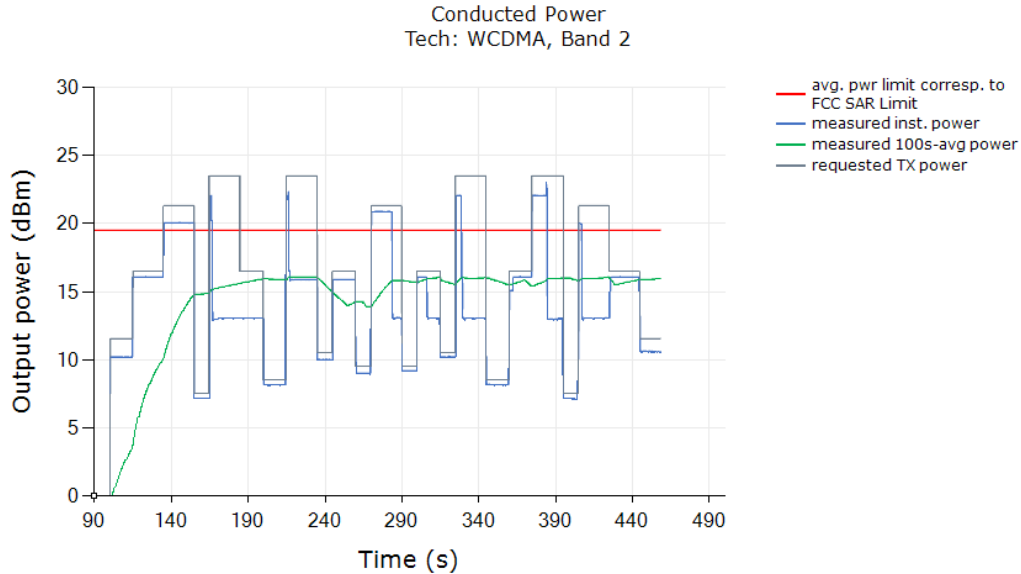

Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (3a) and plotted below to demonstrate that the time-averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

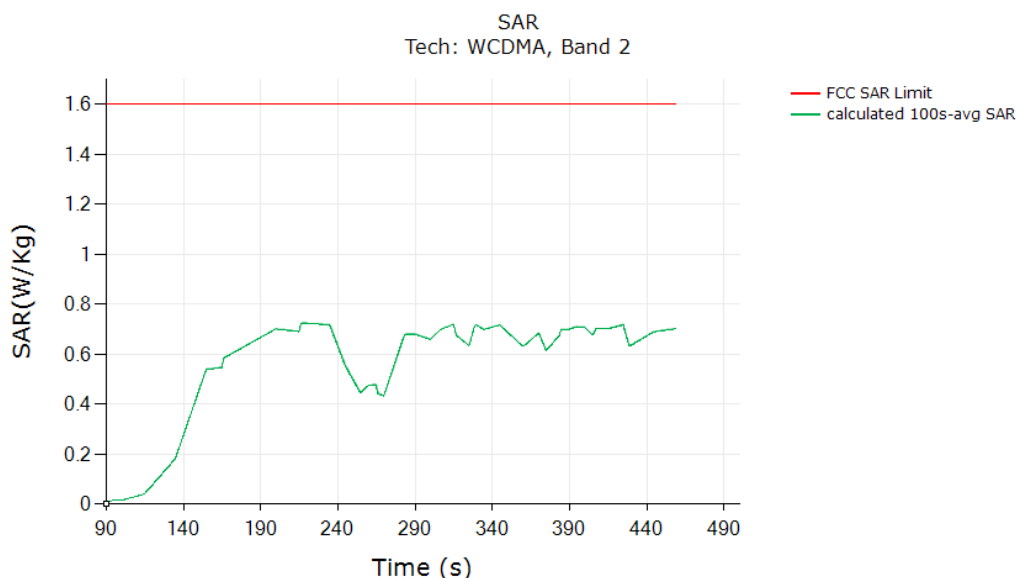


|                                                                                                                 | W/Kg  |
|-----------------------------------------------------------------------------------------------------------------|-------|
| FCC 1gSAR limit                                                                                                 | 1.6   |
| Max 100s-time averaged 1gSAR (green curve)                                                                      | 0.723 |
| Validated: Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +1.0dB device uncertainty |       |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

### 7.3.3 LTE Band 26


#### Test result for test sequence 1:

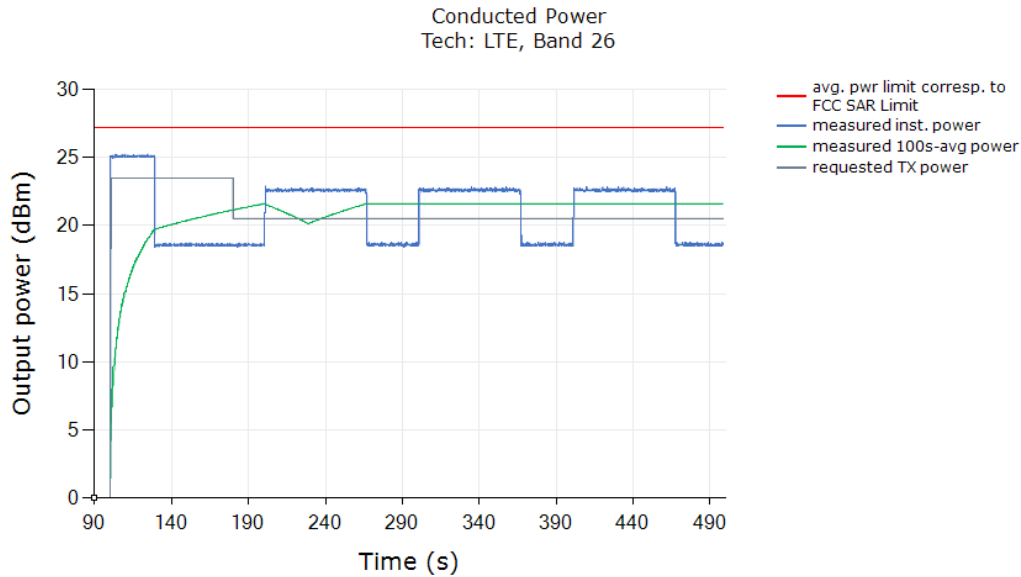

Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (3a) and plotted below to demonstrate that the time-averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

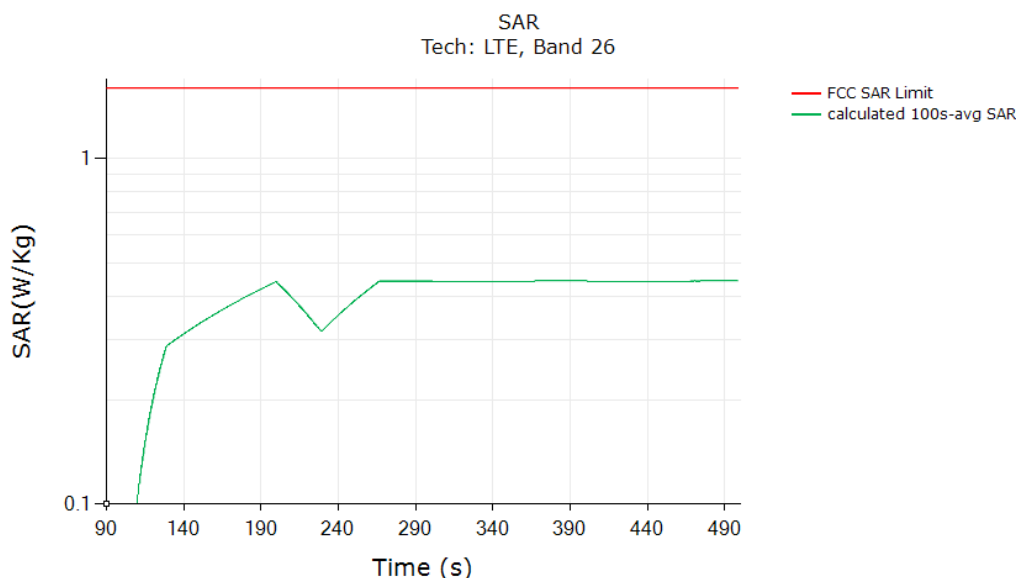


|                                                                                                                        | W/Kg  |
|------------------------------------------------------------------------------------------------------------------------|-------|
| FCC 1gSAR limit                                                                                                        | 1.6   |
| Max 100s-time averaged 10gSAR (green curve)                                                                            | 0.443 |
| <b>Validated:</b> Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +1.0dB device uncertainty |       |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## Test result for test sequence 2:

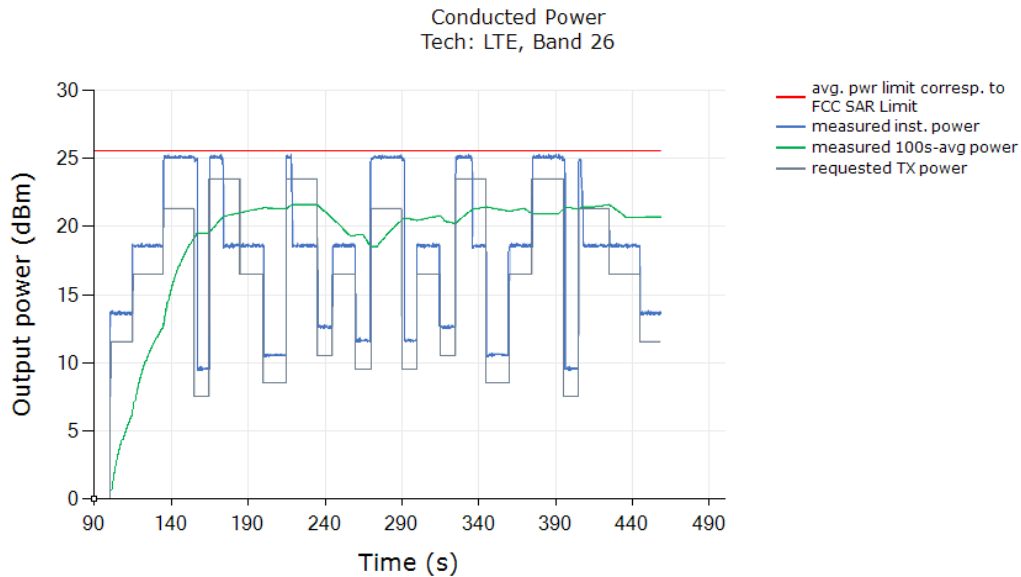

Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (3a) and plotted below to demonstrate that the time-averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號


台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

[www.sgs.com.tw](http://www.sgs.com.tw)

Member of SGS Group

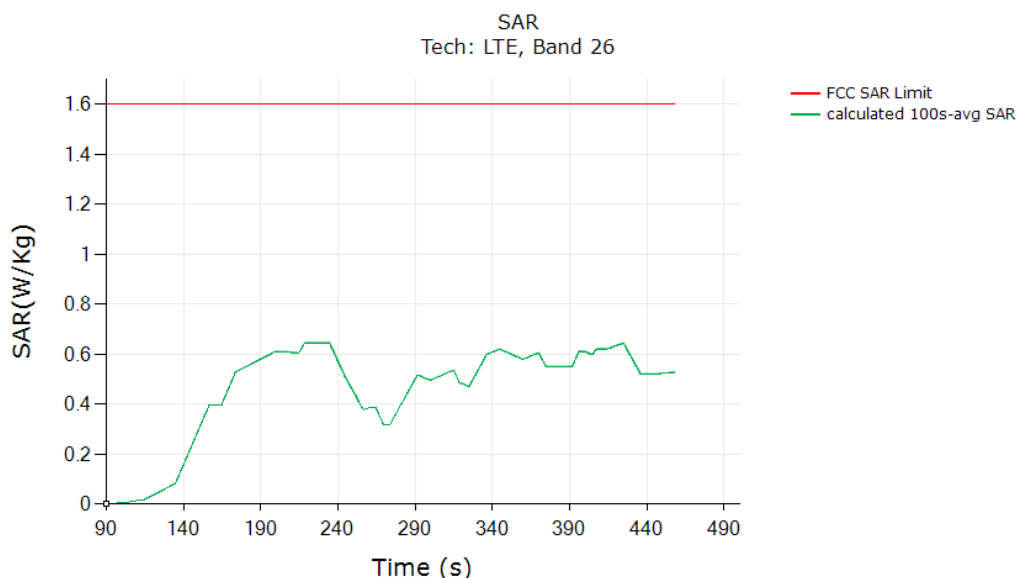


|                                                                                                                        |       |
|------------------------------------------------------------------------------------------------------------------------|-------|
|                                                                                                                        | W/Kg  |
| FCC 1gSAR limit                                                                                                        | 1.6   |
| Max 100s-time averaged 1gSAR (green curve)                                                                             | 0.645 |
| <b>Validated:</b> Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +1.0dB device uncertainty |       |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

### 7.3.4 LTE Band 2


#### Test result for test sequence 1:

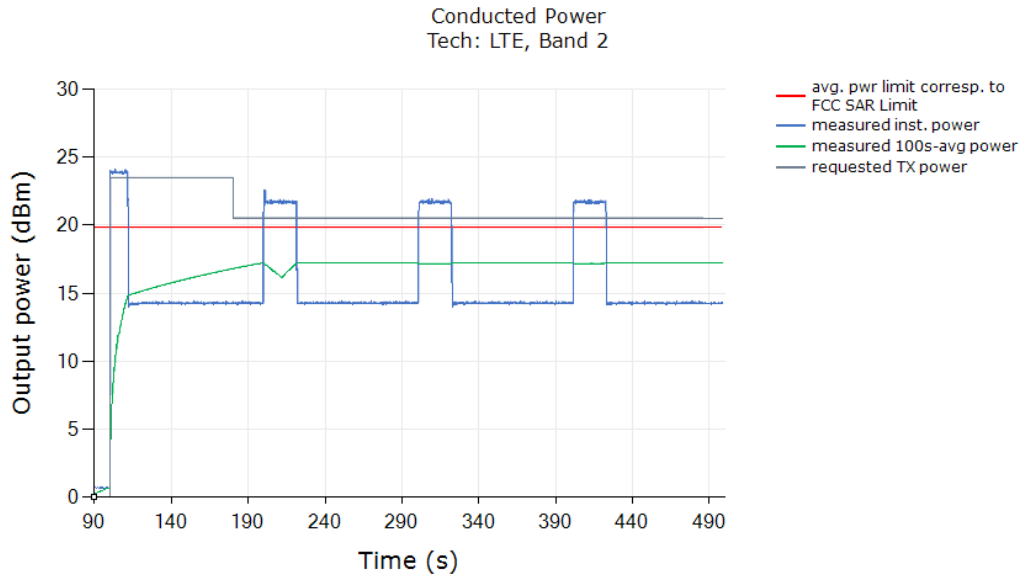

Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (3a) and plotted below to demonstrate that the time-averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

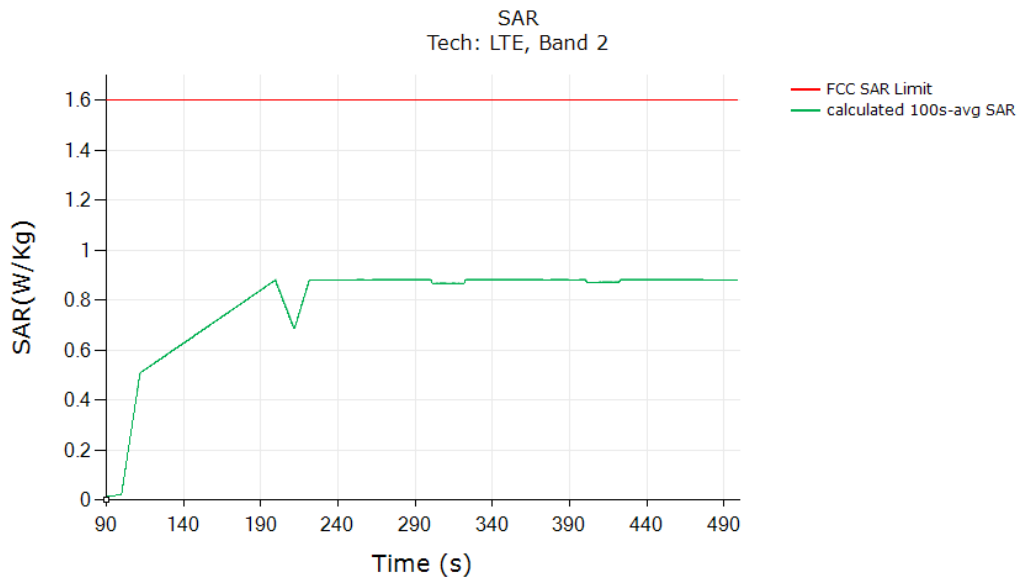


|                                                                                                                 |       |
|-----------------------------------------------------------------------------------------------------------------|-------|
|                                                                                                                 | W/Kg  |
| FCC 1gSAR limit                                                                                                 | 1.6   |
| Max 100s-time averaged 10gSAR (green curve)                                                                     | 0.881 |
| Validated: Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +1.0dB device uncertainty |       |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

### Test result for test sequence 2:

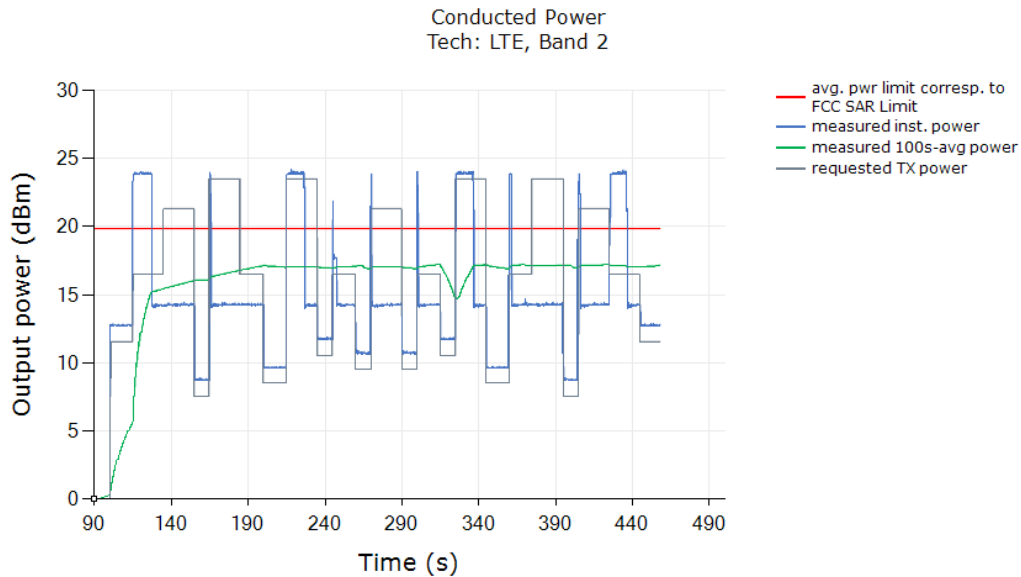


Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (3a) and plotted below to demonstrate that the time-averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

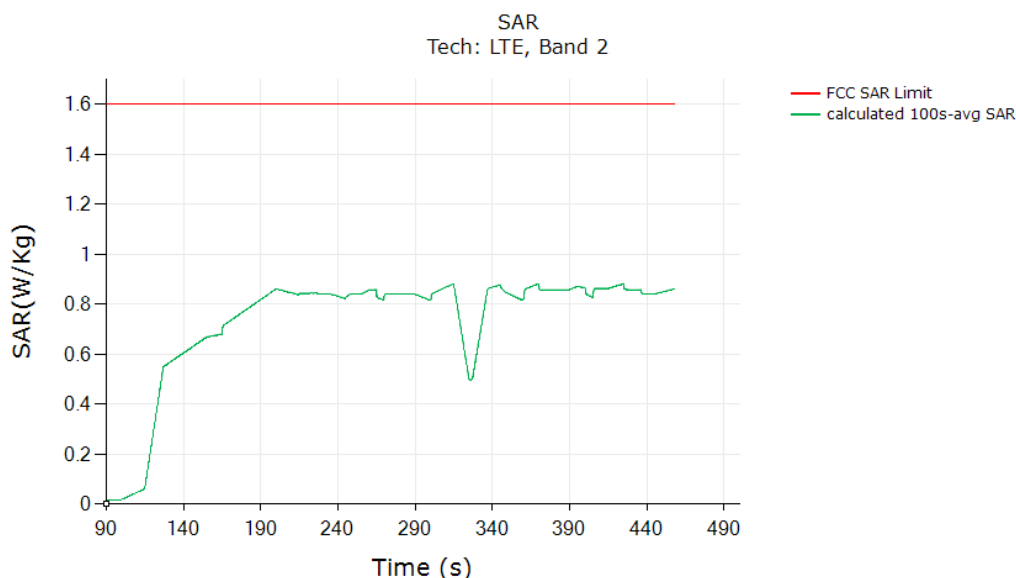


|                                                                                                                        | W/Kg  |
|------------------------------------------------------------------------------------------------------------------------|-------|
| FCC 1gSAR limit                                                                                                        | 1.6   |
| Max 100s-time averaged 1gSAR (green curve)                                                                             | 0.881 |
| <b>Validated:</b> Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +1.0dB device uncertainty |       |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

### 7.3.5 Sub6 NR Band 77


#### Test result for test sequence 1:

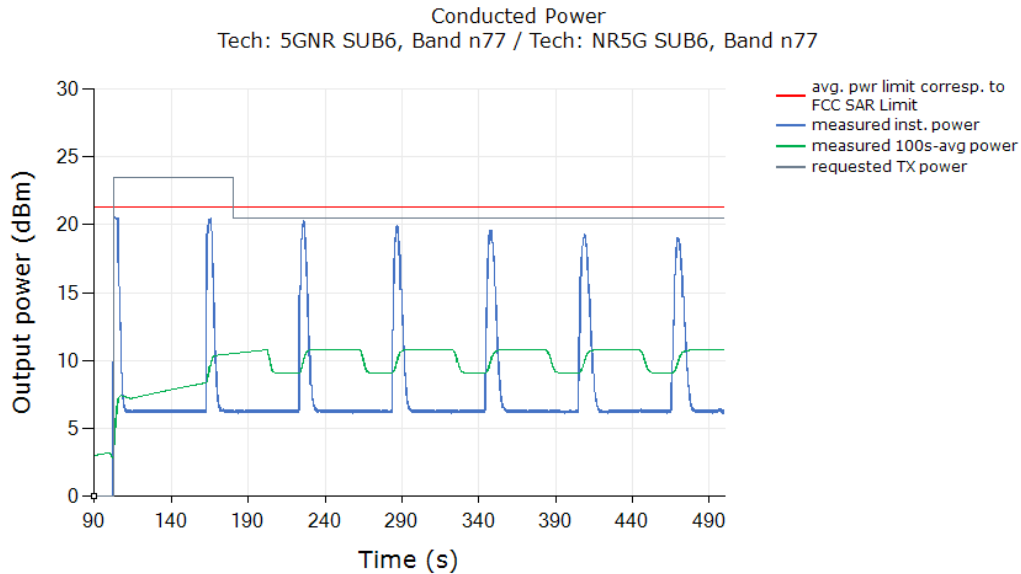

Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (3a) and plotted below to demonstrate that the time-averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

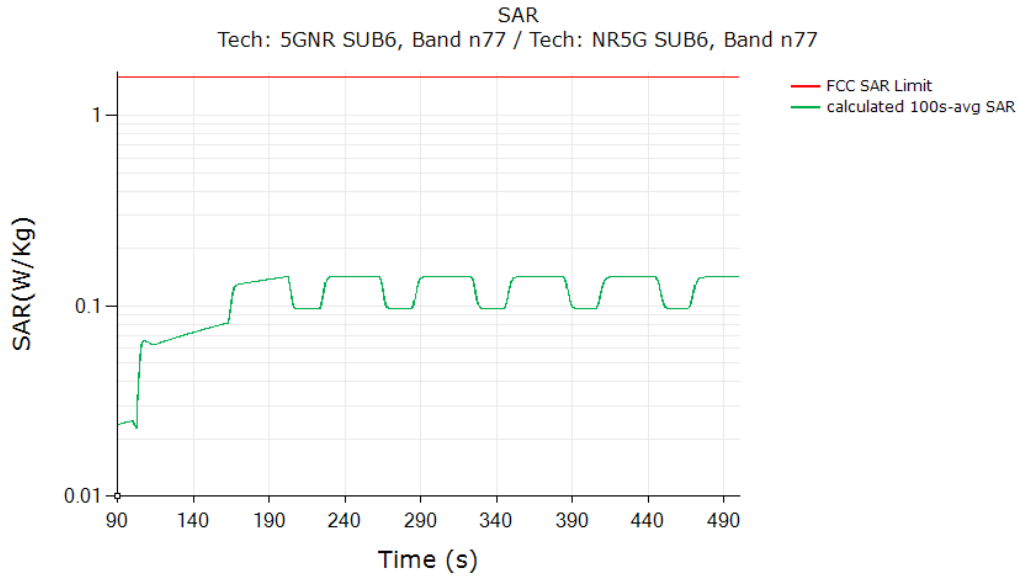


|                                                                                                                                                                  | W/Kg  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|
| FCC 1gSAR limit                                                                                                                                                  | 1.6   |
| Max 100s-time averaged 10gSAR (green curve)                                                                                                                      | 0.143 |
| <b>Validated:</b> Max time averaged SAR (green curve) does not exceed “75% (with 2dB Reserve_Power_Margin) of measured SAR at Plimit, +1.0dB device uncertainty” |       |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


## Test result for test sequence 2:

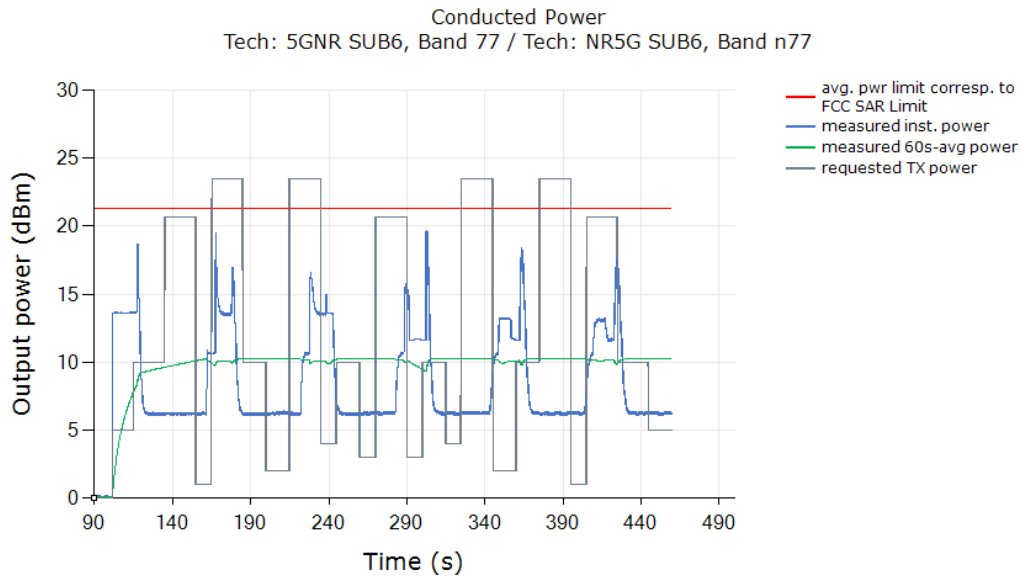

Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (3a) and plotted below to demonstrate that the time-averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

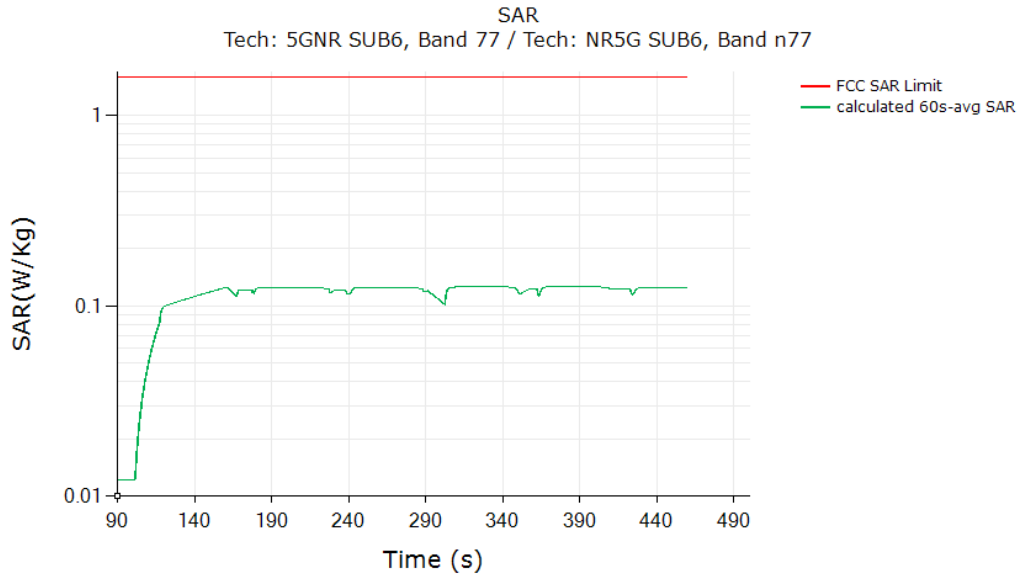


|                                                                                                                                                                  |       |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|
|                                                                                                                                                                  | W/Kg  |
| FCC 1gSAR limit                                                                                                                                                  | 1.6   |
| Max 100s-time averaged 1gSAR (green curve)                                                                                                                       | 0.126 |
| <b>Validated:</b> Max time averaged SAR (green curve) does not exceed “75% (with 2dB Reserve Power Margin) of measured SAR at Plimit, +1.0dB device uncertainty” |       |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


## 7.3.6 Sub6 NR Band 26

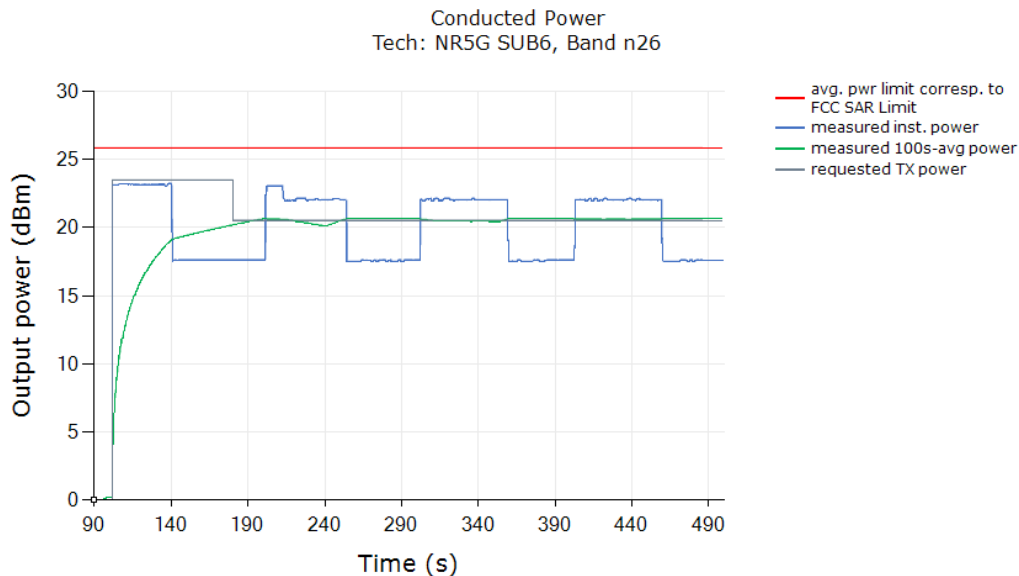Test result for test sequence 1:

Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (3a) and plotted below to demonstrate that the time-averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

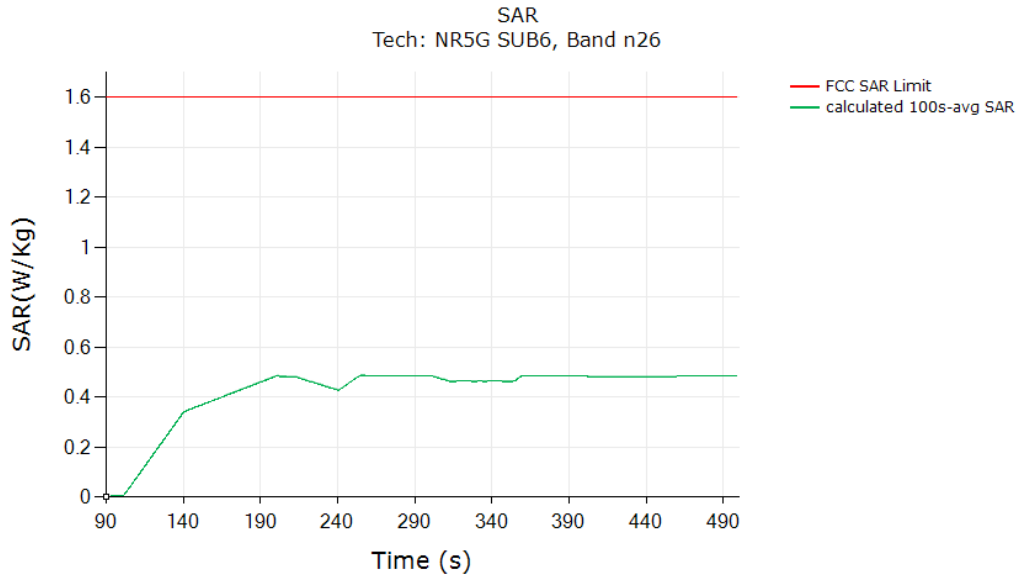

|                                                                                                                                                                  |       |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|
|                                                                                                                                                                  | W/Kg  |
| FCC 1gSAR limit                                                                                                                                                  | 1.6   |
| Max 100s-time averaged 10gSAR (green curve)                                                                                                                      | 0.486 |
| <b>Validated:</b> Max time averaged SAR (green curve) does not exceed “75% (with 2dB Reserve_Power_Margin) of measured SAR at Plimit, +1.0dB device uncertainty” |       |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

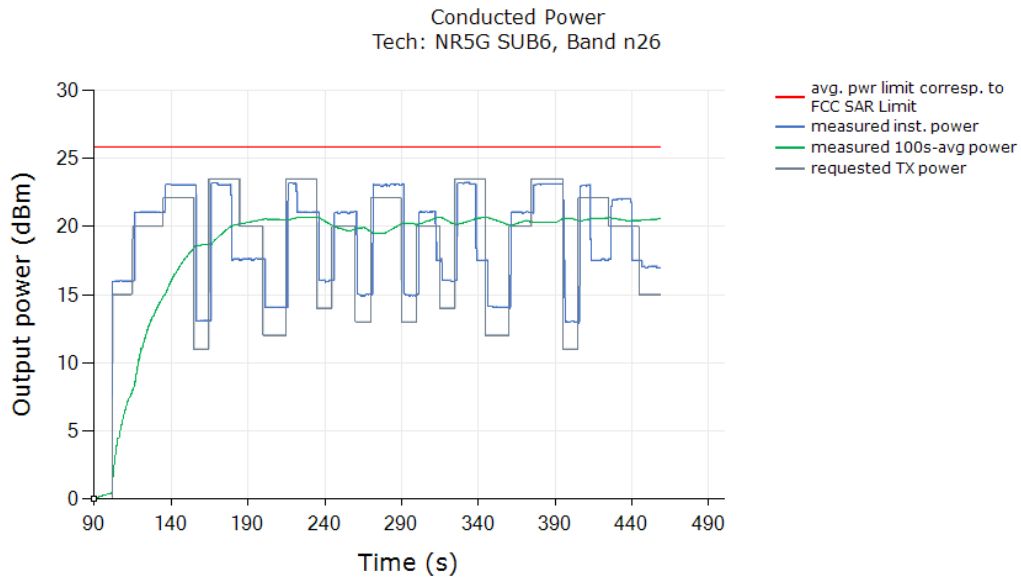Test result for test sequence 2:

Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (3a) and plotted below to demonstrate that the time-averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

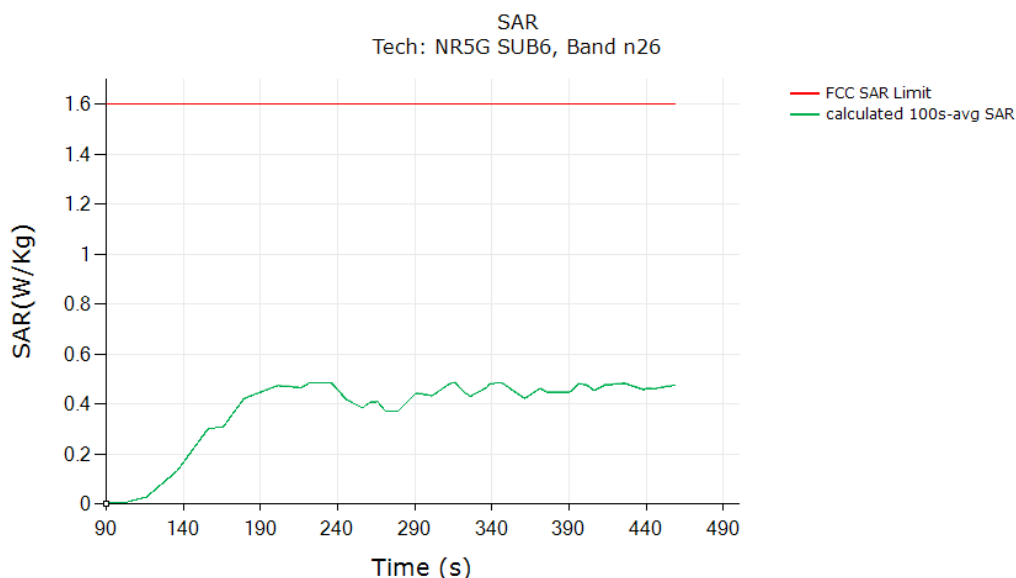

|                                                                                                                                                                  | W/Kg  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|
| FCC 1gSAR limit                                                                                                                                                  | 1.6   |
| Max 100s-time averaged 1gSAR (green curve)                                                                                                                       | 0.486 |
| <b>Validated:</b> Max time averaged SAR (green curve) does not exceed “75% (with 2dB Reserve Power Margin) of measured SAR at Plimit, +1.0dB device uncertainty” |       |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 7.5 Change in Call Test Results

This test was measured with Sub6 NR Band 77, and with callbox requesting maximum power. The call drop was manually performed when the EUT is transmitting at Preserve level as shown in the plot below (dotted black region). The measurement setup is shown in Figure 7-1.

### Call drop test result:

Plot 1: Measured Tx power (dBm) versus time shows that the transmitting power kept the same  $P_{reserve}$  level of Sub6 NR Band 77 after the call was re-established:

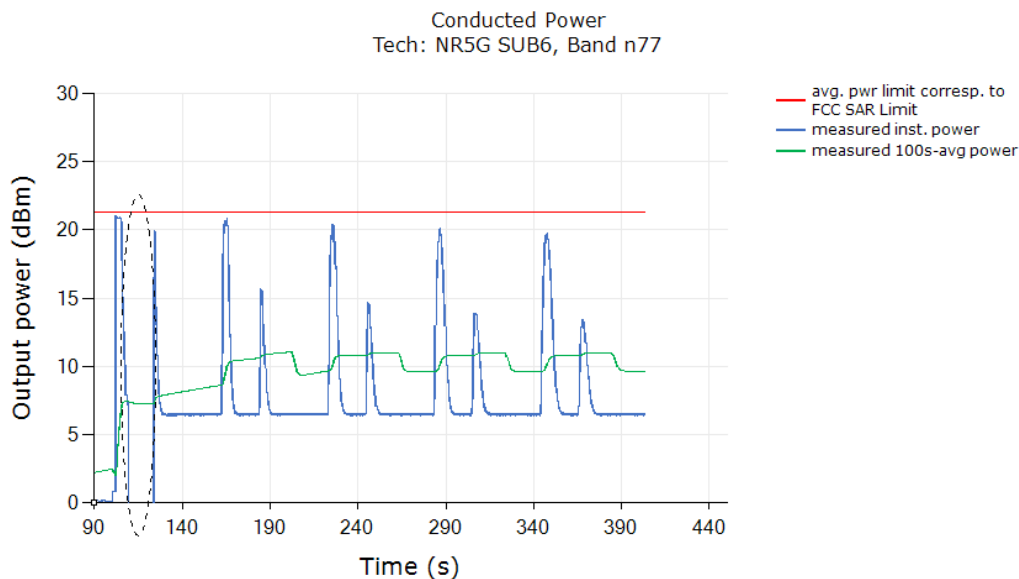


Plot Notes: The conducted power plot shows expected Tx transition.

Plot 2: Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (3a) and plotted below to demonstrate that the time- averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

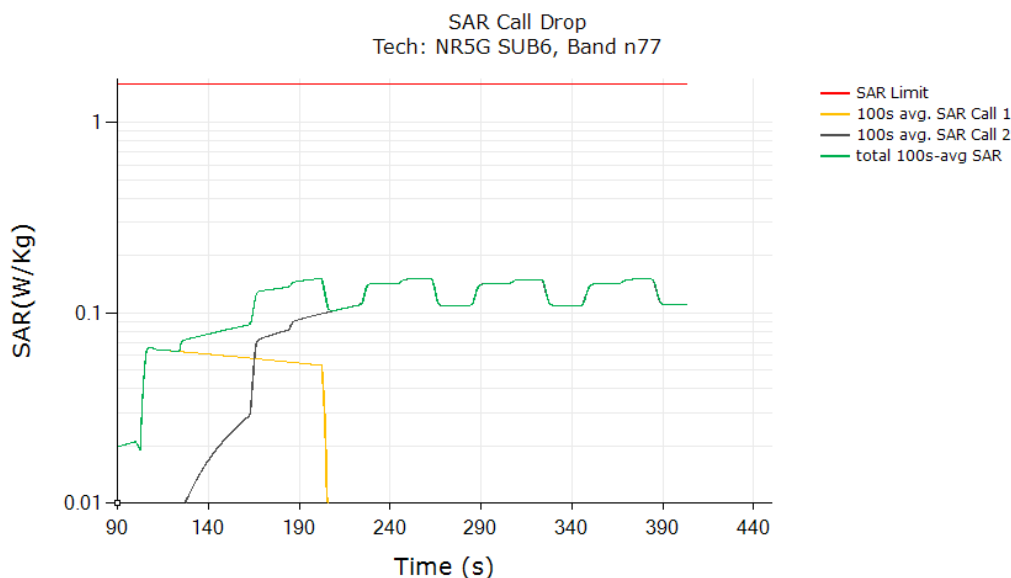

|                                            |       |
|--------------------------------------------|-------|
|                                            | W/Kg  |
| FCC 1gSAR limit                            | 1.6   |
| Max 100s-time averaged 1gSAR (green curve) | 0.152 |
| Validated                                  |       |

The test result validated the continuity of power limiting in change in call scenario.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 7.6 Change in technology/band test results

This test was conducted with callbox requesting maximum power, and with technology switch from WCDMA B5 to LTE B2. Following procedure, and using the measurement setup shown in Figure 7-1(a) and (c), the technology/band switch was performed when the EUT is transmitting at Preserve level as shown in the plot below (dotted black region).


Plot 1: Measured Tx power (dBm) versus time shows that the transmitting power changed from WCDMA B5, Preserve level to LTE B2.

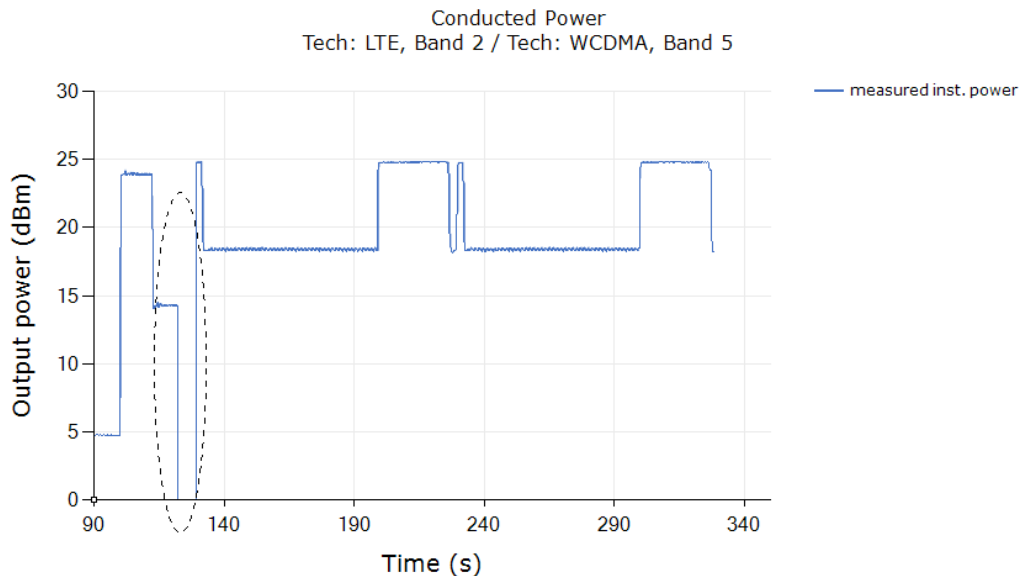

Plot 2: All the time-averaged conducted Tx power measurement results were converted into time-averaged normalized SAR values, and plotted below to demonstrate that the time-averaged normalized exposure versus time does not exceed the normalized FCC limit of 1.0:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

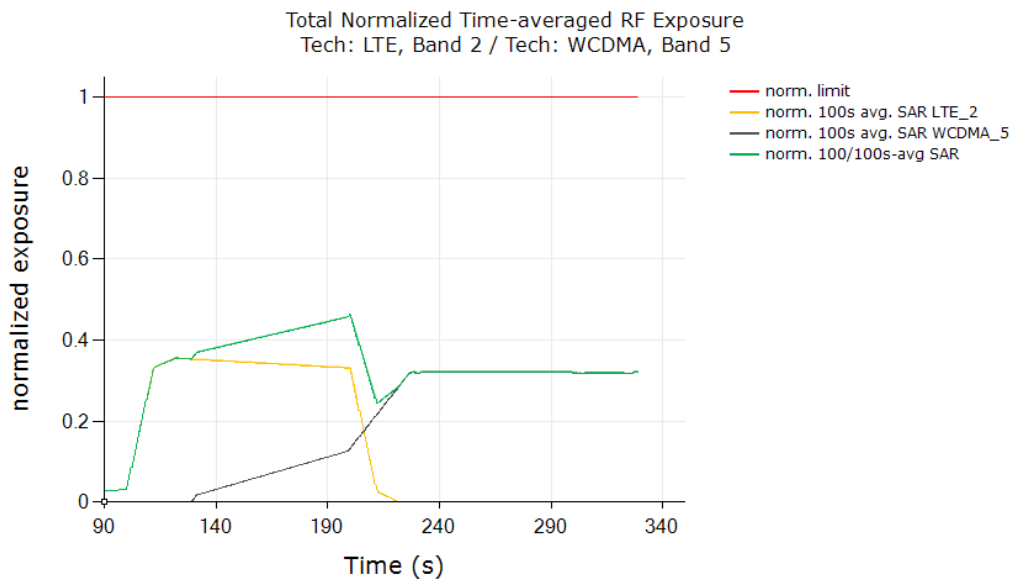

|                                                                 | Exposure Ratio |
|-----------------------------------------------------------------|----------------|
| FCC normalized Exposure Ratio limit                             | 1              |
| Max total time averaged normalized Exposure Ratio (green curve) | 0.463          |
| Validated                                                       |                |

The test result validated the continuity of power limiting in technology/band switch scenario.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 7.7 Change in Time window / antenna switch test results

### 7.6.1 Test case 1: transition from LTE B2 to LTE B43 (i.e., 100s to 60s), then back to LTE B4

Test result for change in time-window (from 100s to 60s to 100s):

Plot 1: Measured Tx power (dBm) versus time shows that the transmitting power changed when LTE B2 switches to LTE Band 43 (~245 seconds timestamp) and switches back to LTE Band 2 (~325 seconds timestamp):

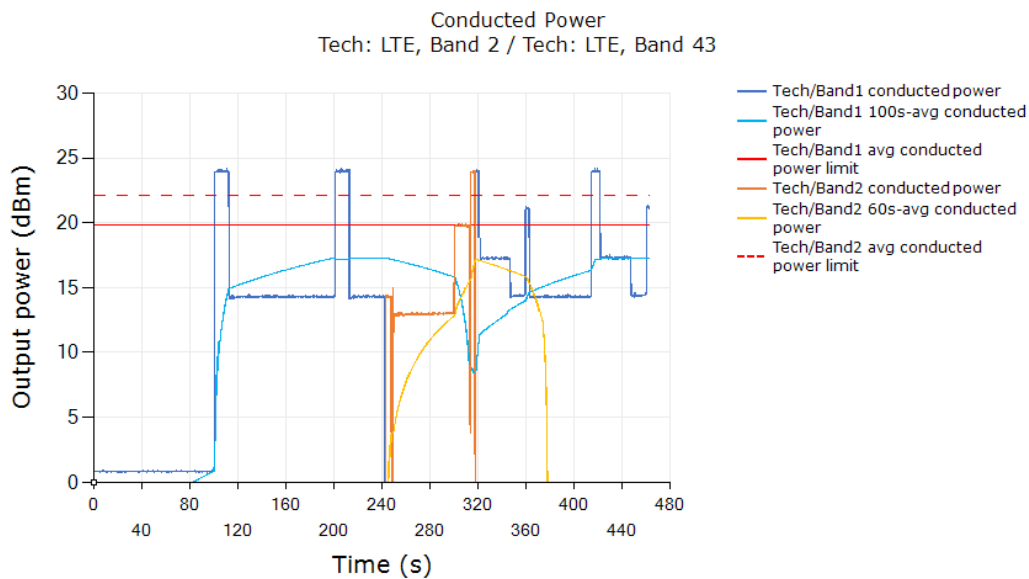

Plot Notes: The conducted power plot shows expected transitions in Tx power at ~245 seconds (100s-to-60s transition) and at ~325 seconds (60s-to-100s transition) in order to maintain total time-averaged RF exposure compliance across time windows, as show in next plot.


Plot 2: All the conducted Tx power measurement results were converted into time-averaged normalized SAR values, and plotted below to demonstrate that the time-averaged normalized SAR versus time does not exceed the FCC limit of 1 unit. Equation (8a) is used to convert the Tx power of device to obtain 100s-averaged normalized SAR in LTE B26 as shown in black curve. Similarly, equation (8b) is used to obtain 60s-averaged normalized SAR in LTE Band 42 as shown in orange curve.

Equation (8c) is used to obtain total time-averaged normalized SAR as shown in green curve (i.e., sum of black and orange curves).

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

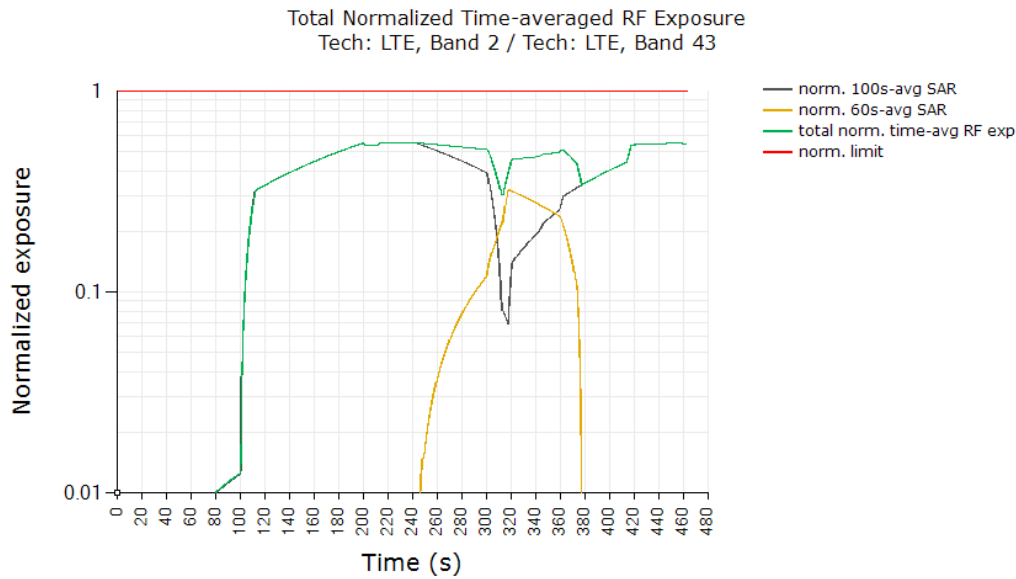

|                                                                 | Exposure Ratio |
|-----------------------------------------------------------------|----------------|
| FCC normalized Exposure Ratio                                   | 1.0            |
| Max total time averaged normalized Exposure Ratio (green curve) | 0.552          |
| Validated                                                       |                |

Plot Notes:0.6875

Maximum power is requested by callbox for the entire duration of the test, with tech/band switches from 100s-to-60s window at ~245s time stamp, and from 60s-to-100s window at ~325s time stamp. Smart Transmit controls the Tx power during these time-window switches to ensure total time-averaged RF exposure, i.e., sum of black and orange curves given by equation (8c), is always compliant. In time-window switch test, at all times the total time averaged normalized RF exposure (green curve) should not exceed normalized SAR\_design\_target +1dB device uncertainty. In this test, with a maximum normalized SAR of 0.564 being  $\leq 0.866$  ( $=1.1/1.6 +1.0$ dB device uncertainty), the above test result validated the continuity of power limiting in time-window switch scenario.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279


f (886-2) 2298-0488

[www.sgs.com.tw](http://www.sgs.com.tw)

Member of SGS Group

## 7.8 Switch in SAR exposure test results

This test was conducted with callbox requesting maximum power, and with the EUT in LTE Band 2 + Sub6 NR Band 77 call. Following procedure detailed in Section 5.3.7 and Appendix B, and using the measurement setup shown in Figure 7-1, the SAR exposure switch measurement is performed with the EUT in various SAR exposure scenarios.

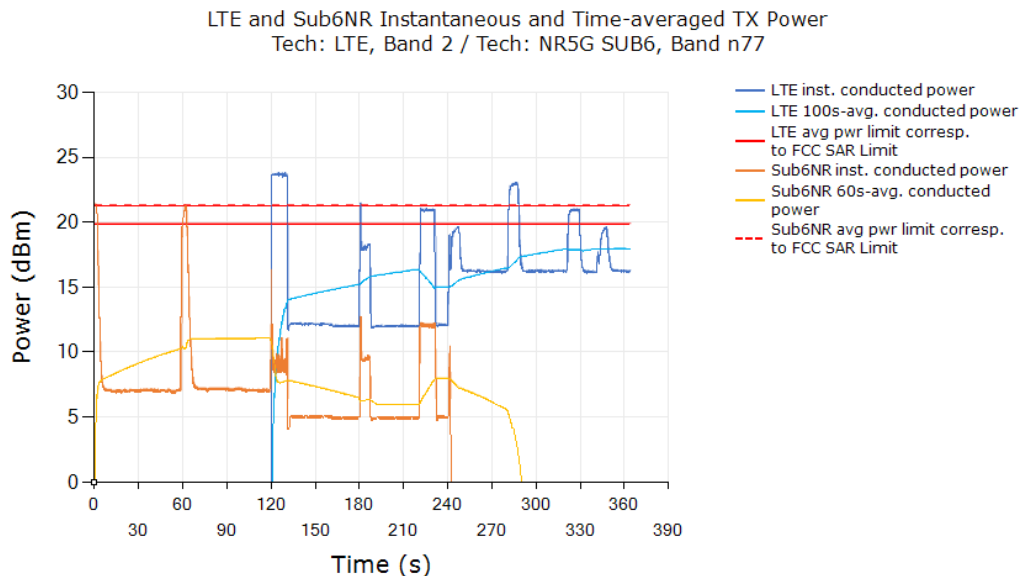


Plot 2: All the conducted Tx power measurement results were converted into time-averaged normalized SAR values using Equation (8a), (8b) and (8c), and plotted below to demonstrate that the time-averaged normalized SAR versus time does not exceed the FCC limit of 1 unit. Equation (8a) is used to convert the LTE Tx power of device to obtain 100s-averaged normalized SAR in LTE B2 as shown in black curve. Similarly, equation (8b) is used to obtain 100s-averaged normalized SAR in Sub6 NR n77 as shown in orange curve. Equation (8c) is used to obtain total time-averaged normalized SAR as shown in green curve (i.e., sum of black and orange curves).

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Total Normalized Time-averaged RF Exposure  
Tech: LTE, Band 2 / Tech: NR5G SUB6, Band n77

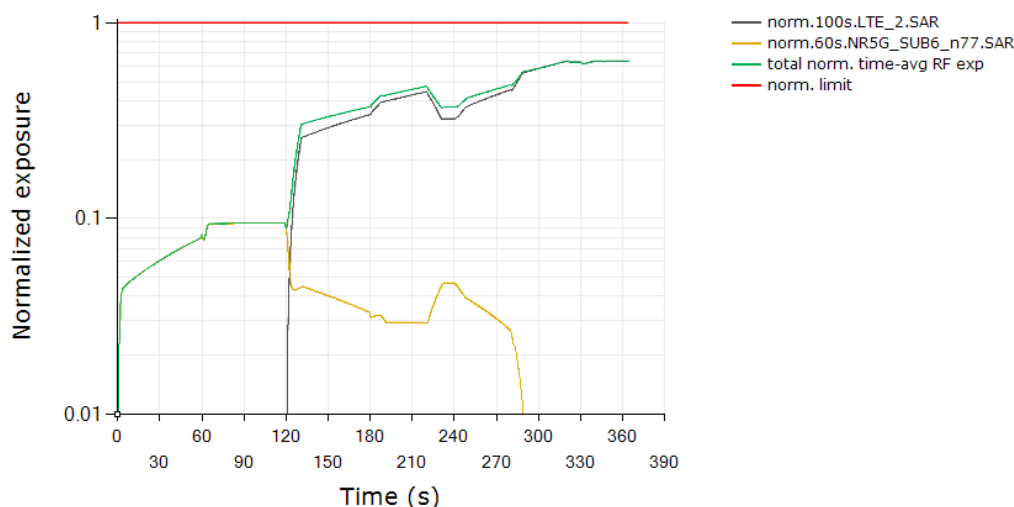

|                                                                 | Exposure Ratio |
|-----------------------------------------------------------------|----------------|
| FCC normalized Exposure Ratio limit                             | 1.0            |
| Max total time averaged normalized Exposure Ratio (green curve) | 0.639          |
| Validated                                                       |                |

#### Plot Notes:

Device starts predominantly in Sub6 NR SAR exposure scenario between 5s and 120s, and in LTE SAR + Sub6 NR SAR exposure scenario between 120s and 240s, and in predominantly in LTE SAR exposure scenario after  $t=240s$ . Here, Smart Transmit allocates a maximum of 75% of exposure margin (based on 2dB reserve margin setting) for Sub6 NR. This corresponds to a normalized 1gSAR exposure value =  $75\% * 0.87 \text{ W/kg measured SAR at Sub6 NR } P_{limit} / 1.6\text{W/kg limit} = 0.407 \pm 1\text{dB device related uncertainty}$  (see orange curve between 5s~120s). For predominantly LTE SAR exposure scenario, maximum normalized 1gSAR exposure should correspond to 100% exposure margin =  $0.73 \text{ W/kg measured SAR at LTE } P_{limit} / 1.6\text{W/kg limit} = 0.456 \pm 1\text{dB device related uncertainty}$  (see black curve after  $t = 240s$ ). Additionally, in SAR exposure switch test, at all times the total time-averaged normalized RF exposure (green curve) should not exceed normalized  $SAR_{design\_target} + 1\text{dB device uncertainty}$ . In this test, with a maximum normalized SAR of 0.657 being  $\leq 0.866 (= 1.1/1.6 + 1\text{dB device uncertainty})$ , the above test result validated the continuity of power limiting in SAR exposure switch scenario.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279


f (886-2) 2298-0488

[www.sgs.com.tw](http://www.sgs.com.tw)

Member of SGS Group

## 7.9 Switch in SAR exposure test results

This test was conducted with callbox requesting maximum power, and with the EUT in LTE Band 2 + Sub6 NR Band 2 call. Following procedure detailed in Section 5.3.7 and Appendix B, and using the measurement setup shown in Figure 7-1, the SAR exposure switch measurement is performed with the EUT in various SAR exposure scenarios.

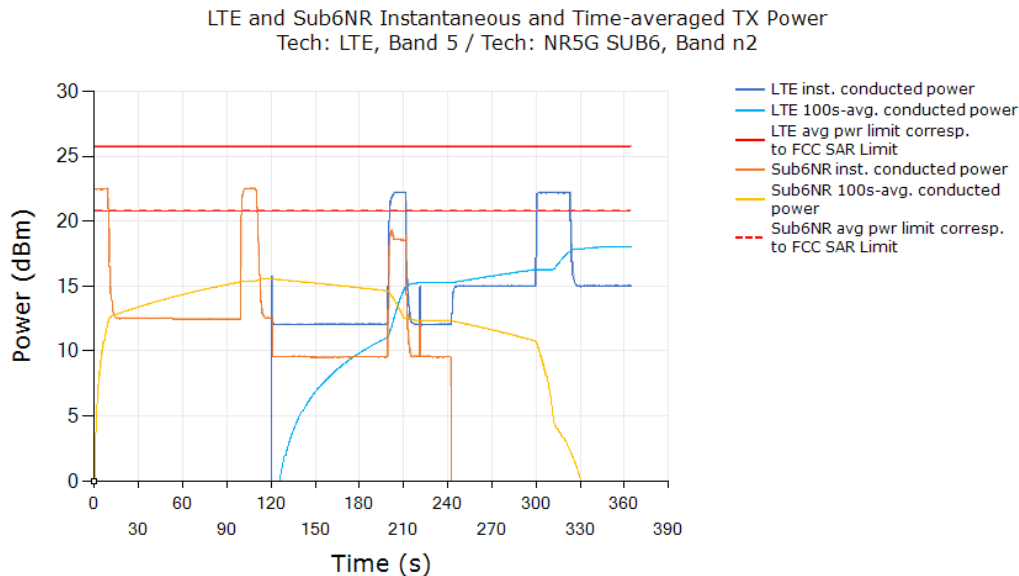


Plot 2: All the conducted Tx power measurement results were converted into time-averaged normalized SAR values using Equation (8a), (8b) and (8c), and plotted below to demonstrate that the time-averaged normalized SAR versus time does not exceed the FCC limit of 1 unit. Equation (8a) is used to convert the LTE Tx power of device to obtain 100s-averaged normalized SAR in LTE B2 as shown in black curve. Similarly, equation (8b) is used to obtain 100s-averaged normalized SAR in Sub6 NR n2 as shown in orange curve. Equation (8c) is used to obtain total time-averaged normalized SAR as shown in green curve (i.e., sum of black and orange curves).

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Total Normalized Time-averaged RF Exposure  
Tech: LTE, Band 5 / Tech: NR5G SUB6, Band n2

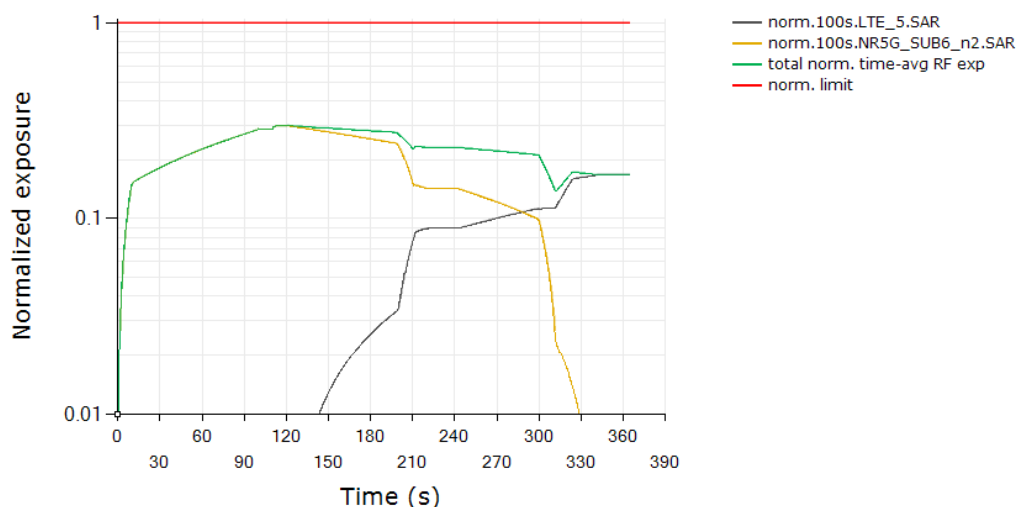

|                                                                 | Exposure Ratio |
|-----------------------------------------------------------------|----------------|
| FCC normalized Exposure Ratio limit                             | 1.0            |
| Max total time averaged normalized Exposure Ratio (green curve) | 0.298          |
| Validated                                                       |                |

#### Plot Notes:

Device starts predominantly in Sub6 NR SAR exposure scenario between 5s and 120s, and in LTE SAR + Sub6 NR SAR exposure scenario between 120s and 240s, and in predominantly in LTE SAR exposure scenario after  $t=240s$ . Here, Smart Transmit allocates a maximum of 75% of exposure margin (based on 2dB reserve margin setting) for Sub6 NR. This corresponds to a normalized 1gSAR exposure value =  $75\% * 0.89 \text{ W/kg measured SAR at Sub6 NR } P_{limit} / 1.6 \text{ W/kg limit} = 0.417 \pm 1 \text{ dB device related uncertainty}$  (see orange curve between 5s~120s). For predominantly LTE SAR exposure scenario, maximum normalized 1gSAR exposure should correspond to 100% exposure margin =  $0.95 \text{ W/kg measured SAR at LTE } P_{limit} / 1.6 \text{ W/kg limit} = 0.594 \pm 1 \text{ dB device related uncertainty}$  (see black curve after  $t = 240s$ ). Additionally, in SAR exposure switch test, at all times the total time-averaged normalized RF exposure (green curve) should not exceed normalized  $SAR_{design\_target} + 1 \text{ dB device uncertainty}$ . In this test, with a maximum normalized SAR of 0.722 being  $\leq 0.866 (= 1.1/1.6 + 1 \text{ dB device uncertainty})$ , the above test result validated the continuity of power limiting in SAR exposure switch scenario.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 8 SAR TEST RESULTS FOR SUB-6 SMART TRANSMIT FEATURE VALIDATION

### 8.2 Measurement setup

The measurement setup in Figure 7-1 is similar to normal SAR measurements. The difference in SAR measurement setup for time averaging feature validation is that the callbox is signaling in close loop power control mode (instead of requesting maximum power in open loop control mode) and callbox is connected to the PC using GPIB so that the test script executed on PC can send GPIB commands to control the callbox's requested power over time (test sequence). The same test script used in conducted setup for time-varying Tx power measurements is also used in this section for running the test sequences during SAR measurements, and the recorded values from the disconnected power meter by the test script were discarded.

As mentioned before, for EUT to follow TPC command sent from the callbox wirelessly, the "path loss" between callbox antenna and the EUT needs to be very well calibrated. Since the SAR chamber is in uncontrolled environment, precautions must be taken to minimize the environmental influences on "path loss". Similarly, in the case of time-varying SAR measurements in Sub6 NR (with LTE as anchor), "path loss" between callbox antenna and the EUT needs to be carefully calibrated for both LTE link as well as for Sub6 NR link.

The EUT is placed in worst-case position according to Table 6-2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

[www.sgs.com.tw](http://www.sgs.com.tw)

Member of SGS Group

### 8.3 SAR measurement results for time-varying Tx power transmission scenario

Following Section 5.4 procedure, time-averaged SAR measurements are conducted using EX3DV4 probe at peak location of area scan over 500 seconds. cDASY6 system verification for SAR measurement is provided in Appendix C.

SAR probe integration times depend on the communication signal being tested. Integration times used by SPEAG for their probe calibrations can be downloaded from here (integration time is listed on the bottom of the first page for each tech):

<https://speag.swiss/assets/downloads/services/cs/UID-Summary-200905.pdf>

Since the sampling rate used by cDASY6 for pointSAR measurements is not in user control, the number of points in 100s or 60s interval is determined from the scan duration setting in cDASY6 time-average pointSAR measurement by (100s or 60s / cDASY6\_scan\_duration \* total number of pointSAR values recorded). Running average is performed over these number of points in excel spreadsheet to obtain 100s-/60s-averaged pointSAR.

For each of selected technology/band (listed in Table 6-2):

1. With *Reserve\_power\_margin* set to 0 dB, area scan is performed at  $P_{limit}$ , and time-averaged pointSAR measurements are conducted to determine the pointSAR at  $P_{limit}$  at peak location, denoted as  $pointSAR_{P_{limit}}$ .

2. With *Reserve\_power\_margin* set to actual (intended) value, two more time-averaged pointSAR measurements are performed at the same peak location for test sequences 1 and 2.

To demonstrate compliance, all the pointSAR measurement results were converted into 1gSAR value by using Equation (5a), rewritten below:

$$1g\_or\_10gSAR(t) = \frac{pointSAR(t)}{pointSAR_{P_{limit}}} * 1g\_or\_10gSAR_{P_{limit}} \quad (5a)$$


where,  $pointSAR(t)$ ,  $pointSAR_{P_{limit}}$ , and  $1g\_SAR_{P_{limit}}$  correspond to the measured instantaneous point SAR, measured point SAR at  $P_{limit}$  from above step 1 and 2, and measured 1gSAR value at  $P_{limit}$  obtained from Part 1 report and listed in Table 6-2 in Section 6.1 of this report.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

### 8.2.1 WCDMA Band 5 SAR test results

#### SAR test results for test sequence 1:

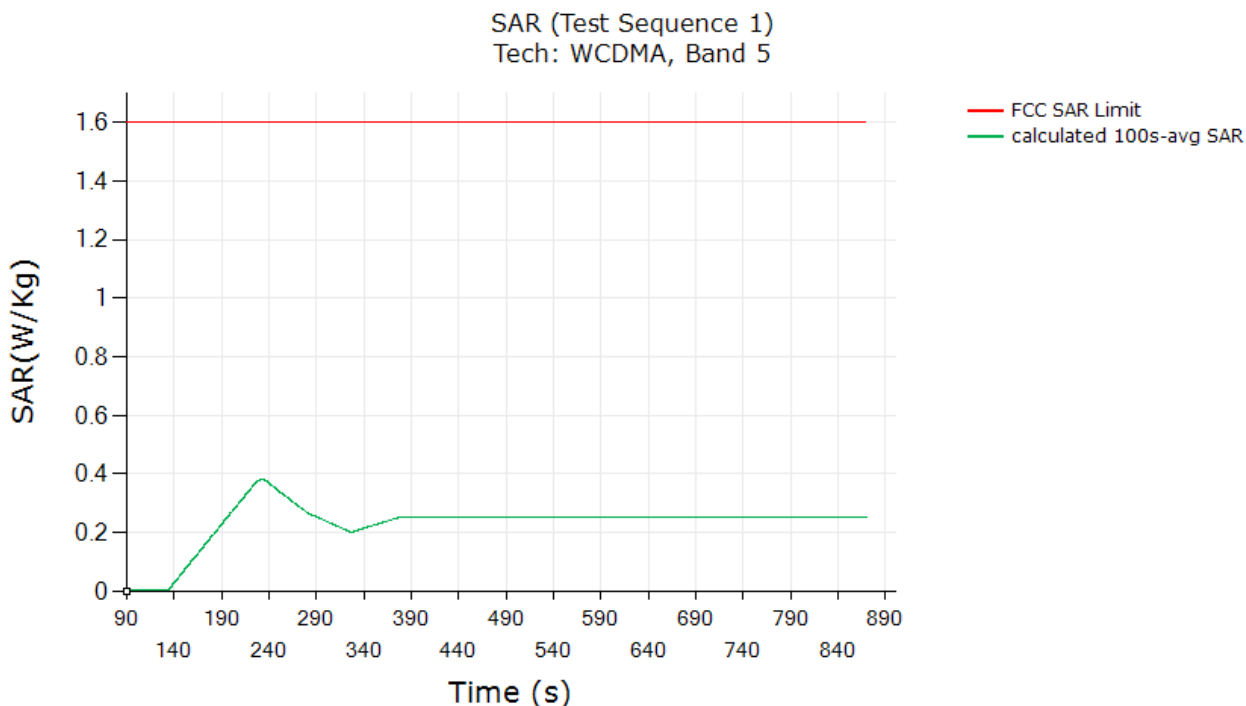

|                                                                                                                        | W/Kg  |
|------------------------------------------------------------------------------------------------------------------------|-------|
| FCC 1gSAR limit                                                                                                        | 1.6   |
| Max 100s-time averaged 1gSAR (green curve)                                                                             | 0.383 |
| <b>Validated:</b> Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +1.0dB device uncertainty |       |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279


f (886-2) 2298-0488

[www.sgs.com.tw](http://www.sgs.com.tw)

Member of SGS Group

## SAR test results for test sequence 2:

SAR (Test Sequence 2)  
Tech: WCDMA, Band 5

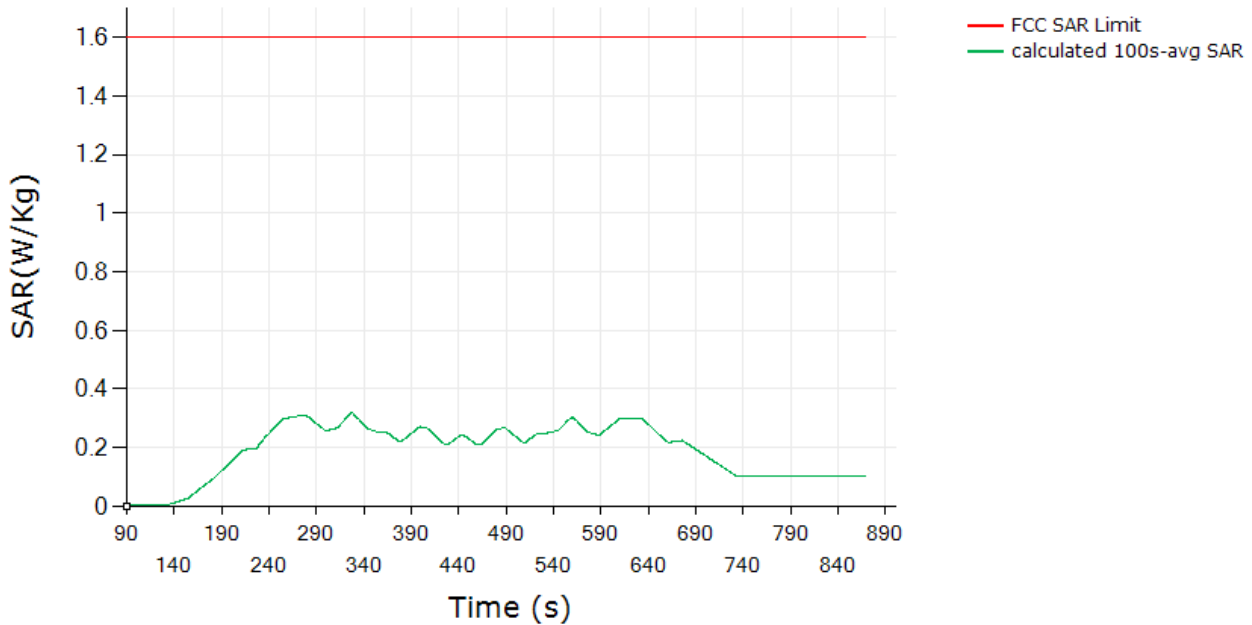


|                                                                                                                        | W/Kg  |
|------------------------------------------------------------------------------------------------------------------------|-------|
| FCC 1gSAR limit                                                                                                        | 1.6   |
| Max 100s-time averaged 1gSAR (green curve)                                                                             | 0.318 |
| <b>Validated:</b> Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +1.0dB device uncertainty |       |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 8.2.2 WCDMA Band 2 SAR test results

### SAR test results for test sequence 1:

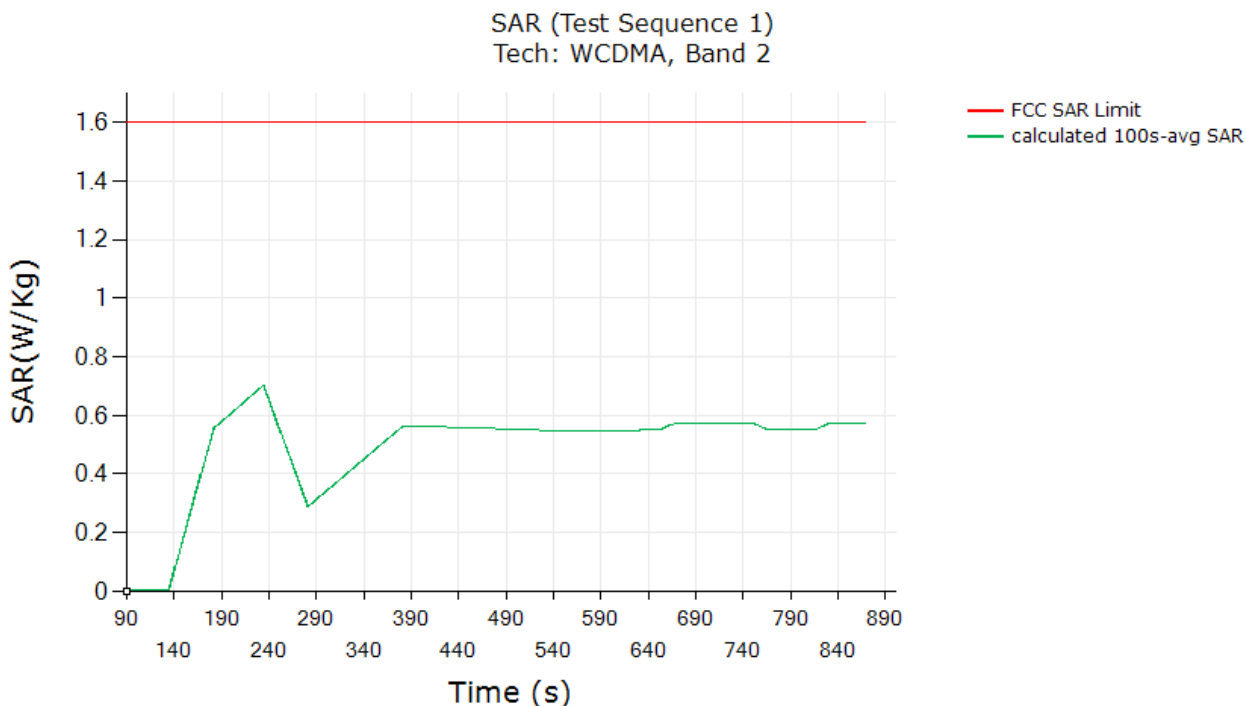

|                                                                                                                 | W/Kg  |
|-----------------------------------------------------------------------------------------------------------------|-------|
| FCC 1gSAR limit                                                                                                 | 1.6   |
| Max 100s-time averaged 1gSAR (green curve)                                                                      | 0.702 |
| Validated: Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +1.0dB device uncertainty |       |


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## SAR test results for test sequence 2:

SAR (Test Sequence 2)

Tech: WCDMA, Band 2

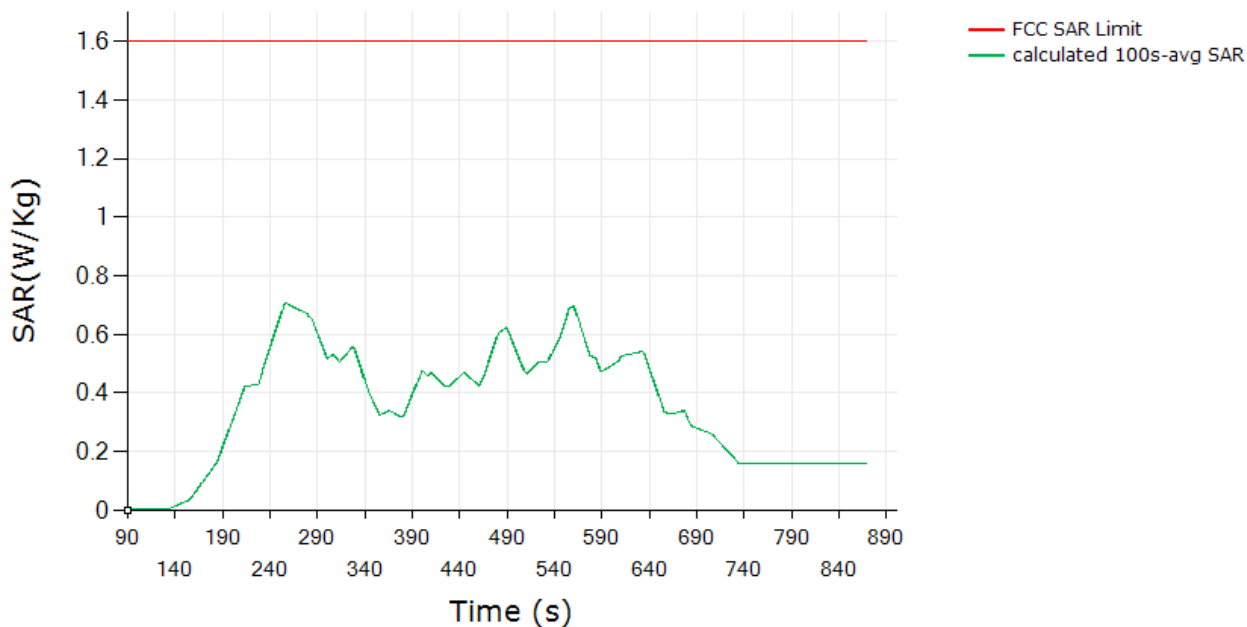

|                                                                                                                        | W/Kg  |
|------------------------------------------------------------------------------------------------------------------------|-------|
| FCC 1gSAR limit                                                                                                        | 1.6   |
| Max 100s-time averaged 1gSAR (green curve)                                                                             | 0.707 |
| <b>Validated:</b> Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +1.0dB device uncertainty |       |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279


f (886-2) 2298-0488

[www.sgs.com.tw](http://www.sgs.com.tw)

Member of SGS Group

### 8.2.3 LTE Band 26 SAR test results

#### SAR test results for test sequence 1:

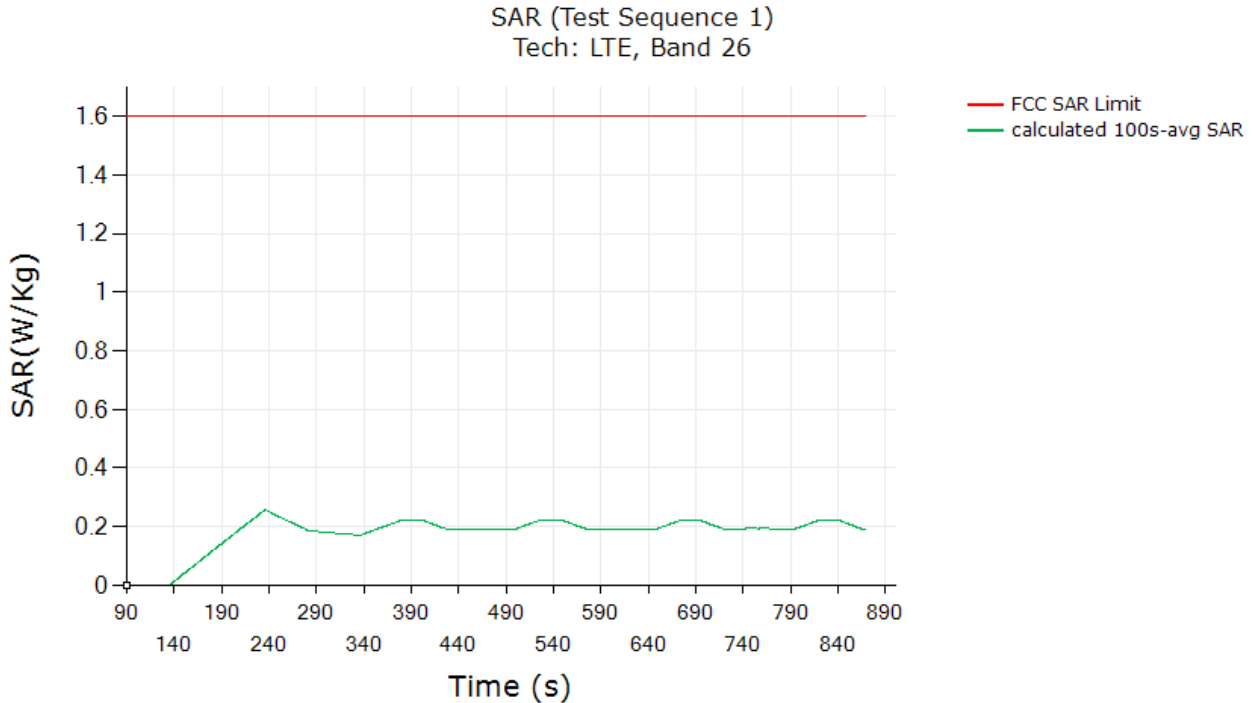


|                                                                                                                        | W/Kg  |
|------------------------------------------------------------------------------------------------------------------------|-------|
| FCC 1gSAR limit                                                                                                        | 1.6   |
| Max 100s-time averaged 1gSAR (green curve)                                                                             | 0.255 |
| <b>Validated:</b> Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +1.0dB device uncertainty |       |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## SAR test results for test sequence 2:

SAR (Test Sequence 2)  
Tech: LTE, Band 26

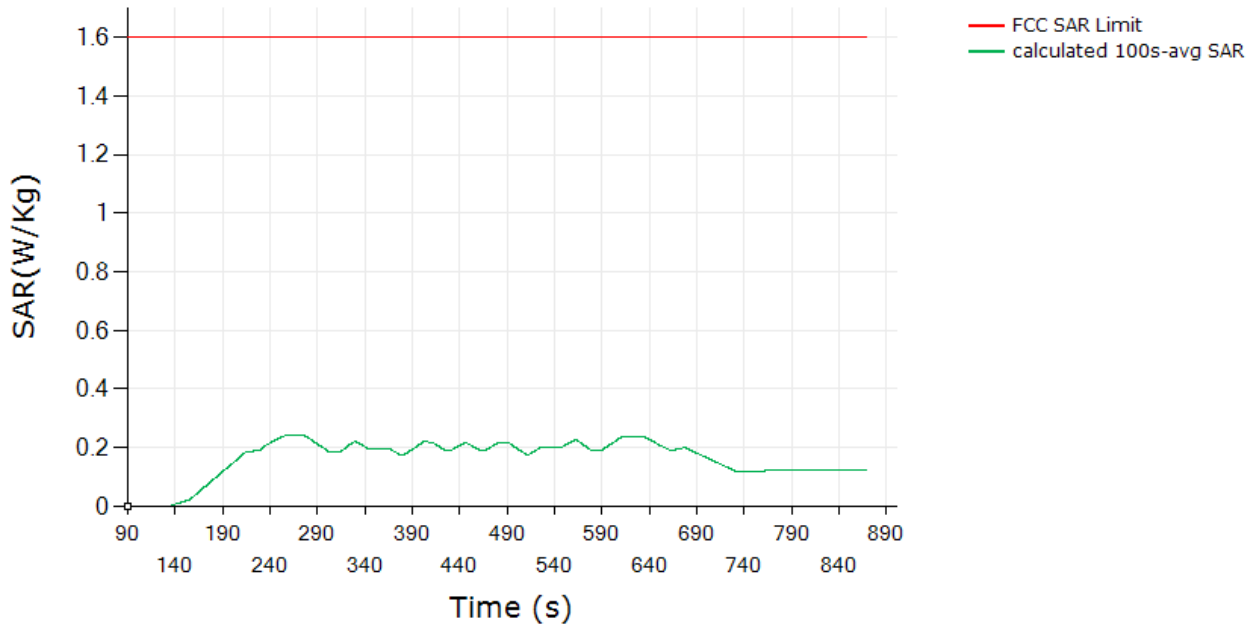

|                                                                                                                        | W/Kg  |
|------------------------------------------------------------------------------------------------------------------------|-------|
| FCC 1gSAR limit                                                                                                        | 1.6   |
| Max 100s-time averaged 1gSAR (green curve)                                                                             | 0.241 |
| <b>Validated:</b> Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +1.0dB device uncertainty |       |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279


f (886-2) 2298-0488

[www.sgs.com.tw](http://www.sgs.com.tw)

Member of SGS Group

## 8.2.4 LTE Band 2 SAR test results


### SAR test results for test sequence 1:

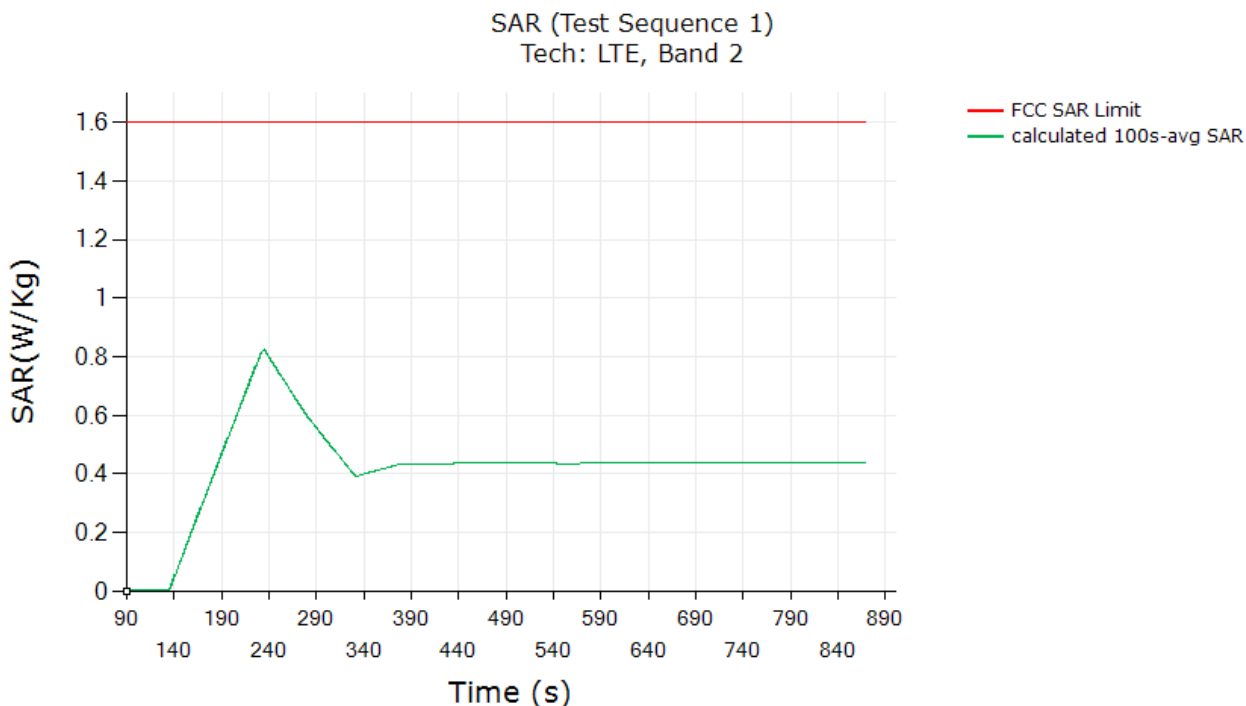

|                                                                                                                        | W/Kg  |
|------------------------------------------------------------------------------------------------------------------------|-------|
| FCC 1gSAR limit                                                                                                        | 1.6   |
| Max 100s-time averaged 1gSAR (green curve)                                                                             | 0.824 |
| <b>Validated:</b> Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +1.0dB device uncertainty |       |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

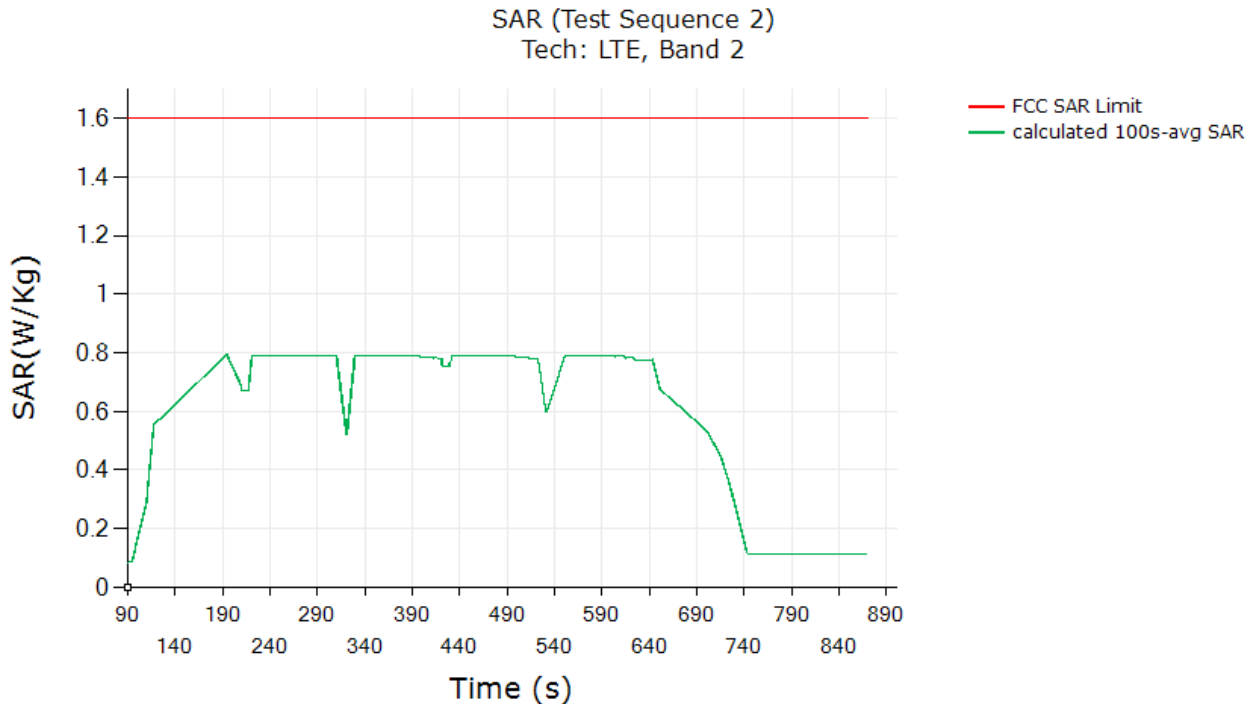SAR test results for test sequence 2:


|                                                                                                                        | W/Kg  |
|------------------------------------------------------------------------------------------------------------------------|-------|
| FCC 1gSAR limit                                                                                                        | 1.6   |
| Max 100s-time averaged 1gSAR (green curve)                                                                             | 0.793 |
| <b>Validated:</b> Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +1.0dB device uncertainty |       |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 8.2.5 Sub6 NR Band 77 SAR test results

### SAR test results for test sequence 1:

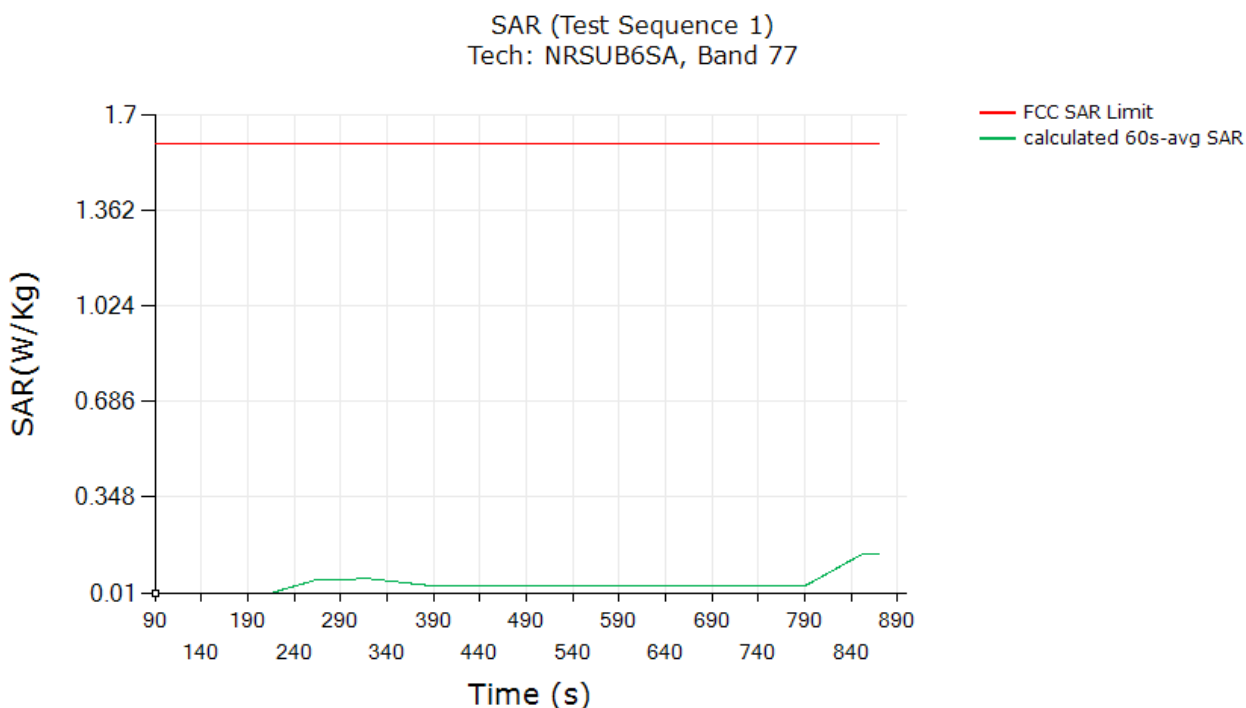

|                                                                                                                                                                  | W/Kg  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|
| FCC 1gSAR limit                                                                                                                                                  | 1.6   |
| Max 100s-time averaged 1gSAR (green curve)                                                                                                                       | 0.146 |
| <b>Validated:</b> Max time averaged SAR (green curve) does not exceed “75% (with 2dB Reserve Power Margin) of measured SAR at Plimit, +1.0dB device uncertainty” |       |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279


f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

## SAR test results for test sequence 2:

SAR (Test Sequence 2)  
Tech: NRSUB6SA, Band 77

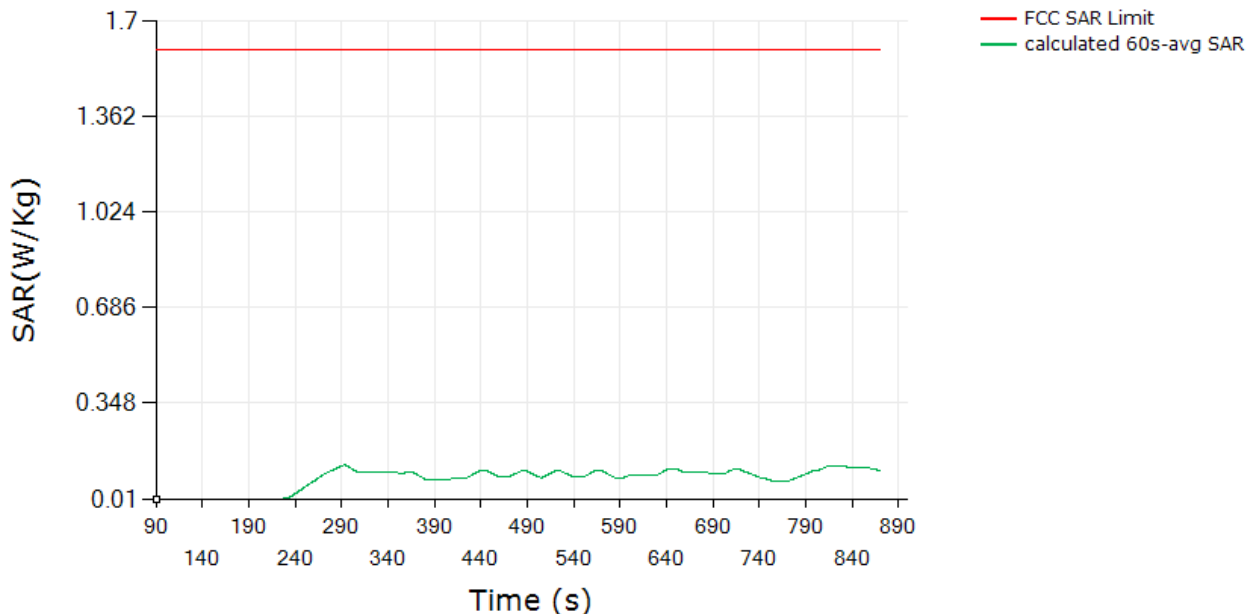


|                                                                                                                                                                  | W/Kg  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|
| FCC 1gSAR limit                                                                                                                                                  | 1.6   |
| Max 100s-time averaged 1gSAR (green curve)                                                                                                                       | 0.130 |
| <b>Validated:</b> Max time averaged SAR (green curve) does not exceed “75% (with 2dB Reserve_Power_Margin) of measured SAR at Plimit, +1.0dB device uncertainty” |       |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

### 8.2.6 Sub6 NR Band 26 SAR test results

#### SAR test results for test sequence 1:

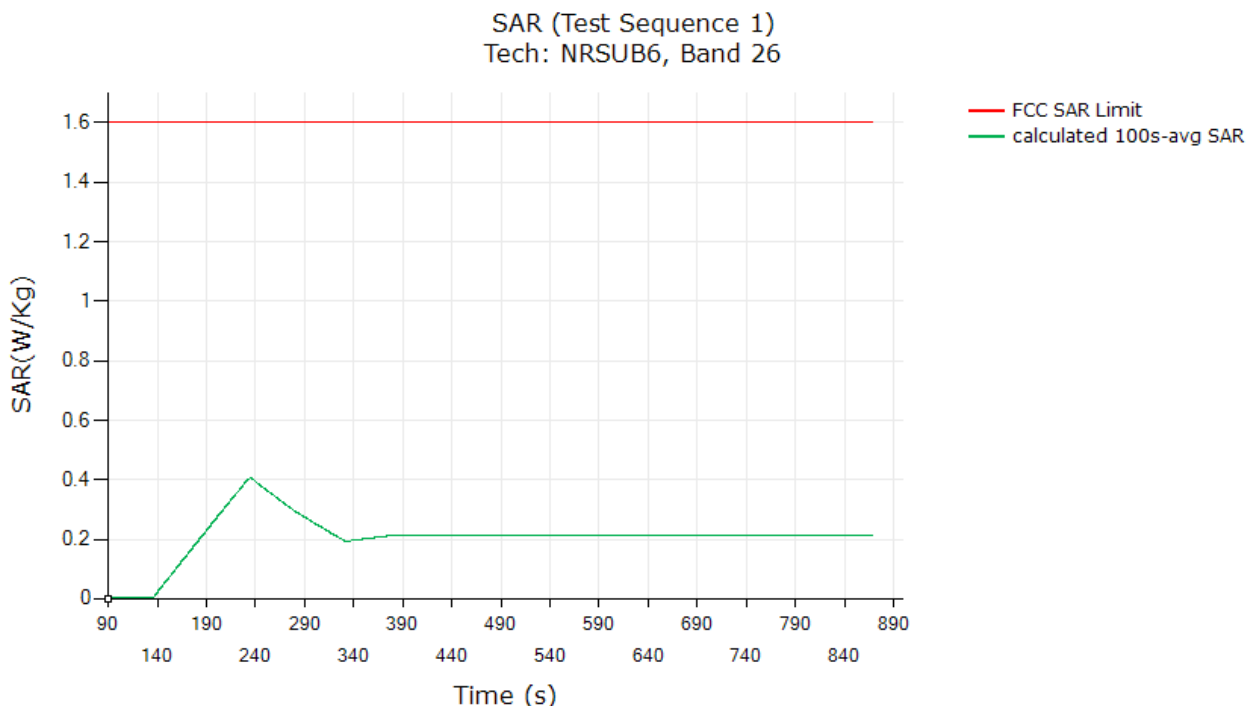


|                                                                                                                                                           |       |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------|-------|
|                                                                                                                                                           | W/Kg  |
| FCC 1gSAR limit                                                                                                                                           | 1.6   |
| Max 100s-time averaged 1gSAR (green curve)                                                                                                                | 0.405 |
| Validated: Max time averaged SAR (green curve) does not exceed “75% (with 2dB Reserve Power Margin) of measured SAR at Plimit, +1.0dB device uncertainty” |       |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## SAR test results for test sequence 2:

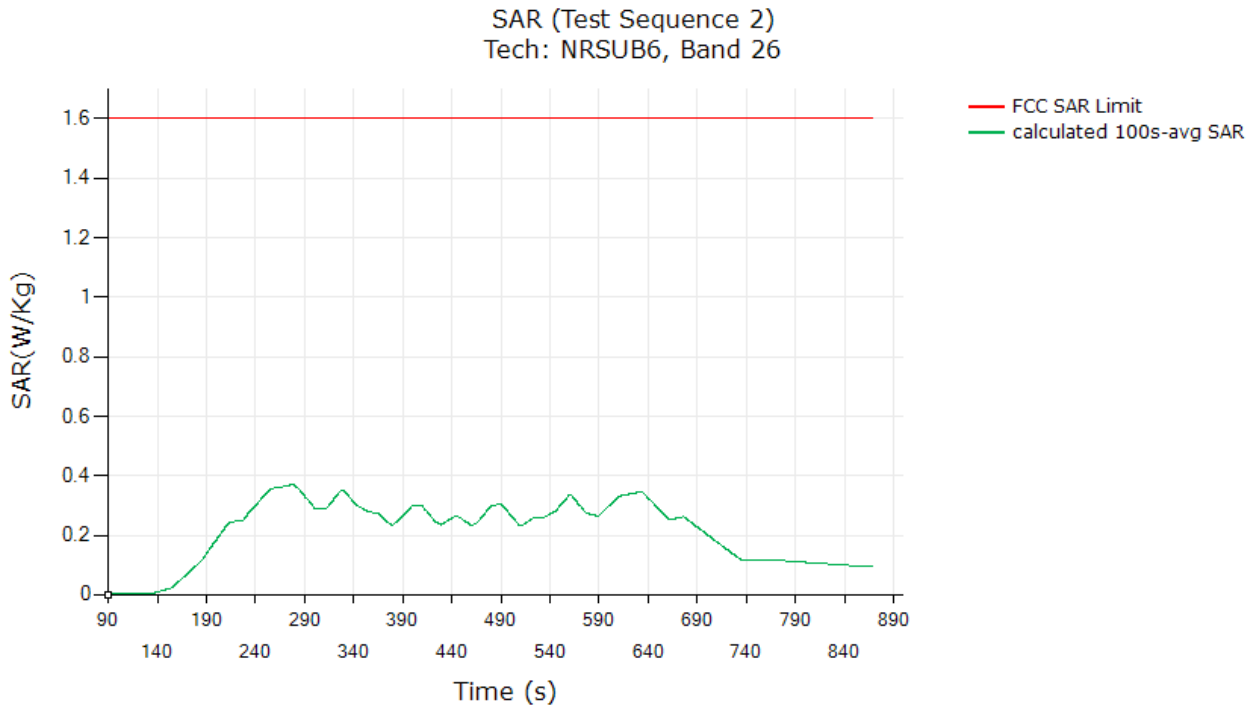

|                                                                                                                                                                  | W/Kg  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|
| FCC 1gSAR limit                                                                                                                                                  | 1.6   |
| Max 100s-time averaged 1gSAR (green curve)                                                                                                                       | 0.370 |
| <b>Validated:</b> Max time averaged SAR (green curve) does not exceed “75% (with 2dB Reserve_Power_Margin) of measured SAR at Plimit, +1.0dB device uncertainty” |       |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 9 CONCLUSIONS

Qualcomm Smart Transmit feature employed in HSN-I66C-4 has been validated through the conducted power/SAR measurement.

As demonstrated in this report, the power limiting enforcement is effective and the total normalized time-averaged RF exposure does not exceed 1.0 for all the transmission scenarios described in Section 4. Therefore, the EUT complies with FCC RF exposure requirements.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

[www.sgs.com.tw](http://www.sgs.com.tw)

Member of SGS Group

## Appendix A. Test Sequences

1. Test sequence is generated based on below parameters of the EUT:

- Measured maximum power ( $P_{max}$ )
- Measured Tx\_power\_at\_SAR\_design\_target ( $P_{limit}$ )
- Reserve\_power\_margin (dB)
  - Preserve (dBm) = measured  $P_{limit}$  (dBm) - Reserve\_power\_margin (dB)
- SAR\_time\_window (100s for FCC)

2. Test Sequence 1 Waveform:

Based on the parameters above, the Test Sequence 1 is generated with one transition between high and low Tx powers. Here, high power =  $P_{max}$ ; low power =  $P_{max}/2$ , and the transition occurs after 80 seconds at high power  $P_{max}$ . As long as the power enforcement is taking into effective during one 100s/60s time window, the validation test with this defined test sequence 1 is valid, otherwise, select other radio configuration (band/DSI within the same technology group) having lower  $P_{limit}$  for this test. The Test sequence 1

waveform is shown below:

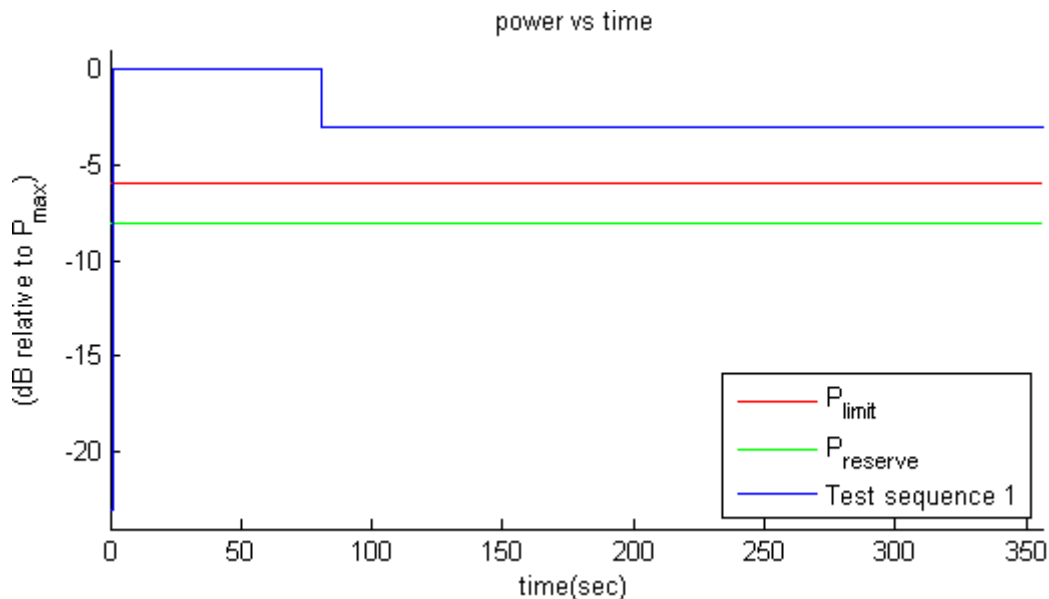


Figure A-1 Test sequence 1 waveform

3. Test Sequence 2 Waveform:

Based on the parameters in A-1, the Test Sequence 2 is generated as described in Table A-1, which contains two 170 second-long sequences (yellow and green highlighted rows) that are mirrored around the center row of 20s, resulting in a total duration of 360 seconds:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Table A-1 Test Sequence 2


| Time duration (seconds) | dB relative to $P_{limit}$ or $P_{reserve}$                                 |
|-------------------------|-----------------------------------------------------------------------------|
| 15                      | $P_{reserve} - 2$                                                           |
| 20                      | $P_{limit}$                                                                 |
| 20                      | $(P_{limit} + P_{max})/2$ averaged in mW and rounded to nearest 0.1 dB step |
| 10                      | $P_{reserve} - 6$                                                           |
| 20                      | $P_{max}$                                                                   |
| 15                      | $P_{limit}$                                                                 |
| 15                      | $P_{reserve} - 5$                                                           |
| 20                      | $P_{max}$                                                                   |
| 10                      | $P_{reserve} - 3$                                                           |
| 15                      | $P_{limit}$                                                                 |
| 10                      | $P_{reserve} - 4$                                                           |
| 20                      | $(P_{limit} + P_{max})/2$ averaged in mW and rounded to nearest 0.1 dB step |
| 10                      | $P_{reserve} - 4$                                                           |
| 15                      | $P_{limit}$                                                                 |
| 10                      | $P_{reserve} - 3$                                                           |
| 20                      | $P_{max}$                                                                   |
| 15                      | $P_{reserve} - 5$                                                           |
| 15                      | $P_{limit}$                                                                 |
| 20                      | $P_{max}$                                                                   |
| 10                      | $P_{reserve} - 6$                                                           |
| 20                      | $(P_{limit} + P_{max})/2$ averaged in mW and rounded to nearest 0.1 dB step |
| 20                      | $P_{limit}$                                                                 |
| 15                      | $P_{reserve} - 2$                                                           |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

The Test Sequence 2 waveform is shown in Figure A-2.

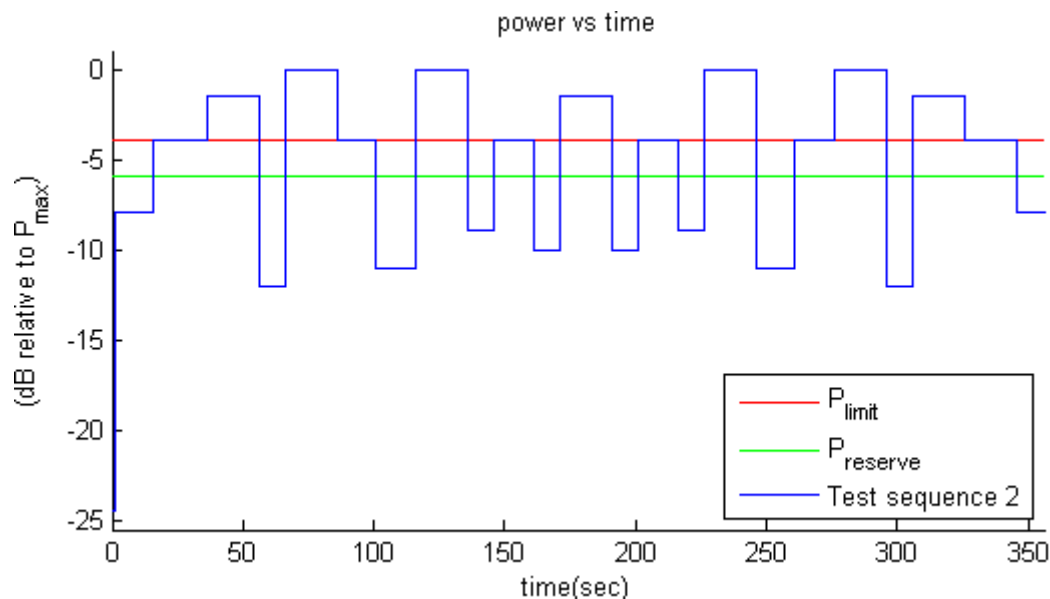

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

[www.sgs.com.tw](http://www.sgs.com.tw)

Member of SGS Group

## Appendix B. Validation for sub6 simultaneous transmission scenarios

Appendix B provides the test procedures for validating Qualcomm Smart Transmit feature for LTE + Sub6 NR non-standalone (NSA) mode transmission scenario, where sub-6GHz LTE link acts as an anchor, and for validating interband ULCA transmission scenario

### B.1 Time-varying Tx power test for sub6 NR in NSA mode

Follows Section 5.2.1 to select test configurations for time-varying test. This test is performed with two pre-defined test sequences (described in Section 5.1) applied to Sub6 NR (with LTE on all-down bits for the entire test after establishing the LTE+Sub6 NR call with the callbox).

Follow the test procedures described in Section 5.3.1 to demonstrate the effectiveness of power limiting enforcement and that the time averaged Tx power of Sub6 NR when converted into 1gSAR values does not exceed the regulatory limit at all times (see Eq. (3a) and (3b)). Sub6 NR response to test sequence1 and test sequence2 will be similar to other technologies (say, LTE) shown in Section 8.

### B.2 Switch in SAR exposure between LTE vs. Sub6 NR during transmission

This test is to demonstrate that Smart Transmit feature accurately accounts for switching in exposures among SAR for LTE radio only, SAR from both LTE radio and sub6 NR, and SAR from sub6 NR only scenarios, and ensures total time-averaged RF exposure compliance with FCC limit.

1. Measure conducted Tx power corresponding to  $P_{limit}$  for LTE and sub6 NR in selected band. Test condition to measure conducted  $P_{limit}$  is:

Establish device in call with the callbox for LTE in desired band. Measure conducted Tx power corresponding to LTE  $P_{limit}$  with Smart Transmit enabled and *Reserve\_power\_margin* set to 0 dB, callbox set to request maximum power.

Repeat above step to measure conducted Tx power corresponding to Sub6 NR  $P_{limit}$ . If testing LTE+Sub6 NR in non-standalone mode, then establish LTE+Sub6 NR call with callbox and request all down bits for radio1 LTE. In this scenario, with callbox requesting maximum power from Sub6 NR, measured conducted Tx power corresponds to radio2  $P_{limit}$  (as radio1 LTE is at all-down bits)

2. Set *Reserve\_power\_margin* to actual (intended) value, with EUT setup for LTE + Sub6 NR call. First, establish LTE connection with the callbox, and then add Sub6 NR connection. As soon as the Sub6 NR connection is established, request all-down bits (or low power) on LTE link and then request UE to transmit at maximum power in Sub6 NR. Continue LTE (all-down bits) + Sub6 NR transmission for more than one time-window duration to test predominantly Sub6 NR SAR exposure scenario (as SAR exposure is negligible from all-down bits in LTE). After at least one time-window, request LTE to go all-up bits to test LTE SAR and Sub6 NR SAR exposure scenario. After at least one more time-window, drop (or request all-down bits) Sub6 NR transmission to test predominantly LTE SAR exposure scenario. Continue the test for at least one more time-window. Record the conducted Tx powers for both LTE and Sub6 NR for the entire duration of this test.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

3. Once the measurement is done, extract instantaneous Tx power versus time for both LTE and Sub6 NR links. Similar to technology/band switch test in Section 5.3.3, convert the conducted Tx power for both these radios into 1g\_SAR value (see Eq. (7a) and (7b)) using corresponding technology/band P<sub>limit</sub> measured in Step 1, and then perform 100s running average to determine time-averaged 1g\_SAR versus time as illustrated in [Figure 5-1](#). Note that here it is assumed both radios have Tx frequencies < 3GHz, otherwise, 60s running average should be performed for radios having Tx frequency between 3GHz and 6GHz.
4. Make one plot containing: (a) instantaneous Tx power versus time measured in Step 2.
5. Make another plot containing: (a) instantaneous 1gSAR versus time determined in Step 3, (b) computed time-averaged 1gSAR versus time determined in Step 3, and (c) corresponding regulatory 1g\_SAR limit.

The validation criteria is, at all times, the time-averaged 1g\_SAR versus time shall not exceed the regulatory 1g\_SAR limit.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## Appendix C. cDASY6 System Verification

## EX3DV4 E-Field Probe

|               |                                                                                                                                                                                                            |                                                                                     |
|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Construction  | Symmetrical design with triangular core<br>Built-in shielding against static charges<br>PEEK enclosure material (resistant to organic solvents, e.g., DGBE)                                                |  |
| Calibration   | Basic Broad Band Calibration in air Conversion Factors (CF) for HSL<br>835/1900/3700 MHz Additional CF for other liquids and frequencies upon request                                                      |                                                                                     |
| Frequency     | 10 MHz to > 6 GHz                                                                                                                                                                                          |                                                                                     |
| Directivity   | ± 0.3 dB in HSL (rotation around probe axis)<br>± 0.5 dB in tissue material (rotation normal to probe axis)                                                                                                |                                                                                     |
| Dynamic Range | 10 μW/g to > 100 mW/g<br>Linearity: ± 0.2 dB (noise: typically < 1 μW/g)                                                                                                                                   |                                                                                     |
| Dimensions    | Tip diameter: 2.5 mm                                                                                                                                                                                       |                                                                                     |
| Application   | High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%. |                                                                                     |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

## PHANTOM (ELI)

|                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                     |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Model           | ELI                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                     |
| Construction    | The ELI phantom is used for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles. |                                                                                     |
| Shell Thickness | 2 ± 0.2 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |
| Filling Volume  | Approx. 30 liters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                     |
| Dimensions      | Major axis: 600 mm<br>Minor axis: 400 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                     |

## DEVICE HOLDER

|              |                                                                                                                                                                                         |                                                                                      |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| Construction | The device holder (Supporter) for Notebook is made by POM (polyoxymethylene resin) , which is non-metal and non-conductive. The height can be adjusted to fit varies kind of notebooks. |  |
|              |                                                                                                                                                                                         | Device Holder                                                                        |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

## Appendix D. INSTRUMENTS LIST

| Equipment List |                                |                   |               |                          |                          |
|----------------|--------------------------------|-------------------|---------------|--------------------------|--------------------------|
| Manufacturer   | Device                         | Type              | Serial number | Date of last calibration | Date of next calibration |
| SPEAG          | Data acquisition Electronics   | DAE4              | 1824          | Jul/14/2025              | Jul/13/2026              |
| SPEAG          | Dosimetric E-Field Probe       | EX3DV4            | 7509          | May/21/2025              | May/20/2026              |
| SPEAG          | System Validation Dipole       | D835V2            | 4d063         | Sep/09/2025              | Sep/08/2026              |
| SPEAG          | System Validation Dipole       | D1900V2           | 5d173         | Apr/16/2025              | Apr/15/2026              |
| SPEAG          | System Validation Dipole       | D3700V2           | 1057          | Nov/18/2025              | Nov/17/2026              |
| R&S            | MXG Analog Signal Generator    | SMB100A03         | 182012        | Aug/09/2025              | Aug/08/2026              |
| Agilent        | Dual-directional coupler       | 772D              | MY46151258    | Oct/08/2025              | Oct/07/2026              |
| Agilent        | Dual-directional coupler       | 778D              | MY46151242    | Sep/09/2025              | Sep/08/2026              |
| Narda          | High Power Directional Coupler | 4216-10           | 2672          | Dec/03/2025              | Dec/02/2026              |
| Narda          | High Power Directional Coupler | 4216-10           | 2673          | Nov/13/2025              | Nov/12/2026              |
| EMCI           | Amplifier                      | EMC 074225P       | 980155        | Calibration not required | Calibration not required |
| R&S            | Power Meter                    | NRX               | 102191        | Feb/21/2025              | Feb/20/2026              |
| R&S            | Power Sensor                   | NRP18S            | 101973        | Feb/21/2025              | Feb/20/2026              |
| R&S            | Power Sensor                   | NRP18S            | 101974        | Nov/26/2025              | Nov/25/2026              |
| R&S            | Power Sensor                   | NRP8S             | 109066        | Nov/03/2025              | Nov/02/2026              |
| SPEAG          | Dielectric Assessment Kit      | DAK-3.5           | 1342          | May/19/2025              | May/18/2026              |
| Agilent        | Network Analyzer               | E5071C            | MY46107530    | Apr/24/2025              | Apr/23/2026              |
| Keysight       | Economy calibration kit        | 85032E            | MY61410221    | May/29/2025              | May/28/2026              |
| SPEAG          | Software                       | DASY 8 V16.0.2.83 | N/A           | Calibration not required | Calibration not required |
| SPEAG          | Phantom                        | ELI               | N/A           | Calibration not required | Calibration not required |
| R&S            | Radio Communication Test       | CMW 500           | 125470        | May/15/2025              | May/14/2026              |
| Keysight       | UXM 5G Wireless Test Platform  | E7515B            | MY60101215    | Apr/16/2025              | Apr/15/2026              |
| TECPEL         | Digital thermometer            | DTM-303A          | TP130074      | May/15/2025              | May/14/2026              |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

[www.sgs.com.tw](http://www.sgs.com.tw)

Member of SGS Group

## Appendix E. SAR SYSTEM VERIFICATION

### Tissue Simulating Liquid

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with homogeneous tissue simulating liquid. For head SAR testing, the liquid height from the ear rint (ERP) of the phantom to the liquid top surface is larger than 15cm. For body SAR testing, the liquid height from reference point to the center of the flat phantom to the liquid top surface is larger than 15cm.

### Tissue Simulant Liquid measurement

The dielectric properties for this Head-simulant fluid were measured by using the SPEAG Dielectric Assessment Kit (DAKS-3.5)

All dielectric parameters of tissue simulates were measured within 24 hours of SAR measurements. The measured conductivity and permittivity are all within  $\pm 5\%$  of the target values.

### Measurement results of Tissue Simulant Liquid

| Tissue Type | Measurement Date | Measured Frequency (MHz) | Target Dielectric Constant, $\epsilon_r$ | Target Conductivity, $\sigma$ (S/m) | Measured Dielectric Constant, $\epsilon_r$ | Measured Conductivity, $\sigma$ (S/m) | % dev $\epsilon_r$ | % dev $\sigma$ |
|-------------|------------------|--------------------------|------------------------------------------|-------------------------------------|--------------------------------------------|---------------------------------------|--------------------|----------------|
| Head        | Dec, 30. 2025    | 821.5                    | 41.564                                   | 0.898                               | 42.603                                     | 0.918                                 | 2.50%              | 2.18%          |
|             |                  | 835                      | 41.500                                   | 0.900                               | 42.667                                     | 0.922                                 | 2.81%              | 2.44%          |
|             |                  | 836.6                    | 41.500                                   | 0.902                               | 42.658                                     | 0.923                                 | 2.79%              | 2.36%          |
|             | Dec, 31. 2025    | 1852.4                   | 40.000                                   | 1.400                               | 41.116                                     | 1.421                                 | 2.79%              | 1.50%          |
|             |                  | 1860                     | 40.000                                   | 1.400                               | 41.090                                     | 1.427                                 | 2.73%              | 1.93%          |
|             |                  | 1900                     | 40.000                                   | 1.400                               | 41.077                                     | 1.432                                 | 2.69%              | 2.29%          |
|             | Jan, 01. 2026    | 3700                     | 37.700                                   | 3.118                               | 38.386                                     | 3.181                                 | 1.82%              | 2.02%          |
|             |                  | 3750                     | 37.650                                   | 3.170                               | 38.348                                     | 3.233                                 | 1.85%              | 1.99%          |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

[www.sgs.com.tw](http://www.sgs.com.tw)

Member of SGS Group

## The composition of the tissue simulating liquid:

Simulating Liquids for 600 MHz -10 GHz, Manufactured by SPEAG:


| Broad-band head tissue simulating liquids | SPEAG Product   | Frequency range (MHz) | Main Ingredients |
|-------------------------------------------|-----------------|-----------------------|------------------|
|                                           | HBBL600-10000V6 | 600 - 10000           | Water, Oil       |

## System check

The microwave circuit arrangement for system check is sketched in below. The daily system accuracy verification occurs within the flat section of the SAM phantom and ELI phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR values.

The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed with SAR values normalized to 1W forward power delivered to the dipole.

During the tests, the liquid depth from the center of the flat phantom to the liquid top surface was 15 cm above in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

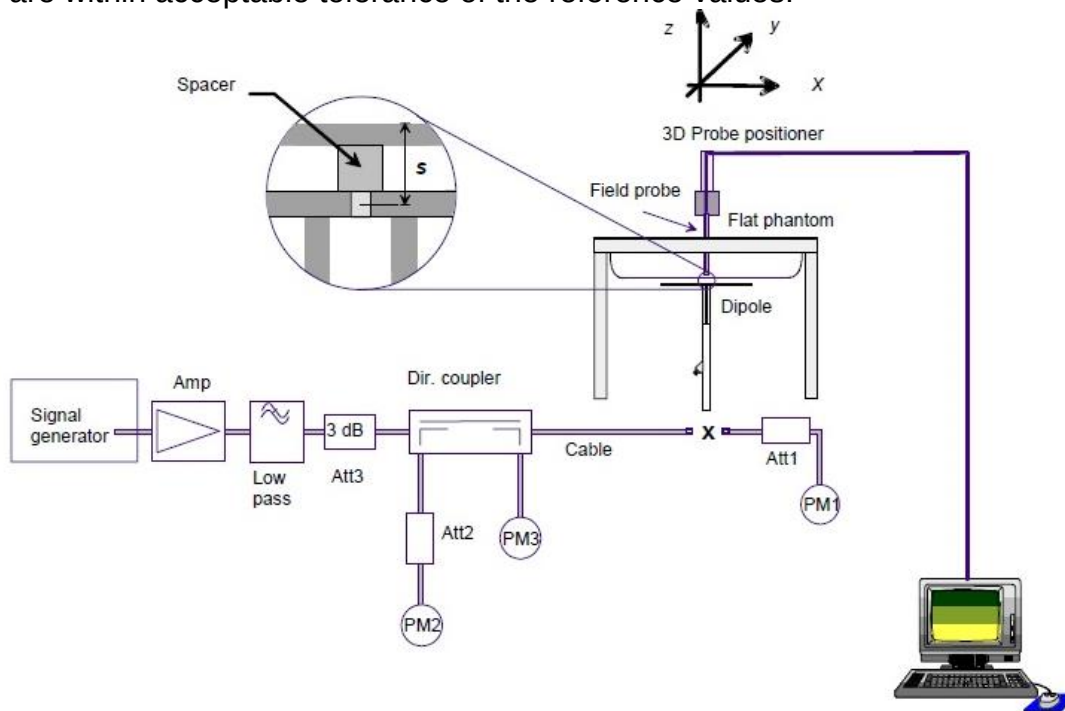

The block diagram of system check

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

[www.sgs.com.tw](http://www.sgs.com.tw)

Member of SGS Group

## System check results

| Frequency | Input Power<br>(mW) | Dipole<br>S/N | Probe<br>S/N    | DAE<br>S/N  | Measured<br>1g SAR<br>(W/kg) | Targeted<br>1g SAR<br>(W/kg) | Normalized<br>1g SAR<br>(W/kg) | Deviation(<br>%) | Date       |
|-----------|---------------------|---------------|-----------------|-------------|------------------------------|------------------------------|--------------------------------|------------------|------------|
| 835       | 250                 | 4d063         | EX3DV4 - SN7509 | DAE4 SN1824 | 2.37                         | 9.47                         | 9.74                           | 2.85%            | 2025/12/30 |
| 1900      | 250                 | 5d173         | EX3DV4 - SN7509 | DAE4 SN1824 | 9.95                         | 39.8                         | 39.24                          | -1.41%           | 2025/12/31 |
| 3700      | 100                 | 1057          | EX3DV4 - SN7509 | DAE4 SN1824 | 6.68                         | 66.8                         | 65.8                           | -1.50%           | 2026/1/1   |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

[www.sgs.com.tw](http://www.sgs.com.tw)

Member of SGS Group

## 10 SAR SYSTEM CHECK RESULTS

Report No. : TESA2511000875EN

Measurement Report

Dipole\_D835\_SN:4d063

Ambient temperature: 22.3; Liquid temperature: 21.9

Exposure Conditions

| Phantom Section, TSL | Position, Test Distance [mm] | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity |
|----------------------|------------------------------|---------------------------------|-------------------|------------------------|------------------|
| Flat, HSL            | FRONT, 15.00                 | 835.000, 35                     | 9.83              | 0.922                  | 42.667           |

### Hardware Setup


|         |                             |                         |
|---------|-----------------------------|-------------------------|
| Phantom | Probe, Calibration Date     | DAE, Calibration Date   |
| ELI     | EX3DV4 - SN7509, 2025-05-21 | DAE4 Sn1824, 2025-07-14 |

### Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 120.0 x 120.0 | 32.0 x 32.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 8.0 x 8.0 x 5.0    |
| Sensor Surface [mm] | 3.0           | 1.4                |

### Measurement Results

|                    | Area Scan  | Zoom Scan  |
|--------------------|------------|------------|
| Date               | 2025-12-30 | 2025-12-30 |
| psSAR1g [W/kg]     | 2.41       | 2.44       |
| psSAR8g [W/kg]     | 1.68       | 1.69       |
| psSAR10g [W/kg]    | 1.59       | 1.61       |
| Power Drift [dB]   | 0.01       | 0.02       |
| M2/M1 [%]          |            | 69.5       |
| Dist 3dB Peak [mm] |            | 16.0       |

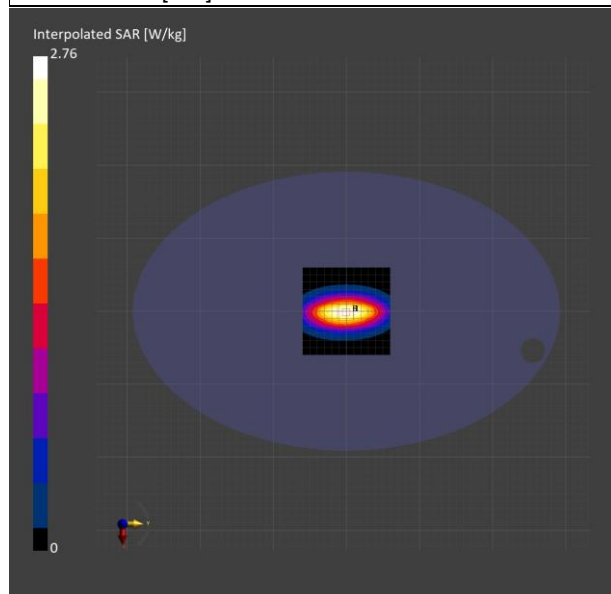

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Report No. : TESA2511000875EN

## Measurement Report

Dipole\_D1900\_SN:5d173

Ambient temperature: 21.8; Liquid temperature: 21.5

## Exposure Conditions

| Phantom Section, TSL | Position, Test Distance [mm] | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity |
|----------------------|------------------------------|---------------------------------|-------------------|------------------------|------------------|
| Flat, HSL            | FRONT, 10.00                 | 1900.000, 50                    | 7.99              | 1.432                  | 41.077           |

## Hardware Setup


|         |                             |                         |
|---------|-----------------------------|-------------------------|
| Phantom | Probe, Calibration Date     | DAE, Calibration Date   |
| ELI     | EX3DV4 - SN7509, 2025-05-21 | DAE4 Sn1824, 2025-07-14 |

## Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 120.0 x 120.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0   | 5.0 x 5.0 x 5.0    |
| Sensor Surface [mm] | 3.0           | 1.4                |

## Measurement Results

|                    | Area Scan  | Zoom Scan  |
|--------------------|------------|------------|
| Date               | 2025-12-31 | 2025-12-31 |
| psSAR1g [W/kg]     | 9.82       | 9.81       |
| psSAR8g [W/kg]     | 5.67       | 5.67       |
| psSAR10g [W/kg]    | 5.19       | 5.21       |
| Power Drift [dB]   | -0.01      | -0.02      |
| M2/M1 [%]          |            | 85.6       |
| Dist 3dB Peak [mm] |            | 9.6        |

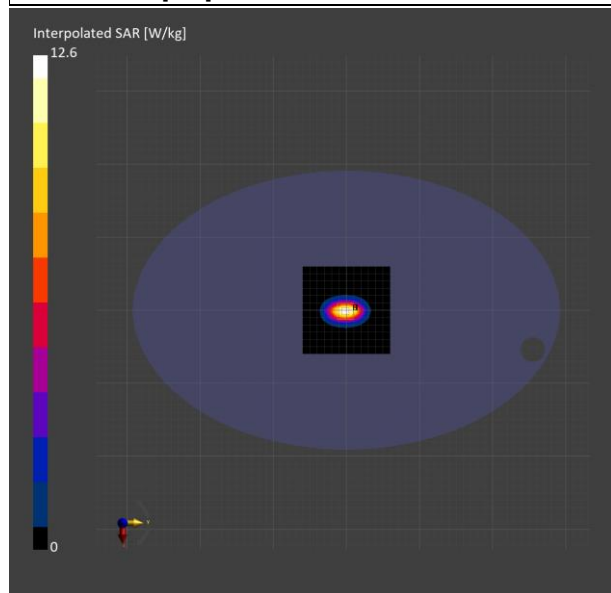

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

[www.sgs.com.tw](http://www.sgs.com.tw)

Member of SGS Group

Report No. : TESA2511000875EN

## Measurement Report

Dipole\_D3700\_SN:1057

Ambient temperature: 22.2; Liquid temperature: 21.7

## Exposure Conditions

| Phantom Section, TSL | Position, Test Distance [mm] | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity |
|----------------------|------------------------------|---------------------------------|-------------------|------------------------|------------------|
| Flat, HSL            | FRONT, 10.00                 | 3700.000, 50                    | 6.81              | 3.181                  | 38.386           |

## Hardware Setup


|         |                             |                         |
|---------|-----------------------------|-------------------------|
| Phantom | Probe, Calibration Date     | DAE, Calibration Date   |
| ELI     | EX3DV4 - SN7509, 2025-05-21 | DAE4 Sn1824, 2025-07-14 |

## Scans Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 120.0 x 120.0 | 24.0 x 24.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 4.0 x 4.0 x 1.4    |
| Sensor Surface [mm] | 3.0           | 1.4                |

## Measurement Results

|                    | Area Scan  | Zoom Scan  |
|--------------------|------------|------------|
| Date               | 2026-01-01 | 2026-01-01 |
| psSAR1g [W/kg]     | 6.71       | 6.58       |
| psSAR8g [W/kg]     | 2.83       | 2.78       |
| psSAR10g [W/kg]    | 2.51       | 2.46       |
| Power Drift [dB]   | 0.11       | 0.05       |
| M2/M1 [%]          |            | 67.6       |
| Dist 3dB Peak [mm] |            | 8.7        |

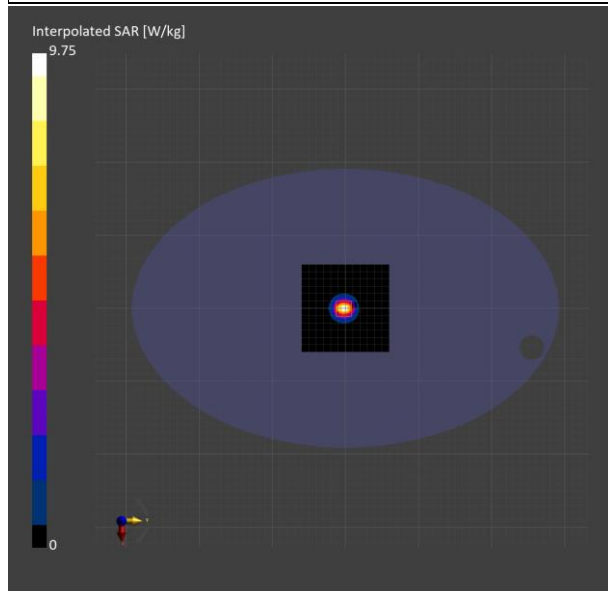

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

[www.sgs.com.tw](http://www.sgs.com.tw)

Member of SGS Group

## 11 APPENDIXES

**Refer to separated files for the following appendixes.**

**11.2 SAR\_Appendix F Photographs**

**11.3 SAR\_Appendix G DAE & Probe Cal. Certificate**

**11.4 SAR\_Appendix H Phantom Description & Dipole Cal. Certificate**

**- End of report -**

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

[www.sgs.com.tw](http://www.sgs.com.tw)

Member of SGS Group