

**#01\_WCDMA II\_RMC 12.2Kbps\_Back\_0mm\_Ch9400**

Communication System: UID 10011 - CAC, UMTS-FDD; Frequency: 1880 MHz

Medium: HSL\_600-7200\_260720 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.462$  S/m;  $\epsilon_r = 43.803$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3642; ConvF(7.32, 6.66, 8.49) @ 1880 MHz; Calibrated: 2026/4/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2026/6/10
- Phantom: ELI V4.0\_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Area Scan (101x81x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 1.34 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 28.11 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 1.53 W/kg

**SAR(1 g) = 0.828 W/kg; SAR(10 g) = 0.429 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 53%

Maximum value of SAR (measured) = 1.27 W/kg

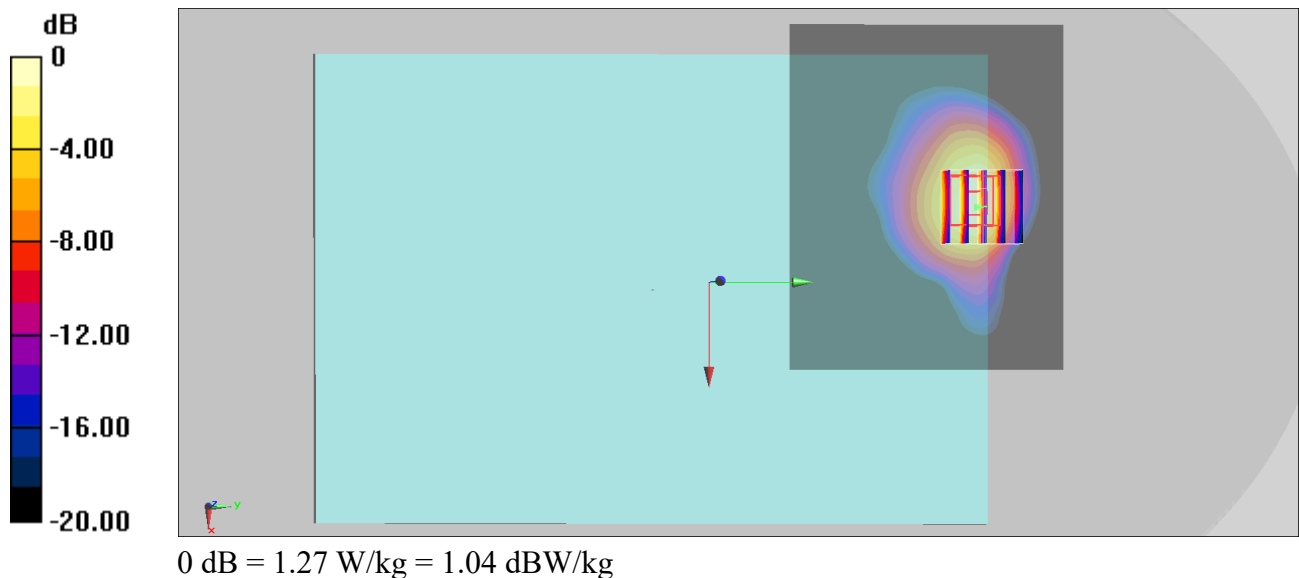

**#02\_WCDMA IV\_RMC 12.2Kbps\_Right\_0mm\_Ch1312**

Communication System: UID 10011 - CAC, UMTS-FDD; Frequency: 1712.4 MHz

Medium: HSL\_600-7200\_260721 Medium parameters used:  $f = 1712.4$  MHz;  $\sigma = 1.351$  S/m;  $\epsilon_r = 44.051$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3642; ConvF(7.41, 6.75, 8.6) @ 1712.4 MHz; Calibrated: 2026/4/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2026/6/10
- Phantom: ELI V4.0\_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Area Scan (41x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.04 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.78 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 1.37 W/kg

**SAR(1 g) = 0.786 W/kg; SAR(10 g) = 0.379 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 56.8%

Maximum value of SAR (measured) = 1.23 W/kg

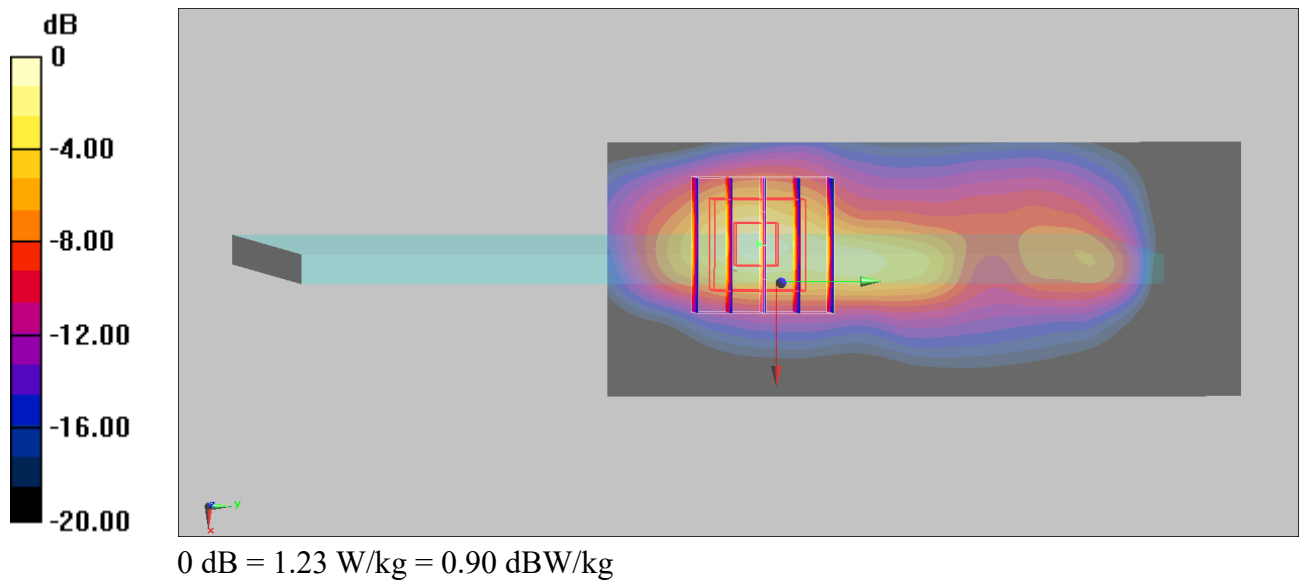

**#03\_WCDMA V\_RMC 12.2Kbps\_Top\_0mm\_Ch4132**

Communication System: UID 10011 - CAC, UMTS-FDD; Frequency: 826.4 MHz

Medium: HSL\_600-7200\_260722 Medium parameters used:  $f = 826.4$  MHz;  $\sigma = 0.938$  S/m;  $\epsilon_r = 45.53$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3642; ConvF(8.65, 7.87, 10.03) @ 826.4 MHz; Calibrated: 2026/4/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2026/6/10
- Phantom: ELI V4.0\_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Area Scan (41x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.39 W/kg

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 39.50 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 1.87 W/kg

**SAR(1 g) = 0.704 W/kg; SAR(10 g) = 0.340 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 57.1%

Maximum value of SAR (measured) = 1.38 W/kg

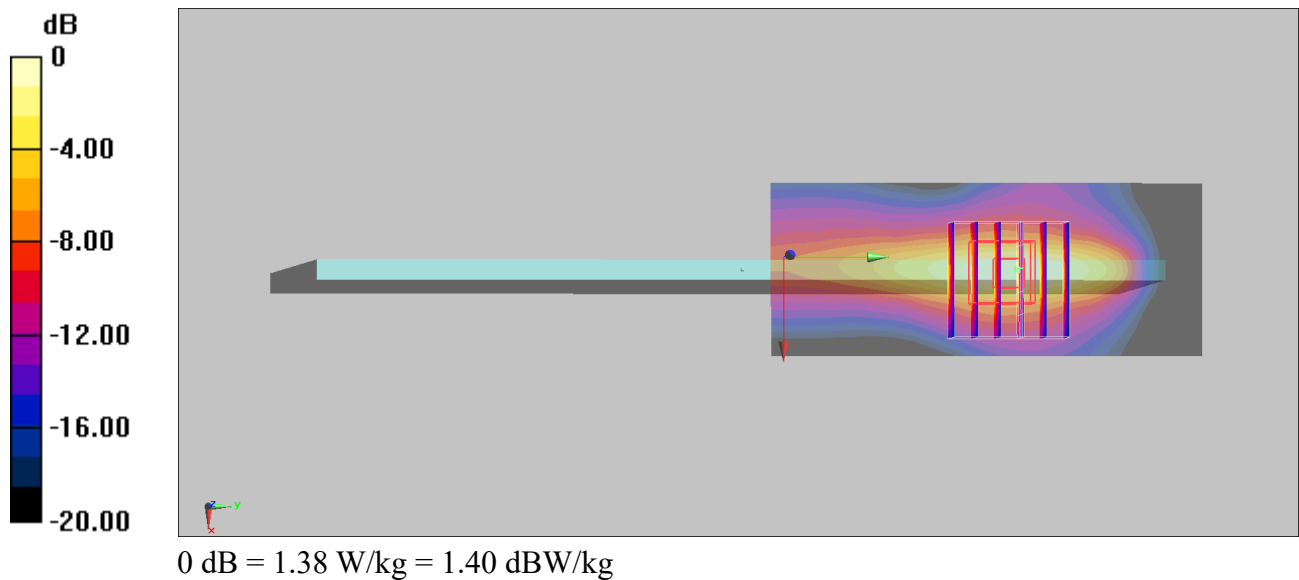

**#04\_LTE Band 5\_10M\_QPSK\_1\_0\_Top\_0mm\_Ch20525**

Communication System: UID 10175 - CAH, LTE-FDD ; Frequency: 836.5 MHz

Medium: HSL\_600-7200\_260722 Medium parameters used :  $f = 836.5$  MHz;  $\sigma = 0.942$  S/m;  $\epsilon_r = 45.513$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3642; ConvF(8.65, 7.87, 10.03) @ 836.5 MHz; Calibrated: 2026/4/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2026/6/10
- Phantom: ELI V4.0\_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.19 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 56.31 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 1.71 W/kg

**SAR(1 g) = 0.815 W/kg; SAR(10 g) = 0.415 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 67.1%

Maximum value of SAR (measured) = 1.22 W/kg

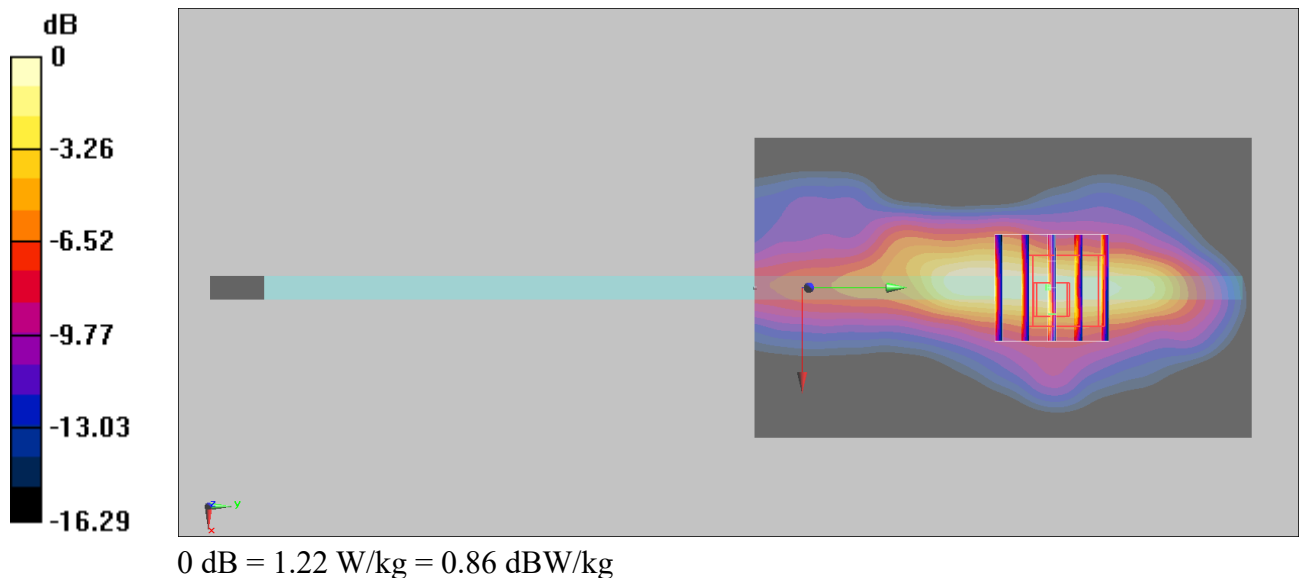

**#05\_LTE Band 7\_20M\_QPSK\_1\_0\_Back\_0mm\_Ch21350**

Communication System: UID 10169 - CAF, LTE-FDD; Frequency: 2560 MHz

Medium: HSL\_600-7200\_260724 Medium parameters used:  $f = 2560$  MHz;  $\sigma = 1.949$  S/m;  $\epsilon_r = 42.764$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3642; ConvF(6.87, 6.25, 7.97) @ 2560 MHz; Calibrated: 2026/4/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2026/6/10
- Phantom: ELI V4.0\_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Area Scan (121x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.30 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.55 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 1.63 W/kg

**SAR(1 g) = 0.798 W/kg; SAR(10 g) = 0.358 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 53%

Maximum value of SAR (measured) = 1.25 W/kg

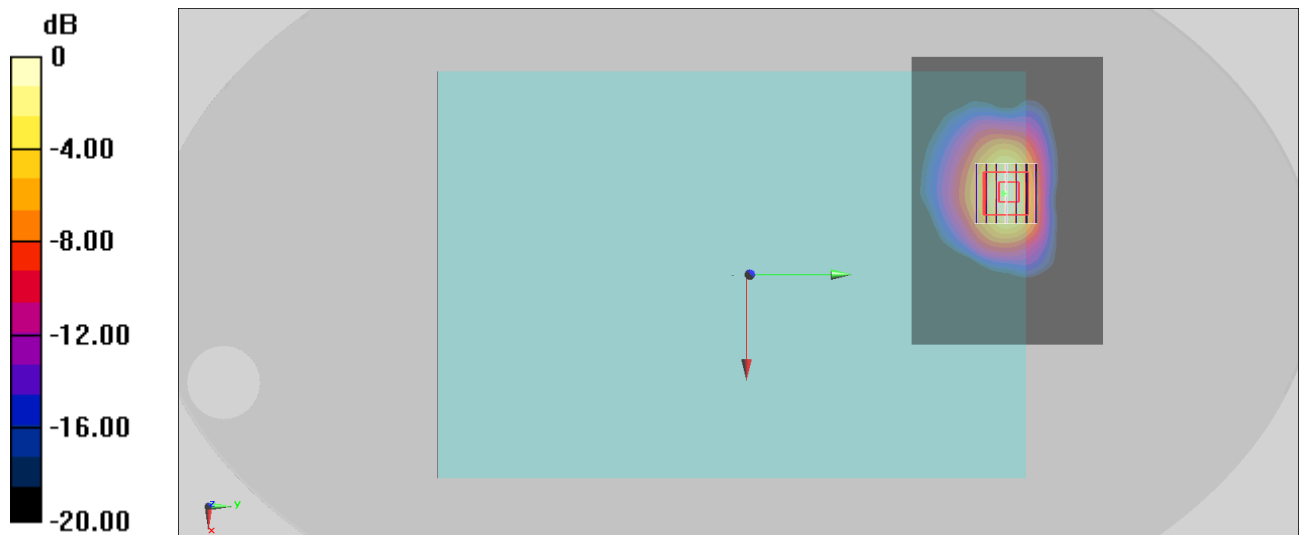

0 dB = 1.25 W/kg = 0.97 dBW/kg

**#06\_LTE Band 12\_10M\_QPSK\_1\_0\_Back\_0mm\_Ch23095**

Communication System: UID 10175 - CAH, LTE-FDD ; Frequency: 707.5 MHz

Medium: HSL\_600-7200\_260713 Medium parameters used :  $f = 707.5$  MHz;  $\sigma = 0.895$  S/m;  $\epsilon_r = 45.854$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C ; Liquid Temperature : 22.7 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3642; ConvF(9.1, 8.28, 10.56) @ 707.5 MHz; Calibrated: 2026/4/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2026/6/10
- Phantom: ELI V4.0\_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.140 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.64 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.430 W/kg

**SAR(1 g) = 0.102 W/kg; SAR(10 g) = 0.034 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 39.7%

Maximum value of SAR (measured) = 0.282 W/kg

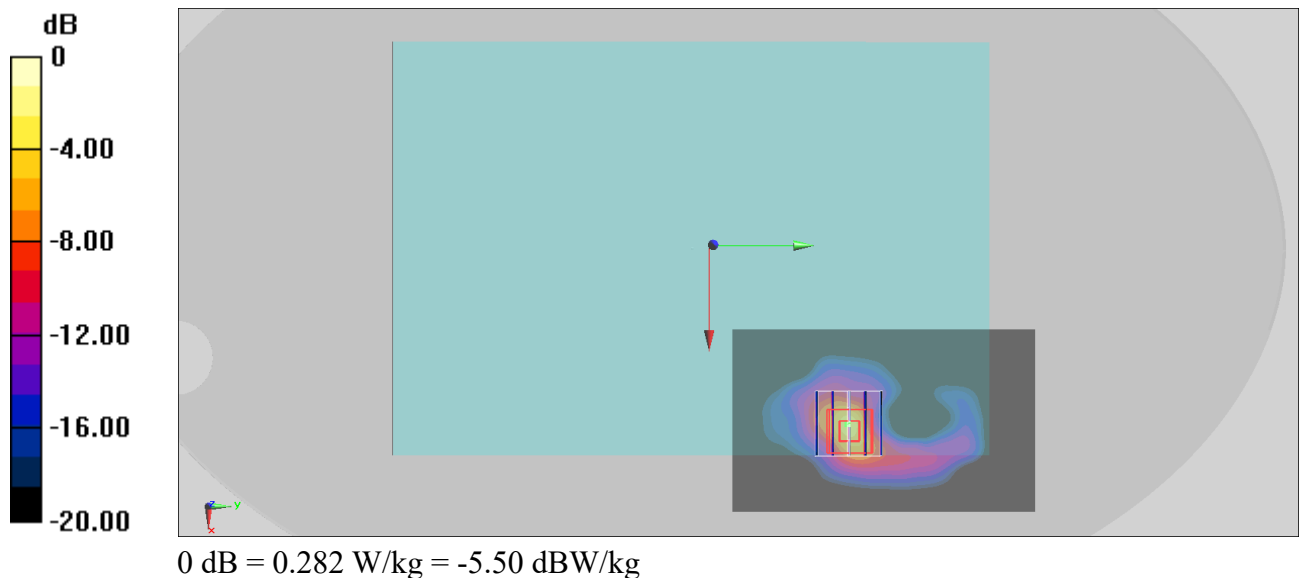

**#07\_LTE Band 13\_10M\_QPSK\_1\_49\_Top\_0mm\_Ch23230**

Communication System: UID 10175 - CAH, LTE-FDD; Frequency: 782 MHz

Medium: HSL\_600-7200\_260713 Medium parameters used:  $f = 782$  MHz;  $\sigma = 0.922$  S/m;  $\epsilon_r = 45.645$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(9.1, 8.28, 10.56) @ 782 MHz; Calibrated: 2026/4/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2026/6/10
- Phantom: ELI V4.0\_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.341 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.42 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 0.421 W/kg

**SAR(1 g) = 0.156 W/kg; SAR(10 g) = 0.072 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 56.9%

Maximum value of SAR (measured) = 0.327 W/kg

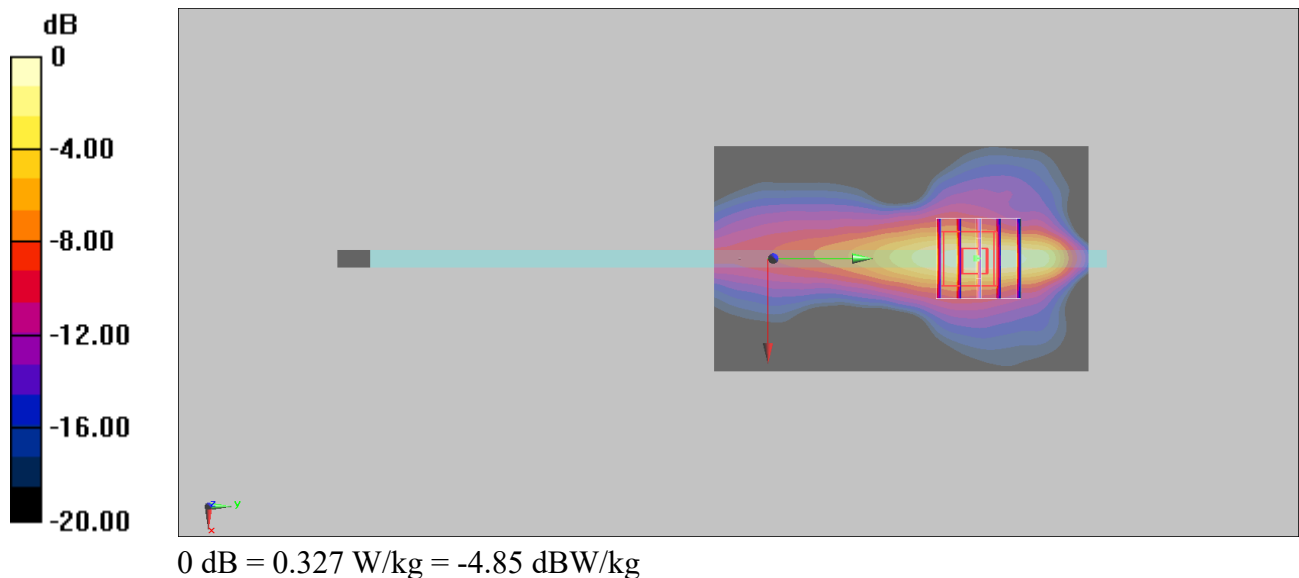

**#08\_LTE Band 14\_10M\_QPSK\_1\_0\_Top\_0mm\_Ch23330**

Communication System: UID 10175 - CAH, LTE-FDD; Frequency: 793 MHz

Medium: HSL\_600-7200\_260713 Medium parameters used:  $f = 793$  MHz;  $\sigma = 0.926$  S/m;  $\epsilon_r = 45.61$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3642; ConvF(9.1, 8.28, 10.56) @ 793 MHz; Calibrated: 2026/4/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2026/6/10
- Phantom: ELI V4.0\_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.563 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.89 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 0.713 W/kg

**SAR(1 g) = 0.269 W/kg; SAR(10 g) = 0.126 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 57.1%

Maximum value of SAR (measured) = 0.557 W/kg

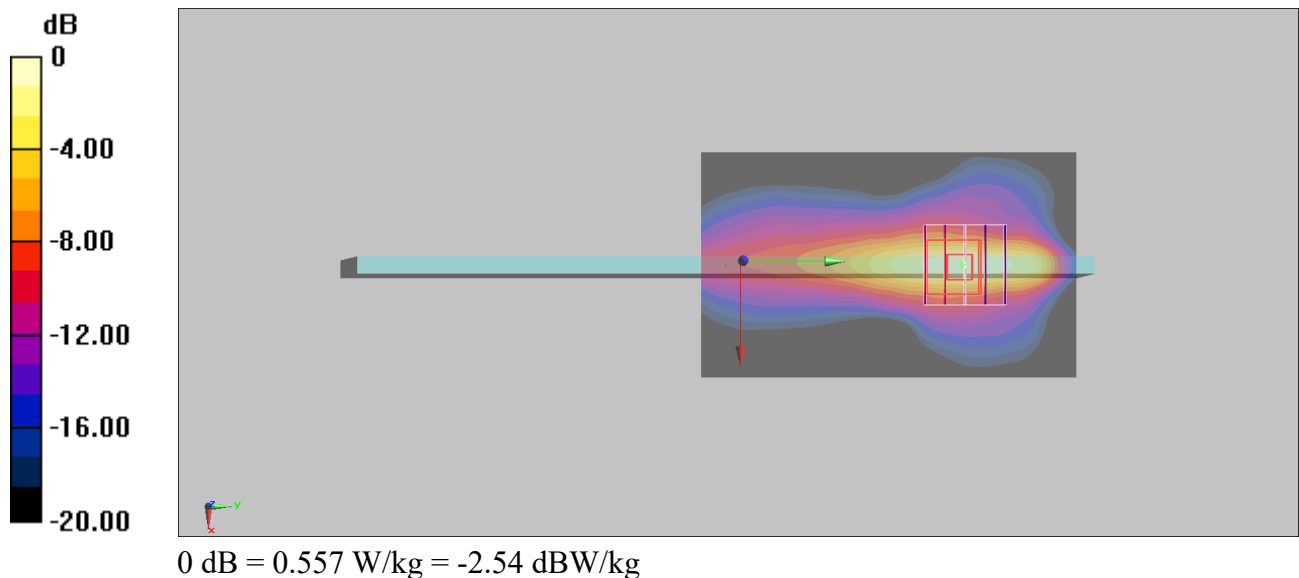

**#09\_LTE Band 17\_10M\_QPSK\_1\_0\_Back\_0mm\_Ch23790**

Communication System: UID 10175 - CAH, LTE-FDD ; Frequency: 710 MHz

Medium: HSL\_600-7200\_260713 Medium parameters used:  $f = 710$  MHz;  $\sigma = 0.896$  S/m;  $\epsilon_r = 45.849$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C ; Liquid Temperature : 22.7 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3642; ConvF(9.1, 8.28, 10.56) @ 710 MHz; Calibrated: 2026/4/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2026/6/10
- Phantom: ELI V4.0\_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.207 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.53 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.595 W/kg

**SAR(1 g) = 0.147 W/kg; SAR(10 g) = 0.050 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 30.8%

Maximum value of SAR (measured) = 0.400 W/kg

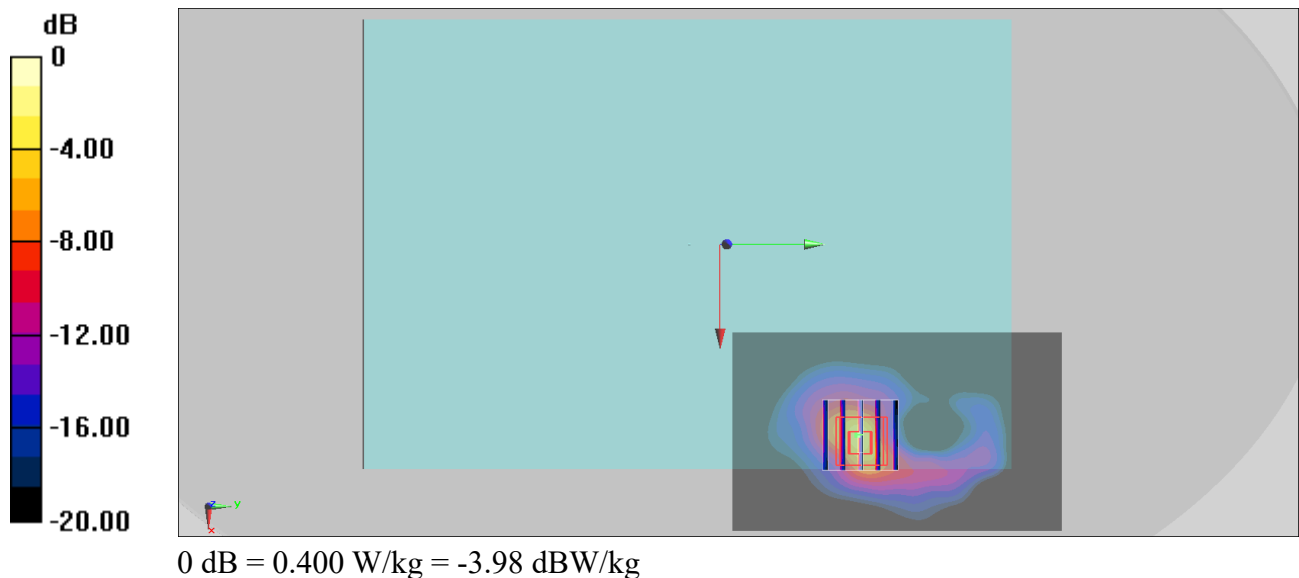

**#10\_LTE Band 25\_20M\_QPSK\_1\_0\_Back\_0mm\_Ch26340**

Communication System: UID 10169 - CAF, LTE-FDD; Frequency: 1880 MHz

Medium: HSL\_600-7200\_260720 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.462$  S/m;  $\epsilon_r = 43.803$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3642; ConvF(7.32, 6.66, 8.49) @ 1880 MHz; Calibrated: 2026/4/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2026/6/10
- Phantom: ELI V4.0\_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Area Scan (101x71x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 1.12 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 24.95 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.21 W/kg

**SAR(1 g) = 0.664 W/kg; SAR(10 g) = 0.350 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 54.2%

Maximum value of SAR (measured) = 1.01 W/kg

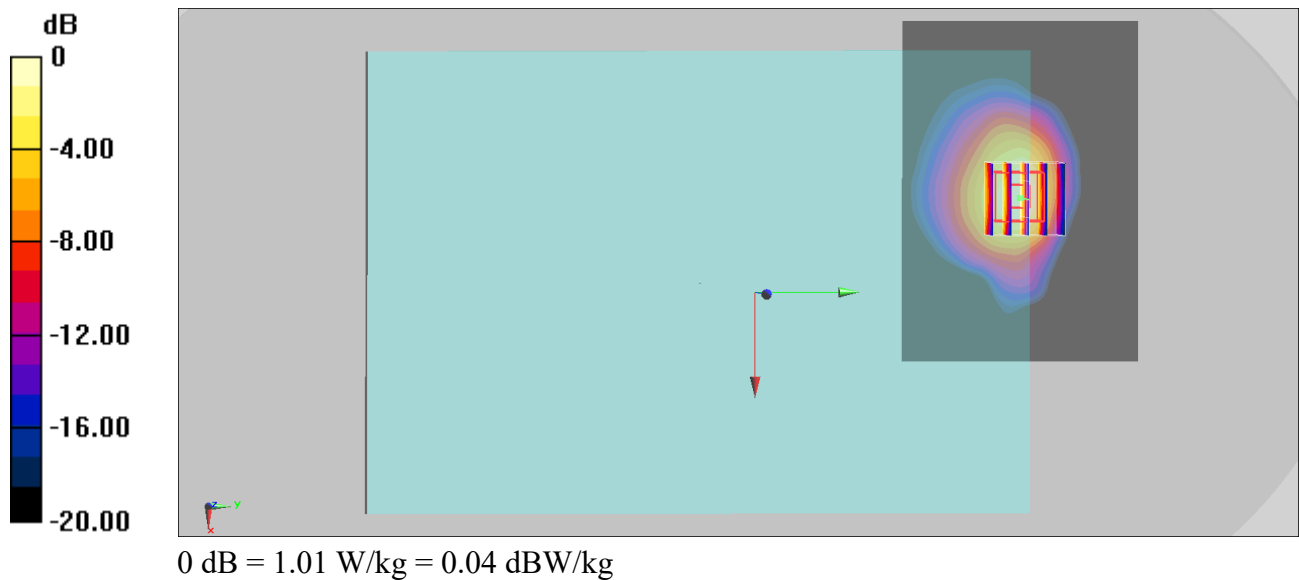

**#11\_LTE Band 26\_15M\_QPSK\_1\_0\_Top\_0mm\_Ch26865**

Communication System: UID 10181 - CAF, LTE-FDD; Frequency: 831.5 MHz

Medium: HSL\_600-7200\_260722 Medium parameters used:  $f = 831.5$  MHz;  $\sigma = 0.94$  S/m;  $\epsilon_r = 45.521$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3642; ConvF(8.65, 7.87, 10.03) @ 831.5 MHz; Calibrated: 2026/4/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2026/6/10
- Phantom: ELI V4.0\_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.05 W/kg

**Zoom Scan (5x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 35.14 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 1.35 W/kg

**SAR(1 g) = 0.522 W/kg; SAR(10 g) = 0.253 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 57.6%

Maximum value of SAR (measured) = 1.03 W/kg

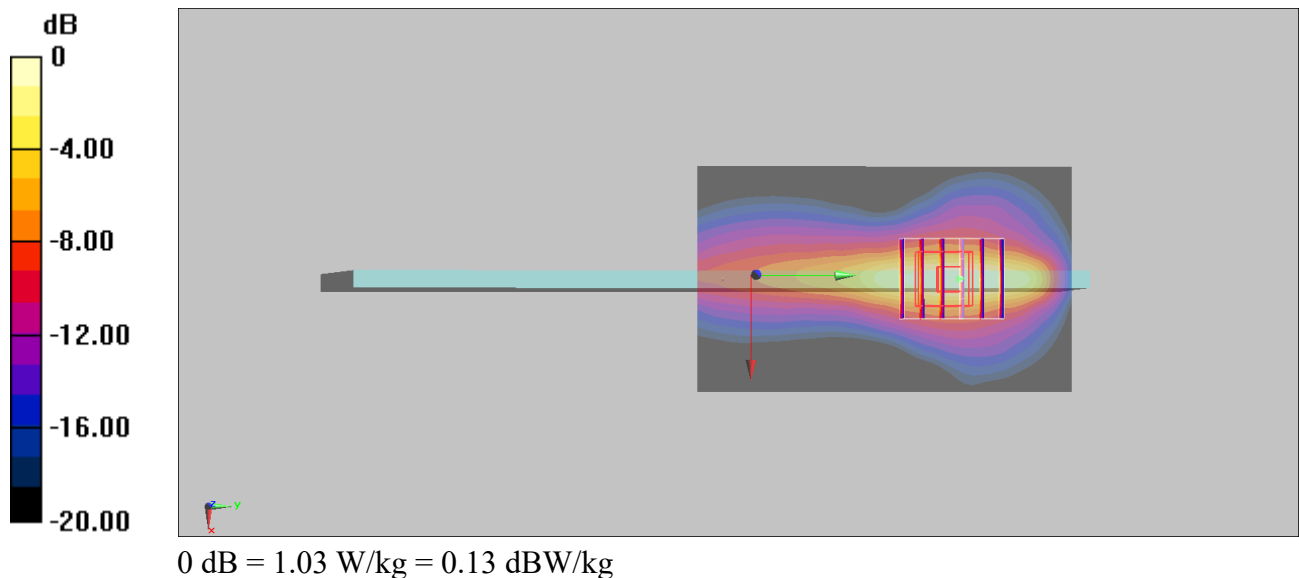

**#12\_LTE Band 30\_10M\_QPSK\_1\_0\_Back\_0mm\_Ch27710**

Communication System: UID 10175 - CAH, LTE-FDD; Frequency: 2310 MHz

Medium: HSL\_600-7200\_260719 Medium parameters used:  $f = 2310$  MHz;  $\sigma = 1.755$  S/m;  $\epsilon_r = 43.323$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3642; ConvF(7.07, 6.43, 8.2) @ 2310 MHz; Calibrated: 2026/4/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2026/6/10
- Phantom: ELI V4.0\_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (121x81x1):** Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm

Maximum value of SAR (interpolated) = 1.55 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 31.54 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.96 W/kg

**SAR(1 g) = 0.988 W/kg; SAR(10 g) = 0.468 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 49.7%

Maximum value of SAR (measured) = 1.53 W/kg

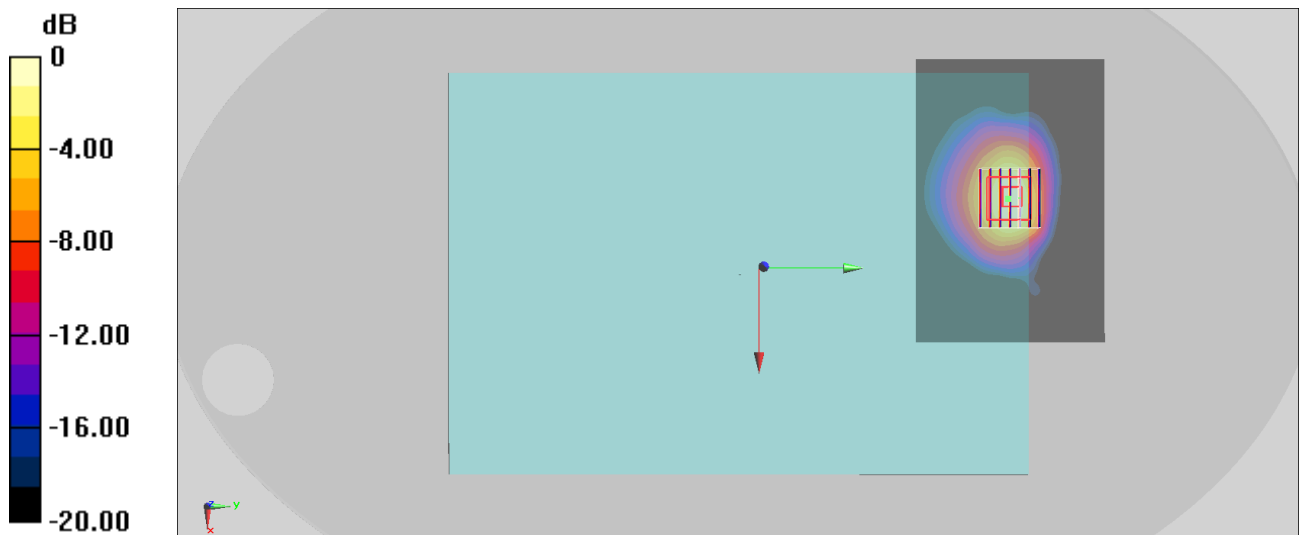

**#13\_LTE Band 66\_20M\_QPSK\_1\_0\_Right\_0mm\_Ch132072**

Communication System: UID 10169 - CAF, LTE-FDD; Frequency: 1720 MHz

Medium: HSL\_600-7200\_260721 Medium parameters used:  $f = 1720$  MHz;  $\sigma = 1.357$  S/m;  $\epsilon_r = 44.06$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3642; ConvF(7.41, 6.75, 8.6) @ 1720 MHz; Calibrated: 2026/4/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2026/6/10
- Phantom: ELI V4.0\_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Area Scan (41x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.28 W/kg

**/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.36 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 1.51 W/kg

**SAR(1 g) = 0.862 W/kg; SAR(10 g) = 0.411 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 57.7%

Maximum value of SAR (measured) = 1.30 W/kg

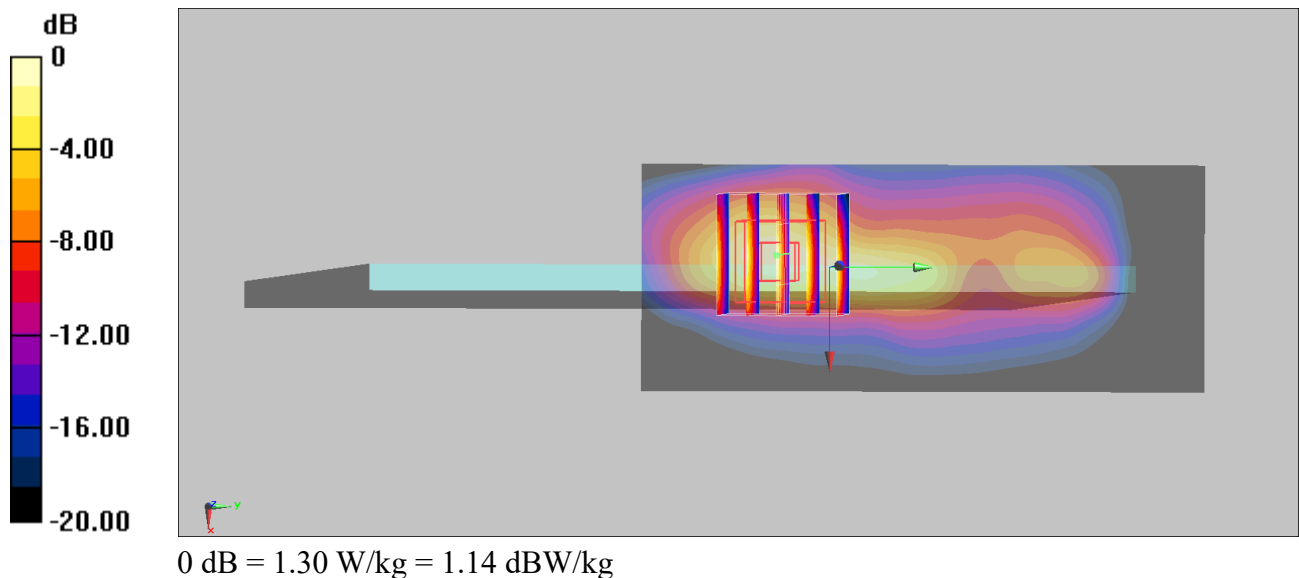

**#14\_LTE Band 71\_20M\_QPSK\_1\_0\_Back\_0mm\_Ch133297**

Communication System: UID 10169 - CAF, LTE-FDD; Frequency: 680.5 MHz

Medium: HSL\_600-7200\_260713 Medium parameters used:  $f = 680.5$  MHz;  $\sigma = 0.885$  S/m;  $\epsilon_r = 45.921$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3642; ConvF(9.1, 8.28, 10.56) @ 680.5 MHz; Calibrated: 2026/4/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2026/6/10
- Phantom: ELI V4.0\_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Area Scan (81x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.526 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.07 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 1.72 W/kg

**SAR(1 g) = 0.518 W/kg; SAR(10 g) = 0.210 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 68.3%

Maximum value of SAR (measured) = 1.23 W/kg

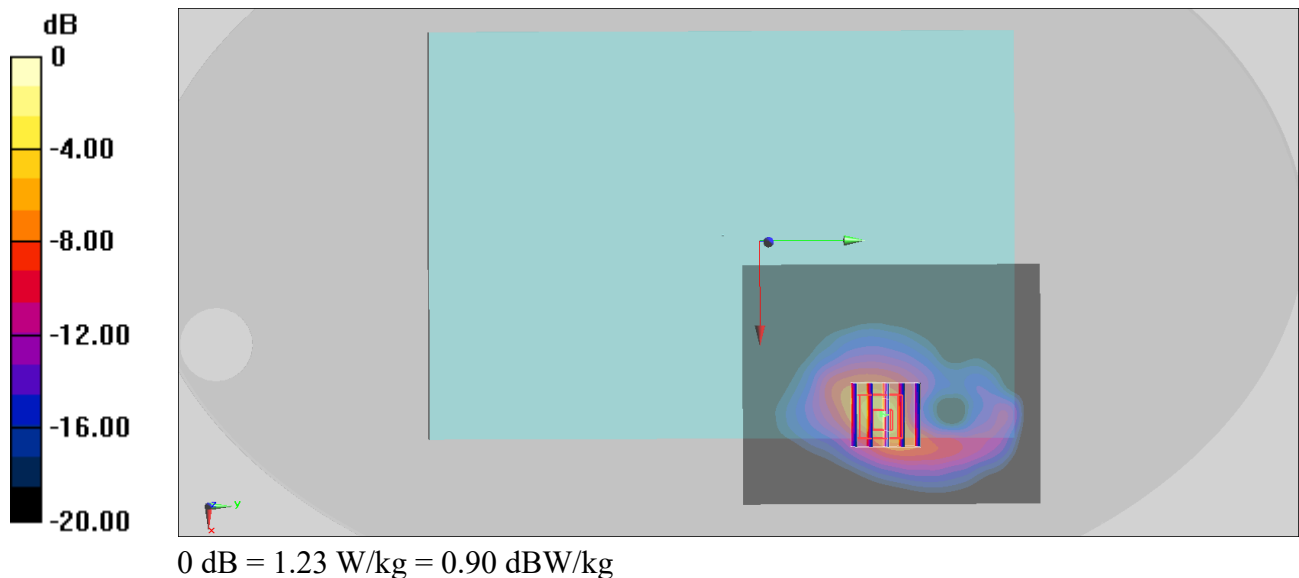

**#15\_LTE Band 38\_20M\_QPSK\_1\_0\_Back\_0mm\_Ch38000**

Communication System: UID 10435 - AAG, LTE-TDD; Frequency: 2595 MHz

Medium: HSL\_600-7200\_260724 Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.977$  S/m;  $\epsilon_r = 42.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3642; ConvF(6.87, 6.25, 7.97) @ 2595 MHz; Calibrated: 2026/4/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2026/6/10
- Phantom: ELI V4.0\_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Area Scan (121x81x1):** Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm

Maximum value of SAR (interpolated) = 1.09 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 23.32 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 1.30 W/kg

**SAR(1 g) = 0.646 W/kg; SAR(10 g) = 0.294 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 51.9%

Maximum value of SAR (measured) = 0.994 W/kg

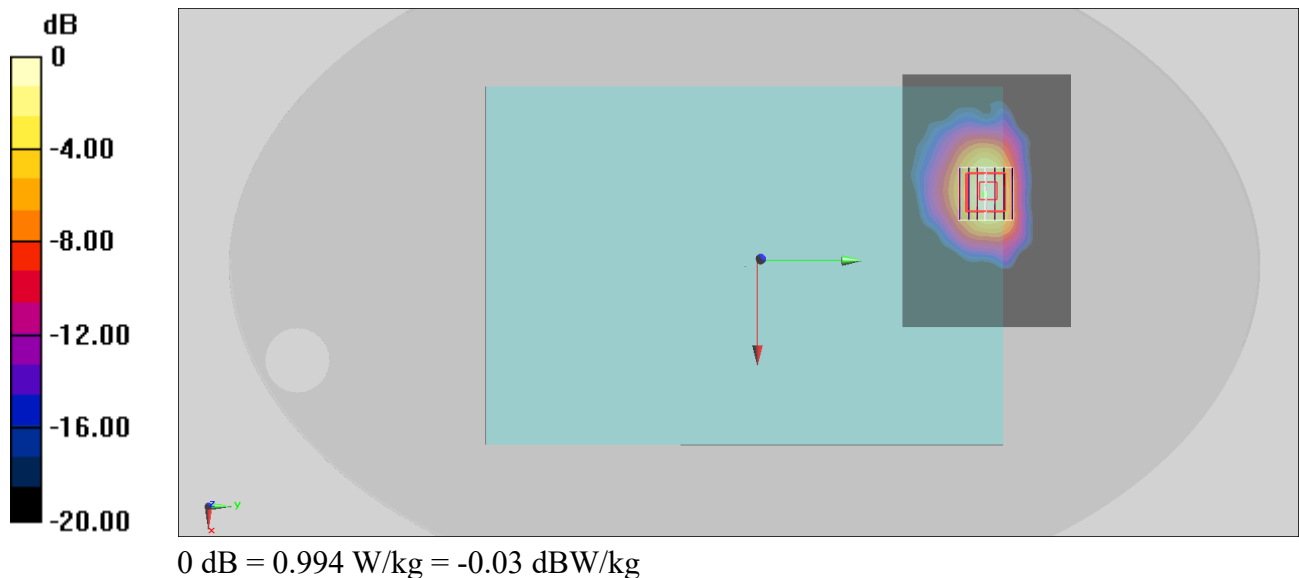

**#16\_LTE Band 41\_20M\_QPSK\_1\_0\_Back\_0mm\_Ch40620**

Communication System: UID 10435 - AAG, LTE-TDD; Frequency: 2593 MHz

Medium: HSL\_600-7200\_260724 Medium parameters used:  $f = 2593$  MHz;  $\sigma = 1.975$  S/m;  $\epsilon_r = 42.703$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3642; ConvF(6.87, 6.25, 7.97) @ 2593 MHz; Calibrated: 2026/4/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2026/6/10
- Phantom: ELI V4.0\_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Area Scan (61x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.59 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.67 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 2.19 W/kg

**SAR(1 g) = 0.865 W/kg; SAR(10 g) = 0.311 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 42%

Maximum value of SAR (measured) = 1.67 W/kg

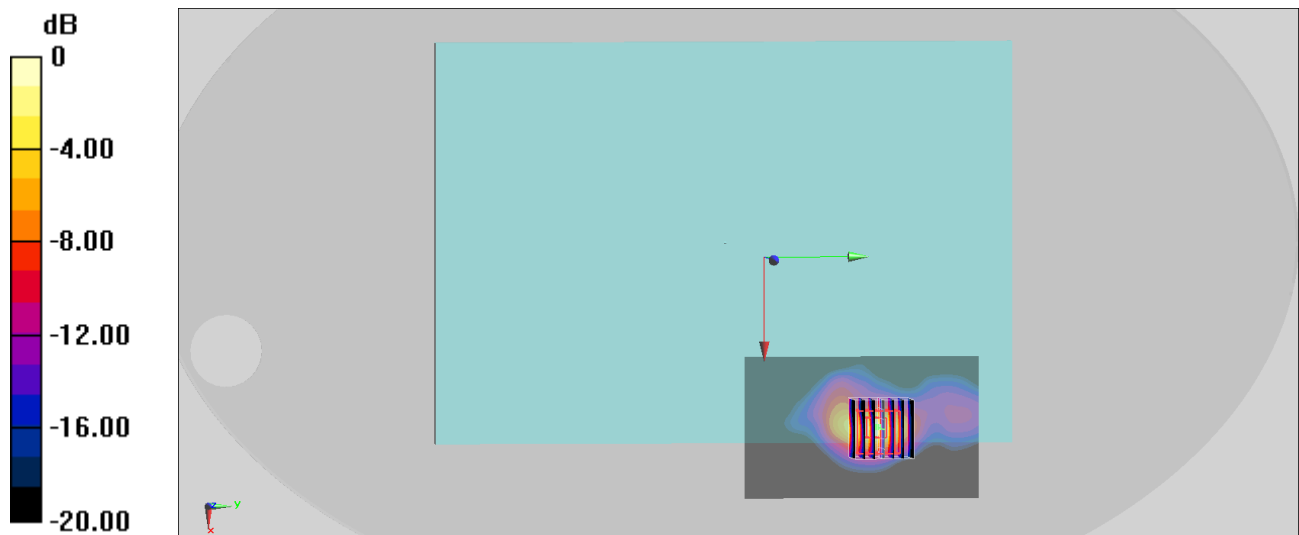

0 dB = 1.67 W/kg = 2.23 dBW/kg

**#17\_LTE Band 42\_20M\_QPSK\_1\_0\_Right\_0mm\_Ch42990**

Communication System: UID 10435 - AAG, LTE-TDD; Frequency: 3540 MHz

Medium: HSL\_600-7200\_260712 Medium parameters used:  $f = 3540$  MHz;  $\sigma = 3.011$  S/m;  $\epsilon_r = 38.239$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7813; ConvF(6.6, 6.62, 7.14) @ 3540 MHz; Calibrated: 2026/5/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1794; Calibrated: 2026/2/16
- Phantom: ELI v4.0\_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Area Scan (61x121x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.569 W/kg

**Zoom Scan (7x7x8)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 11.10 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 3.39 W/kg

**SAR(1 g) = 0.980 W/kg; SAR(10 g) = 0.309 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 70.5%

Maximum value of SAR (measured) = 2.15 W/kg

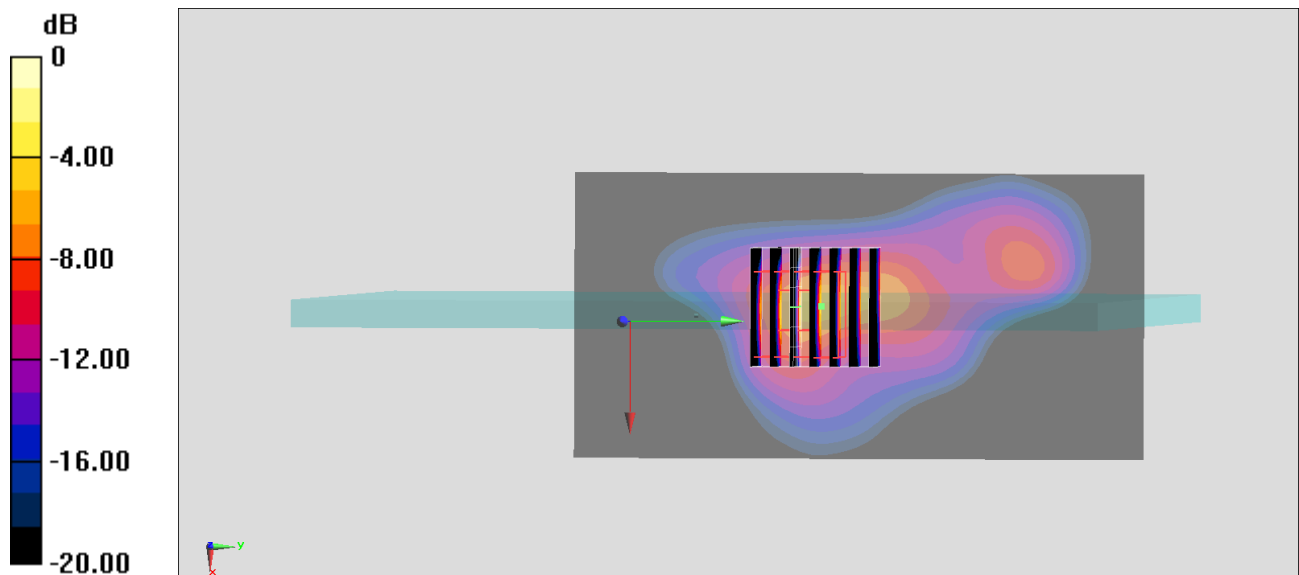

0 dB = 2.15 W/kg = 3.32 dBW/kg

**#18\_LTE Band 48\_20M\_QPSK\_1\_0\_Right\_0mm\_Ch56150**

Communication System: UID 10435 - AAG, LTE-TDD; Frequency: 3641 MHz

Medium: HSL\_600-7200\_260713 Medium parameters used:  $f = 3641$  MHz;  $\sigma = 3.004$  S/m;  $\epsilon_r = 36.976$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7813; ConvF(6.48, 6.5, 7.01) @ 3641 MHz; Calibrated: 2026/5/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1794; Calibrated: 2026/2/16
- Phantom: ELI v4.0\_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Area Scan (61x121x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.556 W/kg

**Zoom Scan (7x7x8)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 9.455 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 3.30 W/kg

**SAR(1 g) = 0.952 W/kg; SAR(10 g) = 0.294 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5 mm

Ratio of SAR at M2 to SAR at M1 = 70.9%

Maximum value of SAR (measured) = 2.03 W/kg

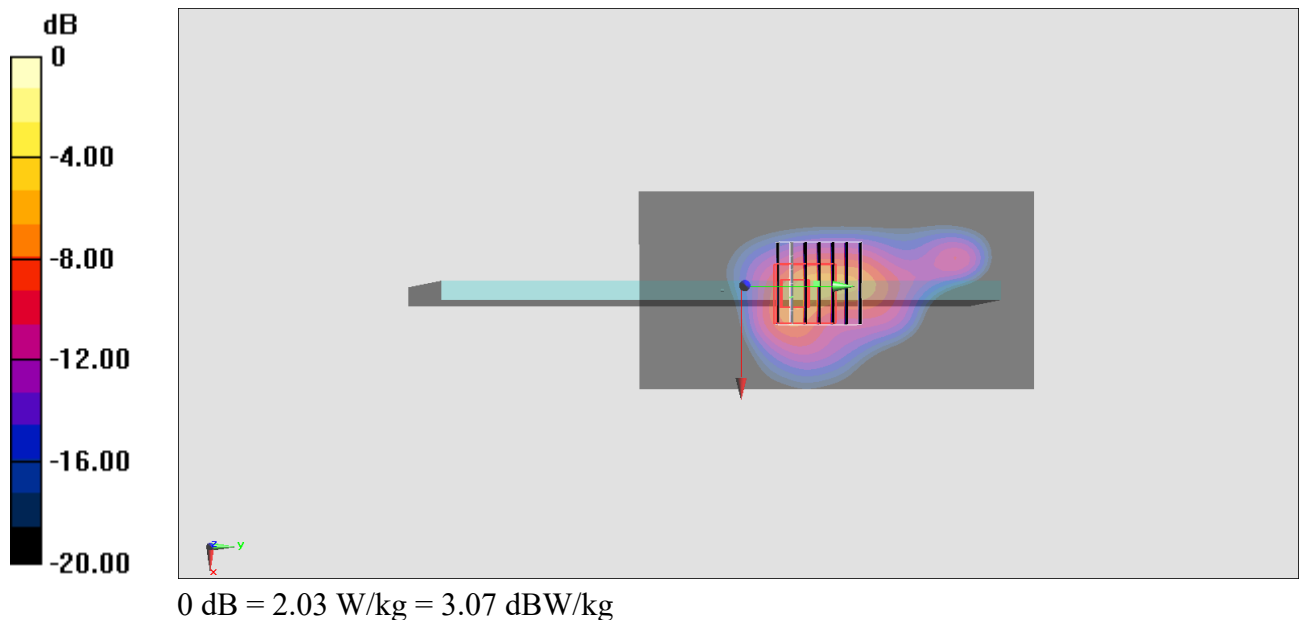

**#19\_FR1 n5\_25M\_BPSK\_1\_64\_Top\_0mm\_Ch167300**

Communication System: UID 10932 - AAC, 5G NR; Frequency: 836.5 MHz

Medium: HSL\_600-7200\_260722 Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.942$  S/m;  $\epsilon_r = 45.513$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3642; ConvF(8.65, 7.87, 10.03) @ 836.5 MHz; Calibrated: 2026/4/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2026/6/10
- Phantom: ELI V4.0\_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.54 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 42.57 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 1.93 W/kg

**SAR(1 g) = 0.859 W/kg; SAR(10 g) = 0.431 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 44.5%

Maximum value of SAR (measured) = 1.54 W/kg

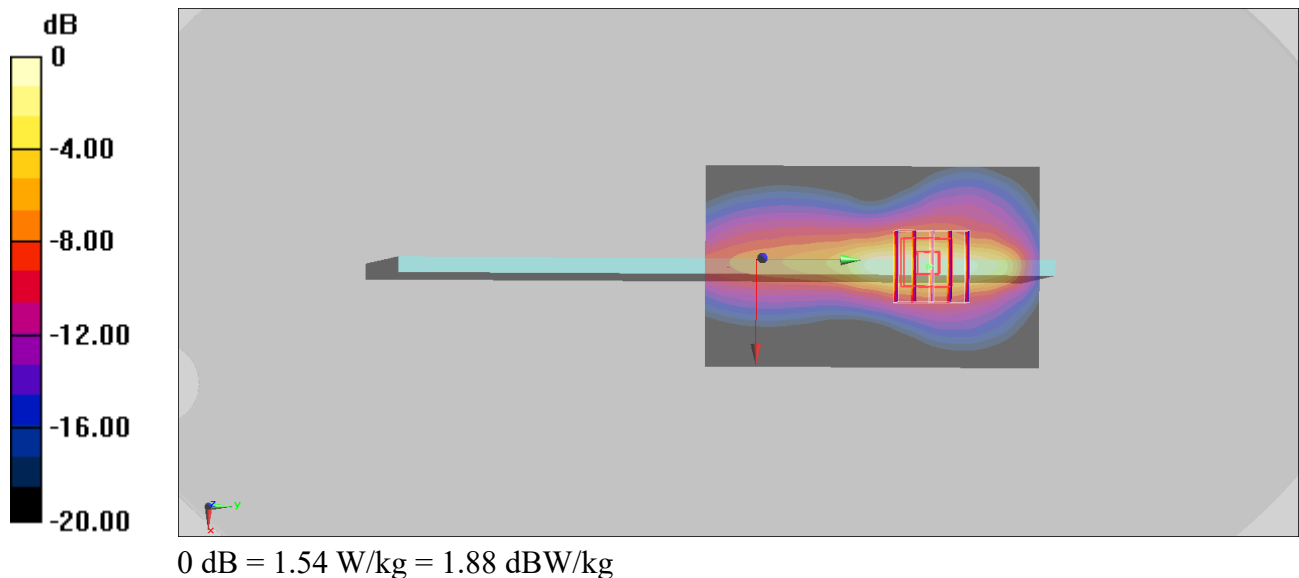

**#20\_FR1 n7\_50M\_BPSK\_1\_1\_Back\_0mm\_Ch507000**

Communication System: UID 10935 - AAD, 5G NR; Frequency: 2535 MHz

Medium: HSL\_600-7200\_260718 Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.937$  S/m;  $\epsilon_r = 42.926$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3642; ConvF(6.87, 6.25, 7.97) @ 2535 MHz; Calibrated: 2026/4/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2026/6/10
- Phantom: ELI V4.0\_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Area Scan (121x81x1):** Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm

Maximum value of SAR (interpolated) = 1.54 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 28.18 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 1.77 W/kg

**SAR(1 g) = 0.873 W/kg; SAR(10 g) = 0.388 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 49.9%

Maximum value of SAR (measured) = 1.43 W/kg

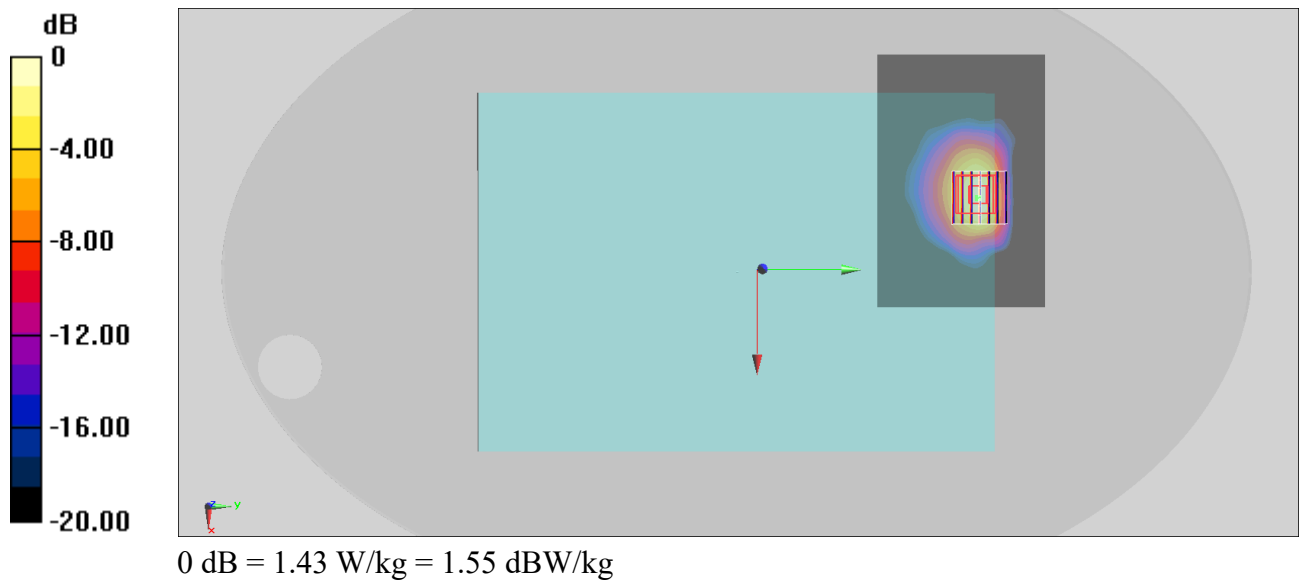

**#21\_FR1 n12\_15M\_BPSK\_1\_1\_Back\_0mm\_Ch141500**

Communication System: UID 10930 - AAC, 5G NR; Frequency: 707.5 MHz

Medium: HSL\_600-7200\_260723 Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.894$  S/m;  $\epsilon_r = 45.73$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3642; ConvF(9.1, 8.28, 10.56) @ 707.5 MHz; Calibrated: 2026/4/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2026/6/10
- Phantom: ELI V4.0\_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.102 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.18 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 0.199 W/kg

**SAR(1 g) = 0.051 W/kg; SAR(10 g) = 0.017 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 53.5%

Maximum value of SAR (measured) = 0.108 W/kg

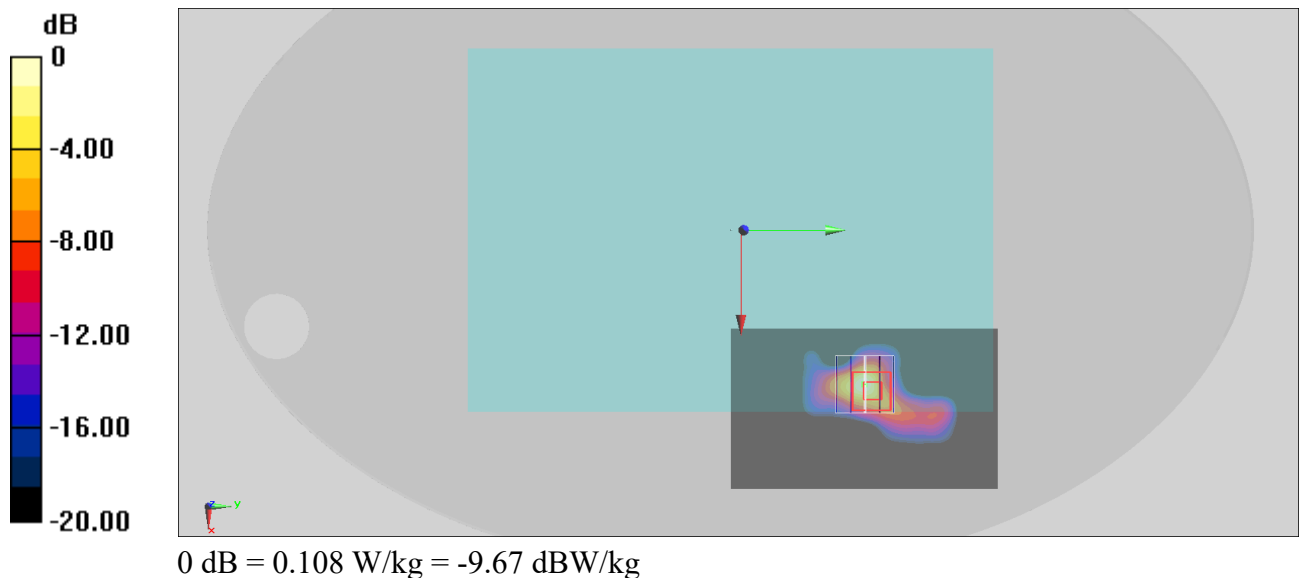

**#22\_FR1 n14\_10M\_BPSK\_1\_1\_Top\_0mm\_Ch158600**

Communication System: UID 10929 - AAD, 5G NR; Frequency: 793 MHz

Medium: HSL\_600-7200\_260723 Medium parameters used:  $f = 793$  MHz;  $\sigma = 0.924$  S/m;  $\epsilon_r = 45.486$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3642; ConvF(9.1, 8.28, 10.56) @ 793 MHz; Calibrated: 2026/4/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2026/6/10
- Phantom: ELI V4.0\_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.444 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.37 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.575 W/kg

**SAR(1 g) = 0.229 W/kg; SAR(10 g) = 0.109 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 49.7%

Maximum value of SAR (measured) = 0.443 W/kg

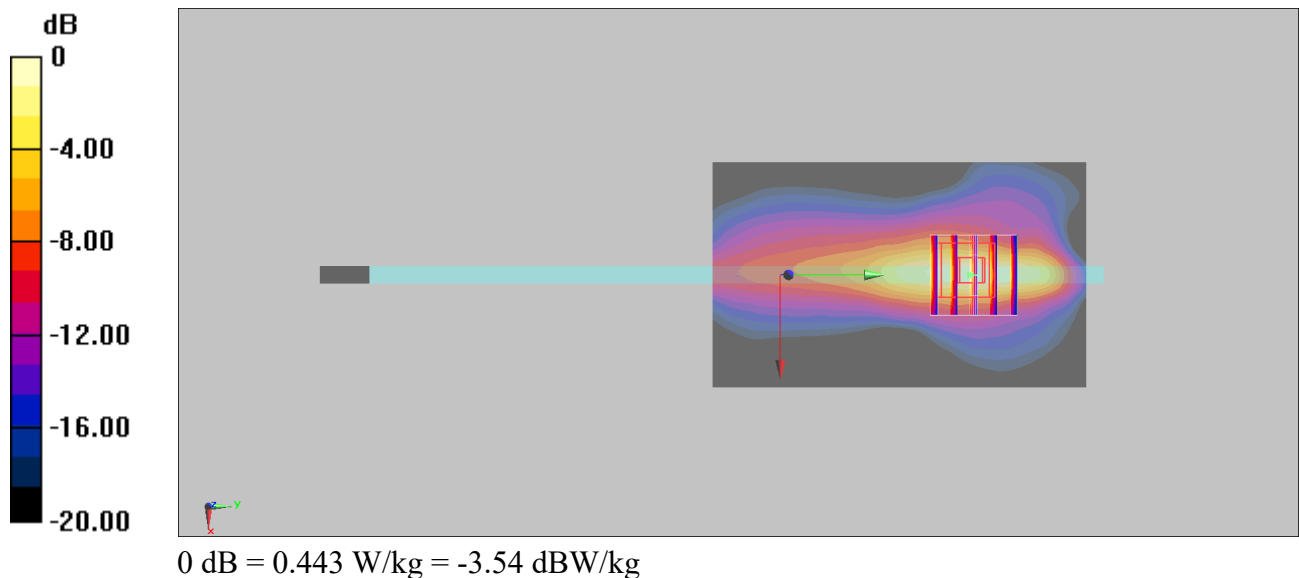

**#23\_FR1 n25\_45M\_BPSK\_1\_1\_Back\_0mm\_Ch376500**

Communication System: UID 10934 - AAC, 5G NR ; Frequency: 1882.5 MHz

Medium: HSL\_600-7200\_260720 Medium parameters used :  $f = 1882.5$  MHz;  $\sigma = 1.464$  S/m;  $\epsilon_r = 43.798$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3642; ConvF(7.32, 6.66, 8.49) @ 1882.5 MHz; Calibrated: 2026/4/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2026/6/10
- Phantom: ELI V4.0\_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.89 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.69 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 2.07 W/kg

**SAR(1 g) = 0.945 W/kg; SAR(10 g) = 0.459 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 45%

Maximum value of SAR (measured) = 1.58 W/kg

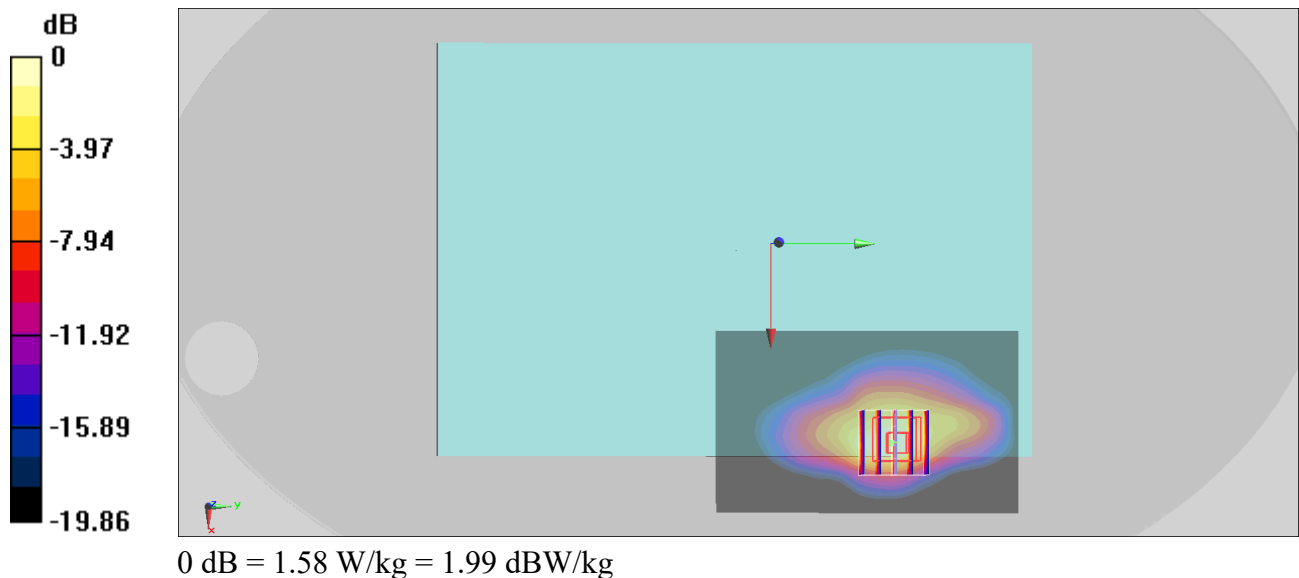

**#24\_FR1 n26\_20M\_BPSK\_1\_104\_Top\_0mm\_Ch166300**

Communication System: UID 10931 - AAC, 5G NR; Frequency: 831.5 MHz

Medium: HSL\_600-7200\_260722 Medium parameters used:  $f = 831.5$  MHz;  $\sigma = 0.94$  S/m;  $\epsilon_r = 45.521$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3642; ConvF(8.65, 7.87, 10.03) @ 831.5 MHz; Calibrated: 2026/4/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2026/6/10
- Phantom: ELI V4.0\_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.10 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.00 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.38 W/kg

**SAR(1 g) = 0.612 W/kg; SAR(10 g) = 0.308 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 43.9%

Maximum value of SAR (measured) = 1.10 W/kg

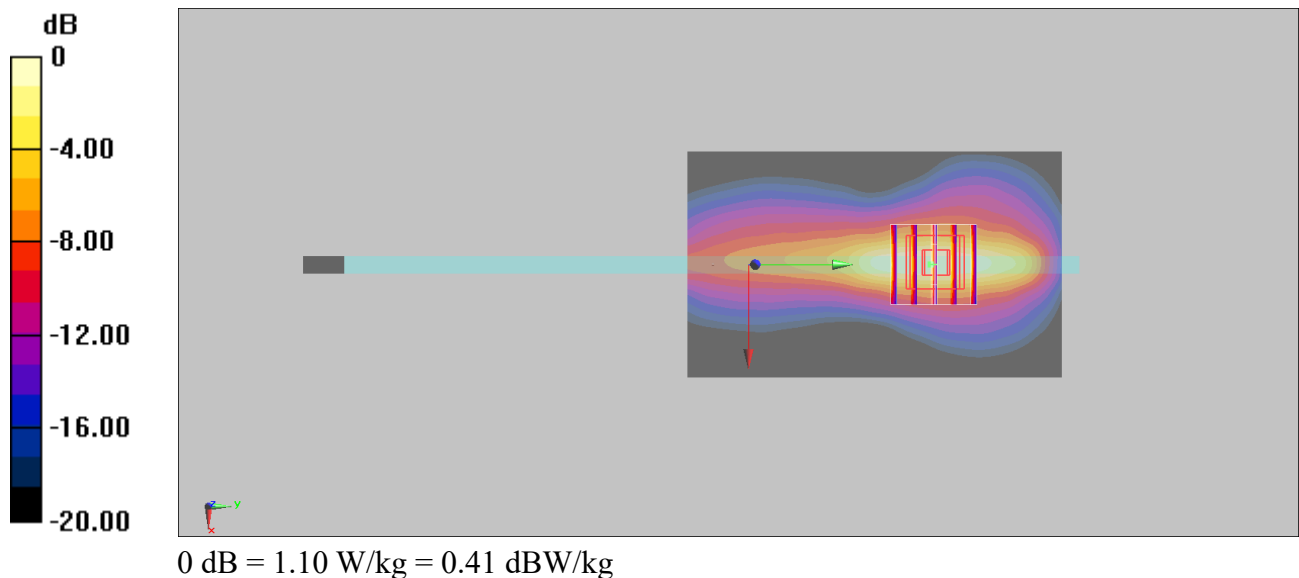

**#25\_FR1 n30\_10M\_BPSK\_1\_1\_Back\_0mm\_Ch462000**

Communication System: UID 10929 - AAD, 5G NR; Frequency: 2310 MHz

Medium: HSL\_600-7200\_260719 Medium parameters used:  $f = 2310$  MHz;  $\sigma = 1.755$  S/m;  $\epsilon_r = 43.323$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3642; ConvF(7.07, 6.43, 8.2) @ 2310 MHz; Calibrated: 2026/4/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2026/6/10
- Phantom: ELI V4.0\_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Area Scan (121x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 2.18 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 31.44 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 1.93 W/kg

**SAR(1 g) = 0.969 W/kg; SAR(10 g) = 0.454 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 50.4%

Maximum value of SAR (measured) = 1.55 W/kg

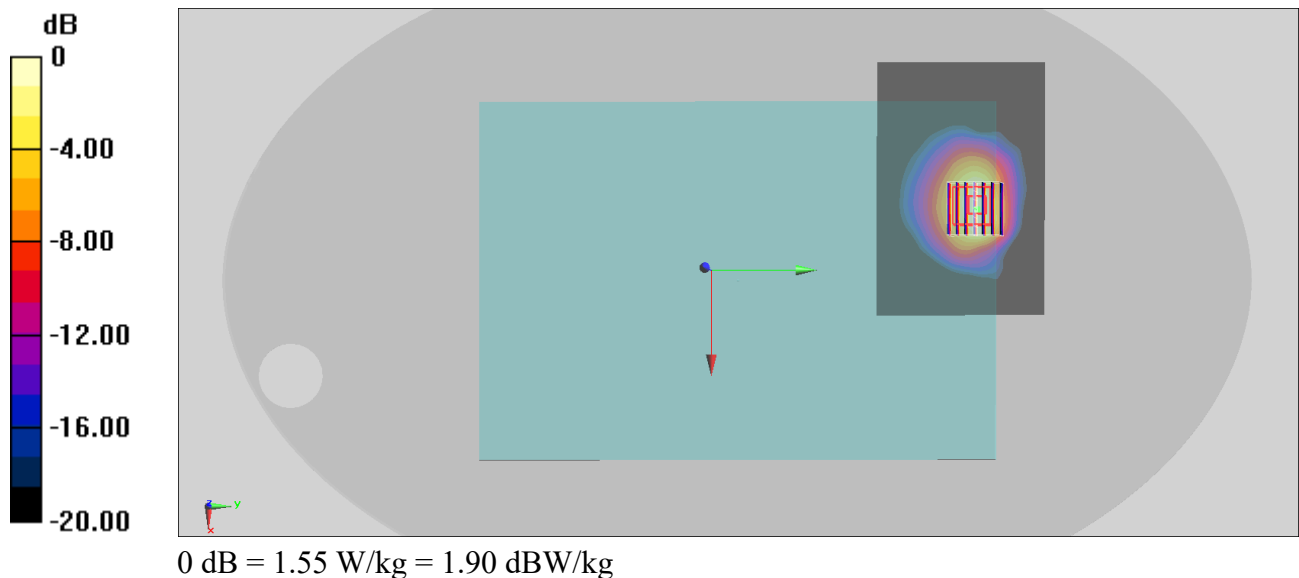

**#26\_FR1 n66\_45M\_BPSK\_1\_1\_Right\_0mm\_Ch349000**

Communication System: UID 10934 - AAC, 5G NR; Frequency: 1745 MHz

Medium: HSL\_600-7200\_260721 Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.376$  S/m;  $\epsilon_r = 44.06$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3642; ConvF(7.41, 6.75, 8.6) @ 1745 MHz; Calibrated: 2026/4/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2026/6/10
- Phantom: ELI V4.0\_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Area Scan (61x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.41 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.01 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 1.68 W/kg

**SAR(1 g) = 0.886 W/kg; SAR(10 g) = 0.421 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 51.3%

Maximum value of SAR (measured) = 1.47 W/kg

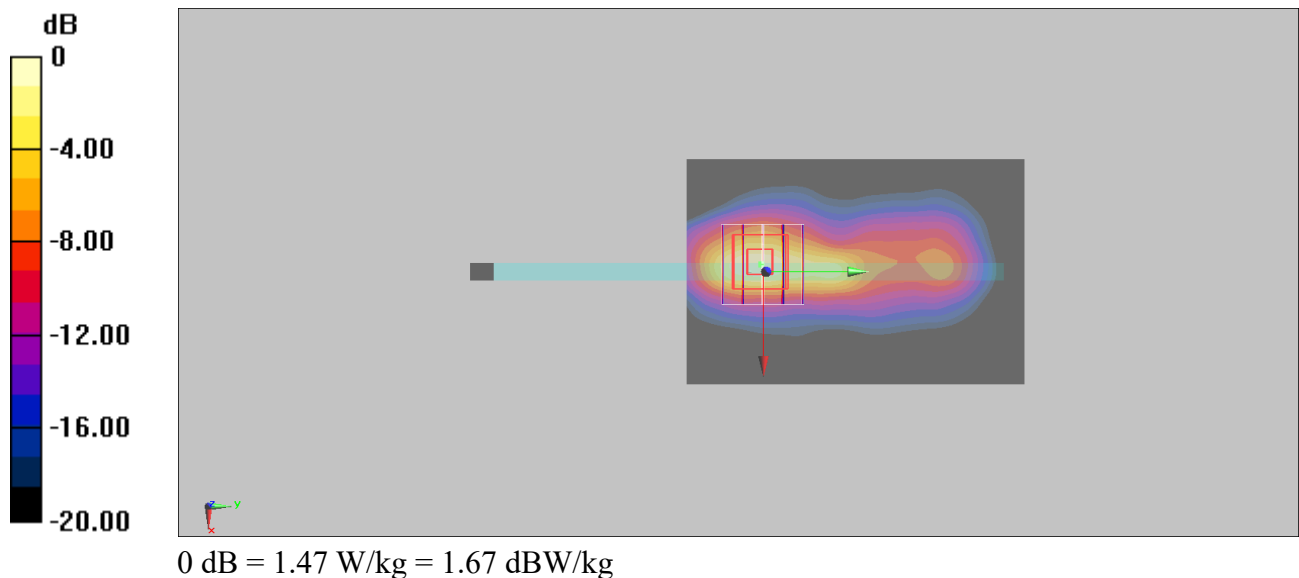

**#27\_FR1 n71\_20M\_BPSK\_1\_53\_Back\_0mm\_Ch136100**

Communication System: UID 10931 - AAC, 5G NR; Frequency: 680.5 MHz

Medium: HSL\_600-7200\_260723 Medium parameters used:  $f = 680.5$  MHz;  $\sigma = 0.884$  S/m;  $\epsilon_r = 45.797$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3642; ConvF(9.1, 8.28, 10.56) @ 680.5 MHz; Calibrated: 2026/4/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2026/6/10
- Phantom: ELI V4.0\_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.473 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.01 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 0.939 W/kg

**SAR(1 g) = 0.295 W/kg; SAR(10 g) = 0.117 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 49.5%

Maximum value of SAR (measured) = 0.611 W/kg

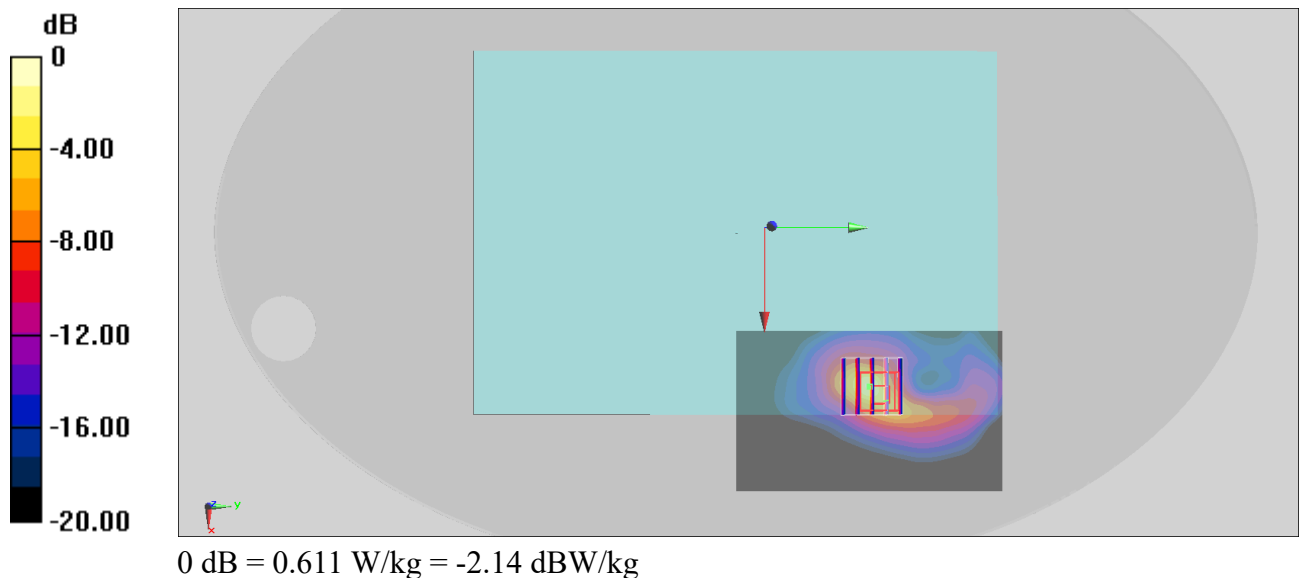

**#28\_FR1 n41\_100M\_BPSK\_1\_1\_Back\_0mm\_Ch518598**

Communication System: UID 10866 - AAF, 5G NR ; Frequency: 2592.99 MHz

Medium: HSL\_600-7200\_260718 Medium parameters used :  $f = 2592.99$  MHz;  $\sigma = 1.981$  S/m;  $\epsilon_r = 42.827$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(6.87, 6.25, 7.97) @ 2592.99 MHz; Calibrated: 2026/4/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2026/6/10
- Phantom: ELI V4.0\_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Area Scan (71x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.52 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.22 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 2.80 W/kg

**SAR(1 g) = 0.995 W/kg; SAR(10 g) = 0.324 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.2 mm

Ratio of SAR at M2 to SAR at M1 = 43.3%

Maximum value of SAR (measured) = 1.90 W/kg

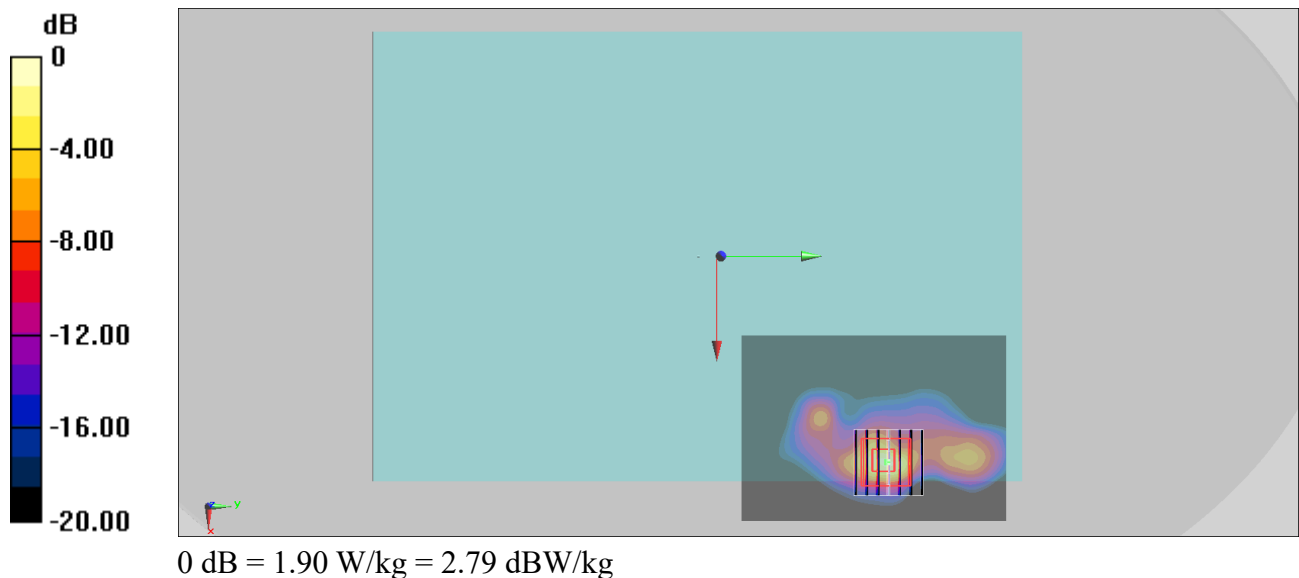

**#29\_FR1\_n48\_40M\_BPSK\_1\_1\_Right\_0mm\_Ch641666**

Communication System: UID 10903 - AAD, 5G NR; Frequency: 3624.99 MHz

Medium: HSL\_600-7200\_260714 Medium parameters used:  $f = 3625$  MHz;  $\sigma = 2.971$  S/m;  $\epsilon_r = 36.834$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7813; ConvF(6.48, 6.5, 7.01) @ 3624.99 MHz; Calibrated: 2026/5/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1794; Calibrated: 2026/2/16
- Phantom: ELI v4.0\_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Area Scan (61x121x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.09 W/kg

**Zoom Scan (7x7x8)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 9.341 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 2.97 W/kg

**SAR(1 g) = 1.1 W/kg; SAR(10 g) = 0.383 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 76.8%

Maximum value of SAR (measured) = 2.27 W/kg

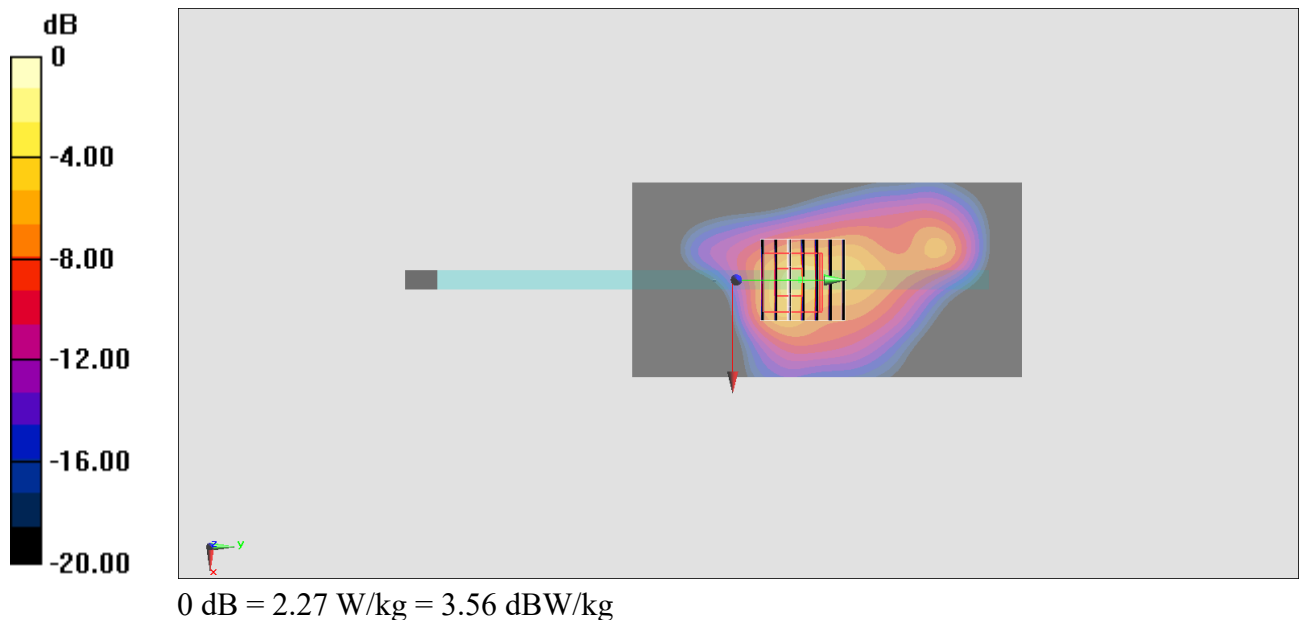

**#30\_FR1 n77\_HPUE\_100M\_BPSK\_1\_1\_Back\_0mm\_Ch656000**

Communication System: UID 10866 - AAF, 5G NR; Frequency: 3840 MHz

Medium: HSL\_600-7200\_260715 Medium parameters used:  $f = 3840$  MHz;  $\sigma = 3.168$  S/m;  $\epsilon_r = 36.374$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7813; ConvF(6.37, 6.39, 6.89) @ 3840 MHz; Calibrated: 2026/5/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1794; Calibrated: 2026/2/16
- Phantom: ELI v4.0\_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Area Scan (101x141x1):** Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm

Maximum value of SAR (interpolated) = 2.20 W/kg

**Zoom Scan (7x7x8)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=1.4$ mm

Reference Value = 20.82 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 3.51 W/kg

**SAR(1 g) = 0.802 W/kg; SAR(10 g) = 0.213 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.5 mm

Ratio of SAR at M2 to SAR at M1 = 65%

Maximum value of SAR (measured) = 2.07 W/kg

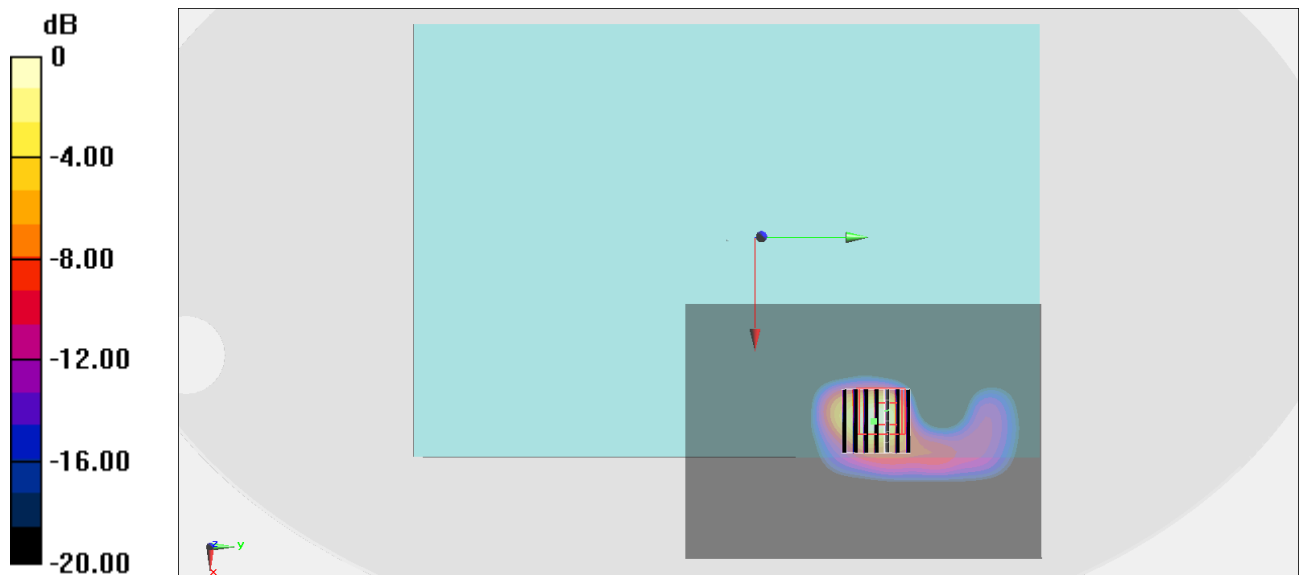

0 dB = 2.07 W/kg = 3.16 dBW/kg