



FCC RADIO TEST REPORT

FCC ID : B94HNQ38C3OMR
Equipment : Notebook PC
Brand Name : HP
Model Name : HSN-Q38C-3
Applicant : HP Inc.
1501 Page Mill Road, Palo Alto CA 94304 USA
Standard : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)

The product was received on Mar. 13, 2026 and testing was performed from May 01, 2026 to May 19, 2026. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards	6
2 Test Configuration of Equipment Under Test	7
2.1 Test Mode.....	7
2.2 Connection Diagram of Test System	8
2.3 Support Unit used in test configuration	8
2.4 Frequency List of Low/Middle/High Channels.....	9
3 Conducted Test Result	10
3.1 Measuring Instruments.....	10
3.2 Conducted Output Power and ERP/EIRP	11
4 Radiated Test Items	12
4.1 Measuring Instruments.....	12
4.2 Test Setup	12
4.3 Test Result of Radiated Test.....	13
4.4 Field Strength of Spurious Radiation Measurement	14
5 List of Measuring Equipment.....	15
6 Measurement Uncertainty	17
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of Radiated Test	
Appendix C. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FG631331-06A	01	Initial issue of report	May 22, 2026



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Pass	-
	§22.913 (a)(5)	Effective Radiated Power (WCDMA Band V)		
	§24.232 (c)	Equivalent Isotropic Radiated Power (WCDMA Band II)		
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power (WCDMA Band IV)		
-	§24.232 (d)	Peak-to-Average Ratio	Reporting only	See Note
-	§2.1049 §22.917 (b) §24.238 (b) §27.53 (g)	Occupied Bandwidth (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	Pass	See Note
-	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Band Edge Measurement (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	Pass	See Note
-	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Conducted Emission (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	Pass	See Note
-	§2.1055 §22.355 §24.235 §27.54	Frequency Stability Temperature & Voltage	Pass	See Note
4.4	§2.1053 §22.917 (a) §24.238 (a) §27.53 (h)	Field Strength of Spurious Radiation (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	Pass	-
Note: 1. For host device, Radiated Spurious Emission, Effective Radiated Power and Equivalent Isotropic Radiated Power are verified and comply with the limit in this test report. 2. For host device, the Conducted Output Power is no difference after compared to module (Model: DRMR-H01)				

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sheng Kuo

Report Producer: Vina Su



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs	WCDMA/LTE/5G NR, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ax/be, Wi-Fi 5GHz 802.11a/n/ac/ax/be, Wi-Fi 6GHz 802.11ax/be and GNSS
Integrated WLAN Module	Brand Name: Intel Model Name: BE211NGW FCC ID: PD9BE211NG
Integrated WLAN Module	Brand Name: Intel Model Name: BE211D2W FCC ID: PD9BE211D2
EUT supports Radios application	WCDMA/LTE/5G NR/GNSS WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80/VHT160 WLAN 11ax HE20/HE40/HE80/HE160 WLAN 11be EHT20/ EHT40/EHT80/EHT160/EHT320 Bluetooth BR/EDR/LE
Antenna Type	WWAN: PIFA Antenna WLAN: <Main>: PIFA Antenna <Aux.>: PIFA Antenna Bluetooth: PIFA Antenna GNSS: PIFA Antenna

Remark:

1. The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.
2. Equipment: WNC DRMR-H01 tested inside of HP Notebook PC.

WWAN Antenna Information				
Antenna 5	Manufacturer	Vendor 1	Peak gain (dBi)	WCDMA Band II: -2.83 WCDMA Band IV: -2.74 WCDMA Band V: -1.71
	Part number	DQ6F15G6100 (81ELBF15.G61)	Type	PIFA
	Manufacturer	Vendor 2	Peak gain (dBi)	WCDMA Band II: 2.72 WCDMA Band IV: 1.40 WCDMA Band V: -2.33
	Part number	DQ602351302 (350-23513)	Type	PIFA

Remark: The above EUT's information was declared by manufacturer. Please refer to Disclaimer in report summary.



1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	TH05-HY	03CH15-HY
Test Engineer	Wei Shun Hung	Sam Pan, Quentin Liu and Bigshow Wang
Temperature (°C)	20.7~22.8	19.4~21.1
Relative Humidity (%)	58.8~60.3	44.7~65.1

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Radiated emissions were investigated as following frequency range:


1. 30 MHz to 9000 MHz for WCDMA Band V
2. 30 MHz to 18000 MHz for WCDMA Band IV
3. 30 MHz to 19100 MHz for WCDMA Band II

All modes, data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

2.2 Connection Diagram of Test System

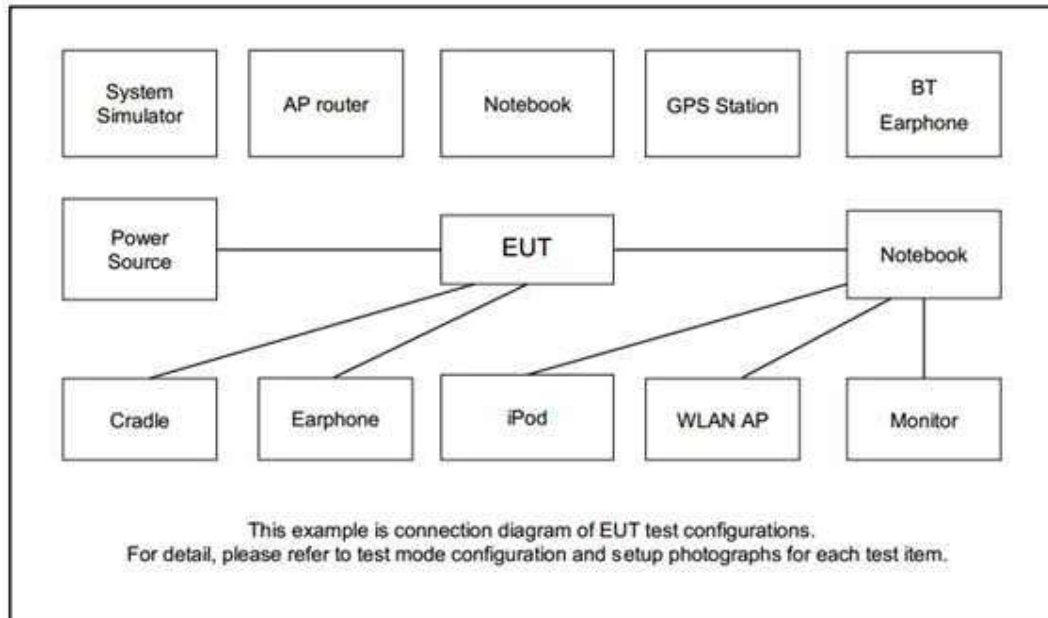

2.3 Support Unit used in test configuration

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
2.	Earphone	Apple	N/A	N/A	Shielded, 1.2m	N/A



2.4 Frequency List of Low/Middle/High Channels

Frequency List				
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest
WCDMA Band V	Channel	4132	4182	4233
	Frequency	826.4	836.4	846.6
WCDMA Band II	Channel	9262	9400	9538
	Frequency	1852.4	1880.0	1907.6
WCDMA Band IV	Channel	1312	1413	1513
	Frequency	1712.4	1732.6	1752.6


3 Conducted Test Result

3.1 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.1 Test Setup

3.1.2 Conducted Output Power



3.1.3 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power and ERP/EIRP

3.2.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for WCDMA Band V

The EIRP of mobile transmitters must not exceed 2 Watts for WCDMA Band II

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port is connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select the lowest, middle, and the highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.


4 Radiated Test Items

4.1 Measuring Instruments


Please refer to the measuring equipment list in this test report.

4.2 Test Setup


For radiated test below 30MHz

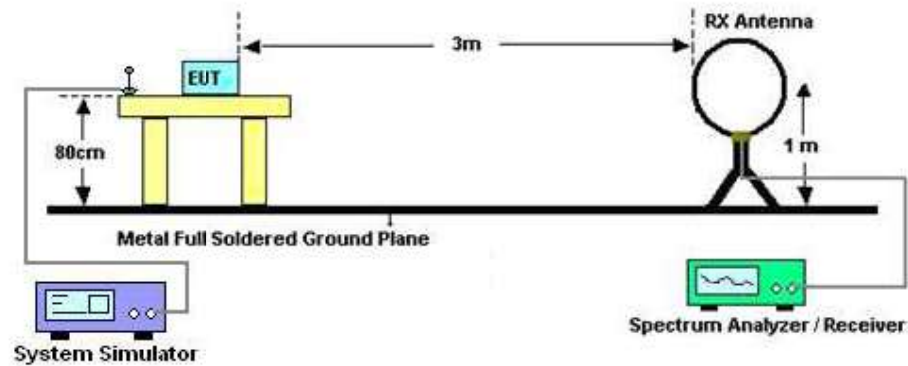


For radiated test from 30MHz to 1GHz

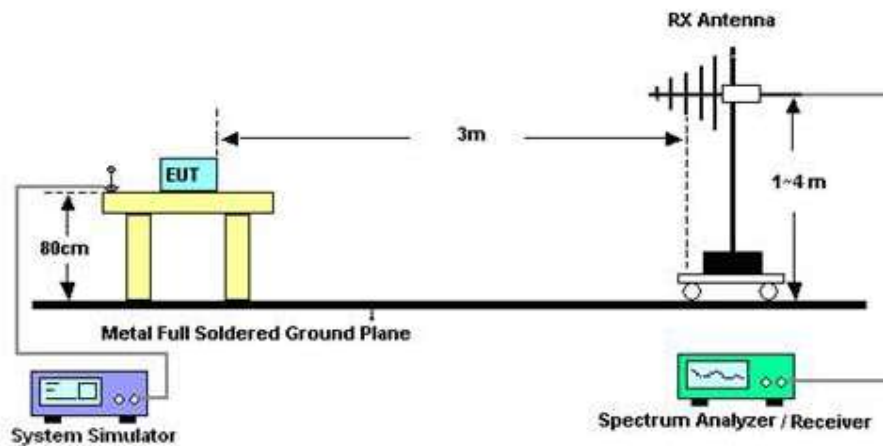

For radiated test from 1GHz to 18GHz

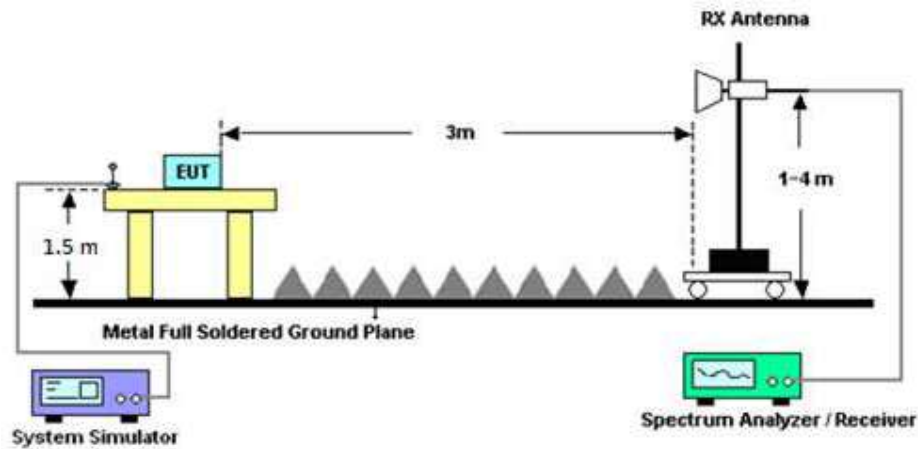

For radiated test above 18GHz

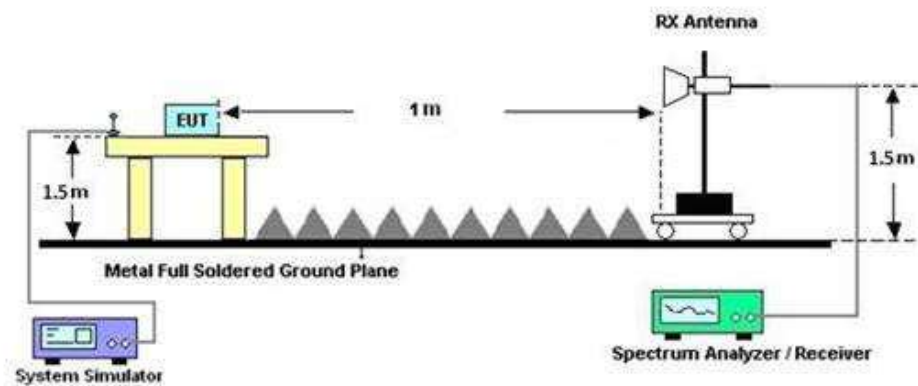

4.3 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



4.4 Field Strength of Spurious Radiation Measurement

4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI C63.26-2015 section 5.5.4 Radiated measurement using the field strength method.

1. The EUT is placed on a rotatable wooden table 0.8 meters for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz above the ground.
2. The EUT is set 3 meters away from the receiving antenna, which is mounted on the antenna tower.
3. The table is rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1 MHz, VBW = 3 MHz, taking record of maximum spurious emission.
6. To convert spectrum reading E(dBuV/m) to EIRP(dBm)
$$\text{EIRP(dBm)} = \text{Level (dBuV/m)} + 20\log(d) - 104.77,$$
where d is the distance at which field strength limit is specified in the rules
7. Field Strength Level (dBm) = Spectrum Reading (dBm) + Antenna Factor + Cable Loss + Read Level - Preamp Factor.
8. ERP (dBm) = EIRP (dBm) - 2.15
9. The RF fundamental frequency shall be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	41912 & 05	30MHz~1GHz	Mar. 16, 2026	May 01, 2026~ May 14, 2026	Mar. 15, 2027	Radiation (03CH15-HY)
Filter	Wainwright	WLJ4-1000-1530-6000-40ST	SN4	1.53GHz Low Pass Filter	Jun. 03, 2025	May 01, 2026~ May 14, 2026	Jun. 02, 2026	Radiation (03CH15-HY)
Filter	Wainwright	WHKX12-2700-3000-18000-60ST	SN4	3GHz High Pass Filter	Jun. 03, 2025	May 01, 2026~ May 14, 2026	Jun. 02, 2026	Radiation (03CH15-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	May 01, 2026~ May 14, 2026	N/A	Radiation (03CH15-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	May 01, 2026~ May 14, 2026	N/A	Radiation (03CH15-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	May 01, 2026~ May 14, 2026	N/A	Radiation (03CH15-HY)
3m Semi Anechoic Chamber(Site VSWR)	TDK	SAC-3M	03CH15-HY	1GHz~18GHz	Oct. 09, 2025	May 01, 2026~ May 14, 2026	Oct. 08, 2026	Radiation (03CH15-HY)
3m Semi Anechoic Chamber(NSA)	TDK	SAC-3M	03CH15-HY	30MHz~1GHz	Oct. 07, 2025	May 01, 2026~ May 14, 2026	Oct. 06, 2026	Radiation (03CH15-HY)
Audio Power Amplifier	SONOMA	310N	363440	9kHz~1GHz	Dec. 18, 2025	May 01, 2026~ May 14, 2026	Dec. 17, 2026	Radiation (03CH15-HY)
Hygrometer	TECPEL	DTM-302	SN1	N/A	Jun. 18, 2025	May 01, 2026~ May 14, 2026	Jun. 17, 2026	Radiation (03CH15-HY)
Software	Audix	E3	RK-002394	N/A	N/A	May 01, 2026~ May 14, 2026	N/A	Radiation (03CH15-HY)
Filter	Wainwright	WHKX8-5872.5-6750-18000-40ST	SN6	6.75GHz High Pass Filter	Jun. 03, 2025	May 01, 2026~ May 14, 2026	Jun. 02, 2026	Radiation (03CH15-HY)
Filter	Wainwright	WHKX12-1080-1200-15000-60ST	SN5	1.2GHz High Pass Filter	Jul. 03, 2025	May 01, 2026~ May 14, 2026	Jul. 02, 2026	Radiation (03CH15-HY)
Hygrometer	TECPEL	DTM-302	SN2	N/A	Aug. 26, 2025	May 01, 2026~ May 14, 2026	Aug. 25, 2026	Radiation (03CH15-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-02294	1GHz~18GHz	Jun. 06, 2025	May 01, 2026~ May 14, 2026	Jun. 05, 2026	Radiation (03CH15-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	May 26, 2025	May 01, 2026~ May 14, 2026	May 25, 2026	Radiation (03CH15-HY)
Preamplifier	EM Electronics	EM01G18G	060802	1GHz~18GHz	Feb. 11, 2026	May 01, 2026~ May 14, 2026	Feb. 10, 2027	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804011/2,804012/2	18GHz~40GHz	Dec. 18, 2025	May 01, 2026~ May 14, 2026	Dec. 17, 2026	Radiation (03CH15-HY)
Signal Analyzer	Keysight	N9010B	MY60241058	10Hz~44GHz	Jul. 15, 2025	May 01, 2026~ May 14, 2026	Jul. 14, 2026	Radiation (03CH15-HY)
Amplifier	EMEC	EM1G18G	060837	1GHz~18GHz	Feb. 11, 2026	May 01, 2026~ May 14, 2026	Feb. 10, 2027	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104, 102E	MY582185/4, 519228/2,803950/2	30MHz~18GHz	Jun. 06, 2025	May 01, 2026~ May 14, 2026	Jun. 02, 2026	Radiation (03CH15-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2E	101108	9 kHz~30 MHz	Dec. 11, 2025	May 01, 2026~ May 14, 2026	Dec. 10, 2026	Radiation (03CH15-HY)
Attenuator	HONOVA	5910 SMA-50-005	0028	30MHz~18GHz	Sep. 09, 2025	May 01, 2026~ May 14, 2026	Sep. 08, 2026	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY519228/2, 803950/2,508407/2E	30MHz~40GHz	Sep. 24, 2025	May 01, 2026~ May 14, 2026	Sep. 23, 2026	Radiation (03CH15-HY)
Digital Thermo-Hygro Meter	TECPEL	DTM-303A	TP241574	N/A	Nov. 10, 2025	May 01, 2026~ May 14, 2026	Nov. 09, 2026	Radiation (03CH15-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Sep. 30, 2025	May 19, 2026	Sep. 29, 2026	Conducted (TH05-HY)
Universal Digital Radio COMM. Tester	Rohde & Schwarz	CMU200	117995	GSM / GPRS / WCDMA / CDMA	Aug. 14, 2025	May 19, 2026	Aug. 13, 2026	Conducted (TH05-HY)
DC Power Supply	GW Instek	GPE-2323	GEU871221	0V~64V ; 0A~6A	Apr. 17, 2026	May 19, 2026	Apr. 16, 2027	Conducted (TH05-HY)
Temperature & Humidity Cabinet Chamber	ESPEC	SU-241	92003713	-30°C ~95°C	Feb. 23, 2026	May 19, 2026	Feb. 22, 2027	Conducted (TH05-HY)
Hygrometer	TECPEL	DTM-303A	TP224371	N/A	Jun. 16, 2025	May 19, 2026	Jun. 15, 2026	Conducted (TH05-HY)



6 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 6 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.3 dB
---	--------

Uncertainty of Radiated Emission Measurement (6 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9 dB
---	--------

Appendix A. Test Results of Conducted Test

Conducted Output Power (Average power and ERP/EIRP)

WCDMA Band V Maximum Average Power [dBm] (GT - LC = -1.71 dB)					
Channel	4132	4182	4233	ERP (dBm)	ERP (W)
Frequency	826.4	836.4	846.6		
RMC 12.2Kbps	23.54	23.60	23.57	19.74	0.0942
Limit	ERP < 7W			Result	Pass

WCDMA Band II Maximum Average Power [dBm] (GT - LC = 2.72 dB)					
Channel	9262	9400	9538	EIRP (dBm)	EIRP (W)
Frequency	1852.4	1880	1907.6		
RMC 12.2Kbps	23.11	23.20	23.22	25.94	0.3926
Limit	EIRP < 2W			Result	Pass

WCDMA Band IV Maximum Average Power [dBm] (GT - LC = 1.4 dB)					
Channel	1312	1413	1513	EIRP (dBm)	EIRP (W)
Frequency	1712.4	1732.6	1752.6		
RMC 12.2Kbps	22.87	22.90	22.87	24.30	0.2692
Limit	EIRP < 1W			Result	Pass



Appendix B. Radiated Spurious Emission Test Data


B1. Summary of each worse mode

Mode	Band	Part	Ch	Freq (MHz)	Level (dBm)	Det	Ant Factor (dB)	AmplCbl (dB)	Filter (dB)	EIRPCF (dB)	Reading (dBuV)	Limit (dBm)	Margin (dB)	Pol	Ant
1	WCDMA B4	Part 27L	H	7010	-48.23	RMS	35.84	-22.02	0.43	-95.23	32.76	-13.00	-35.23	H	5




Ant 5

Part 27L Mode 1
WCDMA B4 Ch1312
L

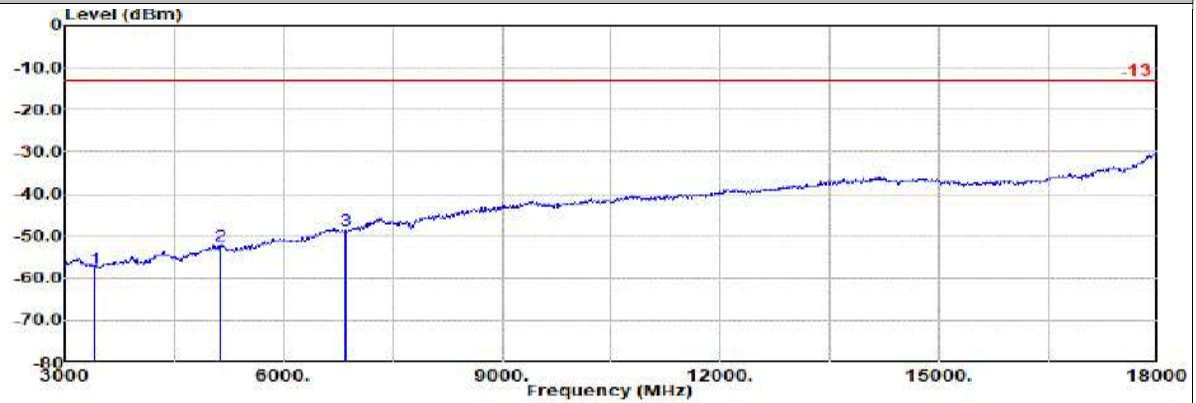

Site : 03CH15-HY
Condition: -13 3m 9120D-02294_250606 Horizontal
: WCDMA Band 4 Ch1312

	Freq	Level	Detector	Ant Factor	Amp	Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm							g			
1	3424.00	-57.75	RMS	29.55	-26.60	1.06	-95.23	33.47	-13.00	-44.75	Horizontal	
2	5137.00	-52.15	RMS	33.15	-24.25	0.48	-95.23	33.70	-13.00	-39.15	Horizontal	
3	6849.00	-48.48	RMS	35.70	-22.08	0.42	-95.23	32.71	-13.00	-35.48	Horizontal	

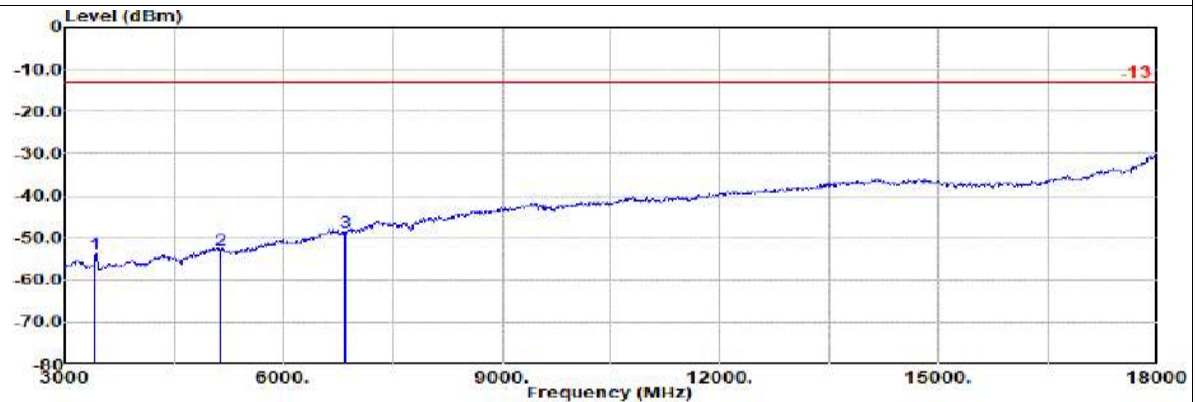


Site : 03CH15-HY
Condition: -13 3m 9120D-02294_250606 Vertical
: WCDMA Band 4 Ch1312

	Freq	Level	Detector	Ant Factor	Amp	Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm							g			
1	3424.00	-53.82	RMS	29.55	-26.60	1.06	-95.23	37.40	-13.00	-40.82	Vertical	
2	5137.00	-52.94	RMS	33.15	-24.25	0.48	-95.23	32.91	-13.00	-39.94	Vertical	
3	6849.00	-48.63	RMS	35.70	-22.08	0.42	-95.23	32.56	-13.00	-35.63	Vertical	




Ant 5

Part 27L Mode 1
WCDMA B4 Ch1413
M

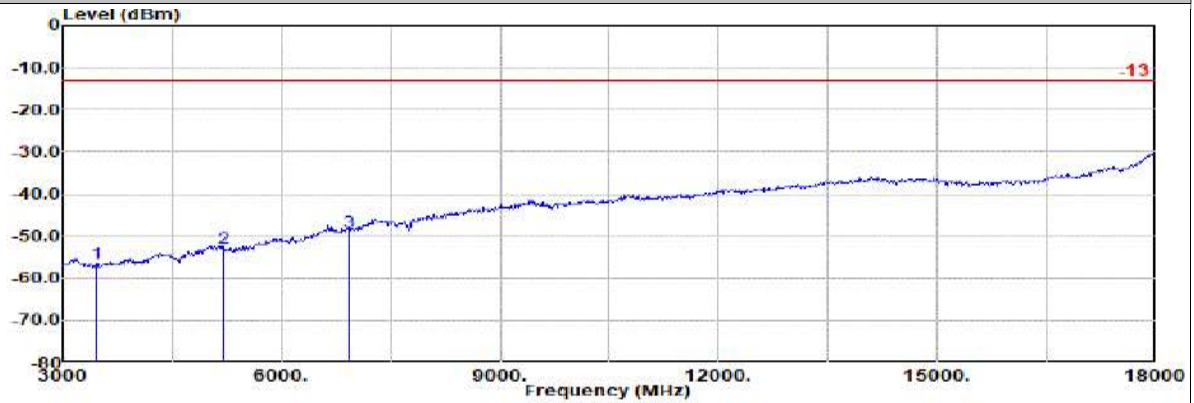

Site : 03CH15-HY
Condition: -13 3m 9120D-02294_250606 Horizontal
: WCDMA Band 4 Ch1413

	Freq	Level	Detector	Ant Factor	Amp	Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm							g			
1	3465.00	-56.60	RMS	29.47	-26.56	1.02	-95.23	34.70	-13.00	-43.60	Horizontal	
2	5197.00	-52.77	RMS	33.01	-24.17	0.46	-95.23	33.16	-13.00	-39.77	Horizontal	
3	6930.00	-48.77	RMS	35.90	-22.05	0.43	-95.23	32.18	-13.00	-35.77	Horizontal	

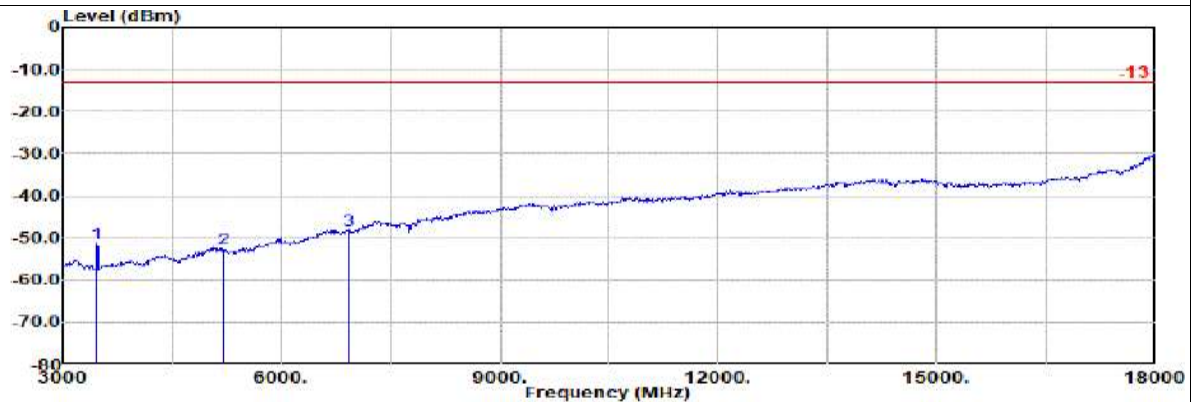

Site : 03CH15-HY
Condition: -13 3m 9120D-02294_250606 Vertical
: WCDMA Band 4 Ch1413

	Freq	Level	Detector	Ant Factor	Amp	Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm							g			
1	3465.00	-51.44	RMS	29.47	-26.56	1.02	-95.23	39.86	-13.00	-38.44	Vertical	
2	5197.00	-52.63	RMS	33.01	-24.17	0.46	-95.23	33.30	-13.00	-39.63	Vertical	
3	6930.00	-48.43	RMS	35.90	-22.05	0.43	-95.23	32.52	-13.00	-35.43	Vertical	




Ant 5

Part 27L Mode 1

WCDMA B4 Ch1513

H

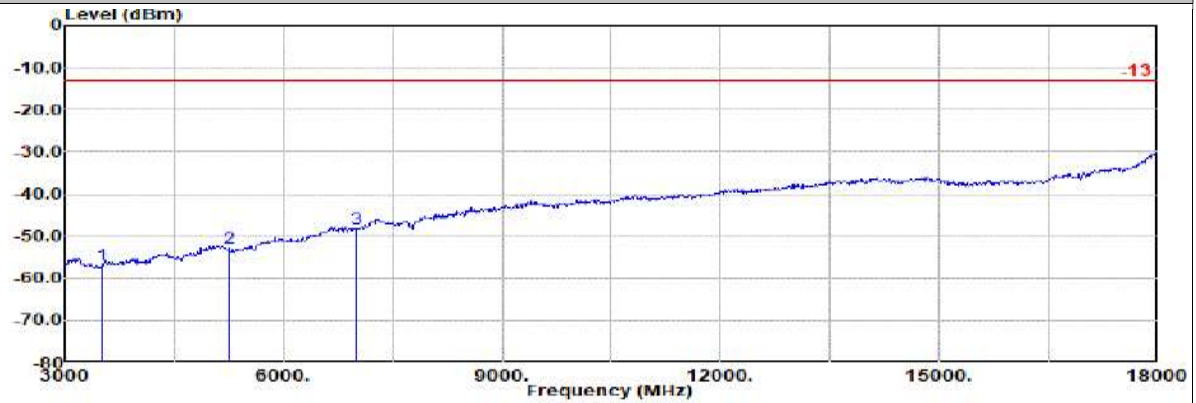


Site : 03CH15-HY

Condition: -13 3m 9120D-02294_250606 Horizontal

: WCDMA Band 4 Ch1513

	Freq	Level	Detector	Ant Factor	Amp	Cb	Filter	EIRPCF	Reading	Limit	Margin	Pol
	MHz	dBm							g	dBm	dB	
1	3510.00	-56.89	RMS	29.42	-26.52	0.98	-95.23	34.46	-13.00	-43.89	Horizontal	
2	5257.00	-52.95	RMS	32.89	-24.07	0.47	-95.23	32.99	-13.00	-39.95	Horizontal	
3	7010.00	-48.23	RMS	35.84	-22.02	0.43	-95.23	32.76	-13.00	-35.23	Horizontal	

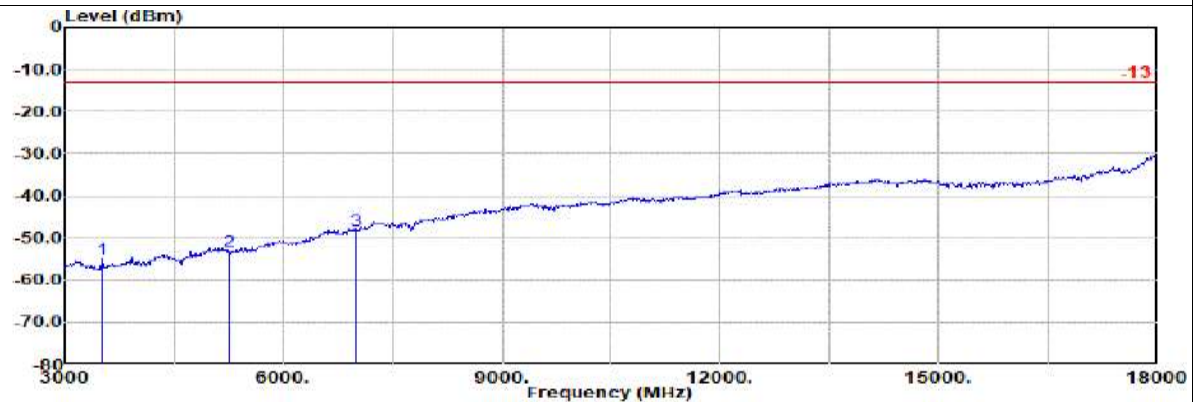

Site : 03CH15-HY

Condition: -13 3m 9120D-02294_250606 Vertical


: WCDMA Band 4 Ch1513

	Freq	Level	Detector	Ant Factor	Amp	Cb	Filter	EIRPCF	Reading	Limit	Margin	Pol
	MHz	dBm							g	dBm	dB	
1	3505.00	-54.89	RMS	29.41	-26.53	0.98	-95.23	36.48	-13.00	-41.89	Vertical	
2	5257.00	-53.07	RMS	32.89	-24.07	0.47	-95.23	32.87	-13.00	-40.07	Vertical	
3	7005.00	-48.42	RMS	35.82	-22.02	0.43	-95.23	32.58	-13.00	-35.42	Vertical	




Ant 5

Part 27L Mode 1
WCDMA B4 Ch1513
H

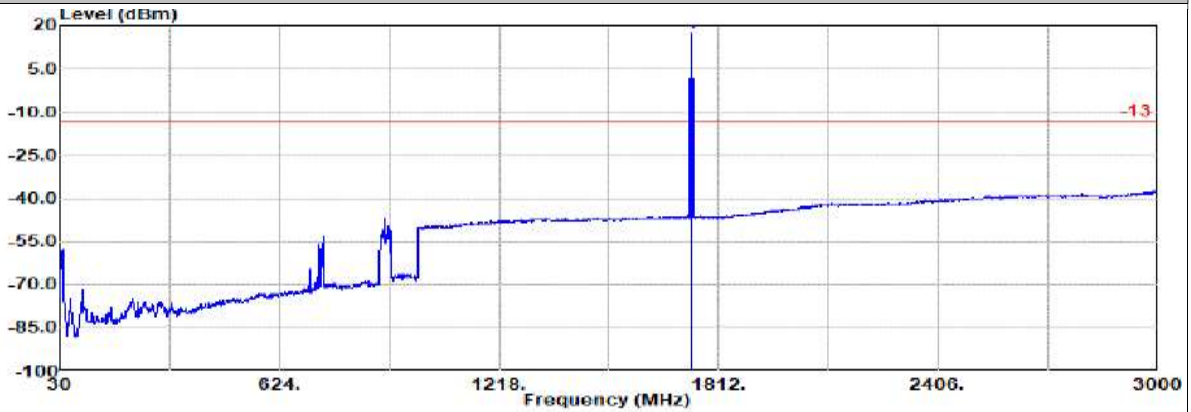

Site : 03CH15-HY
Condition: -13 3m 9120D-02294_250606 Horizontal
Mode : WCDMA Band IV Ch1513
: #1 is fundamental signal which can be ignored.

	Freq	Level	Detector	Ant Amp\Cb Filter			EIRPCF	Readin	Limit	Margin	Pol
				Factor	1						
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1738.00	17.96	RMS	25.18	7.30	0.00	-95.23	80.71	-13.00	30.96	Horizontal

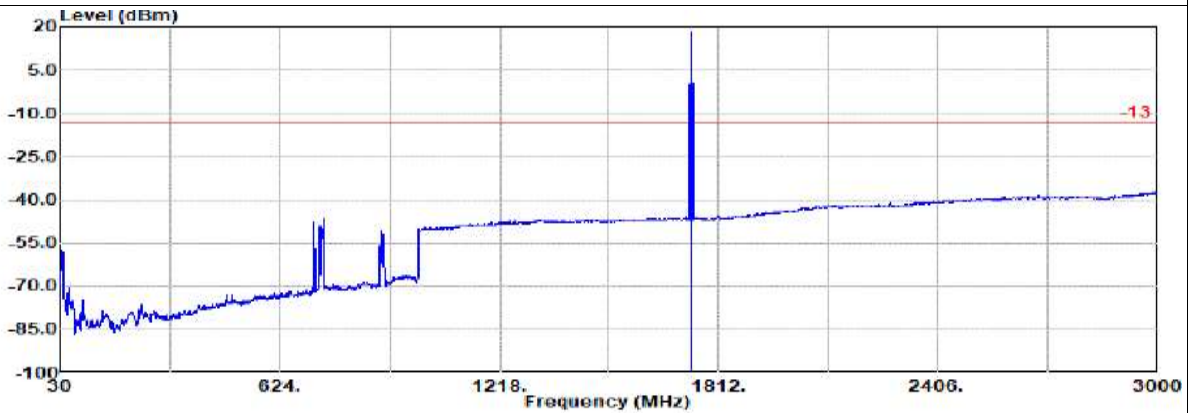

Site : 03CH15-HY
Condition: -13 3m 9120D-02294_250606 Vertical
Mode : WCDMA Band IV Ch1513
: #1 is fundamental signal which can be ignored.

	Freq	Level	Detector	Ant Amp\Cb Filter			EIRPCF	Readin	Limit	Margin	Pol
				Factor	1						
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1738.00	18.59	RMS	25.18	7.30	0.00	-95.23	81.34	-13.00	31.59	Vertical