


NOTES:

1. Surface Material:XF581
- * 2. Surface Material tolerance:0. 038±0. 003mm
3. Surface Material color:white
- 4.printing color is as color defined in artwork
5. Adhesive base:Acrylic
- * 6. Adhesive thickness:0. 025+/-0. 003mm
- * 7. Adhesion to steel (180o磨钢粘着力):1+/-0. 3 kg/25mm
- * 8. Initial Tack (初期力):4+/-2 #
9. Relese Power (90o剥离力):20+/-10 g/25mm
- * 10. Holding Power (持粘力測試法):5+/-2 hr/kg/20mm2
11. Package Style:Reel
12. This part must comply with ROHs and HF



D		C		B		A
REV.	MARK	ECR/ECN NO.	DATE	UPDATE DESCRIPTION	SIGNATURE	
0			15/08/31	First release	Tao	
01			15/09/01	Add Japan RF"201-XXXXXX" and Taiwan NCC"CCAF 15LPXXXXYX"	Tao	
02			15/09/21	Update Japan RF:201-XXXXXX to 201-150412	hongjun	
03			15/10/29	Remove the FCC DoC logo	hongjun	

Ulysses (26*20*R 1.5mm)

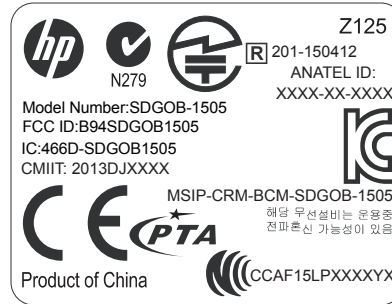

SCALE:2:1

MATERIAL (SPEC.)										SCALE	FOXCONN			
XF581										2:1				
FINISH										SHEET	HON HAI PRECISION IND. CO., LTD. CNSBG			
										1/1				
Select								V		UNIT	PART NAME PTT label			
Dim. Tol.	A	B	C	EPS	EPE	BAG	CTN	Label	USR	MM				
0~6	0.05	0.05	0.10					0.20			MODEL U98H127.0X			
6~30	0.10	0.15	0.20	0.50	0.50	3.00		0.20						
30~120	0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25		SIZE	PART NO. 500.xxxxx.005		DESIGNED Tao	
120~300	0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30		A4				
300~450	0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50			CUSTOMER MODEL		CUSTOMER PART NO.	APPROVED
450~600	0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80						
DRAFT TOLERANCE				± 0.2°		CRITICAL DIM. MARK		*						