

NOTES:


1. Surface Material:XF581
- * 2. Surface Material tolerance:0.038±0.003mm
3. Surface Material color:white
4. printing color is as color defined in artwork
5. Adhesive base:Acrylic
- * 6. Adhesive thickness:0.025+/-0.003mm
- * 7. Adhesion to steel (180o磨钢粘着力):1+/-0.3 kg/25mm
- * 8. Initial Tack (初期力):4+/-2 #
9. Release Power (90o剥离力):20+/-10 g/25mm
- * 10. Holding Power (持粘力测试法):5+/-2 hr/kg/20mm2
11. Package Style:Reel
12. This part must comply with ROHs and HF



NO.3

D		C		B		A
REV.	MARK	ECR/ECN NO.	DATE	UPDATE DESCRIPTION	SIGNATURE	
0			15/08/31	First release	Tao	
01			15/09/01	Add Japan RF"201-XXXXXX" and Taiwan NCC"CCAF 15LPXXXXYX"	Tao	
02			05/9/21	Update Japan RF:201-XXXXXX to 201-150420	hongjun	
03			05/10/29	Remove the FCC DoC logo	hongjun	

UlyssesBlue (26*20*R1.5mm)

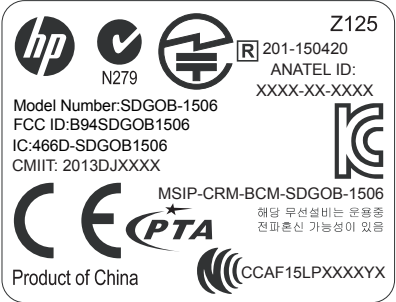

SCALE:2:1

MATERIAL (SPEC.)										SCALE		FOXCONN			
XF581										2:1					
FINISH										SHEET		HON HAI PRECISION IND. CO., LTD. CNSBG			
										1/1					
Select										UNIT		PART NAME			
Dim. Tol.										MM					
A	B	C	EPS	EPE	BAG	CTN	V	Label	USR	PTT label					
0~6	0.05	0.05	0.10						0.20						
6~30	0.10	0.15	0.20	0.50	0.50	3.00			0.20	SIZE					
30~120	0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25							
120~300	0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30		A4					
300~450	0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50							
450~600	0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80							
DRAFT TOLERANCE				± 0.2°		CRITICAL DIM. MARK		*							