

**ENGINEERING, INC.***"One World, One EMC Solution"*

Pls upload to Exhibit 46

EAST#

95195

FACSIMILE MESSAGE

Bill Inglis

X 3042

DATE: 11.23.99

of pages, (including Cover): 7

TO: Bill Inglis

FAX #: 301 344-2050

@: FCC

REF: #10364, EA95195

FROM: Bryan Broadbus

FCC ID BBD3-1AB-M

attn: Bill Inglis

*Family owned and operated since 1979*3535 W. Commonwealth Ave. • Fullerton, CA 92833 • Tel. 714/870-7781 • Fax 714/870-5081 • www.dabenginc.com



November 18, 1999

Bill Inglis
FEDERAL COMMUNICATIONS COMMISSION
Authorization & Evaluation Division
7435 Oakland Mills Road
Columbia, MD 21046

RE: Reference Number : 10364
731 Confirmation #: EA95195
FCC ID: BBD3-1AB-M

Dear Mr. Inglis:

In reference to your E-mail dated 10/26/99, the data in the test report shows an unmodulated carrier at +47 dBm which is 50 watts on sheet 12. The output power listed on sheet 8 for paragraph 2.983 (e)(1) is incorrect. It should be 50 watts at all three input voltages. Included is a revised page.

Attached are additional plots for OBW and Conducted Spurious signals.

This amplifier is intended for single channel use only. It is a class "C" amplifier.

If you have any additional questions please do not hesitate to call.

Sincerely,

Bryan C. Broaddus
V.P., Operations

Family owned and operated since 1979

3535 W. Commonwealth Ave. • Fullerton, CA 92833 • Tel. 714/870-7781 • Fax 714/870-5081 • www.dnbenginc.com

2.983(e) Test Data

Refer to 2.983(e) (1) through 2.983(c) (7).

2.983(e)(1) Measurement of RF Power Output per 2.985

Definition: For RF Power Amplifiers.

Test Method: See FIGURE 2.

Output Power Is measured across a precision 50 ohm load with a wide band sampling RF Voltmeter.

Test Results:

POWER OUTPUT

FREQUENCY	NOMINAL VOLTAGE 13.8 VDC	85% VOLTAGE 11.73 VDC	115% VOLTAGE 15.87 VDC
158 MHz	50 Watts	50 Watts	50 Watts

Occupied Bandwidth Drive

hp

INPUT 6 WATTS POWER
REF 37.8 dBm ATTEN 10 dB


MKR Δ 2.5 KHz
8.30 dB

10 dB/

POS PK

OFFSET
61.0

. dB

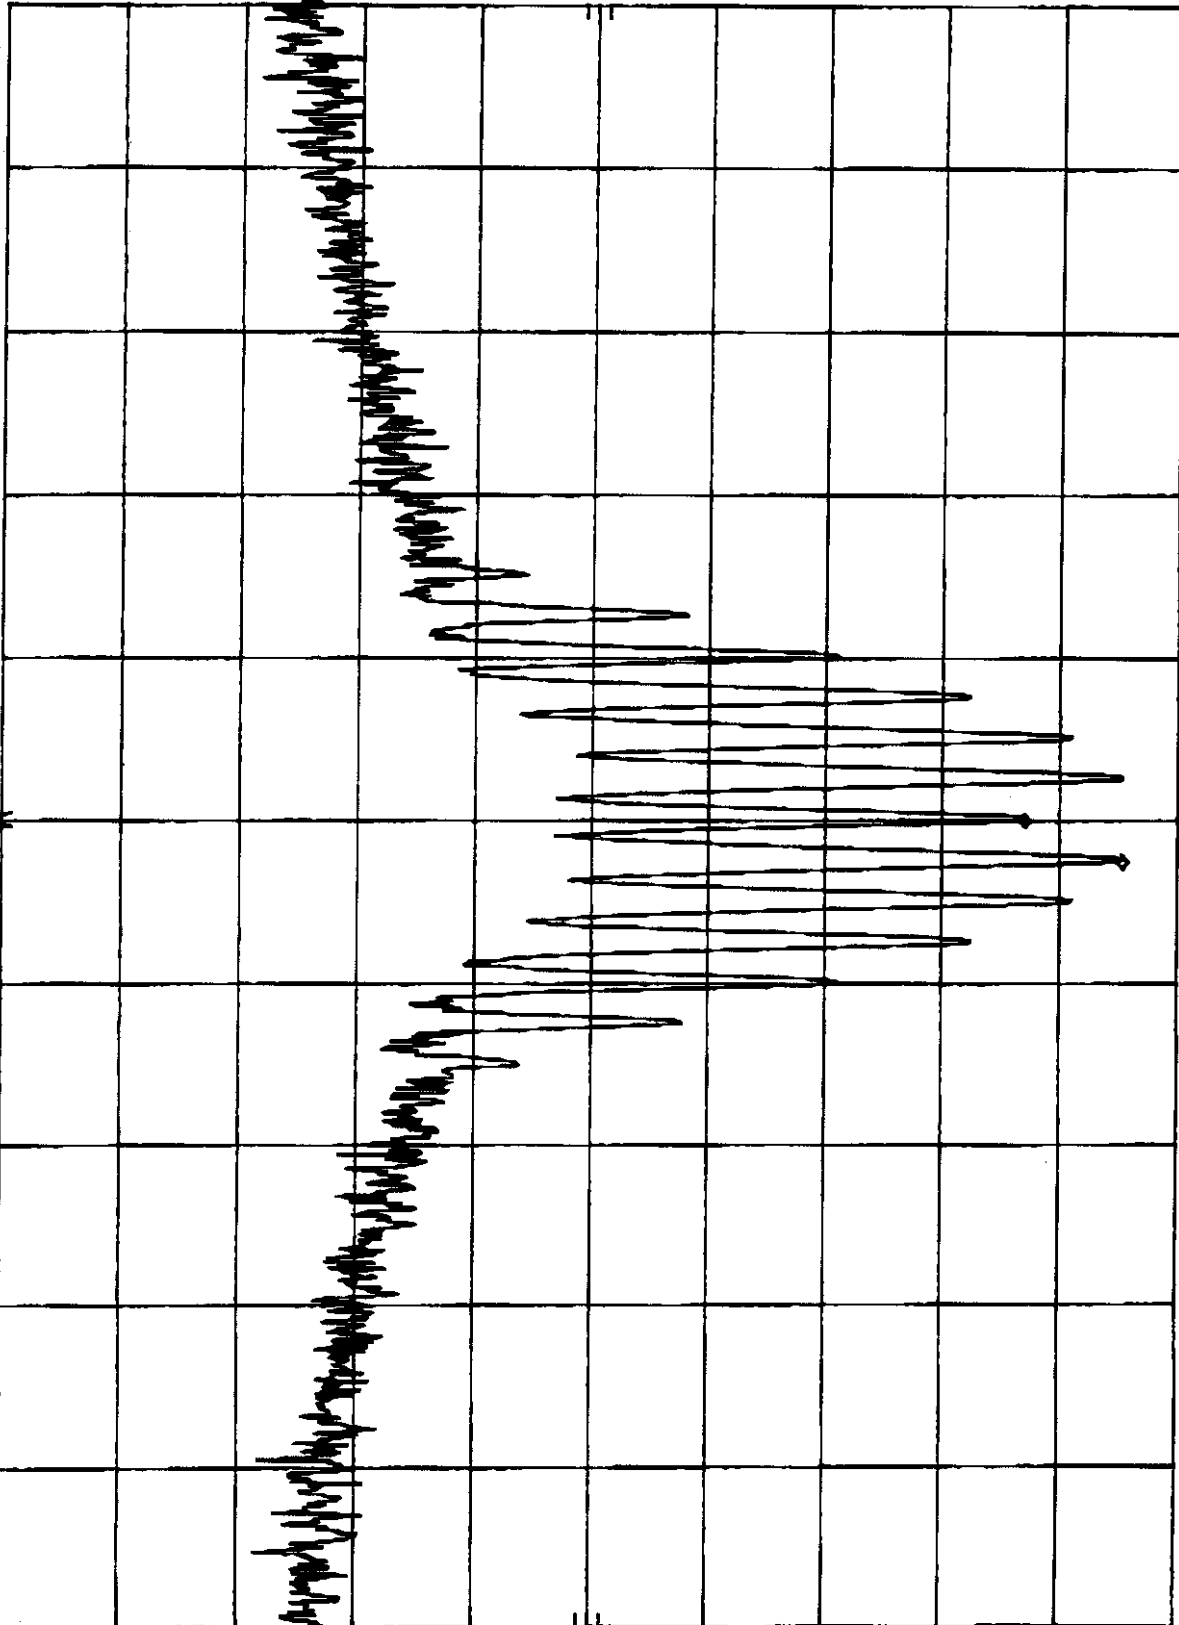

CENTER

158.000 MHz

RES BW 300 Hz

VBW 1 kHz

SPAN 100 kHz

RES BW 300 Hz

VBW 1 kHz

SPAN 100 kHz

SWP 3.00 sec

Decapital Bandwidth Driver

INPUT 6 WATTS POWER
REF 37.8 dBm

ATTEN 10 dB

MKR Δ 2.5 KHZ
8.30 dB

HP

10 dB/

POS PK

OFFSET
61.0

dB


HP

10 dB/

POS PK

OFFSET
61.0

dB

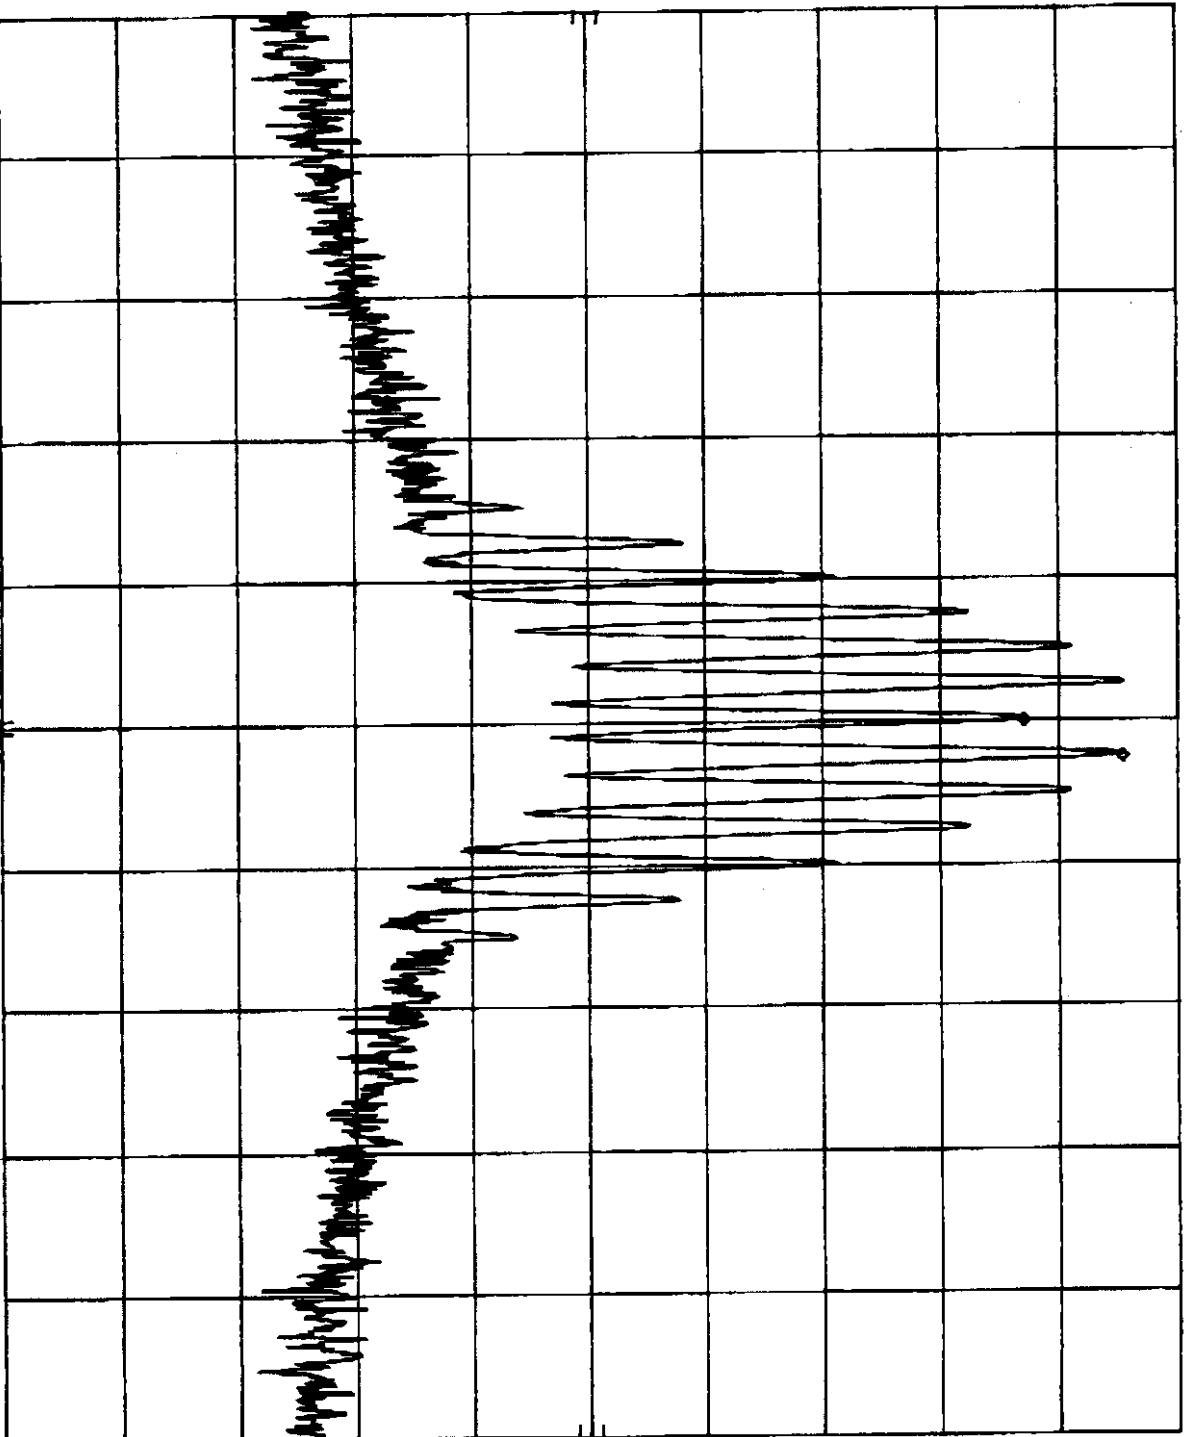

CENTER

CENTER 158.000 MHZ

RES BW 300 HZ

VBW 1 KHZ

SWP 3.00 sec

SPAN 100 KHZ

6 WATTS INPUT ANT. CONDUCTED SPURIOUS
REF 61.0 dBm ATTEN 10 dB

REF 61.0 dBm

ATTEN 10 DB

POS PK

OFFSET

61. 0
3B

[illegible]

DEC 30 1974

VAW 100 kHz

SWEET'S

P.06

NOV-23-1999 16:17

Antenna Conducted Spurious Driver

6 WATTS INPUT ANT. CONDUCTED SPURIOUS
 REF 61.0 dBm ATTEN 10 dB


MKR Δ 316.8 MHz
 -28.60 dB

hpo

10 dB/

POS PK

OFFSET
 61.0
 dB

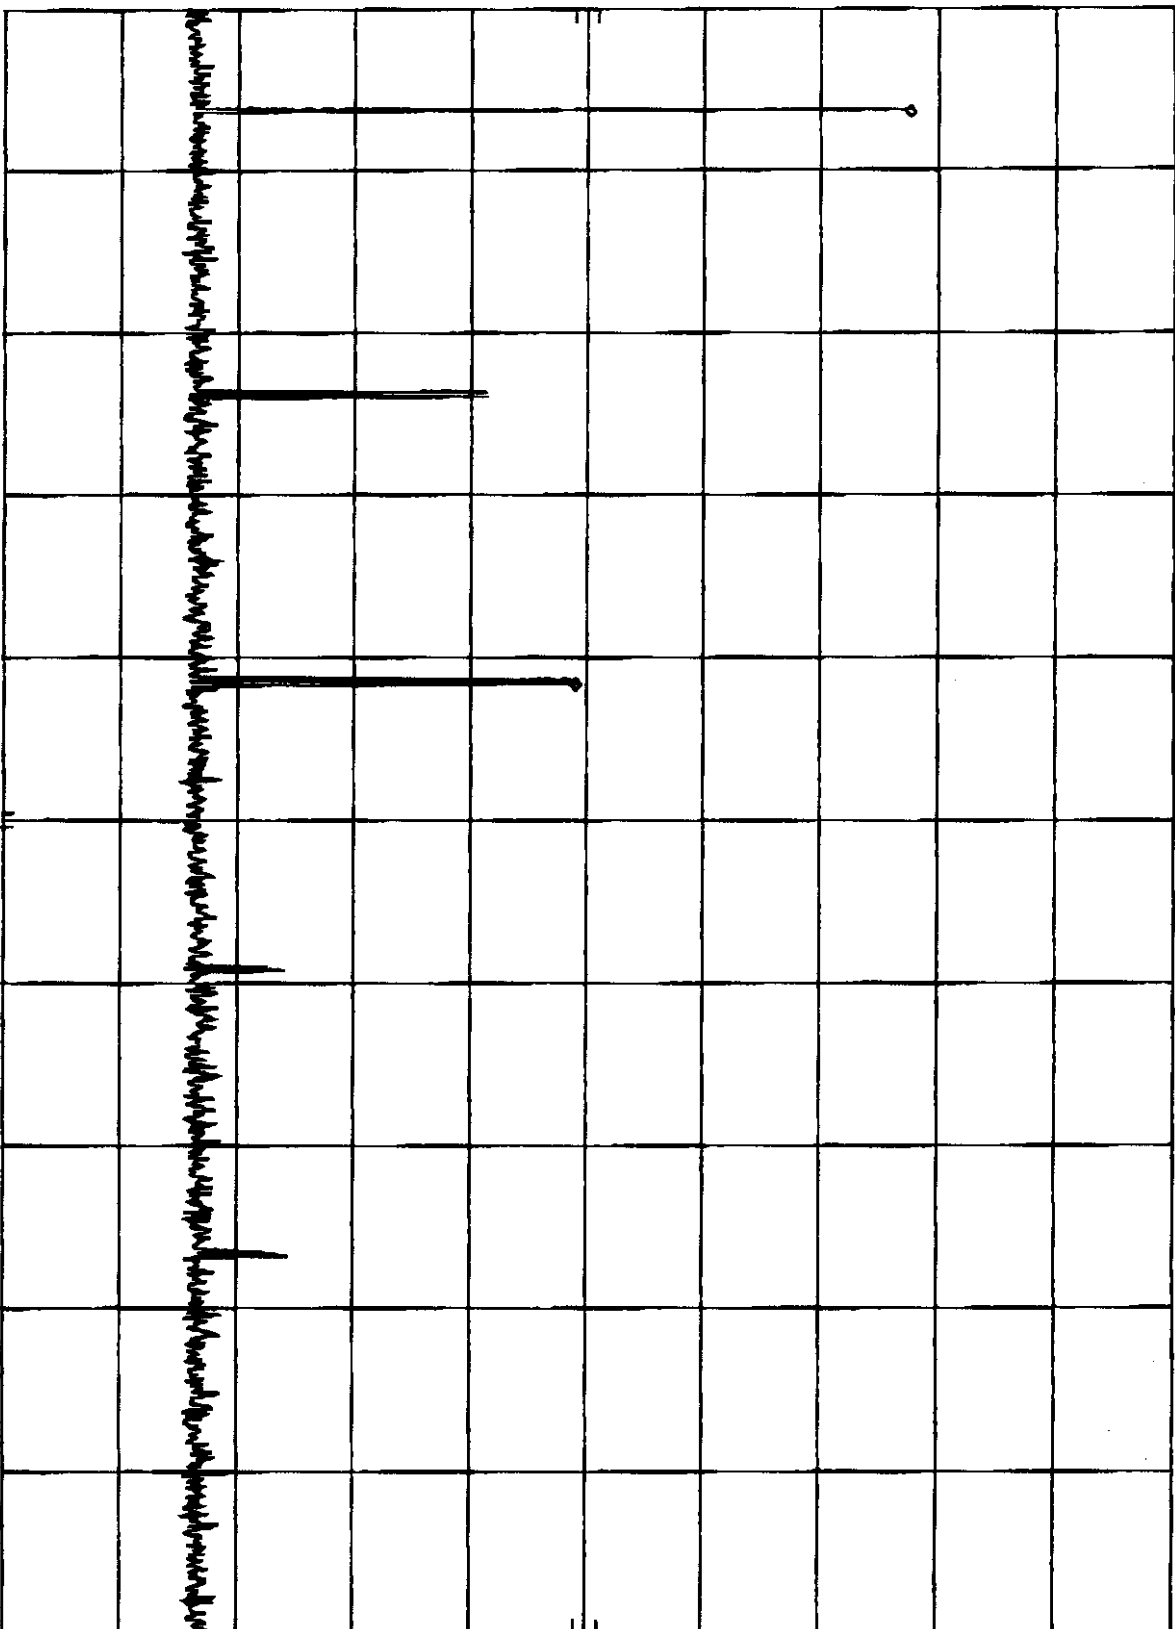

START 100 MHz

BESBW 30 MHz

VBW 100 MHz

STOP 1.000 GHz

CWB 3.72