

TEST REPORT

Applicant: Cobra Electronics Corporation

Address: 1701 Golf Road Suite 3-900, Rolling Meadows, Illinois, 60008,
United States

Product Name: VHF Marine Radio Transceiver

FCC ID: BBOBB650

Standard(s): 47 CFR Part 2
47 CFR Part 80
ANSI C63.26-2015

Report Number: 2502V04204E-RF-00C

Report Date: 2025/10/22

The above device has been tested and found compliant with the requirement of the relevant standards by Bay Area Compliance Laboratories Corp. (Dongguan).

Alice Tan

Reviewed By: Alice Tan

Title: RF Engineer

Pedro Yun

Approved By: Pedro Yun

Title: RF Supervisor

Bay Area Compliance Laboratories Corp. (Dongguan)
No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China

Tel: +86-769-86858888

Fax: +86-769-86858891

www.baclcorp.com.cn

Note: The information marked ▲ is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report cannot be reproduced except in full, without prior written approval of the Company. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0. This report may contain data that are not covered by the accreditation scope and shall be marked with ★. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. Each test item follows the test standard(s) without deviation.

CONTENTS

DOCUMENT REVISION HISTORY	4
1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 ACCESSORY INFORMATION:	5
1.3 ANTENNA INFORMATION DETAIL▲:	5
1.4 EQUIPMENT MODIFICATIONS	5
2. SUMMARY OF TEST RESULTS	6
3. DESCRIPTION OF TEST CONFIGURATION	7
3.1 OPERATION FREQUENCY DETAIL:	7
3.2 EUT OPERATION CONDITION:	7
3.3 EUT EXERCISE SOFTWARE	7
3.4 SUPPORT EQUIPMENT LIST AND DETAILS	8
3.5 SUPPORT CABLE LIST AND DETAILS	8
3.6 BLOCK DIAGRAM OF TEST SETUP	8
3.7 TEST FACILITY	9
3.8 MEASUREMENT UNCERTAINTY	9
4. REQUIREMENTS AND TEST RESULTS	10
4.1 AUTOMATIC TIMING	10
4.1.1 Applicable Standard	10
4.1.2 Block Diagram of Test Setup	10
4.1.3 Test Procedure	10
4.1.4 Test Data And Result	11
4.2 TRANSMITTER FREQUENCY TOLERANCES	12
4.2.1 Applicable Standard	12
4.2.2 Block Diagram of Test Setup	12
4.2.3 Test Procedure	12
4.2.4 Test Data And Result	14
4.3 MODULATION REQUIREMENTS	16
4.3.1 Applicable Standard	16
4.3.2 Block Diagram of Test Setup	16
4.3.3 Test Procedure	17
4.3.4 Test Data And Result	18
4.4 TRANSMITTER POWER	20
4.4.1 Applicable Standard	20
4.4.2 Block Diagram of Test Setup	21
4.4.3 Test Procedure	21
4.4.4 Test Data And Result	22
4.5 BANDWIDTHS AND EMISSION MASK	26
4.5.1 Applicable Standard	26
4.5.2 Block Diagram of Test Setup	26
4.5.3 Test Procedure	27
4.5.4 Test Data And Result	28

4.6 TRANSMITTER UNWANTED EMISSIONS(CONDUCTED)	33
4.6.1 Applicable Standard	33
4.6.2 Block Diagram of Test Setup	33
4.6.3 Test Procedure	33
4.6.4 Test Data And Result	35
4.7 SUPPRESSION OF INTERFERENCE ABOARD SHIPS	42
4.7.1 Applicable Standard	42
4.7.2 Block Diagram of Test Setup	43
4.7.3 Test Procedure	43
4.7.4 Test Data And Result	44
4.8 TRANSMITTER UNWANTED EMISSIONS(RADIATED)	46
4.8.1 Applicable Standard	46
4.8.2 Test setup:	46
4.8.3 Test Procedure:	47
4.8.4 Test Data And Result	48
EXHIBIT A-EUT PHOTOGRAPHS	55
EXHIBIT B-TEST SETUP PHOTOGRAPHS	56

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	2502V04204E-RF-00C	Original Report	2025/10/22

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	VHF Marine Radio Transceiver
EUT Model:	BlueBound 650B
Multiple Model:	BlueBound 650W, 0190011-1, 0190011-3
Operation Frequency Range:	FM:156.05~157.425MHz DSC: 156.525 MHz
Types Of Equipment:	Portable VHF radiotelephones (voice only)
Modulation Mode:	FM, FSK
Channel Spacing:	25kHz
Emission Type:	G3E, G2B
DSC Function:	Support
AIS Function:	Not Support
Maximum Output Power:	6W(High power Level) 3W(Middle power Level) 1W(Low power Level)
Rated Input Voltage:	DC 7.4V from battery or DC 5V from Adapter
Serial Number:	For Radiated Spurious Emission test: 3633-24 For RF Conducted test:3633-23
EUT Received Date:	2025/7/9
EUT Received Status:	Good
Note: The multiple models are electrically identical with the test model. Please refer to the declaration letter for more detail, which was provided by manufacturer.	

1.2 Accessory Information:

Accessory Description	Manufacturer	Model	Parameters
Adapter 1#	A.V.&L.T.E.POWER SUPPLY	SAW20-050-3000UD	Input: 100-240Vac 50/60Hz 0.6A Output: 5Vdc 3A
Adapter 2#	Unknown	0010131-1	Input: 12V-30Vdc Output: 5Vdc 3A
Charging base	Cobra Electronics Corporation	Unknown	5Vdc,3A
Battery	Unknown	MR650LI(2ICP6/39/71)	DC 7.4V

1.3 Antenna Information Detail ▲:

Antenna Connector	Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range
SMA	Helical	50	2dBi(-0.15dBd) 156~162MHz

1.4 Equipment Modifications

No modifications are made to the EUT during all test items.

2. SUMMARY OF TEST RESULTS

Rules	Description of Test	Results
§80.203(c)	Automatic Timing	Compliant
§2.1055; §80.209	Transmitter Frequency Tolerances	Compliant
§2.1047; §80.213	Modulation Requirements	Compliant
§2.1046; §80.215	Transmitter Power	Compliant
§2.1049; §80.205, §80.211	Bandwidth And Emission Mask	Compliant
§2.1051; §80.211	Transmitter Unwanted Emissions(Conducted)	Compliant
§80.217	Suppression of Interference Aboard Ships	Compliant
§2.1053; §80.211	Transmitter Unwanted Emissions(Radiated)	Compliant

3. DESCRIPTION OF TEST CONFIGURATION

3.1 Operation Frequency Detail:

Channel	Transmit Frequency (MHz)	Receive Frequency (MHz)	Channel Number	Transmitting Frequency (MHz)	Receiving Frequency (MHz)
01A	156.050	156.050	27	157.350	161.950
05A	156.250	156.250	28	157.400	162.000
6	156.300	156.300	63A	156.175	156.175
07A	156.350	156.350	65A	156.275	156.275
8	156.400	156.400	66A	156.325	156.325
9	156.450	156.450	67	156.375*	156.375
10	156.500	156.500	68	156.425	156.425
11	156.550	156.550	69	156.475	156.475
12	156.600	156.600	70	156.525*	156.525
13	156.65*	156.650	71	156.575*	156.575
14	156.700	156.700	72	156.625	156.625
15		156.750	73	156.675	156.675
16	156.800	156.800	74	156.725	156.725
17	156.850*	156.850	77	156.875*	156.875
18A	156.900	156.900	78A	156.925	156.925
19A	156.950	156.950	79A	156.975	156.975
20	157.000	161.600	80A	157.025	157.025
20A	157.000	157.000	81A	157.075	157.075
21A	157.050	157.050	82A	157.125	157.125
22A	157.100	157.100	83A	157.175	157.175
23A	157.150	157.150	84	157.225	161.825
24	157.200	161.800	85	157.275	161.875
25	157.250	161.850	86	157.325	161.925
26	157.300	161.900	87	157.375	157.375
/	/	/	88A	157.425	157.425

Note:

1. The channel frequency plan for USA maritime radio communications, based on the 25 kHz channel spacing, is set forth in §80.373(f).
2. All above channels support High, Middle and Low power level, except the channels mark with '*' are only low power level.
3. 156.525MHz is for DSC and without Middle and high power level.
4. The channels in bold was tested in the report.

3.2 EUT Operation Condition:

The system was configured for testing in Engineering Mode, which was provided by the manufacturer.

3.3 EUT Exercise Software

No software was used during test.


3.4 Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Fenfei	Terminal	N-J-10W	S1

3.5 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length(m)	From Port	To
/	/	/	/	/	/

3.6 Block Diagram of Test Setup

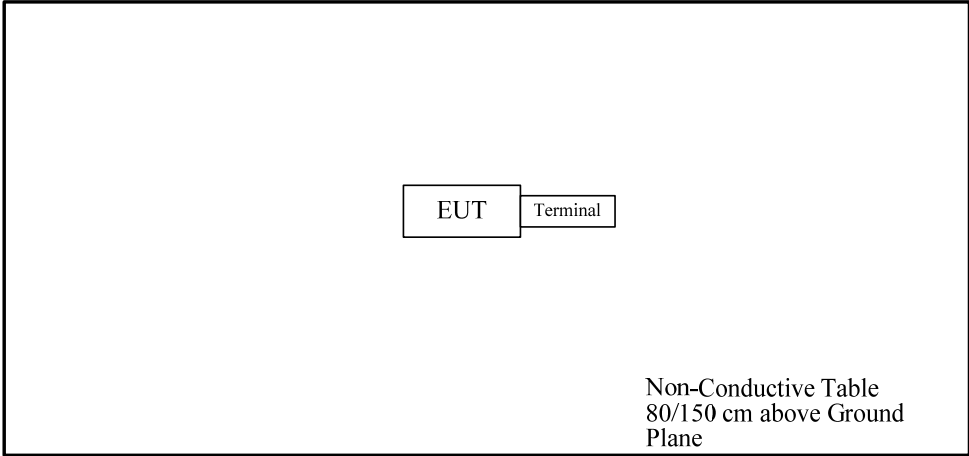

3.7 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 829273, the FCC Designation No. : CN5044.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

3.8 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
RF Frequency	0.082×10^{-6}
Unwanted Emissions, radiated	±3.62 dB
Unwanted Emissions, conducted	±2.47 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
Audio Frequency/Low Pass Filter Response	4.02%
Modulation Limiting	1.19%

4. REQUIREMENTS AND TEST RESULTS


4.1 Automatic Timing

4.1.1 Applicable Standard

FCC §80.203(c)

All VHF ship station transmitters that are either manufactured in or imported into the United States, on or after August 1, 1993, or are initially installed on or after August 1, 1994, must be equipped with an automatic timing device that deactivates the transmitter and reverts the transmitter to the receive mode after an uninterrupted transmission period of five minutes, plus or minus 10 per cent. Additionally, such transmitters must have a device that indicates when the automatic timer has deactivated the transmitter. VHF ship station transmitters initially installed before August 1, 1994, are authorized for use indefinitely at the same maritime station. VHF hand-held, portable transmitters are not required to comply with the requirements in paragraph (c) of this section except when used as described in § 80.141.

4.1.2 Block Diagram of Test Setup

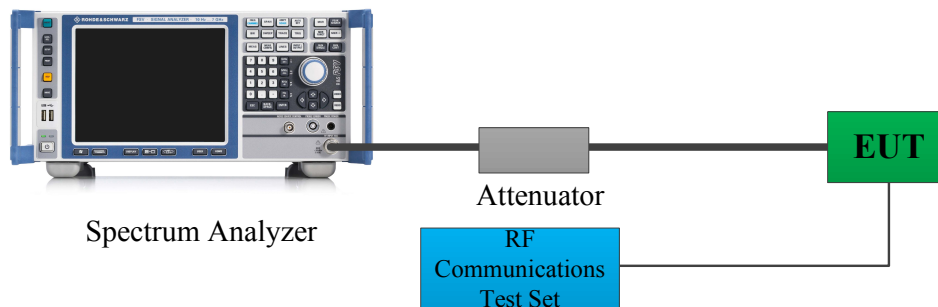

4.1.3 Test Procedure

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set $RBW \geq OBW$.
- 3) Set $VBW \geq RBW$. Set detector = peak or average.
- 4) Set Sweep time more than five minutes.
- 5) Push to talk and don't release.
6. Measure the Transmission On Time.


Serial Number:	3633-23	Test Date:	2025/9/24
Test Site:	RF	Test Mode:	Transmitting
Tester:	Stu Song	Test Result:	Pass

Temperature: (°C)	26	Relative Humidity: (%)	61	ATM Pressure: (kPa)	99.1
----------------------	----	------------------------------	----	------------------------	------

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200160/026	2025/7/28	2026/7/27
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-03	2025/8/22	2026/8/21
Huaxiang	Coaxial Attenuator	DTS250-30	11022109	2025/6/6	2026/6/5
HP	RF Communications Test Set	8920A	3438A05201	2025/2/14	2026/2/13

Only the high power level channel was tested.

Test Frequency (MHz)	Uninterrupted Transmission period (s)	Limit (s)
156.8	300	270~330




4.2 Transmitter frequency tolerances

4.2.1 Applicable Standard

FCC §80.209

Frequency bands and categories of stations	Tolerances ¹
(5) Band 156-162 MHz:	
(i) Coast stations:	
For carriers licensed to operate with a carrier power:	
Below 3 watts	10.
3 to 100 watts	5. ⁷
(ii) Ship stations	10. ⁴
(iii) Survival craft stations operating on 121.500 MHz	50.
(iv) EPIRBs:	
Operating on 121.500 and 243.000 MHz	50.
Operating on 156.750 and 156.800 MHz. ⁶	10.

4.2.2 Block Diagram of Test Setup

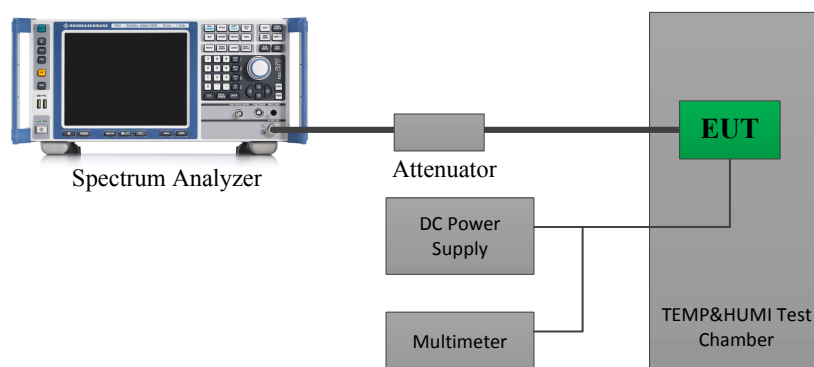

4.2.3 Test Procedure

According to ANSI C63.26-2015 Section 5.6:

Frequency stability is a measure of the frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at +20 °C and rated supply voltage.

The operating carrier frequency shall be set up in accordance with the manufacturer's published operation and instruction manual prior to the commencement of these tests. No adjustment of any frequency determining circuit element shall be made subsequent to this initial set-up. Frequency stability is tested:

- a) At 10 °C intervals of temperatures between –30 °C and +50 °C at the manufacturer's rated supply voltage, and

b) At +20 °C temperature and $\pm 15\%$ supply voltage variations. If a product is specified to operate over a range of input voltage then the -15% variation is applied to the lowermost voltage and the $+15\%$ is applied to the uppermost voltage.

During the test all necessary settings, adjustments and control of the EUT have to be performed without disturbing the test environment, i.e., without opening the environmental chamber. The frequency stabilities can be maintained to a lesser temperature range provided that the transmitter is automatically inhibited from operating outside the lesser temperature range. For handheld equipment that is only capable of operating from internal batteries and the supply voltage cannot be varied, the frequency stability tests shall be performed at the nominal battery voltage and the battery end point voltage specified by the manufacturer. An external supply voltage can be used and set at the internal battery nominal voltage, and again at the battery operating end point voltage which shall be specified by the equipment manufacturer.

If an unmodulated carrier is not available, the mean frequency of a modulated carrier can be obtained by using a frequency counter with gating time set to an appropriately large multiple of bit periods (gating time depending on the required accuracy). Full details on the choice of values shall be included in the test report.

4.2.4 Test Data And Result

Serial Number:	3633-23	Test Date:	2025/9/24
Test Site:	RF	Test Mode:	Transmitting
Tester:	Stu Song	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26	Relative Humidity: (%)	61	ATM Pressure: (kPa)	99.1
----------------------	----	---------------------------	----	------------------------	------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200160/026	2025/7/28	2026/7/27
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-03	2025/8/22	2026/8/21
Huaxiang	Coaxial Attenuator	DTS250-30	11022109	2025/6/6	2026/6/5
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30173	2025/8/1	2026/7/31
All-sun	Multimeter	EM305A	8348897	2025/8/18	2026/8/17
TDK-Lambda	DC Power Supply	Z+60-14	F-08-EM038-1	N/A	N/A

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Only the high power level channel was tested for 156.8MHz.

Un-modulation, Test Frequency: 156.800MHz, Limit: ±10.0 ppm			
Temperature	Voltage Supplied	Measured Frequency	Frequency Error
(°C)	(V _{DC})	(MHz)	(ppm)
-30	7.4	156.8000492	0.31
-20		156.8000381	0.24
-10		156.8000276	0.18
0		156.8000188	0.12
10		156.8000075	0.05
20		156.8000000	0.00
30		156.7999906	-0.06
40		156.7999834	-0.11
50		156.7999719	-0.18
20	6.5	156.8000138	0.09
20	8.2	156.7999833	-0.11

Note: the operation voltage range was declared by manufacturer ▲.

Un-modulation, Test Frequency: 156.525MHz, Limit: ± 10.0 ppm			
Temperature	Voltage Supplied	Measured Frequency	Frequency Error
(°C)	(V _{DC})	(MHz)	(ppm)
-30	7.4	156.5250458	0.29
-20		156.5250377	0.24
-10		156.5250273	0.17
0		156.5250194	0.12
10		156.5250099	0.06
20		156.5250000	0.00
30		156.5249921	-0.05
40		156.5249835	-0.11
50		156.5249712	-0.18
20	6.5	156.5250176	0.11
20	8.2	156.5249843	-0.10

Note: the operation voltage range was declared by manufacturer ▲.

4.3 Modulation requirements


4.3.1 Applicable Standard

FCC §80.213

(a) Transmitters must meet the following modulation requirements:

- (1) When double sideband emission is used the peak modulation must be maintained between 75 and 100 percent;
 - (2) When phase or frequency modulation is used in the 156-162 MHz band the peak modulation must be maintained between 75 and 100 percent. A frequency deviation of ± 5 kHz is defined as 100 percent peak modulation; and
 - (3) In single sideband operation the upper sideband must be transmitted. Single sideband transmitters must automatically limit the peak envelope power to their authorized operating power and meet the requirements in § 80.207(c).
- (b) Radiotelephone transmitters using A3E, F3E and G3E emission must have a modulation limiter to prevent any modulation over 100 percent. This requirement does not apply to survival craft transmitters, to transmitters that do not require a license or to transmitters whose output power does not exceed 3 watts.
- (c) Coast station transmitters operated in the 72.0-73.0 MHz and 75.4-76.0 MHz bands must be equipped with an audio low-pass filter. The filter must be installed between the modulation limiter and the modulated radio frequency stage. At frequencies between 3 kHz and 15 kHz it must have an attenuation greater than at 1 kHz by at least $40\log_{10}(f/3)$ dB where “f” is the frequency in kilohertz. At frequencies above 15 kHz the attenuation must be at least 28 dB greater than at 1 kHz.
- (d) Ship and coast station transmitters operating in the 156-162 MHz and 216-220 bands must be capable of proper operation with a frequency deviation that does not exceed ± 5 kHz when using any emission authorized by § 80.207.

4.3.2 Block Diagram of Test Setup

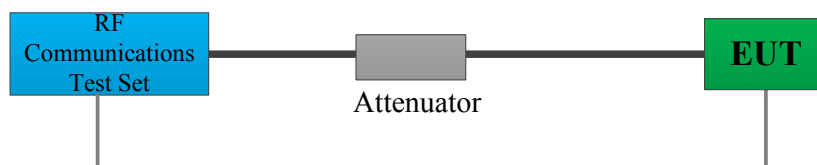

4.3.3 Test Procedure

According to ANSI C63.26-2015 Section 5.3.2:

Modulation limiting test methodology

Modulation limiting is the ability of a transmitter circuit to limit the transmitter from producing deviations in excess of a rated system deviation.

- a) Connect the equipment as illustrated in Figure.
- b) Adjust the transmitter per the manufacturer's procedure for full rated system deviation.
- c) Set the test receiver to measure peak positive deviation. Set the audio bandwidth for ≤ 0.25 Hz to ≥ 15000 Hz. Turn the de-emphasis function off.
- d) Apply a 1000 Hz modulating signal to the transmitter from the audio frequency generator, and adjust the level to obtain 60% of full rated system deviation. This is the 0 dB reference level.
- e) Increase the level from the audio generator by 20 dB in 5 dB increments recording the deviation as measured from the test receiver in each step. Verify that the audio level used to make the OBW measurement is included in the sweep.
- f) Repeat for step e) at 300 Hz, 2500 Hz and 3000 Hz at a minimum using the 0 dB reference level obtained in step d).
- g) Set the test receiver to measure peak negative deviation and repeat step d) through step f).
- h) The values recorded in step f) and step g) are the modulation limiting.
- i) Plot the data set as a percentage of deviation relative to the 0 dB reference point versus input voltage.

According to ANSI C63.26-2015 Section 5.3.3:

Audio frequency response test methodology—Constant Input

- a) Connect the equipment as illustrated in Figure.
- b) Set the test receiver to measure peak positive deviation. Set the audio bandwidth for ≤ 50 Hz to $\geq 15\ 000$ Hz. Turn the de-emphasis function off.
- c) Adjust the transmitter per the manufacturer's procedure for full rated system deviation.
- d) Apply a 1000 Hz tone and adjust the audio frequency generator to produce 20% of the rated system deviation.
- e) Set the test receiver to measure rms deviation and record the deviation reading as DEVREF.
- f) Set the audio frequency generator to the desired test frequency between 300 Hz and 3000 Hz.

4.3.4 Test Data And Result

Serial Number:	3633-23	Test Date:	2025/9/26
Test Site:	RF	Test Mode:	Transmitting
Tester:	Stu Song	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	26	Relative Humidity: (%)	63	ATM Pressure: (kPa)	100.7


Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-03	2025/8/22	2026/8/21
Huaxiang	Coaxial Attenuator	DTS250-30	11022109	2025/6/6	2026/6/5
HP	RF Communications Test Set	8920A	3438A05201	2025/2/14	2026/2/13

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data:
Only the high power level channel was tested.

Audio Frequency Response

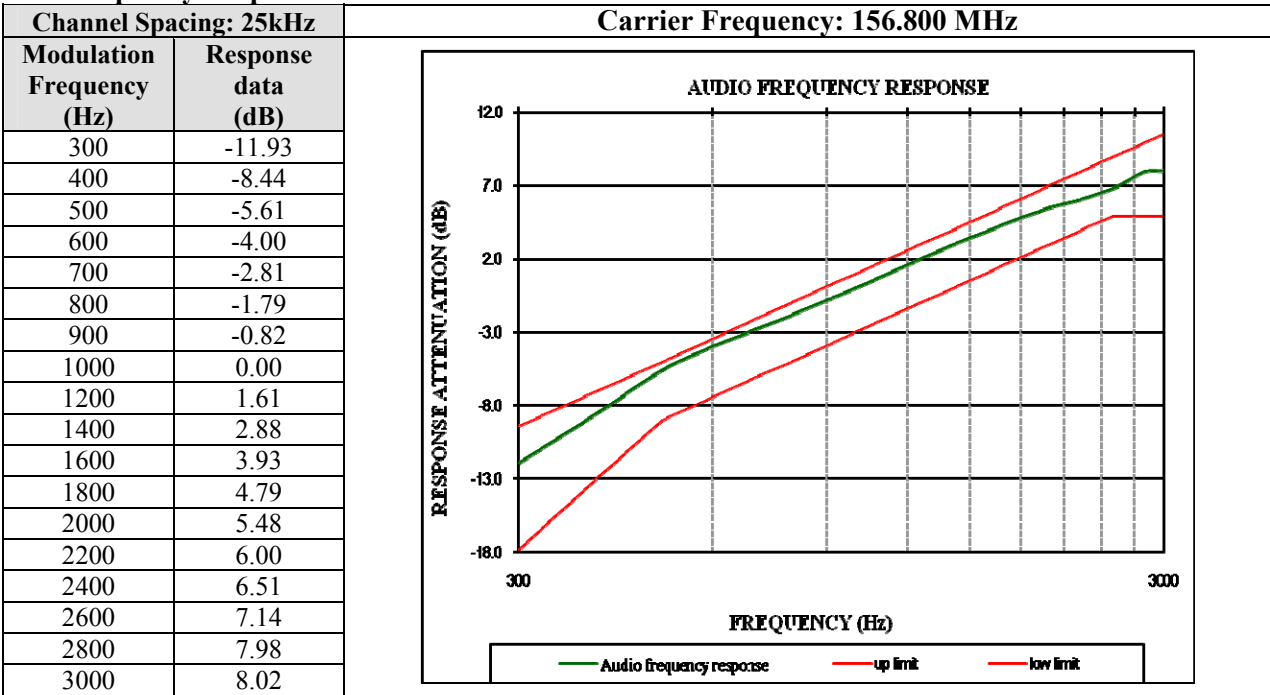

Modulation Limiting

Carrier Frequency: 156.800 MHz, Channel Spacing:25kHz											
Audio Frequency(Hz)	DEVIATION (@+0dB)		DEVIATION (@+5dB)		DEVIATION (@+10dB)		DEVIATION (@+15dB)		DEVIATION (@+20dB)		Limit [kHz]
	[kHz]		[kHz]		[kHz]		[kHz]		kHz]		
	Peak Positive	Peak Negative	Peak Positive	Peak Negative	Peak Positive	Peak Negative	Peak Positive	Peak Negative	Peak Positive	Peak Negative	
300	0.778	0.777	1.358	1.348	2.435	2.426	3.894	3.958	3.900	4.028	5.000
1000	3.000	3.000	3.733	3.769	3.790	3.841	3.819	3.882	3.822	3.882	5.000
2500	3.743	4.061	3.775	4.091	3.783	4.097	3.784	4.099	3.787	4.099	5.000
3000	3.651	3.896	3.672	3.914	3.676	3.914	3.705	3.956	3.705	3.960	5.000

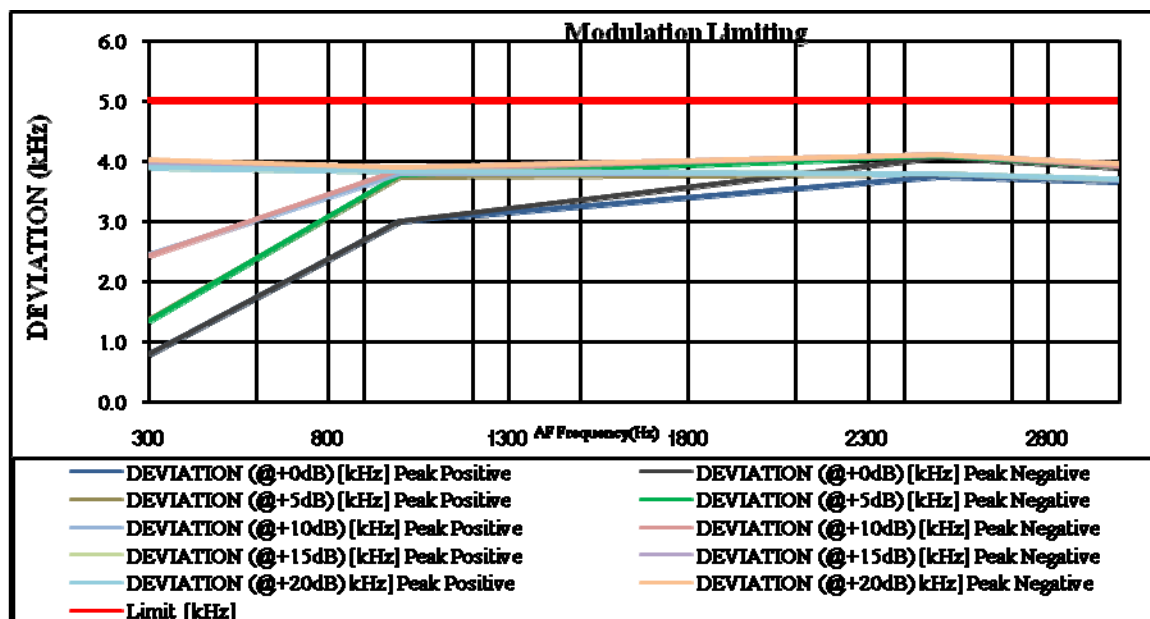

4.4 Transmitter power

4.4.1 Applicable Standard

FCC §80.215

(a) Transmitter power shown on the radio station authorization is the maximum power the licensee is authorized to use. Power is expressed in the following terms:

- (1) For single sideband emission: Peak envelope power
- (2) For G3E emission: Carrier power;
- (3) For PON and F3N emission: Mean power;
- (4) For all emissions in the 1626.5-1646.5 MHz band: equivalent isotropic radiated power.
- (5) For all other emissions: the carrier power multiplied by 1.67.

(e) Ship stations frequencies above 27500 kHz. The maximum power must not exceed the values listed below.


- (1) Ship stations 156-162 MHz - 25W^[6]

^[6]Reducible to 1 watt or less, except for transmitters limited to public correspondence channels and used in an automated system.

(g) The carrier power of ship station radiotelephone transmitters, except portable transmitters, operating in the 156-162 MHz band must be at least 8 but not more than 25 watts. Transmitters that use 12 volt lead acid storage batteries as a primary power source must be measured with a primary voltage between 12.2 and 13.7 volts DC. Additionally, unless otherwise indicated, equipment in radiotelephone ship stations operating in the 156-162 MHz band must meet the following requirements:

- (1) All transmitters and remote control units must be capable of reducing the carrier power to one watt or less;
- (2) Except as indicated in (g)(4) of this section, all transmitters manufactured after January 21, 1987, or in use after January 21, 1997, must automatically reduce the carrier power to one watt or less when the transmitter is tuned to 156.375 MHz or 156.650 MHz, and must be provided with a manual override switch which when held by an operator will permit full carrier power operation on 156.375 MHz and 156.650 MHz;
- (3) [Reserved]
- (4) Hand-held portable transmitters are not required to comply with the automatic reduction of carrier power in (g)(2) of this section; and
- (5) Transmitters dedicated for use on public correspondence duplex channels as additional equipment to a VHF ship station in the Great Lakes which meet all pertinent rules in this part are not required to reduce their carrier power to one watt.

4.4.2 Block Diagram of Test Setup

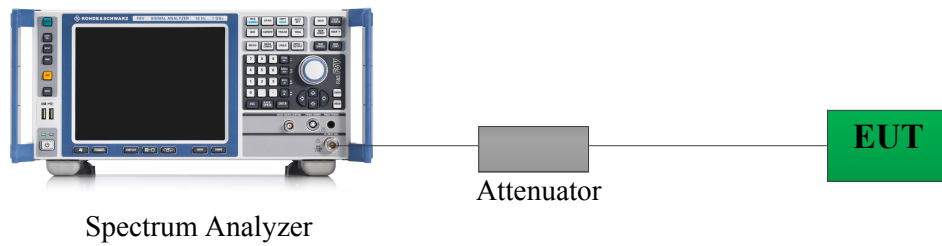

Note: The Insertion loss of the RF cable, Attenuators was offset into the Spectrum Analyzer.

4.4.3 Test Procedure

C63.26-2015, Clause 5.2.3.3

This procedure can be used to measure the peak power in either a CW-like or noise-like narrowband RF signal. The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a $VBW \geq 3 \times RBW$.

- a) Set the $RBW \geq OBW$.
- b) Set $VBW \geq 3 \times RBW$.
- c) Set $span \geq 2 \times OBW$.
- d) Sweep time $\geq 10 \times (\text{number of points in sweep}) \times (\text{transmission symbol period})$.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the peak amplitude level

4.4.4 Test Data And Result

Serial Number:	3633-23	Test Date:	2025/9/24
Test Site:	RF	Test Mode:	Transmitting
Tester:	Stu Song	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	26	Relative Humidity: (%)	61	ATM Pressure: (kPa)	99.1

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200160/026	2025/7/28	2026/7/27
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-03	2025/8/22	2026/8/21
Huaxiang	Coaxial Attenuator	DTS250-30	11022109	2025/6/6	2026/6/5
HP	RF Communications Test Set	8920A	3438A05201	2025/2/14	2026/2/13

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:


Modulation Mode	Channel Separation	f _c	High Power Level		Middle Power Level		Low Power Level	
		MHz	Reading(dBm)	Limit(dBm)	Reading(dBm)	Limit(dBm)	Reading(dBm)	Limit(dBm)
FM	25kHz	156.050	37.47	43.98	34.65	43.98	29.57	30.00
		156.800	37.49	43.98	34.67	43.98	29.56	30.00
		157.425	37.53	43.98	34.65	43.98	29.57	30.00
		156.575	/	/	/	/	29.56	30.00
DSC B1300	25kHz	156.525	/	/	/	/	29.56	30.00
DSC Y2100		156.525	/	/	/	/	29.56	30.00

156.050 MHz High Power

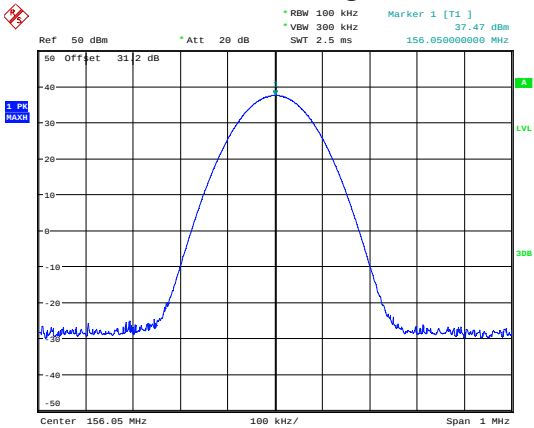


ProjectNo.:2502V04204E-RF Tester:Stu Song
Date: 24.SEP.2025 13:13:41

156.050 MHz Middle Power

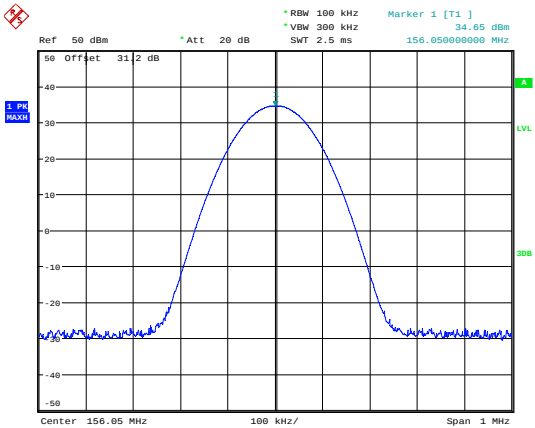


ProjectNo.:2502V04204E-RF Tester:Stu Song
Date: 24.SEP.2025 13:14:13

156.800 MHz High Power

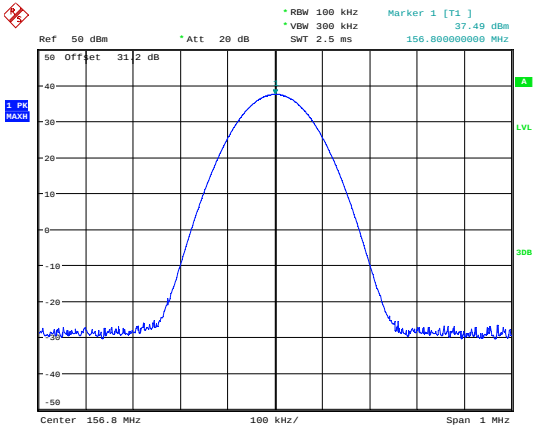


ProjectNo.:2502V04204E-RF Tester:Stu Song
Date: 24.SEP.2025 13:15:44

156.800 MHz Middle Power

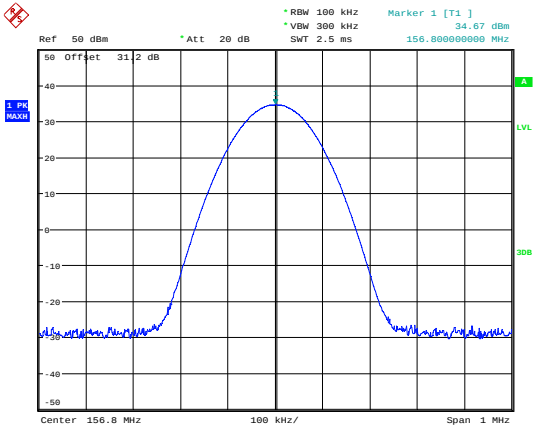


ProjectNo.:2502V04204E-RF Tester:Stu Song
Date: 24.SEP.2025 13:16:18

157.425 MHz High Power

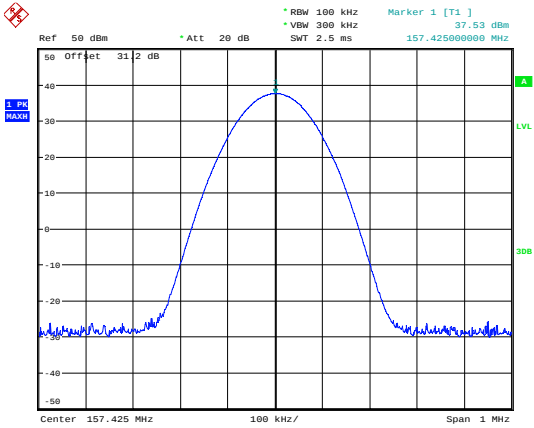


ProjectNo.:2502V04204E-RF Tester:Stu Song
Date: 24.SEP.2025 13:18:51

157.425 MHz Middle Power

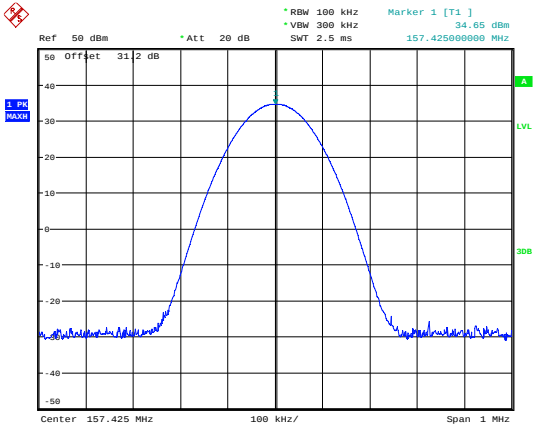


ProjectNo.:2502V04204E-RF Tester:Stu Song
Date: 24.SEP.2025 13:20:13

156.050 MHz Low Power

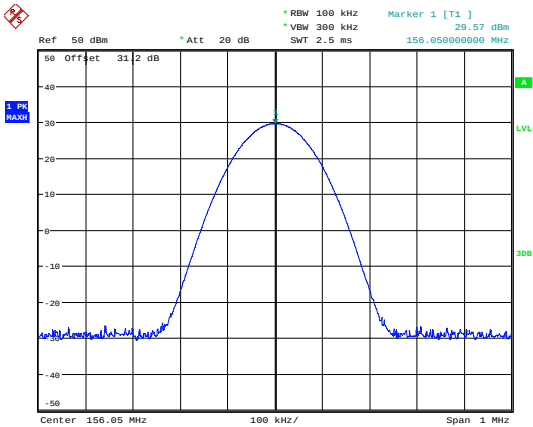


ProjectNo.:2502V04204E-RF Tester:Stu Song
Date: 24.SEP.2025 11:10:12

156.800 MHz Low Power

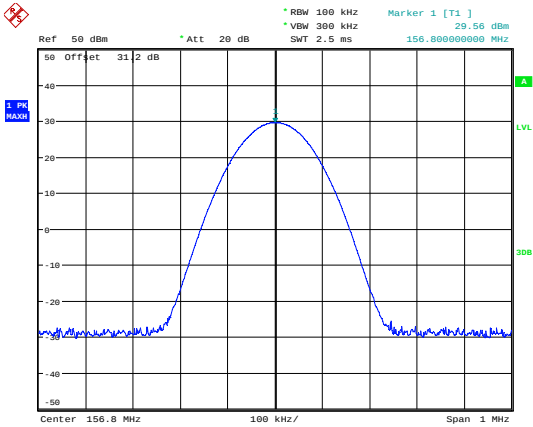


ProjectNo.:2502V04204E-RF Tester:Stu Song
Date: 24.SEP.2025 13:17:21

157.425 MHz Low Power

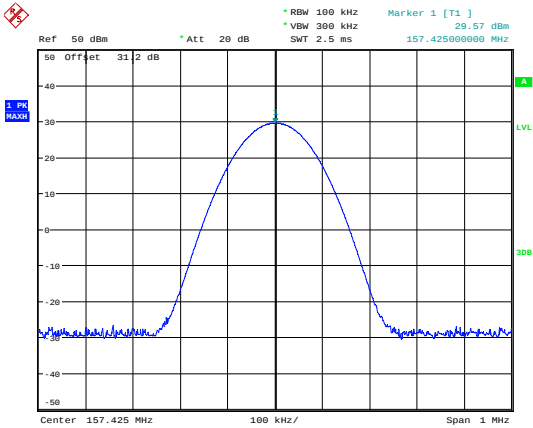


ProjectNo.:2502V04204E-RF Tester:Stu Song
Date: 24.SEP.2025 13:21:04

156.525 MHz Low Power(BY1300)

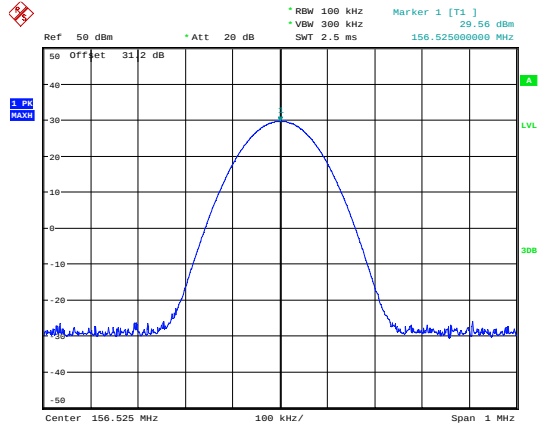


ProjectNo.:2502V04204E-RF Tester:Stu Song
Date: 24.SEP.2025 13:25:44

156.525 MHz Low Power(BY2100)

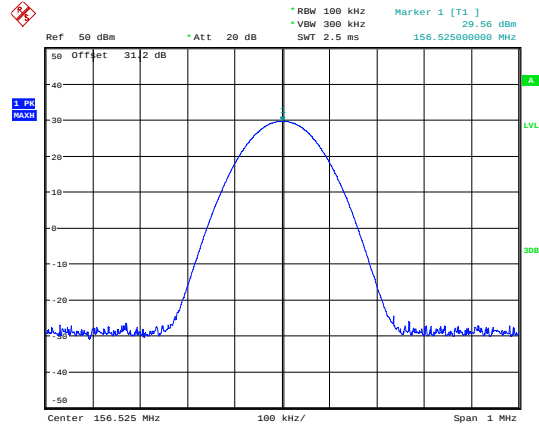

ProjectNo.:2502V04204E-RF Tester:Stu Song
Date: 24.SEP.2025 13:26:22

156.575 MHz Low Power

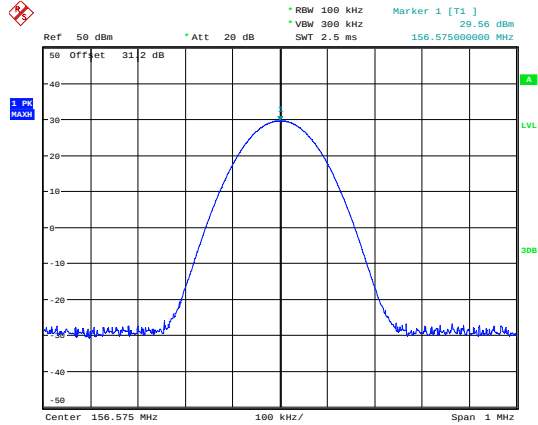

ProjectNo.:2502V04204E-RF Tester:Stu Song
Date: 24.SEP.2025 13:23:40

4.5 Bandwidths and Emission Mask

4.5.1 Applicable Standard

FCC §80.205 Bandwidths

- (a) An emission designator shows the necessary bandwidth for each class of emission of a station except that in ship earth stations it shows the occupied or necessary bandwidth, whichever is greater. The following table gives the class of emission and corresponding emission designator and authorized bandwidth:

Class of emission	Emission designator	Authorized bandwidth (kHz)
G3E ⁸	16KOG3E	20.0


⁸ Applicable only when maximum frequency deviation is 5 kHz. See also paragraph (b) of this section.

- (b) For land stations the maximum authorized frequency deviation for F3E or G3E emission is as follows:
- (1) 5 kHz in the 72.0-73.0 MHz, 75.4-76.0 MHz and 156-162 MHz bands;
 - (2) 15 kHz for stations which were authorized for operation before December 1, 1961, in the 73.0-74.6 MHz band.

FCC §80.211 Emission limitations

- (f) The mean power when using emissions other than those in paragraphs (a), (b), (c) and (d) of this section:
- (1) On any frequency removed from the assigned frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: At least 25 dB;
 - (2) On any frequency removed from the assigned frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: At least 35 dB; and
 - (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least 43 plus $10\log_{10}$ (mean power in watts) dB.

4.5.2 Block Diagram of Test Setup

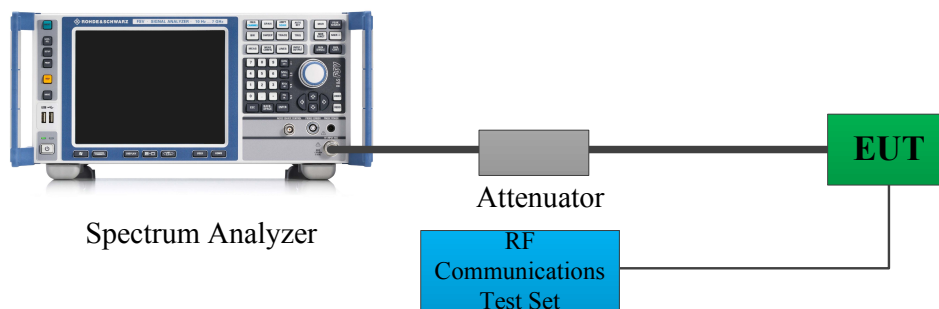

Note: The Insertion loss of the RF cable, Attenuators was offset into the Spectrum Analyzer.

4.5.3 Test Procedure

According to ANSI C63.26-2015 Section 5.4.4:

The OBW is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

The following procedure shall be used for measuring (99%) power bandwidth:

a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (typically a span of $1.5 \times \text{OBW}$ is sufficient).

b) The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times \text{RBW}$.

c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.
NOTE—Step a), step b), and step c) may require iteration to adjust within the specified tolerances.

d) Set the detection mode to peak, and the trace mode to max-hold.

e) If the instrument does not have a 99% OBW function, recover the trace data points and sum directly in linear power terms. Place the recovered amplitude data points, beginning at the lowest frequency, in a running sum until 0.5% of the total is reached. Record that frequency as the lower OBW frequency. Repeat the process until 99.5% of the total is reached and record that frequency as the upper OBW frequency. The 99% power OBW can be determined by computing the difference these two frequencies.

f) The OBW shall be reported and plot(s) of the measuring instrument display shall be provided with the test report. The frequency and amplitude axis and scale shall be clearly labeled. Tabular data can be reported in addition to the plot(s).

According to ANSI C63.26-2015 Section 5.7.3:

f) See Annex I for example emission mask plots.

4.5.4 Test Data And Result

Serial Number:	3633-23	Test Date:	2025/9/25
Test Site:	RF	Test Mode:	Transmitting
Tester:	Stu Song	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.9	Relative Humidity: (%)	64	ATM Pressure: (kPa)	99.5
----------------------	------	---------------------------	----	------------------------	------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101947	2025/7/28	2026/7/27
R&S	Spectrum Analyzer	FSU 26	200160/026	2025/7/28	2026/7/27
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-03	2025/8/22	2026/8/21
Huaxiang	Coaxial Attenuator	DTS250-30	11022109	2025/6/6	2026/6/5
HP	RF Communications Test Set	8920A	3438A05201	2025/2/14	2026/2/13

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data:

Modulation Mode	Test Frequency (MHz)	Occupied Bandwidth			
		High Power Level (kHz)	Middle Power Level (kHz)	Low Power Level (kHz)	Limit (kHz)
FM 25kHz	156.050	15.064	15.064	15.064	20.000
	156.800	15.064	15.064	15.064	20.000
	157.425	15.064	15.064	15.064	20.000
	156.575	/	/	15.064	20.000
DSC 1300	156.525	/	/	5.449	20.000
DSC 2100	156.525	/	/	8.654	20.000


High Power Level:

Test Items	99% Occupied Bandwidth	Emission Mask																																																	
156.050 MHz	Ref 40 dBm Offset 31.2 dB Att 20 dB SWT 1.15 s Delta 1 [T1] RBW 300 Hz VBW 3 kHz 16.153846154 kHz 3.05 dB Marker 1 [T1] 156.041924977 MHz Temp 1 [T1 0dB] 156.042461949 MHz Temp 2 [T1 0dB] 156.057532051 MHz 30B 1PK MAX Center 156.05 MHz 10 kHz/ Span 100 kHz ProjectNo.:2502V04204E-RF Tester:Stu Song Date: 25.SEP.2025 10:40:08	Spectrum Ref Level 40.00 dBm Offset 31.20 dB Mode Sweep SGL Count 30/30 Limit check PASS CF 156.05 MHz 1000 pts Span 125.0 kHz Spectrum Emission Mask Standard: Emask B-H 1x Power 37.40 dBm 1x Bandwidth 25.000 kHz RBW 300.000 Hz <table><tr><th>Range Low</th><th>Range Up</th><th>RBW</th><th>Frequency</th><th>Power Abs</th><th>Power Rel</th><th>ΔLimit</th></tr><tr><td>-62.500 kHz</td><td>-50.000 kHz</td><td>30.000 kHz</td><td>155.99594 MHz</td><td>-25.87 dBm</td><td>-63.33 dB</td><td>-12.87 dB</td></tr><tr><td>-50.000 kHz</td><td>-20.000 kHz</td><td>300.000 Hz</td><td>156.02644 MHz</td><td>-47.73 dBm</td><td>-85.19 dB</td><td>-50.23 dB</td></tr><tr><td>-20.000 kHz</td><td>-10.000 kHz</td><td>300.000 Hz</td><td>156.03994 MHz</td><td>-2.04 dBm</td><td>-39.50 dB</td><td>-14.54 dB</td></tr><tr><td>10.000 kHz</td><td>20.000 kHz</td><td>300.000 Hz</td><td>156.06019 MHz</td><td>2.36 dBm</td><td>-35.10 dB</td><td>-10.14 dB</td></tr><tr><td>20.000 kHz</td><td>50.000 kHz</td><td>300.000 Hz</td><td>156.09644 MHz</td><td>-47.07 dBm</td><td>-84.52 dB</td><td>-49.57 dB</td></tr><tr><td>50.000 kHz</td><td>62.500 kHz</td><td>30.000 kHz</td><td>156.10744 MHz</td><td>-26.04 dBm</td><td>-63.50 dB</td><td>-13.04 dB</td></tr></table> ProjectNo.:2502V04204E-RF Tester:Stu Song Date: 25.SEP.2025 14:23:36	Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit	-62.500 kHz	-50.000 kHz	30.000 kHz	155.99594 MHz	-25.87 dBm	-63.33 dB	-12.87 dB	-50.000 kHz	-20.000 kHz	300.000 Hz	156.02644 MHz	-47.73 dBm	-85.19 dB	-50.23 dB	-20.000 kHz	-10.000 kHz	300.000 Hz	156.03994 MHz	-2.04 dBm	-39.50 dB	-14.54 dB	10.000 kHz	20.000 kHz	300.000 Hz	156.06019 MHz	2.36 dBm	-35.10 dB	-10.14 dB	20.000 kHz	50.000 kHz	300.000 Hz	156.09644 MHz	-47.07 dBm	-84.52 dB	-49.57 dB	50.000 kHz	62.500 kHz	30.000 kHz	156.10744 MHz	-26.04 dBm	-63.50 dB	-13.04 dB
	Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit																																												
-62.500 kHz	-50.000 kHz	30.000 kHz	155.99594 MHz	-25.87 dBm	-63.33 dB	-12.87 dB																																													
-50.000 kHz	-20.000 kHz	300.000 Hz	156.02644 MHz	-47.73 dBm	-85.19 dB	-50.23 dB																																													
-20.000 kHz	-10.000 kHz	300.000 Hz	156.03994 MHz	-2.04 dBm	-39.50 dB	-14.54 dB																																													
10.000 kHz	20.000 kHz	300.000 Hz	156.06019 MHz	2.36 dBm	-35.10 dB	-10.14 dB																																													
20.000 kHz	50.000 kHz	300.000 Hz	156.09644 MHz	-47.07 dBm	-84.52 dB	-49.57 dB																																													
50.000 kHz	62.500 kHz	30.000 kHz	156.10744 MHz	-26.04 dBm	-63.50 dB	-13.04 dB																																													
156.800 MHz	Ref 40 dBm Offset 31.2 dB Att 20 dB SWT 1.15 s Delta 1 [T1] RBW 300 Hz VBW 3 kHz 16.153846154 kHz 3.05 dB Marker 1 [T1] 156.791924977 MHz Temp 1 [T1 0dB] 156.792461949 MHz Temp 2 [T1 0dB] 156.807532051 MHz 30B 1PK MAX Center 156.8 MHz 10 kHz/ Span 100 kHz ProjectNo.:2502V04204E-RF Tester:Stu Song Date: 25.SEP.2025 11:20:11	Spectrum Ref Level 40.00 dBm Offset 31.20 dB Mode Sweep SGL Count 30/30 Limit check PASS CF 156.8 MHz 1000 pts Span 125.0 kHz Spectrum Emission Mask Standard: Emask B-H 1x Power 37.33 dBm 1x Bandwidth 25.000 kHz RBW 300.000 Hz <table><tr><th>Range Low</th><th>Range Up</th><th>RBW</th><th>Frequency</th><th>Power Abs</th><th>Power Rel</th><th>ΔLimit</th></tr><tr><td>-62.500 kHz</td><td>-50.000 kHz</td><td>30.000 kHz</td><td>156.74719 MHz</td><td>-25.99 dBm</td><td>-63.32 dB</td><td>-12.89 dB</td></tr><tr><td>-50.000 kHz</td><td>-20.000 kHz</td><td>300.000 Hz</td><td>156.75519 MHz</td><td>-46.86 dBm</td><td>-84.19 dB</td><td>-49.36 dB</td></tr><tr><td>-20.000 kHz</td><td>-10.000 kHz</td><td>300.000 Hz</td><td>156.78994 MHz</td><td>-2.11 dBm</td><td>-39.44 dB</td><td>-14.61 dB</td></tr><tr><td>10.000 kHz</td><td>20.000 kHz</td><td>300.000 Hz</td><td>156.81019 MHz</td><td>2.24 dBm</td><td>-35.09 dB</td><td>-10.26 dB</td></tr><tr><td>20.000 kHz</td><td>50.000 kHz</td><td>300.000 Hz</td><td>156.82331 MHz</td><td>-47.81 dBm</td><td>-85.14 dB</td><td>-50.31 dB</td></tr><tr><td>50.000 kHz</td><td>62.500 kHz</td><td>30.000 kHz</td><td>156.85256 MHz</td><td>-26.80 dBm</td><td>-63.13 dB</td><td>-12.80 dB</td></tr></table> ProjectNo.:2502V04204E-RF Tester:Stu Song Date: 25.SEP.2025 14:25:49	Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit	-62.500 kHz	-50.000 kHz	30.000 kHz	156.74719 MHz	-25.99 dBm	-63.32 dB	-12.89 dB	-50.000 kHz	-20.000 kHz	300.000 Hz	156.75519 MHz	-46.86 dBm	-84.19 dB	-49.36 dB	-20.000 kHz	-10.000 kHz	300.000 Hz	156.78994 MHz	-2.11 dBm	-39.44 dB	-14.61 dB	10.000 kHz	20.000 kHz	300.000 Hz	156.81019 MHz	2.24 dBm	-35.09 dB	-10.26 dB	20.000 kHz	50.000 kHz	300.000 Hz	156.82331 MHz	-47.81 dBm	-85.14 dB	-50.31 dB	50.000 kHz	62.500 kHz	30.000 kHz	156.85256 MHz	-26.80 dBm	-63.13 dB	-12.80 dB
	Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit																																												
-62.500 kHz	-50.000 kHz	30.000 kHz	156.74719 MHz	-25.99 dBm	-63.32 dB	-12.89 dB																																													
-50.000 kHz	-20.000 kHz	300.000 Hz	156.75519 MHz	-46.86 dBm	-84.19 dB	-49.36 dB																																													
-20.000 kHz	-10.000 kHz	300.000 Hz	156.78994 MHz	-2.11 dBm	-39.44 dB	-14.61 dB																																													
10.000 kHz	20.000 kHz	300.000 Hz	156.81019 MHz	2.24 dBm	-35.09 dB	-10.26 dB																																													
20.000 kHz	50.000 kHz	300.000 Hz	156.82331 MHz	-47.81 dBm	-85.14 dB	-50.31 dB																																													
50.000 kHz	62.500 kHz	30.000 kHz	156.85256 MHz	-26.80 dBm	-63.13 dB	-12.80 dB																																													
157.425 MHz	Ref 40 dBm Offset 31.2 dB Att 20 dB SWT 1.15 s Delta 1 [T1] RBW 300 Hz VBW 3 kHz 16.153846154 kHz 3.67 dB Marker 1 [T1] 157.416924977 MHz Temp 1 [T1 0dB] 157.417461949 MHz Temp 2 [T1 0dB] 157.432532051 MHz 30B 1PK MAX Center 157.425 MHz 10 kHz/ Span 100 kHz ProjectNo.:2502V04204E-RF Tester:Stu Song Date: 25.SEP.2025 11:24:02	Spectrum Ref Level 40.00 dBm Offset 31.20 dB Mode Sweep SGL Count 30/30 Limit check PASS CF 157.425 MHz 1000 pts Span 125.0 kHz Spectrum Emission Mask Standard: Emask B-H 1x Power 37.43 dBm 1x Bandwidth 25.000 kHz RBW 300.000 Hz <table><tr><th>Range Low</th><th>Range Up</th><th>RBW</th><th>Frequency</th><th>Power Abs</th><th>Power Rel</th><th>ΔLimit</th></tr><tr><td>-62.500 kHz</td><td>-50.000 kHz</td><td>30.000 kHz</td><td>157.36461 MHz</td><td>-26.15 dBm</td><td>-63.60 dB</td><td>-13.15 dB</td></tr><tr><td>-50.000 kHz</td><td>-20.000 kHz</td><td>300.000 Hz</td><td>157.39494 MHz</td><td>-47.43 dBm</td><td>-84.88 dB</td><td>-49.93 dB</td></tr><tr><td>-20.000 kHz</td><td>-10.000 kHz</td><td>300.000 Hz</td><td>157.41494 MHz</td><td>-1.94 dBm</td><td>-39.39 dB</td><td>-14.44 dB</td></tr><tr><td>10.000 kHz</td><td>20.000 kHz</td><td>300.000 Hz</td><td>157.43519 MHz</td><td>2.35 dBm</td><td>-35.10 dB</td><td>-10.15 dB</td></tr><tr><td>20.000 kHz</td><td>50.000 kHz</td><td>300.000 Hz</td><td>157.45156 MHz</td><td>-47.45 dBm</td><td>-84.90 dB</td><td>-49.95 dB</td></tr><tr><td>50.000 kHz</td><td>62.500 kHz</td><td>30.000 kHz</td><td>157.47744 MHz</td><td>-26.27 dBm</td><td>-63.72 dB</td><td>-13.27 dB</td></tr></table> ProjectNo.:2502V04204E-RF Tester:Stu Song Date: 25.SEP.2025 14:27:48	Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit	-62.500 kHz	-50.000 kHz	30.000 kHz	157.36461 MHz	-26.15 dBm	-63.60 dB	-13.15 dB	-50.000 kHz	-20.000 kHz	300.000 Hz	157.39494 MHz	-47.43 dBm	-84.88 dB	-49.93 dB	-20.000 kHz	-10.000 kHz	300.000 Hz	157.41494 MHz	-1.94 dBm	-39.39 dB	-14.44 dB	10.000 kHz	20.000 kHz	300.000 Hz	157.43519 MHz	2.35 dBm	-35.10 dB	-10.15 dB	20.000 kHz	50.000 kHz	300.000 Hz	157.45156 MHz	-47.45 dBm	-84.90 dB	-49.95 dB	50.000 kHz	62.500 kHz	30.000 kHz	157.47744 MHz	-26.27 dBm	-63.72 dB	-13.27 dB
	Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit																																												
-62.500 kHz	-50.000 kHz	30.000 kHz	157.36461 MHz	-26.15 dBm	-63.60 dB	-13.15 dB																																													
-50.000 kHz	-20.000 kHz	300.000 Hz	157.39494 MHz	-47.43 dBm	-84.88 dB	-49.93 dB																																													
-20.000 kHz	-10.000 kHz	300.000 Hz	157.41494 MHz	-1.94 dBm	-39.39 dB	-14.44 dB																																													
10.000 kHz	20.000 kHz	300.000 Hz	157.43519 MHz	2.35 dBm	-35.10 dB	-10.15 dB																																													
20.000 kHz	50.000 kHz	300.000 Hz	157.45156 MHz	-47.45 dBm	-84.90 dB	-49.95 dB																																													
50.000 kHz	62.500 kHz	30.000 kHz	157.47744 MHz	-26.27 dBm	-63.72 dB	-13.27 dB																																													

156.050
MHz




**156.800
MHz**




**157.425
MHz**




156.050
MHz



156.800
MHz



**157.425
MHz**



Low Power Level:

Test Items	99% Occupied Bandwidth	Emission Mask																																																	
156.575 MHz	Ref 40 dBm Att 20 dB RBW 300 Hz VBW 3 kHz SWT 1.15 s Delta 1 [T1] 1.07 dB 16.153846154 kHz Offset 31.2 dB 156.56923877 MHz 156.567463949 MHz 156.582533951 MHz 1 Pk MAX 30 dBm 20 dBm 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm Center 156.575 MHz 10 kHz/ Span 100 kHz 156.575 MHz 1.07 dB 16.153846154 kHz 156.56923877 MHz 156.567463949 MHz 156.582533951 MHz 156.575 MHz 1.07 dB 16.153846154 kHz 156.56923877 MHz 156.567463949 MHz 156.582533951 MHz ProjectNo.:2502V04204E-RF Tester:Stu Song Date: 25.SEP.2025 11:28:18	Ref Level 40.00 dBm Offset 31.20 dB Mode Sweep SGL Count 30/30 1 Pk Max Limit check PA65 30 dBm 20 dBm 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm CF 156.575 MHz 1000 pts Span 125.0 kHz Spectrum Emission Mask Standard: Emask B-L 1x Power 29.61 dBm 1x Bandwidth 25.000 kHz RBW 300.000 Hz <table><tr><th>Range Low</th><th>Range Up</th><th>RBW</th><th>Frequency</th><th>Power Abs</th><th>Power Rel</th><th>ΔLimit</th></tr><tr><td>-62.500 kHz</td><td>-50.000 kHz</td><td>30.000 kHz</td><td>156.52444 MHz</td><td>-30.64 dBm</td><td>-60.25 dB</td><td>-17.64 dB</td></tr><tr><td>-50.000 kHz</td><td>-20.000 kHz</td><td>300.000 Hz</td><td>156.53869 MHz</td><td>-51.40 dBm</td><td>-81.01 dB</td><td>-46.00 dB</td></tr><tr><td>-20.000 kHz</td><td>-10.000 kHz</td><td>300.000 Hz</td><td>156.56494 MHz</td><td>-9.69 dBm</td><td>-39.30 dB</td><td>-14.29 dB</td></tr><tr><td>10.000 kHz</td><td>20.000 kHz</td><td>300.000 Hz</td><td>156.58519 MHz</td><td>-5.47 dBm</td><td>-35.09 dB</td><td>-10.07 dB</td></tr><tr><td>20.000 kHz</td><td>50.000 kHz</td><td>300.000 Hz</td><td>156.61456 MHz</td><td>-50.46 dBm</td><td>-80.07 dB</td><td>-45.06 dB</td></tr><tr><td>50.000 kHz</td><td>62.500 kHz</td><td>30.000 kHz</td><td>156.62556 MHz</td><td>-32.05 dBm</td><td>-61.66 dB</td><td>-19.05 dB</td></tr></table> ProjectNo.:2502V04204E-RF Tester:Stu Song Date: 25.SEP.2025 14:29:54	Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit	-62.500 kHz	-50.000 kHz	30.000 kHz	156.52444 MHz	-30.64 dBm	-60.25 dB	-17.64 dB	-50.000 kHz	-20.000 kHz	300.000 Hz	156.53869 MHz	-51.40 dBm	-81.01 dB	-46.00 dB	-20.000 kHz	-10.000 kHz	300.000 Hz	156.56494 MHz	-9.69 dBm	-39.30 dB	-14.29 dB	10.000 kHz	20.000 kHz	300.000 Hz	156.58519 MHz	-5.47 dBm	-35.09 dB	-10.07 dB	20.000 kHz	50.000 kHz	300.000 Hz	156.61456 MHz	-50.46 dBm	-80.07 dB	-45.06 dB	50.000 kHz	62.500 kHz	30.000 kHz	156.62556 MHz	-32.05 dBm	-61.66 dB	-19.05 dB
	Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit																																												
	-62.500 kHz	-50.000 kHz	30.000 kHz	156.52444 MHz	-30.64 dBm	-60.25 dB	-17.64 dB																																												
-50.000 kHz	-20.000 kHz	300.000 Hz	156.53869 MHz	-51.40 dBm	-81.01 dB	-46.00 dB																																													
-20.000 kHz	-10.000 kHz	300.000 Hz	156.56494 MHz	-9.69 dBm	-39.30 dB	-14.29 dB																																													
10.000 kHz	20.000 kHz	300.000 Hz	156.58519 MHz	-5.47 dBm	-35.09 dB	-10.07 dB																																													
20.000 kHz	50.000 kHz	300.000 Hz	156.61456 MHz	-50.46 dBm	-80.07 dB	-45.06 dB																																													
50.000 kHz	62.500 kHz	30.000 kHz	156.62556 MHz	-32.05 dBm	-61.66 dB	-19.05 dB																																													
156.525 MHz (BY1300)	Ref 40 dBm Att 20 dB RBW 300 Hz VBW 3 kHz SWT 1.15 s Delta 1 [T1] 0.77 dB 6.089743599 kHz Offset 31.2 dB 156.521995288 MHz 156.522274641 MHz 156.527724359 MHz 1 Pk MAX 30 dBm 20 dBm 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm Center 156.525 MHz 10 kHz/ Span 100 kHz 156.525 MHz 0.77 dB 6.089743599 kHz 156.521995288 MHz 156.522274641 MHz 156.527724359 MHz 156.525 MHz 0.77 dB 6.089743599 kHz 156.521995288 MHz 156.522274641 MHz 156.527724359 MHz ProjectNo.:2502V04204E-RF Tester:Stu Song Date: 25.SEP.2025 11:29:51	Ref Level 40.00 dBm Offset 31.20 dB Mode Sweep SGL Count 30/30 1 Pk Max Limit check PA65 30 dBm 20 dBm 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm CF 156.525 MHz 1000 pts Span 125.0 kHz Spectrum Emission Mask Standard: Emask B-L 1x Power 29.71 dBm 1x Bandwidth 25.000 kHz RBW 300.000 Hz <table><tr><th>Range Low</th><th>Range Up</th><th>RBW</th><th>Frequency</th><th>Power Abs</th><th>Power Rel</th><th>ΔLimit</th></tr><tr><td>-62.500 kHz</td><td>-50.000 kHz</td><td>30.000 kHz</td><td>156.47194 MHz</td><td>-31.10 dBm</td><td>-60.81 dB</td><td>-18.10 dB</td></tr><tr><td>-50.000 kHz</td><td>-20.000 kHz</td><td>300.000 Hz</td><td>156.48056 MHz</td><td>-52.21 dBm</td><td>-81.92 dB</td><td>-46.81 dB</td></tr><tr><td>-20.000 kHz</td><td>-10.000 kHz</td><td>300.000 Hz</td><td>156.51444 MHz</td><td>-50.61 dBm</td><td>-80.32 dB</td><td>-55.21 dB</td></tr><tr><td>10.000 kHz</td><td>20.000 kHz</td><td>300.000 Hz</td><td>156.53594 MHz</td><td>-51.02 dBm</td><td>-80.73 dB</td><td>-55.62 dB</td></tr><tr><td>20.000 kHz</td><td>50.000 kHz</td><td>300.000 Hz</td><td>156.56181 MHz</td><td>-51.71 dBm</td><td>-81.42 dB</td><td>-46.31 dB</td></tr><tr><td>50.000 kHz</td><td>62.500 kHz</td><td>30.000 kHz</td><td>156.57619 MHz</td><td>-30.92 dBm</td><td>-60.63 dB</td><td>-17.92 dB</td></tr></table> ProjectNo.:2502V04204E-RF Tester:Stu Song Date: 25.SEP.2025 14:30:27	Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit	-62.500 kHz	-50.000 kHz	30.000 kHz	156.47194 MHz	-31.10 dBm	-60.81 dB	-18.10 dB	-50.000 kHz	-20.000 kHz	300.000 Hz	156.48056 MHz	-52.21 dBm	-81.92 dB	-46.81 dB	-20.000 kHz	-10.000 kHz	300.000 Hz	156.51444 MHz	-50.61 dBm	-80.32 dB	-55.21 dB	10.000 kHz	20.000 kHz	300.000 Hz	156.53594 MHz	-51.02 dBm	-80.73 dB	-55.62 dB	20.000 kHz	50.000 kHz	300.000 Hz	156.56181 MHz	-51.71 dBm	-81.42 dB	-46.31 dB	50.000 kHz	62.500 kHz	30.000 kHz	156.57619 MHz	-30.92 dBm	-60.63 dB	-17.92 dB
	Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit																																												
	-62.500 kHz	-50.000 kHz	30.000 kHz	156.47194 MHz	-31.10 dBm	-60.81 dB	-18.10 dB																																												
-50.000 kHz	-20.000 kHz	300.000 Hz	156.48056 MHz	-52.21 dBm	-81.92 dB	-46.81 dB																																													
-20.000 kHz	-10.000 kHz	300.000 Hz	156.51444 MHz	-50.61 dBm	-80.32 dB	-55.21 dB																																													
10.000 kHz	20.000 kHz	300.000 Hz	156.53594 MHz	-51.02 dBm	-80.73 dB	-55.62 dB																																													
20.000 kHz	50.000 kHz	300.000 Hz	156.56181 MHz	-51.71 dBm	-81.42 dB	-46.31 dB																																													
50.000 kHz	62.500 kHz	30.000 kHz	156.57619 MHz	-30.92 dBm	-60.63 dB	-17.92 dB																																													
156.525 MHz (BY2100)	Ref 40 dBm Att 20 dB RBW 300 Hz VBW 3 kHz SWT 1.15 s Delta 1 [T1] 1.22 dB 9.294873795 kHz Offset 31.2 dB 156.520950564 MHz 156.520873877 MHz 156.529324923 MHz 1 Pk MAX 30 dBm 20 dBm 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm Center 156.525 MHz 10 kHz/ Span 100 kHz 156.525 MHz 1.22 dB 9.294873795 kHz 156.520950564 MHz 156.520873877 MHz 156.529324923 MHz 156.525 MHz 1.22 dB 9.294873795 kHz 156.520950564 MHz 156.520873877 MHz 156.529324923 MHz ProjectNo.:2502V04204E-RF Tester:Stu Song Date: 25.SEP.2025 11:30:58	Ref Level 40.00 dBm Offset 31.20 dB Mode Sweep SGL Count 30/30 1 Pk Max Limit check PA65 30 dBm 20 dBm 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm CF 156.525 MHz 1000 pts Span 125.0 kHz Spectrum Emission Mask Standard: Emask B-L 1x Power 29.82 dBm 1x Bandwidth 25.000 kHz RBW 300.000 Hz <table><tr><th>Range Low</th><th>Range Up</th><th>RBW</th><th>Frequency</th><th>Power Abs</th><th>Power Rel</th><th>ΔLimit</th></tr><tr><td>-62.500 kHz</td><td>-50.000 kHz</td><td>30.000 kHz</td><td>156.46331 MHz</td><td>-31.24 dBm</td><td>-61.09 dB</td><td>-18.24 dB</td></tr><tr><td>-50.000 kHz</td><td>-20.000 kHz</td><td>300.000 Hz</td><td>156.47506 MHz</td><td>-50.48 dBm</td><td>-80.33 dB</td><td>-45.08 dB</td></tr><tr><td>-20.000 kHz</td><td>-10.000 kHz</td><td>300.000 Hz</td><td>156.51469 MHz</td><td>-40.43 dBm</td><td>-70.28 dB</td><td>-45.03 dB</td></tr><tr><td>10.000 kHz</td><td>20.000 kHz</td><td>300.000 Hz</td><td>156.53569 MHz</td><td>-41.03 dBm</td><td>-70.88 dB</td><td>-45.63 dB</td></tr><tr><td>20.000 kHz</td><td>50.000 kHz</td><td>300.000 Hz</td><td>156.56056 MHz</td><td>-52.04 dBm</td><td>-81.89 dB</td><td>-46.64 dB</td></tr><tr><td>50.000 kHz</td><td>62.500 kHz</td><td>30.000 kHz</td><td>156.57656 MHz</td><td>-31.63 dBm</td><td>-61.48 dB</td><td>-18.63 dB</td></tr></table> ProjectNo.:2502V04204E-RF Tester:Stu Song Date: 25.SEP.2025 14:31:27	Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit	-62.500 kHz	-50.000 kHz	30.000 kHz	156.46331 MHz	-31.24 dBm	-61.09 dB	-18.24 dB	-50.000 kHz	-20.000 kHz	300.000 Hz	156.47506 MHz	-50.48 dBm	-80.33 dB	-45.08 dB	-20.000 kHz	-10.000 kHz	300.000 Hz	156.51469 MHz	-40.43 dBm	-70.28 dB	-45.03 dB	10.000 kHz	20.000 kHz	300.000 Hz	156.53569 MHz	-41.03 dBm	-70.88 dB	-45.63 dB	20.000 kHz	50.000 kHz	300.000 Hz	156.56056 MHz	-52.04 dBm	-81.89 dB	-46.64 dB	50.000 kHz	62.500 kHz	30.000 kHz	156.57656 MHz	-31.63 dBm	-61.48 dB	-18.63 dB
	Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit																																												
	-62.500 kHz	-50.000 kHz	30.000 kHz	156.46331 MHz	-31.24 dBm	-61.09 dB	-18.24 dB																																												
-50.000 kHz	-20.000 kHz	300.000 Hz	156.47506 MHz	-50.48 dBm	-80.33 dB	-45.08 dB																																													
-20.000 kHz	-10.000 kHz	300.000 Hz	156.51469 MHz	-40.43 dBm	-70.28 dB	-45.03 dB																																													
10.000 kHz	20.000 kHz	300.000 Hz	156.53569 MHz	-41.03 dBm	-70.88 dB	-45.63 dB																																													
20.000 kHz	50.000 kHz	300.000 Hz	156.56056 MHz	-52.04 dBm	-81.89 dB	-46.64 dB																																													
50.000 kHz	62.500 kHz	30.000 kHz	156.57656 MHz	-31.63 dBm	-61.48 dB	-18.63 dB																																													

4.6 Transmitter Unwanted Emissions(Conducted)


4.6.1 Applicable Standard

FCC §80.211 Emission limitations

(f) The mean power when using emissions other than those in paragraphs (a), (b), (c) and (d) of this section:

- (1) On any frequency removed from the assigned frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: At least 25 dB;
- (2) On any frequency removed from the assigned frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: At least 35 dB; and
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least 43 plus $10\log_{10}$ (mean power in watts) dB.

4.6.2 Block Diagram of Test Setup

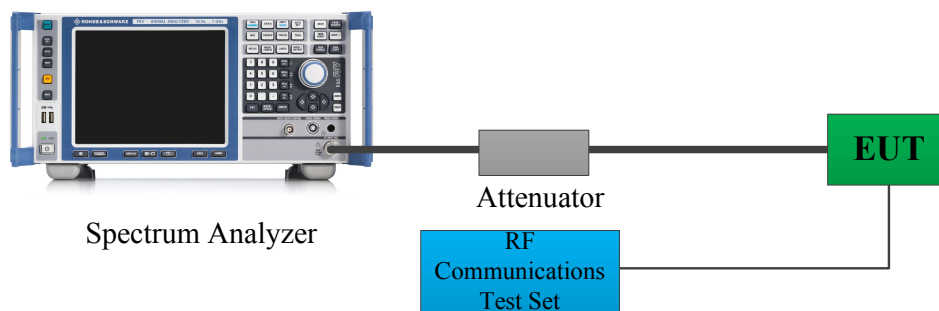

Note: The Insertion loss of the RF cable, Attenuators was offset into the Spectrum Analyzer.

4.6.3 Test Procedure

According to ANSI C63.26-2015 Section 5.7.4:

- a) Set the spectrum analyzer start frequency to the lowest frequency generated by the EUT, without going below 9 kHz, and the stop frequency to the lower frequency covered by the measurements previously performed in 5.7.3. As an alternative, the stop frequency can be set to the value specified in 5.1.1, depending on the EUT operating range, if the resulting plot can clearly demonstrate compliance for all frequencies not addressed by the out-of-band emissions measurements performed as per 5.7.3.
- b) When using an average power (rms) detector, ensure that the number of points in the sweep $\geq 2 \times (\text{span} / \text{RBW})$. This may require that the measurement range defined by the start and stop frequencies be subdivided, depending on the spectrum analyzer capabilities. This requirement does not apply to peak-detected power measurements. When average power is specified by the applicable regulation, a peak-detector can be utilized for preliminary measurements to accommodate wider frequency spans. Any emissions found in the preliminary measurement to exceed the applicable limit(s) shall be further examined using a power averaging (rms) detector with the minimum number of measurement points as defined above.

- c) The sweep time should be set to auto-couple for performing peak-detector measurements. For measurements that use a power averaging (rms) detector, the sweep time shall be set as described for out-of-band emissions measurements in item d) of 5.7.3.
- d) Identify and measure the highest spurious emission levels in each frequency range. It is not necessary to re-measure the out-of-band emissions as a part of this test. Record the frequencies and amplitudes corresponding to the measured emissions and capture the data plots.
- e) Repeat step b) through step d) for the upper spurious emission frequency range if not already captured by a wide span measurement performed as per the alternative provided in step a). The upper frequency for this measurement is defined in 5.1.1 as a function of the EUT operating range.
- f) Compare the results with the corresponding limit in the applicable regulation.
- g) The test report shall include the data plots of the measuring instrument display and the measured data.

4.6.4 Test Data And Result

Serial Number:	3633-23	Test Date:	2025/9/24
Test Site:	RF	Test Mode:	Transmitting
Tester:	Stu Song	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26	Relative Humidity: (%)	61	ATM Pressure: (kPa)	99.1
----------------------	----	---------------------------	----	------------------------	------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200160/026	2025/7/28	2026/7/27
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-03	2025/8/22	2026/8/21
Huaxiang	Coaxial Attenuator	DTS250-30	11022109	2025/6/6	2026/6/5
HP	RF Communications Test Set	8920A	3438A05201	2025/2/14	2026/2/13



* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Only the high power level was tested for 156.025MHz, 156.8MHz and 157.425MHz.



Note: The maximum path attenuation of 30MHz-2GHz was added into the offset.

156.050 MHz

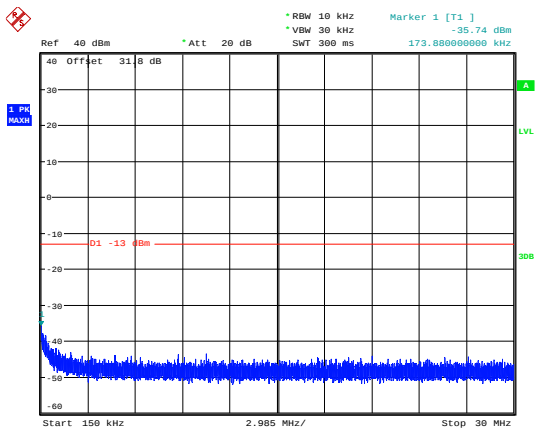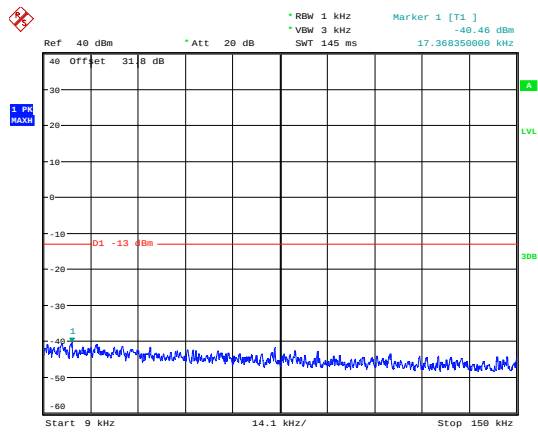

ProjectNo.:2502V04204E-RF Tester:Stu Song
Date: 24.SEP.2025 14:18:36



ProjectNo.:2502V04204E-RF Tester:Stu Song
Date: 24.SEP.2025 14:41:47

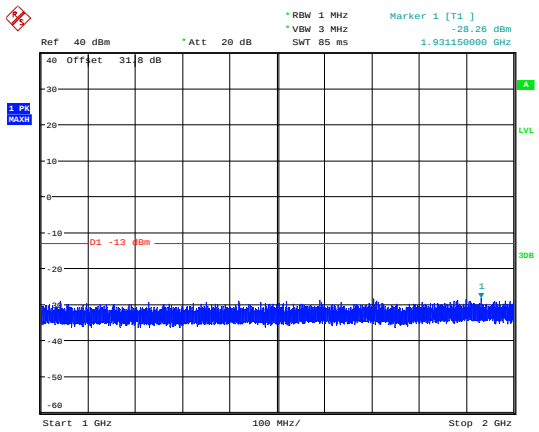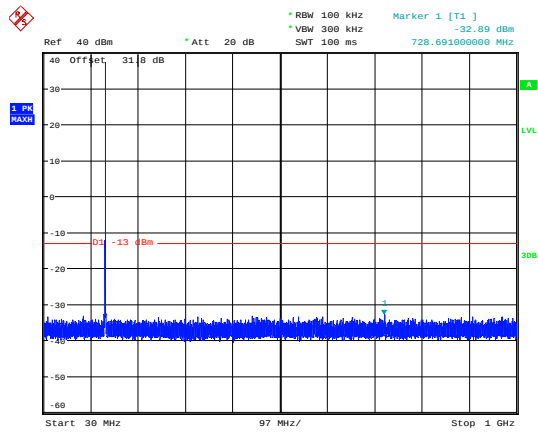

ProjectNo.:2502V04204E-RF Tester:Stu Song
Date: 24.SEP.2025 15:40:48



ProjectNo.:2502V04204E-RF Tester:Stu Song
Date: 24.SEP.2025 15:54:47

156.800 MHz

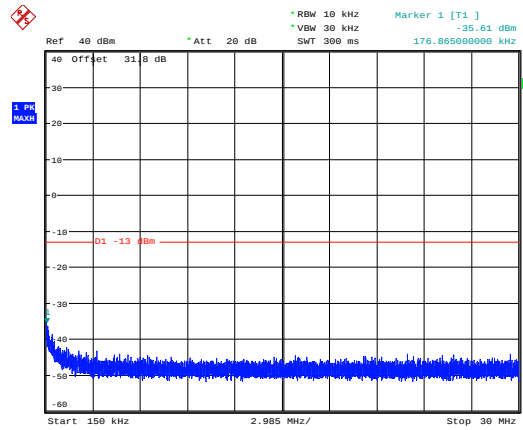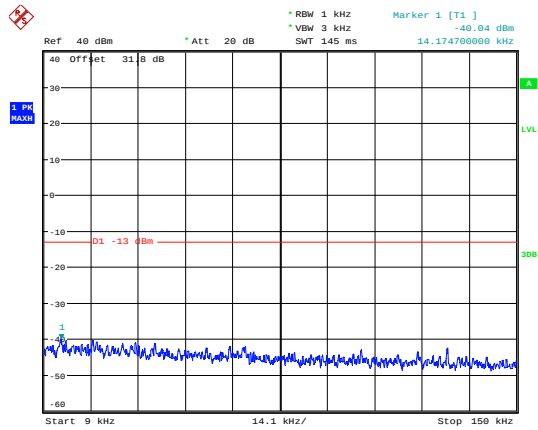

ProjectNo.:2502V04204E-RF Tester:Stu Song
Date: 24.SEP.2025 14:21:58



ProjectNo.:2502V04204E-RF Tester:Stu Song
Date: 24.SEP.2025 14:43:17

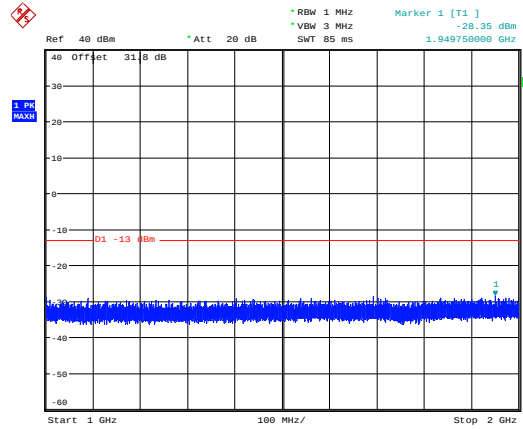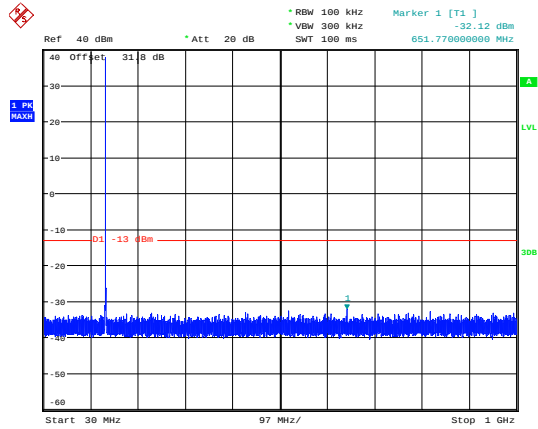

ProjectNo.:2502V04204E-RF Tester:Stu Song
Date: 24.SEP.2025 15:43:06



ProjectNo.:2502V04204E-RF Tester:Stu Song
Date: 24.SEP.2025 15:55:42

157.425 MHz

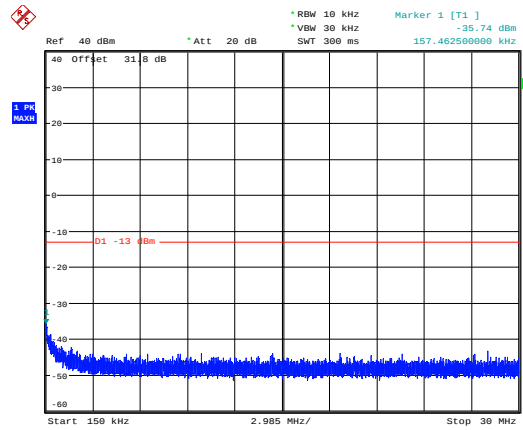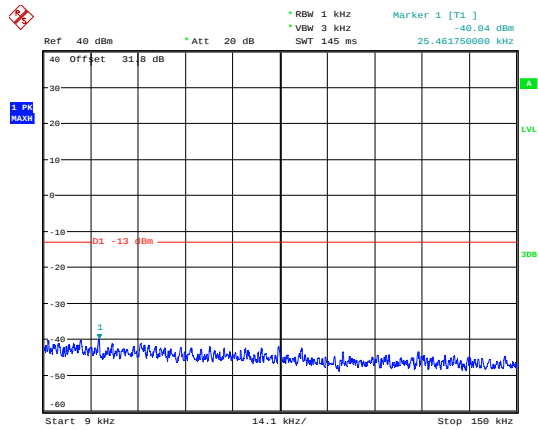

ProjectNo.:2502V04204E-RF Tester:Stu Song
Date: 24.SEP.2025 14:23:16



ProjectNo.:2502V04204E-RF Tester:Stu Song
Date: 24.SEP.2025 14:45:33

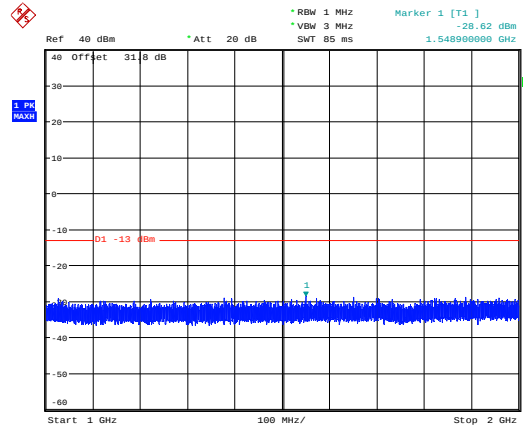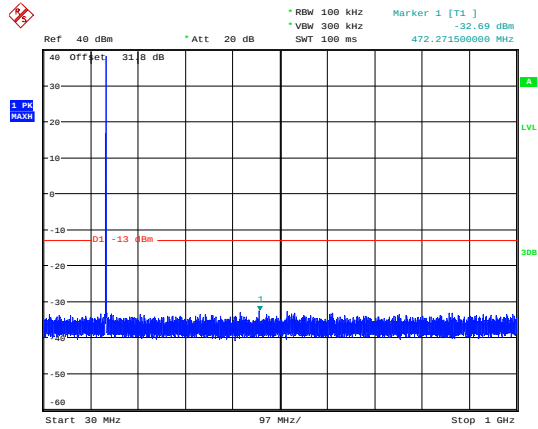

ProjectNo.:2502V04204E-RF Tester:Stu Song
Date: 24.SEP.2025 15:44:02



ProjectNo.:2502V04204E-RF Tester:Stu Song
Date: 24.SEP.2025 15:56:31

156.575 MHz

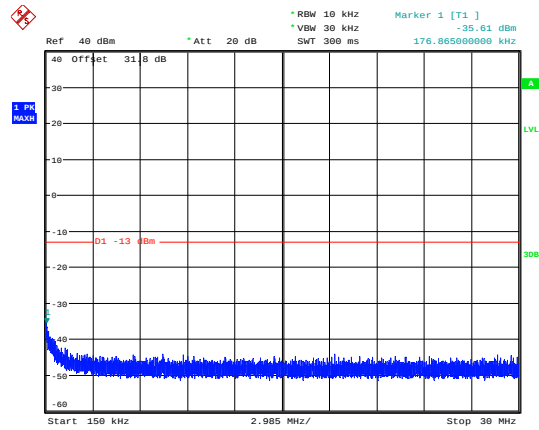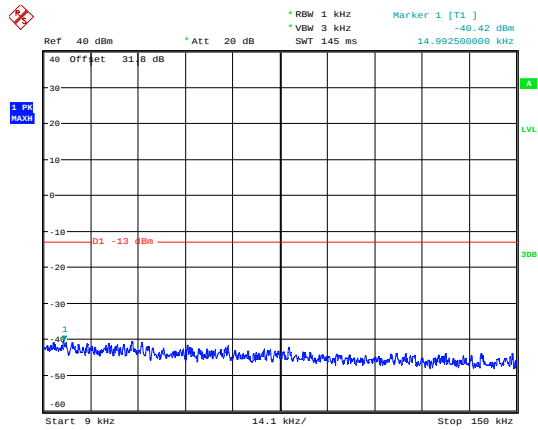

ProjectNo.:2502V04204E-RF Tester:Stu Song
Date: 24.SEP.2025 14:26:32


ProjectNo.:2502V04204E-RF Tester:Stu Song
Date: 24.SEP.2025 14:47:39

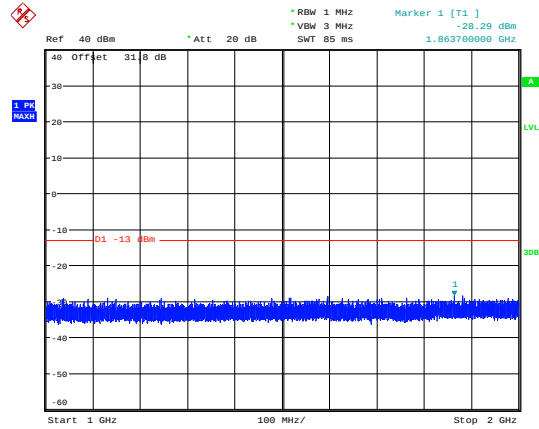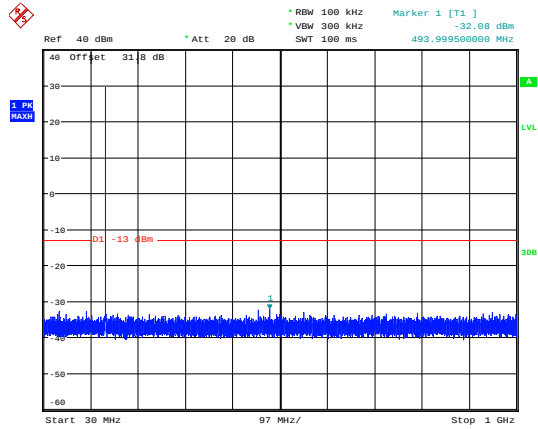


ProjectNo.:2502V04204E-RF Tester:Stu Song
Date: 24.SEP.2025 15:45:01

ProjectNo.:2502V04204E-RF Tester:Stu Song
Date: 24.SEP.2025 15:57:28


156.525 MHz(BY1300)

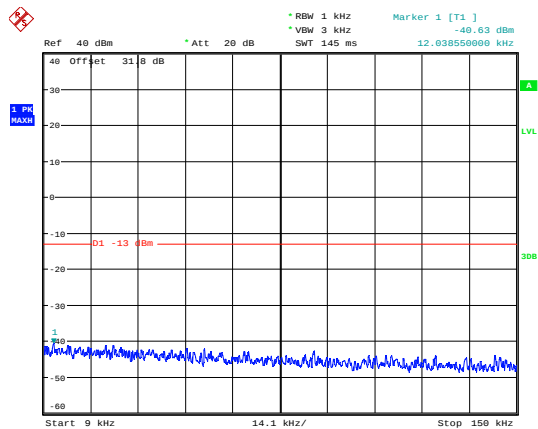


ProjectNo.:2502V04204E-RF Tester:Stu Song
Date: 24.SEP.2025 14:30:14

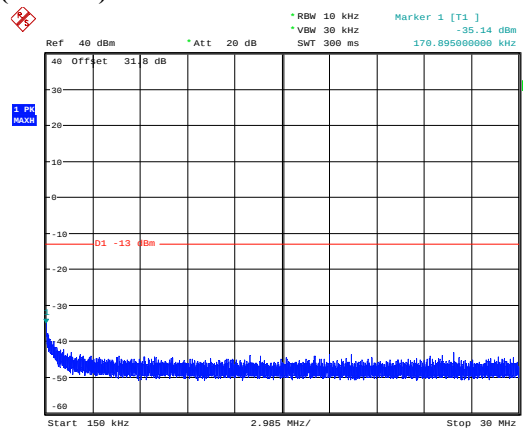

ProjectNo.:2502V04204E-RF Tester:Stu Song
Date: 24.SEP.2025 14:50:12


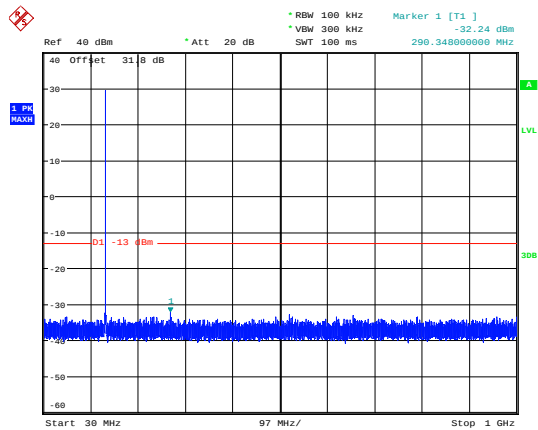


ProjectNo.:2502V04204E-RF Tester:Stu Song
Date: 24.SEP.2025 15:46:12

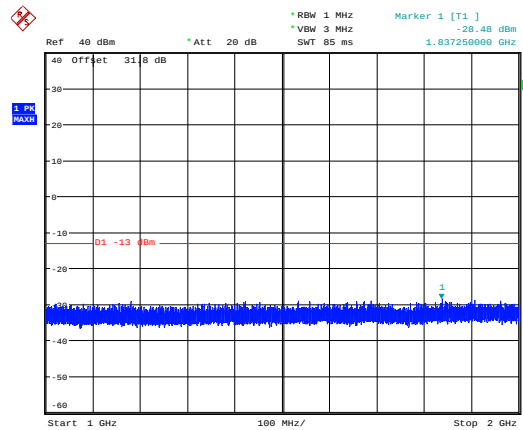



ProjectNo.:2502V04204E-RF Tester:Stu Song
Date: 24.SEP.2025 16:00:18

156.525 MHz(BY2100)

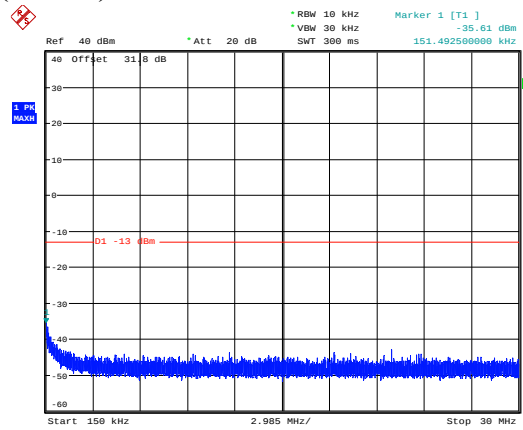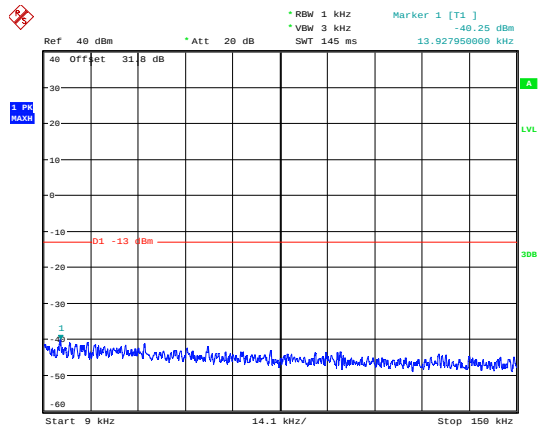

ProjectNo.:2502V04204E-RF Tester:Stu Song
Date: 24.SEP.2025 14:31:54

ProjectNo.:2502V04204E-RF Tester:Stu Song
Date: 24.SEP.2025 14:51:46

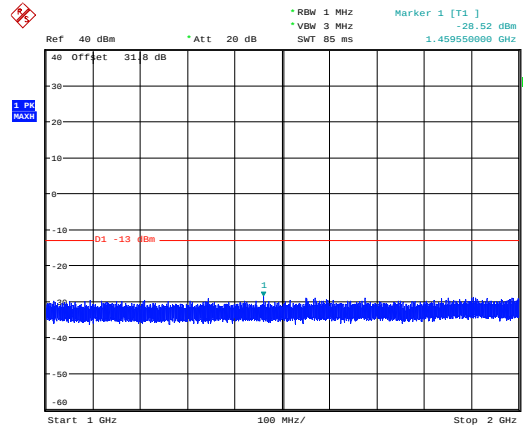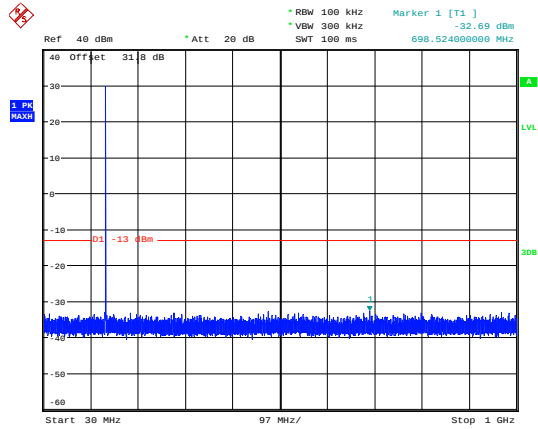

ProjectNo.:2502V04204E-RF Tester:Stu Song
Date: 24.SEP.2025 15:47:22

ProjectNo.:2502V04204E-RF Tester:Stu Song
Date: 24.SEP.2025 16:02:10

4.7 Suppression of interference aboard ships

4.7.1 Applicable Standard

FCC §80.217 Emission limitations

- (a) A voluntarily equipped ship station receiver must not cause harmful interference to any receiver required by statute or treaty.
- (b) The electromagnetic field from receivers required by statute or treaty must not exceed the following value at a distance over sea water of one nautical mile from the receiver:

Frequency of interfering emissions	Field intensity in microvolts per meter
Below 30 MHz	0.1
30 to 100 MHz	.3
100 to 300 MHz	1.0
Over 300 MHz	3.0


Or

Deliver not more than the following amounts of power, to an artificial antenna having electrical characteristics equivalent to those of the average receiving antenna(s) use on shipboard:

Frequency of interfering emissions	Power to artificial antenna in microwatts
Below 30 MHz	400
30 to 100 MHz	4,000
100 to 300 MHz	40,000
Over 300 MHz	400,000

NB-DP and data transmission equipment installed in ship and coast stations before October 1, 1990, that operates on the frequencies in the 4,000-27,500 kHz bands must be capable of operation in accordance with the technical requirements of either ITU-R M.476-5 or ITU-R M.625-3 (both incorporated by reference, see § 80.7), and may be used indefinitely. Equipment installed on or after October 1, 1990, must be capable of operation in accordance with the technical requirements of ITU-R M.625-3, 1995 (incorporated by reference, see § 80.7). NB-DP and data transmission equipment are additionally permitted to utilize any modulation, so long as emissions are within the limits set forth in § 80.211(f) and the equipment is also capable of operation in accordance with ITU-R M.625-3 (incorporated by reference, see § 80.7).

4.7.2 Block Diagram of Test Setup

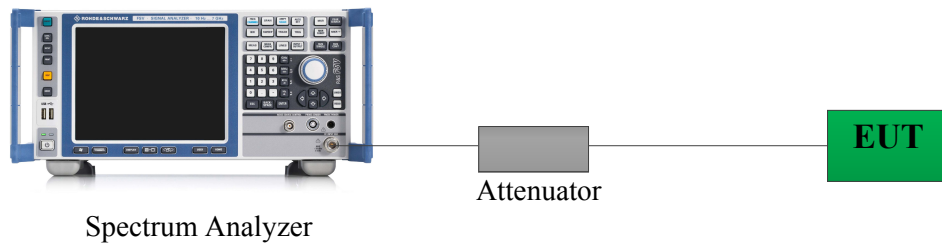

Note: The Insertion loss of the RF cable, Attenuators was offset into the Spectrum Analyzer.

4.7.3 Test Procedure

According to ANSI C63.26-2015 Section 5.7.4:

- a) Set the spectrum analyzer start frequency to the lowest frequency generated by the EUT, without going below 9 kHz, and the stop frequency to the lower frequency covered by the measurements previously performed in 5.7.3. As an alternative, the stop frequency can be set to the value specified in 5.1.1, depending on the EUT operating range, if the resulting plot can clearly demonstrate compliance for all frequencies not addressed by the out-of-band emissions measurements performed as per 5.7.3.
- b) When using an average power (rms) detector, ensure that the number of points in the sweep $\geq 2 \times (\text{span} / \text{RBW})$. This may require that the measurement range defined by the start and stop frequencies be subdivided, depending on the spectrum analyzer capabilities. This requirement does not apply to peak-detected power measurements. When average power is specified by the applicable regulation, a peak-detector can be utilized for preliminary measurements to accommodate wider frequency spans. Any emissions found in the preliminary measurement to exceed the applicable limit(s) shall be further examined using a power averaging (rms) detector with the minimum number of measurement points as defined above.
- c) The sweep time should be set to auto-couple for performing peak-detector measurements. For measurements that use a power averaging (rms) detector, the sweep time shall be set as described for out-of-band emissions measurements in item d) of 5.7.3.
- d) Identify and measure the highest spurious emission levels in each frequency range. It is not necessary to re-measure the out-of-band emissions as a part of this test. Record the frequencies and amplitudes corresponding to the measured emissions and capture the data plots.
- e) Repeat step b) through step d) for the upper spurious emission frequency range if not already captured by a wide span measurement performed as per the alternative provided in step a). The upper frequency for this measurement is defined in 5.1.1 as a function of the EUT operating range.
- f) Compare the results with the corresponding limit in the applicable regulation.
- g) The test report shall include the data plots of the measuring instrument display and the measured data.

4.7.4 Test Data And Result

Serial Number:	3633-23	Test Date:	2025/9/24
Test Site:	RF	Test Mode:	Transmitting
Tester:	Stu Song	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	26	Relative Humidity: (%)	61	ATM Pressure: (kPa)	99.1


Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200160/026	2025/7/28	2026/7/27
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-03	2025/8/22	2026/8/21
Huaxiang	Coaxial Attenuator	DTS250-30	11022109	2025/6/6	2026/6/5
HP	RF Communications Test Set	8920A	3438A05201	2025/2/14	2026/2/13


** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:


High power level 156.800MHz was tested.

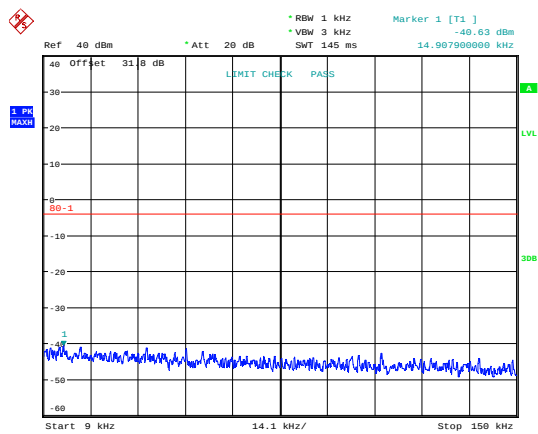


ProjectNo.:2502V04204E-RF Tester:Stu Song
Date: 24.SEP.2025 16:18:03

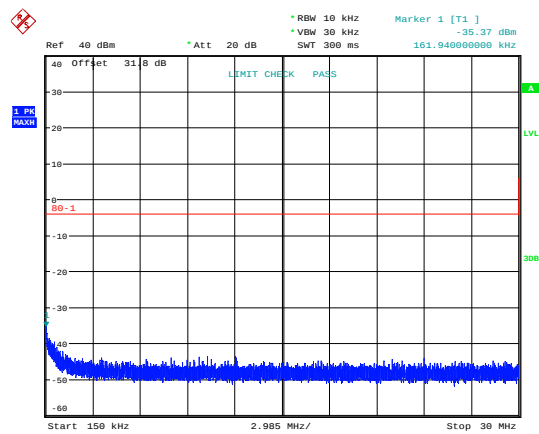

ProjectNo.:2502V04204E-RF Tester:Stu Song
Date: 24.SEP.2025 16:20:56

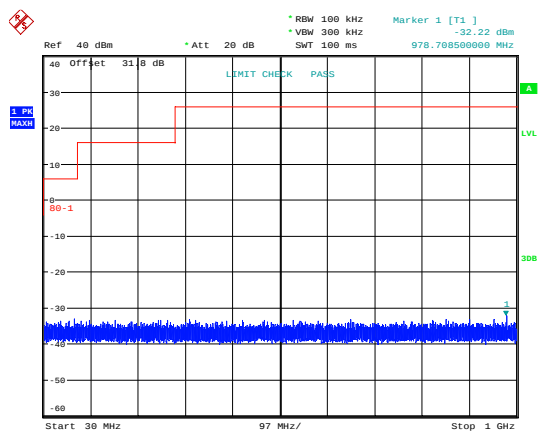

ProjectNo.:2502V04204E-RF Tester:Stu Song
Date: 24.SEP.2025 16:22:01

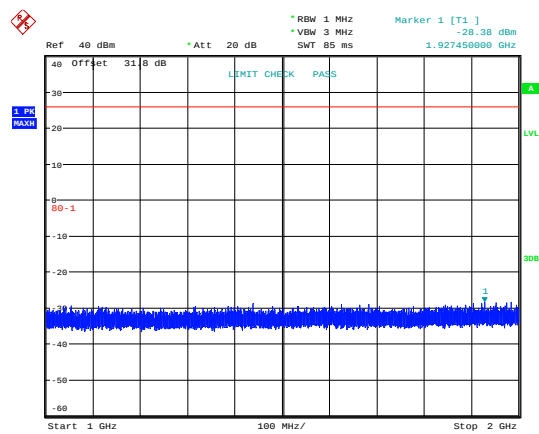

ProjectNo.:2502V04204E-RF Tester:Stu Song
Date: 24.SEP.2025 16:24:41

4.8 Transmitter Unwanted Emissions(Radiated)

4.8.1 Applicable Standard

FCC §80.211 Emission limitations

(f) The mean power when using emissions other than those in paragraphs (a), (b), (c) and (d) of this section:

- (1) On any frequency removed from the assigned frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: At least 25 dB;
- (2) On any frequency removed from the assigned frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: At least 35 dB; and
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least 43 plus $10\log_{10}$ (mean power in watts) dB.

4.8.2 Test setup:

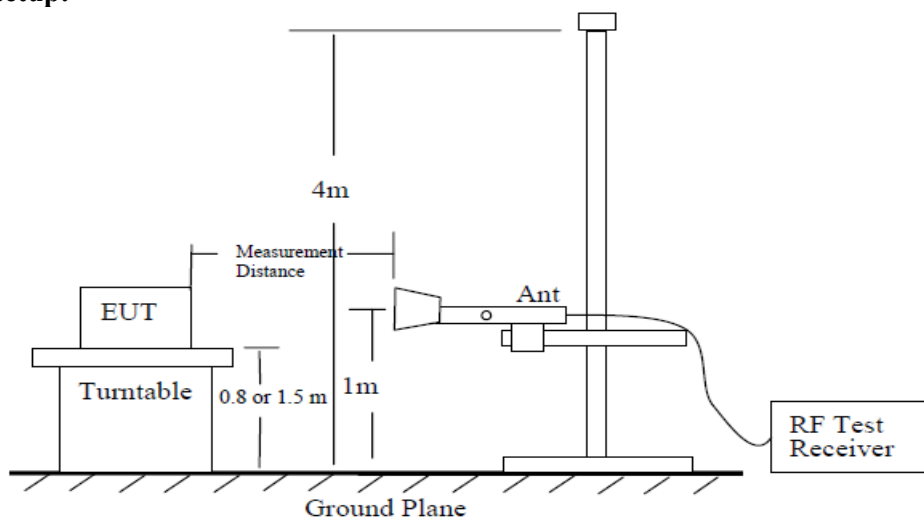


Figure 6—Test site-up for radiated ERP and/or EIRP measurements

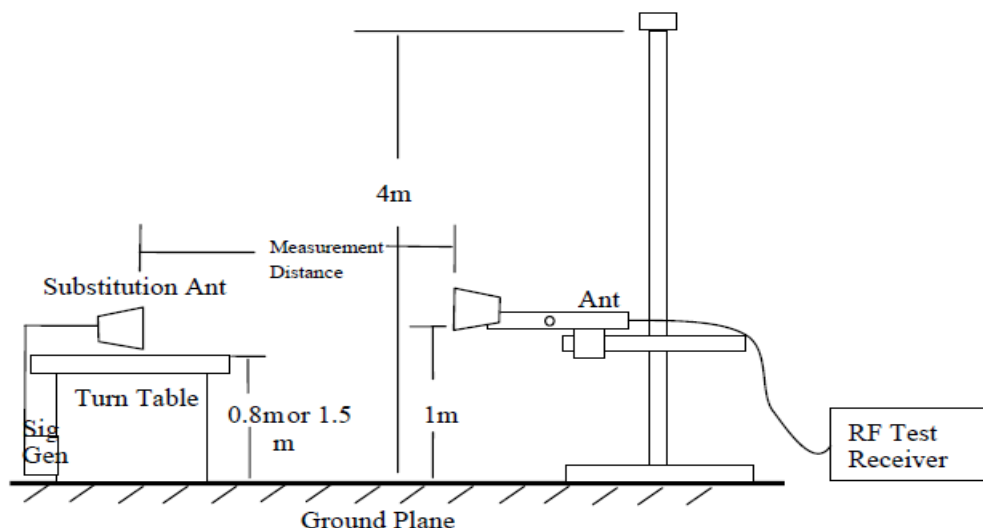


Figure 7—Substitution method set-up for radiated emission

4.8.3 Test Procedure:

- a) Place the EUT in the center of the turntable. The EUT shall be configured to transmit into the standard non-radiating load (for measuring radiated spurious emissions), connected with cables of minimal length unless specified otherwise. If the EUT uses an adjustable antenna, the antenna shall be positioned to the length that produces the worst case emission at the fundamental operating frequency.
- b) Each emission under consideration shall be evaluated:
 - 1) Raise and lower the measurement antenna in accordance 5.5.2, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
 - 2) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
 - 3) Return the turntable to the azimuth where the highest emission amplitude level was observed.
 - 4) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
 - 5) Record the measured emission amplitude level and frequency using the appropriate RBW.
- c) Repeat step b) for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
- d) Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
- e) Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
- f) Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
- g) For each emission that was detected and measured in the initial test [i.e., in step b) and step c)]:
 - 1) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
 - 2) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step b) and step c).
 - 3) Record the output power level of the signal generator when equivalence is achieved in step 2).
- h) Repeat step e) through step g) with the measurement antenna oriented in the opposite polarization.
- i) Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:

$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$

where

P_e = equivalent emission power in dBm

P_s = source (signal generator) power in dBm

NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.

- j) Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from: $\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB}$. If necessary, the antenna gain can be calculated from calibrated antenna factor information
- k) Provide the complete measurement results as a part of the test report.

4.8.4 Test Data And Result

Serial Number:	3633-24	Test Date:	Below 1GHz:2025/9/2 Above 1GHz: 2025/9/3
Test Site:	Chamber A	Test Mode:	Transmitting
Tester:	Lancer Zhang	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	26.6~26.7	Relative Humidity: (%)	29~35	ATM Pressure: (kPa)	100.3~100.5

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
30~1000MHz					
Sunol Sciences	Hybrid Antenna	JB3	A060611-2	2024/4/16	2027/4/15
Narda	Coaxial Attenuator	757C-6dB	34010	2024/4/16	2027/4/15
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2025/7/1	2026/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2025/7/1	2026/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2025/7/1	2026/6/30
Sonoma	Amplifier	310N	372193	2025/7/30	2026/7/29
R&S	EMI Test Receiver	ESCI	100035	2025/6/25	2026/6/24
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
Micro-Coax	Coaxial Cable	UFA210B	99G1448	2024/9/5	2025/9/4
Agilent	Signal Generator	E8247C	MY43321350	2025/7/28	2026/7/27
Above 1GHz					
AH	Horn Antenna	SAS-571	1177	2023/2/22	2026/2/21
ETS-Lindgren	Horn Antenna	3115	000 527 35	2023/9/7	2026/9/6
HUBER+SUHNER	Coaxial Cable	SUCOFLEX 126EA	MY369/26/26EA	2025/7/1	2026/6/30
Micro-Coax	Coaxial Cable	UFA210B	99G1448	2024/9/5	2025/9/4
Mini-Circuits	Preamplifier	ZVA-183-S+	5696001267	2025/2/14	2026/2/13
R&S	Spectrum Analyzer	FSV40	101589	2025/7/28	2026/7/27
Agilent	Signal Generator	E8247C	MY43321350	2025/7/28	2026/7/27
Mini-Circuits	High Pass Filter	VHF-650+	31052	2025/7/1	2026/6/30

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Please refer to the below table.

Only the high power level channel was tested for 156.05MHz, 156.8MHz and 157.425MHz.

After pre-scan in the X, Y and Z axes of orientation, the worst case is below:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
Test Frequency: 156.05MHz								
312.10	H	60.53	-47.89	0.00	0.32	-48.21	-13.00	35.21
312.10	V	57.97	-48.67	0.00	0.32	-48.99	-13.00	35.99
468.15	H	60.00	-45.85	0.00	0.36	-46.21	-13.00	33.21
468.15	V	73.68	-29.49	0.00	0.36	-29.85	-13.00	16.85
624.20	H	50.93	-51.13	0.00	0.36	-51.49	-13.00	38.49
624.20	V	57.88	-41.53	0.00	0.36	-41.89	-13.00	28.89
780.25	H	39.10	-59.90	0.00	0.47	-60.37	-13.00	47.37
780.25	V	46.03	-49.87	0.00	0.47	-50.34	-13.00	37.34
936.30	H	36.87	-57.44	0.00	0.51	-57.95	-13.00	44.95
936.30	V	42.05	-49.13	0.00	0.51	-49.64	-13.00	36.64
1092.35	H	55.08	-61.42	6.84	0.35	-54.93	-13.00	41.93
1092.35	V	55.60	-61.83	6.84	0.35	-55.34	-13.00	42.34
1248.40	H	65.31	-51.05	7.74	0.36	-43.67	-13.00	30.67
1248.40	V	65.22	-51.40	7.74	0.36	-44.02	-13.00	31.02
1404.45	H	75.72	-40.97	8.65	0.38	-32.70	-13.00	19.70
1404.45	V	68.62	-48.42	8.65	0.38	-40.15	-13.00	27.15
1560.50	H	67.60	-50.90	9.30	0.41	-42.01	-13.00	29.01
1560.50	V	63.32	-55.36	9.30	0.41	-46.47	-13.00	33.47

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
Test Frequency: 156.8MHz								
313.60	H	58.61	-49.79	0.00	0.32	-50.11	-13.00	37.11
313.60	V	58.63	-47.97	0.00	0.32	-48.29	-13.00	35.29
470.40	H	57.76	-48.06	0.00	0.36	-48.42	-13.00	35.42
470.40	V	74.24	-28.90	0.00	0.36	-29.26	-13.00	16.26
627.20	H	51.07	-50.94	0.00	0.37	-51.31	-13.00	38.31
627.20	V	56.74	-42.60	0.00	0.37	-42.97	-13.00	29.97
784.00	H	46.60	-52.31	0.00	0.47	-52.78	-13.00	39.78
784.00	V	49.35	-46.47	0.00	0.47	-46.94	-13.00	33.94
940.80	H	41.21	-52.95	0.00	0.51	-53.46	-13.00	40.46
940.80	V	42.18	-48.87	0.00	0.51	-49.38	-13.00	36.38
1097.60	H	56.84	-59.64	6.87	0.35	-53.12	-13.00	40.12
1097.60	V	57.48	-59.92	6.87	0.35	-53.40	-13.00	40.40
1254.40	H	63.24	-53.04	7.78	0.37	-45.63	-13.00	32.63
1254.40	V	68.44	-48.09	7.78	0.37	-40.68	-13.00	27.68
1411.20	H	74.13	-42.67	8.68	0.38	-34.37	-13.00	21.37
1411.20	V	73.99	-43.15	8.68	0.38	-34.85	-13.00	21.85
1568.00	H	68.71	-49.83	9.31	0.41	-40.93	-13.00	27.93
1568.00	V	65.14	-53.56	9.31	0.41	-44.66	-13.00	31.66

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
Test Frequency: 157.425MHz								
314.85	H	56.48	-51.89	0.00	0.32	-52.21	-13.00	39.21
314.85	V	57.24	-49.33	0.00	0.32	-49.65	-13.00	36.65
472.28	H	58.37	-47.42	0.00	0.36	-47.78	-13.00	34.78
472.28	V	73.29	-29.82	0.00	0.36	-30.18	-13.00	17.18
629.70	H	50.41	-51.57	0.00	0.37	-51.94	-13.00	38.94
629.70	V	55.37	-43.90	0.00	0.37	-44.27	-13.00	31.27
787.13	H	47.24	-51.60	0.00	0.48	-52.08	-13.00	39.08
787.13	V	50.24	-45.52	0.00	0.48	-46.00	-13.00	33.00
944.55	H	42.67	-51.35	0.00	0.51	-51.86	-13.00	38.86
944.55	V	40.37	-50.57	0.00	0.51	-51.08	-13.00	38.08
1101.98	H	52.64	-63.84	6.89	0.35	-57.30	-13.00	44.30
1101.98	V	63.95	-53.43	6.89	0.35	-46.89	-13.00	33.89
1259.40	H	65.27	-50.95	7.80	0.37	-43.52	-13.00	30.52
1259.40	V	71.42	-45.04	7.80	0.37	-37.61	-13.00	24.61
1416.83	H	74.82	-42.07	8.72	0.38	-33.73	-13.00	20.73
1416.83	V	73.24	-43.98	8.72	0.38	-35.64	-13.00	22.64
1574.25	H	68.97	-49.60	9.32	0.42	-40.70	-13.00	27.70
1574.25	V	64.72	-54.00	9.32	0.42	-45.10	-13.00	32.10

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
Test Frequency: 156.575MHz								
313.15	H	54.60	-53.81	0.00	0.32	-54.13	-13.00	41.13
313.15	V	50.08	-56.53	0.00	0.32	-56.85	-13.00	43.85
469.73	H	48.03	-57.80	0.00	0.36	-58.16	-13.00	45.16
469.73	V	56.89	-46.26	0.00	0.36	-46.62	-13.00	33.62
626.30	H	37.57	-64.46	0.00	0.37	-64.83	-13.00	51.83
626.30	V	46.95	-52.41	0.00	0.37	-52.78	-13.00	39.78
782.88	H	38.24	-60.70	0.00	0.47	-61.17	-13.00	48.17
782.88	V	36.66	-59.19	0.00	0.47	-59.66	-13.00	46.66
939.45	H	36.11	-58.09	0.00	0.51	-58.60	-13.00	45.60
939.45	V	32.17	-58.92	0.00	0.51	-59.43	-13.00	46.43
1096.03	H	51.32	-65.17	6.86	0.35	-58.66	-13.00	45.66
1096.03	V	54.66	-62.75	6.86	0.35	-56.24	-13.00	43.24
1252.60	H	65.80	-50.51	7.77	0.37	-43.11	-13.00	30.11
1252.60	V	63.85	-52.71	7.77	0.37	-45.31	-13.00	32.31
1409.18	H	61.74	-55.02	8.67	0.38	-46.73	-13.00	33.73
1409.18	V	59.67	-57.44	8.67	0.38	-49.15	-13.00	36.15
1565.75	H	67.18	-51.35	9.31	0.41	-42.45	-13.00	29.45
1565.75	V	64.32	-54.37	9.31	0.41	-45.47	-13.00	32.47

BY1300

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
Test Frequency: 156.525MHz								
313.05	H	60.24	-48.17	0.00	0.32	-48.49	-13.00	35.49
313.05	V	55.37	-51.25	0.00	0.32	-51.57	-13.00	38.57
469.58	H	53.72	-52.11	0.00	0.36	-52.47	-13.00	39.47
469.58	V	55.68	-47.47	0.00	0.36	-47.83	-13.00	34.83
626.10	H	43.72	-58.31	0.00	0.37	-58.68	-13.00	45.68
626.10	V	44.81	-54.55	0.00	0.37	-54.92	-13.00	41.92
782.63	H	40.18	-58.76	0.00	0.47	-59.23	-13.00	46.23
782.63	V	42.18	-53.67	0.00	0.47	-54.14	-13.00	41.14
939.15	H	37.18	-57.03	0.00	0.51	-57.54	-13.00	44.54
939.15	V	34.27	-56.83	0.00	0.51	-57.34	-13.00	44.34
1095.68	H	48.97	-67.52	6.85	0.35	-61.02	-13.00	48.02
1095.68	V	53.30	-64.11	6.85	0.35	-57.61	-13.00	44.61
1252.20	H	60.92	-55.39	7.76	0.37	-48.00	-13.00	35.00
1252.20	V	59.63	-56.93	7.76	0.37	-49.54	-13.00	36.54
1408.73	H	67.86	-48.90	8.67	0.38	-40.61	-13.00	27.61
1408.73	V	65.33	-51.77	8.67	0.38	-43.48	-13.00	30.48
1565.25	H	67.07	-51.46	9.30	0.41	-42.57	-13.00	29.57
1565.25	V	65.21	-53.48	9.30	0.41	-44.59	-13.00	31.59

BY2100

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
Test Frequency: 156.525MHz								
313.05	H	62.41	-46.00	0.00	0.32	-46.32	-13.00	33.32
313.05	V	57.10	-49.52	0.00	0.32	-49.84	-13.00	36.84
469.58	H	54.18	-51.65	0.00	0.36	-52.01	-13.00	39.01
469.58	V	54.33	-48.82	0.00	0.36	-49.18	-13.00	36.18
626.10	H	45.72	-56.31	0.00	0.37	-56.68	-13.00	43.68
626.10	V	46.91	-52.45	0.00	0.37	-52.82	-13.00	39.82
782.63	H	42.71	-56.23	0.00	0.47	-56.70	-13.00	43.70
782.63	V	43.66	-52.19	0.00	0.47	-52.66	-13.00	39.66
939.15	H	40.18	-54.03	0.00	0.51	-54.54	-13.00	41.54
939.15	V	36.82	-54.28	0.00	0.51	-54.79	-13.00	41.79
1095.68	H	50.27	-66.22	6.85	0.35	-59.72	-13.00	46.72
1095.68	V	53.11	-64.30	6.85	0.35	-57.80	-13.00	44.80
1252.20	H	61.20	-55.11	7.76	0.37	-47.72	-13.00	34.72
1252.20	V	61.08	-55.48	7.76	0.37	-48.09	-13.00	35.09
1408.73	H	67.41	-49.35	8.67	0.38	-41.06	-13.00	28.06
1408.73	V	65.75	-51.35	8.67	0.38	-43.06	-13.00	30.06
1565.25	H	67.93	-50.60	9.30	0.41	-41.71	-13.00	28.71
1565.25	V	52.41	-66.28	9.30	0.41	-57.39	-13.00	44.39

Note 1: The unit of antenna gain is dBd for frequency below 1GHz and is dBi for frequency above 1GHz.

Note 2:

Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

EXHIBIT A-EUT PHOTOGRAPHS

Please refer to the attachment 2502V04204E-RF-FCC-EXP EUT EXTERNAL PHOTOGRAPHS and 2502V04204E-RF-FCC-INP EUT INTERNAL PHOTOGRAPHS

EXHIBIT B-TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2502V04204E-RF-00C-TSP TEST SETUP PHOTOGRAPHS.

******* END OF REPORT *******