

	Test Report Serial No.: 121505BBO-T709-S95U		Report Issue Date:	January 11, 2006
	Date(s) of Evaluation: December 21-22, 2005		Report Issue No.:	S709-011106-R0
	Description of Test(s):	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

RF EXPOSURE EVALUATION

SPECIFIC ABSORPTION RATE

SAR TEST REPORT

FOR

COBRA ELECTRONICS CORPORATION

PORTABLE FM UHF FRS/GMRS PTT RADIO TRANSCEIVER

MODEL(S): LI6000, LI6050

FCC ID: BBOLI6000

IC: 906B-LI6000

Test Report Serial Number

121505BBO-T709-S95U

Test Report Issue No.

S709-011106-R0

Test Lab

**Celltech Compliance Testing & Engineering Lab
(Celltech Labs Inc.)
1955 Moss Court
Kelowna, BC
Canada
V1Y 9L3**

Test Report Prepared By:

Cheri Frangiadakis

**Cheri Frangiadakis
Test Report Writer
Celltech Labs Inc.**

Test Report Approved By:

Jonathan Hughes

**Jonathan Hughes
General Manager
Celltech Labs Inc.**

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOLI6000	IC ID:	906B-LI6000	
Model(s):	LI6000, LI6050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 1 of 40

	Test Report Serial No.:	121505BBO-T709-S95U	Report Issue Date:	January 11, 2006
	Date(s) of Evaluation:	December 21-22, 2005	Report Issue No.:	S709-011106-R0
	Description of Test(s):	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

DECLARATION OF COMPLIANCE SAR RF EXPOSURE EVALUATION

Test Lab

CELLTECH LABS INC.
Testing and Engineering Services
1955 Moss Court
Kelowna, B.C.
Canada V1Y 9L3
Phone: 250-448-7047
Fax: 250-448-7046
e-mail: info@celltechlabs.com
web site: www.celltechlabs.com

Applicant Information

COBRA ELECTRONICS CORPORATION
6500 West Cortland Street
Chicago, IL 60707
United States

FCC IDENTIFIER: BBOLI6000
IC IDENTIFIER: 906B-LI6000
Model(s): LI6000, LI6050

SAR Test Requirement(s): FCC 47 CFR §2.1093; Health Canada Safety Code 6
SAR Test Procedure(s): FCC OET Bulletin 65, Supplement C (Edition 01-01)
Industry Canada RSS-102 Issue 2
Device Description: Portable UHF FRS/GMRS PTT Radio Transceiver
Modulation Type: FM (UHF)

Transmit Frequency Range(s): 462.5500 - 462.7250 MHz (GMRS Channels 15-22)
462.5625 - 462.7125 MHz (FRS/GMRS Channels 1-7)
467.5625 - 467.7125 MHz (FRS Channels 8-14)
Max. RF Output Power Tested: 0.372 Watts (25.71 dBm) ERP (462.6375 MHz) GMRS Channel 4
Antenna Type(s) Tested: External Fixed Stubby
Battery Type(s) Tested: Lithium-ion 7.4 V, 950 mAh

Body-Worn Accessories Tested: Plastic Belt-Clip (6 mm thickness)
Audio Accessories Tested: Generic Earbud with Lapel-Microphone

Max. SAR Level(s) Evaluated: Face-Held: 0.243 W/kg (1g) - 50% duty cycle
Body-Worn: 0.554 W/kg (1g) - 50% duty cycle

Celltech Labs Inc. declares under its sole responsibility that this wireless portable device has demonstrated compliance with the Specific Absorption Rate (SAR) RF exposure requirements specified in FCC 47 CFR §2.1093 and Health Canada's Safety Code 6. The device was tested in accordance with the measurement standards and procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01) and Industry Canada RSS-102 Issue 2 for the General Population / Uncontrolled Exposure environment. All measurements were performed in accordance with the SAR system manufacturer recommendations.

I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc. The results and statements contained in this report pertain only to the device(s) evaluated.

Tested By:



Sean Johnston
Compliance Technologist
Celltech Labs Inc.

Reviewed By:



Spencer Watson
Senior Compliance Technologist
Celltech Labs Inc.



Applicant:	Cobra Electronics Corporation	FCC ID:	BBOLI6000	IC ID:	906B-LI6000	
Model(s):	LI6000, LI6050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 2 of 40

	Test Report Serial No.:	121505BBO-T709-S95U	Report Issue Date:	January 11, 2006
	Date(s) of Evaluation:	December 21-22, 2005	Report Issue No.:	S709-011106-R0
	Description of Test(s):	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

TABLE OF CONTENTS	
1.0 INTRODUCTION	4
2.0 DESCRIPTION OF DEVICE UNDER TEST (DUT)	4
3.0 SAR MEASUREMENT SYSTEM	5
4.0 MEASUREMENT SUMMARY	6
5.0 DETAILS OF SAR EVALUATION	7
6.0 EVALUATION PROCEDURES	7
7.0 SYSTEM PERFORMANCE CHECK	8
8.0 SIMULATED EQUIVALENT TISSUES	9
9.0 SAR SAFETY LIMITS	9
10.0 ROBOT SYSTEM SPECIFICATIONS	10
11.0 PROBE SPECIFICATION (ET3DV6)	11
12.0 SIDE PLANAR PHANTOM	11
13.0 VALIDATION PLANAR PHANTOM	11
14.0 DEVICE HOLDER	11
15.0 TEST EQUIPMENT LIST	12
16.0 MEASUREMENT UNCERTAINTIES	13
MEASUREMENT UNCERTAINTIES (CONT.)	14
17.0 REFERENCES	15
APPENDIX A - SAR MEASUREMENT DATA	16
APPENDIX B - SYSTEM PERFORMANCE CHECK DATA	22
APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS	27
APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS	31
APPENDIX E - SYSTEM VALIDATION	39
APPENDIX F - PROBE CALIBRATION	40

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOLI6000	IC ID:	906B-LI6000	
Model(s):	LI6000, LI6050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 3 of 40

	Test Report Serial No.:	121505BBO-T709-S95U	Report Issue Date:	January 11, 2006
	Date(s) of Evaluation:	December 21-22, 2005	Report Issue No.:	S709-011106-R0
	Description of Test(s):	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

1.0 INTRODUCTION

This measurement report demonstrates compliance of the Cobra Electronics Corporation Model(s): LI6000, LI6050 Portable UHF FRS/GMRS PTT Radio Transceiver FCC ID: BBOLI6000 with the SAR (Specific Absorption Rate) RF exposure requirements specified in FCC 47 CFR §2.1093 (see reference [1]), and Health Canada's Safety Code 6 (see reference [2]) for the General Population / Uncontrolled Exposure environment. The test procedures described in FCC OET Bulletin 65, Supplement C (Edition 01-01) (see reference [3]) and IC RSS-102 Issue 2 (see reference [4]), were employed. A description of the product and operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used, and the provisions of the rules are included within this test report.

2.0 DESCRIPTION OF DEVICE UNDER TEST (DUT)

SAR Test Requirement(s)	FCC Rule Part 47 CFR §2.1093				
	Health Canada Safety Code 6				
SAR Test Procedure(s)	FCC OET Bulletin 65, Supplement C (01-01)				
	Industry Canada RSS-102 Issue 2				
Device Description	Portable FM UHF FRS/GMRS PTT Radio Transceiver				
RF Exposure Category	General Population / Uncontrolled Environment				
FCC IDENTIFIER	BBOLI6000				
IC IDENTIFIER	906B-LI6000				
Model(s)	LI6000			LI6050	
Test Sample Serial No.	0025783			Identical Prototype	
Modulation Type	FM (UHF)				
Transmit Frequency Range(s)	462.5500 - 462.7250 MHz			GMRS Channels 15-22	
	462.5625 - 462.7125 MHz			FRS/GMRS Channels 1-7	
	467.5625 - 467.7125 MHz			FRS Channels 8-14	
Max. RF Output Power Tested	0.372 Watts	25.71 dBm	ERP	462.6375 MHz	GMRS Channel 4
Antenna Type(s) Tested	External Fixed Stubby				
Battery Type(s) Tested	Lithium-ion		7.4 V		950 mAh
Body-Worn Accessories Tested	Plastic Belt-Clip			6 mm thickness	
Audio Accessories Tested	Generic Earbud with Lapel-Microphone				

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOLI6000	IC ID:	906B-LI6000	
Model(s):	LI6000, LI6050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 4 of 40


	Test Report Serial No.: 121505BBO-T709-S95U		Report Issue Date:	January 11, 2006
	Date(s) of Evaluation: December 21-22, 2005		Report Issue No.:	S709-011106-R0
	Description of Test(s): RF Exposure SAR		FCC 47 CFR §2.1093	IC RSS-102 Issue 2

3.0 SAR MEASUREMENT SYSTEM

Celltech Labs Inc. SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for brain and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.



DASY4 SAR Measurement System with Plexiglas validation phantom

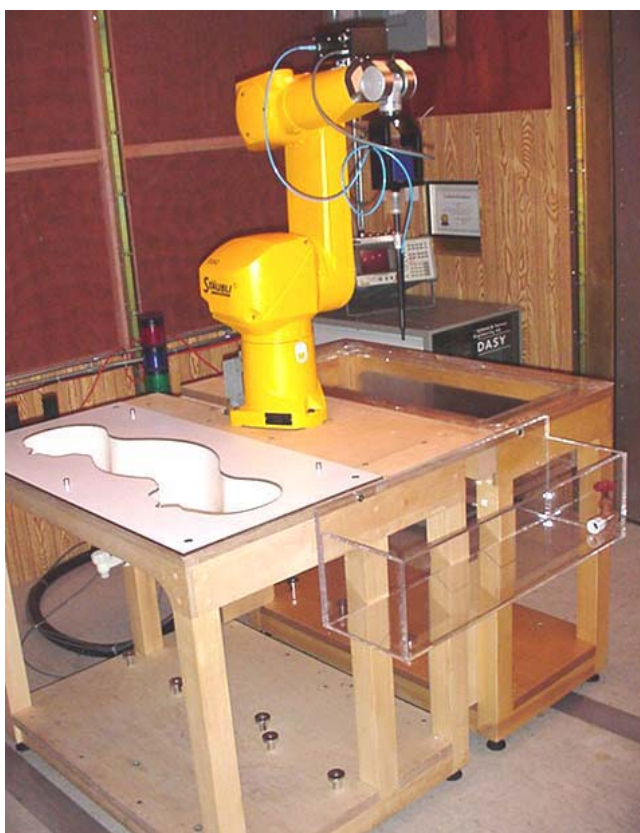

DASY4 SAR Measurement System with Plexiglas side planar phantom

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOLI6000	IC ID:	906B-LI6000	
Model(s):	LI6000, LI6050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				

	Test Report Serial No.:	121505BBO-T709-S95U	Report Issue Date:	January 11, 2006
	Date(s) of Evaluation:	December 21-22, 2005	Report Issue No.:	S709-011106-R0
	Description of Test(s):	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

4.0 MEASUREMENT SUMMARY

SAR EVALUATION RESULTS

Test Type	Test Date	Freq. (MHz)	Chan.	Test Mode	Battery Type	Antenna Position	Accessories Tested	Separation Distance to Planar Phantom (cm)	ERP Start Power (Watts)	Measured SAR 1g (W/kg)		SAR Drift During Test (dB)	Scaled SAR with droop 1g (W/kg)	
							Body-Worn			Duty Cycle			Duty Cycle	
							Audio			100%	50%		100%	50%
Face	Dec 22	462.6375	4	CW	Li-ion	Fixed	--	2.5	0.372	0.486	0.243	0.0370	--	--
Body	Dec 21	462.6375	4	CW	Li-ion	Fixed	Belt-Clip	0.6	0.372	0.797	0.399	-1.43	1.11	0.554
							Ear-Mic							
ANSI / IEEE C95.1 1999 SAFETY LIMIT						BRAIN / BODY: 1.6 W/kg (averaged over 1 gram)				Spatial Peak Uncontrolled Exposure / General Population				
Test Date(s)		December 22, 2005				December 21, 2005				Measured Fluid Type		Brain	Body	Unit
Dielectric Constant ϵ_r		450 MHz Brain				450 MHz Body				Atmospheric Pressure		100.8	102.0	kPa
		IEEE Target	Meas.	Dev.	IEEE Target	Meas.	Dev.	Relative Humidity		30	30	%		
		43.5	± 5%	42.7	-1.8%	56.7	± 5%	56.7	0.0%	Ambient Temperature		24.1	23.6	°C
Conductivity σ (mho/m)		450 MHz Brain				450 MHz Body				Fluid Temperature		22.0	22.8	°C
		IEEE Target	Meas.	Dev.	IEEE Target	Meas.	Dev.	Fluid Depth		>15	>15	cm		
		0.87	± 5%	0.85	-2.3%	0.94	± 5%	0.95	+1.1%	ρ (Kg/m³)		1000	1000	

Note(s):

- The measurement results were obtained with the DUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum SAR location of the DUT are reported in Appendix A.
- The transmission band of the DUT is less than 10 MHz; therefore mid channel data only is reported (per FCC OET Bulletin 65, Supplement C, Edition 01-01 - see reference [3]).
- The power droop measured by the DASY4 system for the duration of the SAR evaluation was added to the measured SAR level to report a scaled SAR result as shown in the above test data table.
- The ambient and fluid temperatures were measured prior to, and during, the fluid dielectric parameter check and the SAR evaluations. The temperatures reported were consistent for all measurement periods.
- The dielectric parameters of the simulated tissue mixtures were measured prior to the SAR evaluations using an ALS-PR-DIEL Dielectric Probe Kit and an HP 8753ET Network Analyzer (see Appendix C).
- The SAR evaluations were performed within 24 hours of the system performance check.



Project Number:

709

Company:

Cobra Electronics

Product:

LI6000

Test Start Date:

19-Dec-05

Test End Date:

19-Dec-05

c) Finals

Configuration				Polarity	Distance m	Carrier Channel	Frequency MHz	Corrected Field Strength dBuV/m	Substituted SA Level (Uncorrected) dBm	Power Applied to Antenna dBm	Antenna Gain dBd	Calculated ERP Carrier Level	
EUT#	Orientation	Power Source	Accessory									dBm	milliWatts
1	Long Edge Up	Li-Ion	none	H	3	15	462.5500	129.57	109.10	25.77	-0.19	25.39	345.91
1	Long Edge Up	Li-Ion	none	V	3	15	462.5500	120.27	99.80	17.72	-0.19	17.34	54.20
1	Long Edge Up	Li-Ion	none	H	3	4	462.6375	129.68	109.20	25.90	-0.19	25.71	372.34
1	Long Edge Up	Li-Ion	none	V	3	4	462.6375	120.58	100.10	18.12	-0.19	17.74	59.41
1	Long Edge Up	Li-Ion	none	H	3	22	462.7250	129.68	109.20	25.85	-0.19	25.47	352.22
1	Long Edge Up	Li-Ion	none	V	3	22	462.7250	120.38	99.90	17.85	-0.19	17.47	55.82

Comment:

Measurement made at a 3 meter distance, with the EUT placed 1 meter above the ground plane

Bold indicates highest in set

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOLI6000	IC ID:	906B-LI6000	
Model(s):	LI6000, LI6050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				

	Test Report Serial No.: 121505BBO-T709-S95U		Report Issue Date:	January 11, 2006
	Date(s) of Evaluation: December 21-22, 2005		Report Issue No.:	S709-011106-R0
	Description of Test(s):	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

5.0 DETAILS OF SAR EVALUATION

The Cobra Electronics Corporation Model(s): LI6000, LI6050 Portable FM UHF FRS/GMRS PTT Radio Transceiver FCC ID: BBOLI6000 was compliant for localized Specific Absorption Rate (General Population / Uncontrolled Exposure) based on the test provisions and conditions described below. The detailed test setup photographs are shown in Appendix D.

1. The DUT was evaluated in a face-held configuration with the front of the radio placed parallel to the outer surface of the planar phantom. A 2.5 cm separation distance was maintained between the front of the DUT and the outer surface of the planar phantom.
2. The DUT was tested in a body-worn configuration with the back of the radio placed parallel to the outer surface of the planar phantom. The attached plastic belt-clip accessory was touching the planar phantom and provided a 0.6 cm separation distance from the back of the DUT to the outer surface of the planar phantom. The DUT was evaluated for body-worn SAR with a generic ear-bud lapel-microphone audio accessory connected to the audio port.
3. The RF conducted output power of the DUT could not be measured due to a non-detachable antenna. The DUT was evaluated for SAR at the maximum conducted power level preset by the manufacturer.
4. The DUT was evaluated for SAR at the maximum ERP level measured prior to the SAR evaluation (see ERP data table on page 6) at Celltech Labs' 3-meter Open Area Test Site using the signal substitution method in accordance with ANSI/TIA-603-C-2004 (see reference [6]).
5. The power drift of the DUT during the SAR evaluations was measured by the DASY4 system.
6. A SAR-versus-Time power drift evaluation was performed in the test configuration that reported the maximum-scaled SAR level. See Appendix A (SAR Test Plots) for SAR-versus-Time power drift evaluation plot.
7. The area scan evaluation was performed with a fully charged battery. After the area scan was completed the radio was cooled down and the battery was replaced with a fully charged battery prior to the zoom scan evaluation.
8. The DUT was tested in unmodulated continuous transmit operation (Continuous Wave mode at 100% duty cycle) with the transmit key constantly depressed. For a push-to-talk device the 50% duty cycle compensation reported assumes a transmit/receive cycle of equal time base.
9. The SAR evaluations were performed using a Plexiglas planar phantom.
10. The SAR evaluations were performed within 24 hours of the system performance check.

6.0 EVALUATION PROCEDURES

- (i) The evaluation was performed in the applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.
- (ii) For body-worn and face-held devices a planar phantom was used.
- The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm.

An area scan was determined as follows:

- Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.
- A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are >2 dB from the global maximum. The remaining maxima are then used to position the cube scans.

A 1g and 10g spatial peak SAR was determined as follows:

- Extrapolation is used to find the points between the dipole center of the probe and the surface of the phantom. This data cannot be measured, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.4 mm (see probe calibration document in Appendix F). The extrapolation was based on trivariate quadratics computed from the previously calculated 3D interpolated points nearest the phantom surface.
- Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).
- A zoom scan volume of 32 mm x 32 mm x 30 mm (5 x 5 x 7 points) centered at the peak SAR location determined from the area scan is used for all zoom scans for devices with a transmit frequency < 800 MHz. Zoom scans for frequencies ≥ 800 MHz are determined with a scan volume of 30 mm x 30 mm x 30 mm (7 x 7 x 7) to ensure complete capture of the peak spatial-average SAR.

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOLI6000	IC ID:	906B-LI6000	
Model(s):	LI6000, LI6050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				

	Test Report Serial No.:	121505BBO-T709-S95U	Report Issue Date:	January 11, 2006
	Date(s) of Evaluation:	December 21-22, 2005	Report Issue No.:	S709-011106-R0
	Description of Test(s):	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

7.0 SYSTEM PERFORMANCE CHECK

Prior to the SAR evaluations a system check was performed using a Plexiglas planar phantom and 450MHz dipole (see Appendix E for system validation procedures). The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using an ALS-PR-DIEL Dielectric Probe Kit and HP 8753ET Network Analyzer (see Appendix C). A forward power of 250 mW was applied to the dipole and the system was verified to a tolerance of $\pm 10\%$ (see Appendix B for system performance check test plots).

SYSTEM PERFORMANCE CHECK EVALUATION

Test Date	450MHz Equiv. Tissue	SAR 1g (W/kg)			Dielectric Constant ϵ_r			Conductivity σ (mho/m)			ρ (Kg/m ³)	Amb. Temp. (°C)	Fluid Temp. (°C)	Fluid Depth (cm)	Humid. (%)	Barom. Press. (kPa)
		IEEE Target	Meas.	Dev.	IEEE Target	Meas.	Dev.	IEEE Target	Meas.	Dev.						
12/21/05	Brain	1.23 $\pm 10\%$	1.31	+6.5%	43.5 $\pm 5\%$	42.6	-2.1%	0.87 $\pm 5\%$	0.85	-2.3%	1000	22.4	22.1	≥ 15	30	102.1
12/22/05	Brain	1.23 $\pm 10\%$	1.31	+6.5%	43.5 $\pm 5\%$	42.7	-1.8%	0.87 $\pm 5\%$	0.85	-2.3%	1000	23.5	21.9	≥ 15	30	100.8

Note(s):

1. The ambient and fluid temperatures were measured prior to, and during, the fluid dielectric parameter check and the system performance check. The temperatures listed in the table above were consistent for all measurement periods.

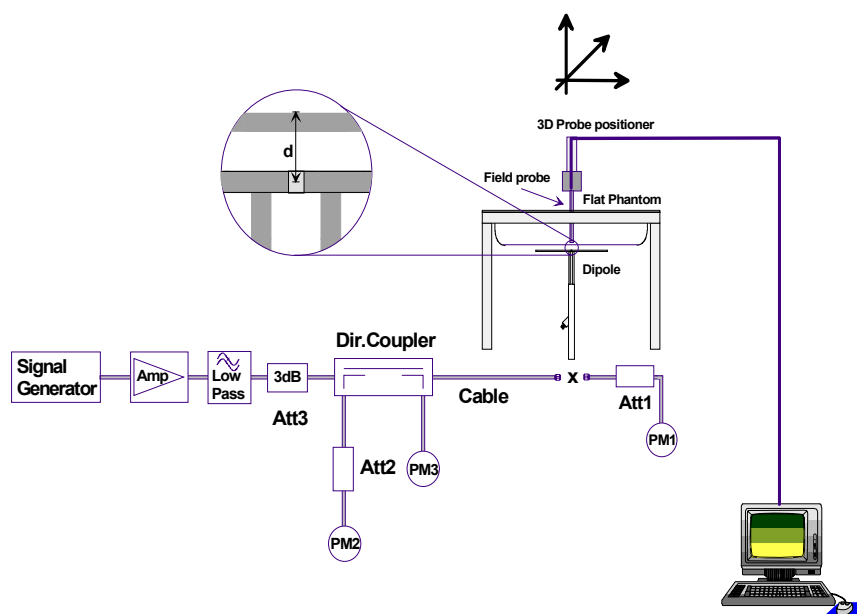


Figure 1. System Performance Check Setup Diagram



450 MHz Dipole Setup

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOLI6000	IC ID:	906B-LI6000	
Model(s):	LI6000, LI6050	Portable FRS/GMRS PTT Radio Transceiver	462.5500 - 467.7125 MHz			
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 8 of 40

	Test Report Serial No.: 121505BBO-T709-S95U		Report Issue Date:	January 11, 2006
	Date(s) of Evaluation: December 21-22, 2005		Report Issue No.:	S709-011106-R0
	Description of Test(s):	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

8.0 SIMULATED EQUIVALENT TISSUES

The 450MHz brain and body simulated tissue mixtures consist of a viscous gel using hydroxethylcellulose (HEC) gelling agent and saline solution. Preservation with a bactericide is added and visual inspection is made to ensure air bubbles are not trapped during the mixing process. The fluid was prepared according to standardized procedures, and measured for dielectric parameters (permittivity and conductivity).

SIMULATED TISSUE MIXTURES		
INGREDIENT	450 MHz Brain	450 MHz Body
	System Check & DUT Evaluation	DUT Evaluation
Water	38.56 %	52.00 %
Sugar	56.32 %	45.65 %
Salt	3.95 %	1.75 %
HEC	0.98 %	0.50 %
Bactericide	0.19 %	0.10 %

9.0 SAR SAFETY LIMITS

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1g of tissue)	1.60	8.0
Spatial Peak (hands/wrists/feet/ankles averaged over 10g)	4.0	20.0

Notes:

1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
2. Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOLI6000	IC ID:	906B-LI6000	
Model(s):	LI6000, LI6050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				

	Test Report Serial No.: 121505BBO-T709-S95U		Report Issue Date:	January 11, 2006
	Date(s) of Evaluation: December 21-22, 2005		Report Issue No.:	S709-011106-R0
	Description of Test(s):	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

10.0 ROBOT SYSTEM SPECIFICATIONS

Specifications

POSITIONER: Stäubli Unimation Corp. Robot Model: RX60L
Repeatability: 0.02 mm
No. of axis: 6

Data Acquisition Electronic (DAE) System

Cell Controller

Processor: AMD Athlon XP 2400+
Clock Speed: 2.0 GHz
Operating System: Windows XP Professional

Data Converter

Features: Signal Amplifier, multiplexer, A/D converter, and control logic
Software: DASY4 software
Connecting Lines: Optical downlink for data and status info.
 Optical uplink for commands and clock

DASY4 Measurement Server

Function: Real-time data evaluation for field measurements and surface detection
Hardware: PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM
Connections: COM1, COM2, DAE, Robot, Ethernet, Service Interface

E-Field Probe

Model: ET3DV6
Serial No.: 1387
Construction: Triangular core fiber optic detection system
Frequency: 10 MHz to 6 GHz
Linearity: ± 0.2 dB (30 MHz to 3 GHz)

Phantom(s)

Evaluation Phantom

Type: Side Planar Phantom
Shell Material: Plexiglas
Bottom Thickness: 2.0 mm $\pm$ 0.1 mm
Outer Dimensions: 75.0 cm (L) x 22.5 cm (W) x 20.5 cm (H); Back Plane: 25.7 cm (H)

Validation Phantom (≤ 450 MHz)

Type: Planar Phantom
Shell Material: Plexiglas
Bottom Thickness: 6.2 mm $\pm$ 0.1 mm
Outer Dimensions: 86.0 cm (L) x 39.5 cm (W) x 21.8 cm (H)

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOLI6000	IC ID:	906B-LI6000	
Model(s):	LI6000, LI6050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				

	Test Report Serial No.:	121505BBO-T709-S95U	Report Issue Date:	January 11, 2006
	Date(s) of Evaluation:	December 21-22, 2005	Report Issue No.:	S709-011106-R0
	Description of Test(s):	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

11.0 PROBE SPECIFICATION (ET3DV6)

Construction:	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g. glycol)
Calibration:	In air from 10 MHz to 2.5 GHz In brain simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy $\pm 8\%$)
Frequency:	10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)
Directivity:	± 0.2 dB in brain tissue (rotation around probe axis) ± 0.4 dB in brain tissue (rotation normal to probe axis)
Dynamic Range:	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Surface Detection:	± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces
Dimensions:	Overall length: 330 mm Tip length: 16 mm Body diameter: 12 mm Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm
Application:	General dosimetry up to 3 GHz Compliance tests of mobile phone



**ET3DV6
E-Field Probe**

12.0 SIDE PLANAR PHANTOM

The side planar phantom is constructed of Plexiglas material with a 2.0 mm shell thickness for face-held and body-worn SAR evaluations of portable radio transceivers. The side planar phantom is mounted on the side of the DASY4 compact system table.



Plexiglas Side Planar Phantom

13.0 VALIDATION PLANAR PHANTOM

The validation planar phantom is constructed of Plexiglas material with a 6.0 mm shell thickness for SAR validations at 450MHz and below. The validation planar phantom is mounted in the table of the DASY4 compact system.



Validation Planar Phantom

14.0 DEVICE HOLDER

The DASY4 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65° . The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.



Device Holder

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOLI6000	IC ID:	906B-LI6000	
Model(s):	LI6000, LI6050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					

	Test Report Serial No.:	121505BBO-T709-S95U	Report Issue Date:	January 11, 2006
	Date(s) of Evaluation:	December 21-22, 2005	Report Issue No.:	S709-011106-R0
	Description of Test(s):	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

15.0 TEST EQUIPMENT LIST

USED	TEST EQUIPMENT	ASSET NO.	SERIAL NO.	DATE CALIBRATED		CALIBRATION DUE DATE
	DESCRIPTION					
x	Schmid & Partner DASY4 System	-	-	-	-	-
x	-DASY4 Measurement Server	00158	1078	N/A	N/A	N/A
x	-Robot	00046	599396-01	N/A	N/A	N/A
x	-DAE4	00019	353	15Jun05	15Jun06	15Jun06
	-DAE3	00018	370	25Jan05	25Jan06	25Jan06
x	-ET3DV6 E-Field Probe	00016	1387	18Mar05	18Mar06	18Mar06
	-ET3DV6 E-Field Probe	00017	1590	20May05	20May06	20May06
	-EX3DV4 E-Field Probe	00125	3547	21Jan05	21Jan06	21Jan06
	-300MHz Validation Dipole	00023	135	25Oct05	25Oct06	25Oct06
x	-450MHz Validation Dipole	00024	136	25Oct05	25Oct06	25Oct06
	-835MHz Validation Dipole	00022	411	Brain	30Mar05	30Mar06
				Body	12Apr05	12Apr06
	-900MHz Validation Dipole	00020	054	Brain	10Jun05	10Jun06
				Body	10Jun05	10Jun06
	-1800MHz Validation Dipole	00021	247	Brain	14Jun05	14Jun06
				Body	14Jun05	14Jun06
	-1900MHz Validation Dipole	00032	151	Brain	17Jun05	17Jun06
				Body	22Apr05	22Apr06
	-2450MHz Validation Dipole	00025	150	Brain	20Sep05	20Sep06
				Body	22Apr05	22Apr06
	-5000MHz Validation Dipole	00126	1031	Brain	11Jan05	11Jan06
				Body	11Jan05	11Jan06
	-SAM Phantom V4.0C	00154	1033	N/A	N/A	N/A
	-Barski Planar Phantom	00155	03-01	N/A	N/A	N/A
x	-Plexiglas Side Planar Phantom	00156	161	N/A	N/A	N/A
x	-Plexiglas Validation Planar Phantom	00157	137	N/A	N/A	N/A
	HP 85070C Dielectric Probe Kit	00033	N/A	N/A	N/A	N/A
x	ALS-PR-DIEL Dielectric Probe Kit	00160	260-00953	N/A	N/A	N/A
x	Gigatronics 8652A Power Meter	00110	1835801	16Apr05	16Apr06	16Apr06
	Gigatronics 8652A Power Meter	00008	1835267	29Apr05	29Apr06	29Apr06
x	Gigatronics 80701A Power Sensor	00012	1834350	12Sep05	12Sep06	12Sep06
	Gigatronics 80701A Power Sensor	00014	1833699	07Sep05	07Sep06	07Sep06
x	Gigatronics 80701A Power Sensor	00109	1834366	16Apr05	16Apr06	16Apr06
x	HP 8753ET Network Analyzer	00134	US39170292	04May05	04May06	04May06
x	HP 8648D Signal Generator	00005	3847A00611	29Apr05	29Apr06	29Apr06
x	Rohde & Schwarz SMR40 Signal Generator	00006	100104	12Apr05	12Apr06	12Apr06
x	Amplifier Research 5S1G4 Power Amplifier	00106	26235	N/A	N/A	N/A

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOLI6000	IC ID:	906B-LI6000	
Model(s):	LI6000, LI6050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				

	Test Report Serial No.:	121505BBO-T709-S95U	Report Issue Date:	January 11, 2006
	Date(s) of Evaluation:	December 21-22, 2005	Report Issue No.:	S709-011106-R0
	Description of Test(s):	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

16.0 MEASUREMENT UNCERTAINTIES

UNCERTAINTY BUDGET FOR DEVICE EVALUATION						
Error Description	Uncertainty Value ±%	Probability Distribution	Divisor	ci 1g	Uncertainty Value ±% (1g)	V _i or V _{eff}
Measurement System						
Probe calibration	4.0	Normal	1	1	4.0	∞
Axial isotropy of the probe	4.7	Rectangular	1.732050808	0.7	1.9	∞
Spherical isotropy of the probe	9.6	Rectangular	1.732050808	0.7	3.9	∞
Spatial resolution	0	Rectangular	1.732050808	1	0.0	∞
Boundary effects	1	Rectangular	1.732050808	1	0.6	∞
Probe linearity	4.7	Rectangular	1.732050808	1	2.7	∞
Detection limit	1	Rectangular	1.732050808	1	0.6	∞
Readout electronics	0.3	Normal	1	1	0.3	∞
Response time	0.8	Rectangular	1.732050808	1	0.5	∞
Integration time	2.6	Rectangular	1.732050808	1	1.5	∞
RF ambient conditions	3	Rectangular	1.732050808	1	1.7	∞
Mech. constraints of robot	0.4	Rectangular	1.732050808	1	0.2	∞
Probe positioning	2.9	Rectangular	1.732050808	1	1.7	∞
Extrapolation & integration	1	Rectangular	1.732050808	1	0.6	∞
Test Sample Related						
Device positioning	2.9	Normal	1	1	2.9	12
Device holder uncertainty	3.6	Normal	1	1	3.6	8
Power drift	5	Rectangular	1.732050808	1	2.9	∞
Phantom and Setup						
Phantom uncertainty	4	Rectangular	1.732050808	1	2.3	∞
Liquid conductivity (target)	5	Rectangular	1.732050808	0.64	1.8	∞
Liquid conductivity (measured)	2.5	Normal	1	0.64	1.6	∞
Liquid permittivity (target)	5	Rectangular	1.732050808	0.6	1.7	∞
Liquid permittivity (measured)	2.5	Normal	1	0.6	1.5	∞
Combined Standard Uncertainty					9.88	
Expanded Uncertainty (k=2)					19.77	

Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 (see reference [5])

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOLI6000	IC ID:	906B-LI6000	
Model(s):	LI6000, LI6050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				

	Test Report Serial No.: 121505BBO-T709-S95U		Report Issue Date: January 11, 2006	
	Date(s) of Evaluation: December 21-22, 2005		Report Issue No.: S709-011106-R0	
	Description of Test(s): RF Exposure SAR		FCC 47 CFR §2.1093 IC RSS-102 Issue 2	

MEASUREMENT UNCERTAINTIES (Cont.)

UNCERTAINTY BUDGET FOR SYSTEM VALIDATION						
Error Description	Uncertainty Value ±%	Probability Distribution	Divisor	ci 1g	Uncertainty Value ±% (1g)	V _i or V _{eff}
Measurement System						
Probe calibration	4.0	Normal	1	1	4.0	∞
Axial isotropy of the probe	4.7	Rectangular	1.732050808	1	2.7	∞
Spherical isotropy of the probe	0	Rectangular	1.732050808	1	0.0	∞
Spatial resolution	0	Rectangular	1.732050808	1	0.0	∞
Boundary effects	1	Rectangular	1.732050808	1	0.6	∞
Probe linearity	4.7	Rectangular	1.732050808	1	2.7	∞
Detection limit	1	Rectangular	1.732050808	1	0.6	∞
Readout electronics	0.3	Normal	1	1	0.3	∞
Response time	0	Rectangular	1.732050808	1	0.0	∞
Integration time	0	Rectangular	1.732050808	1	0.0	∞
RF ambient conditions	3	Rectangular	1.732050808	1	1.7	∞
Mech. constraints of robot	0.4	Rectangular	1.732050808	1	0.2	∞
Probe positioning	2.9	Rectangular	1.732050808	1	1.7	∞
Extrapolation & integration	1	Rectangular	1.732050808	1	0.6	∞
Test Sample Related						
Dipole Positioning	2	Normal	1.732050808	1	1.2	∞
Power & Power Drift	4.7	Normal	1.732050808	1	2.7	∞
Phantom and Setup						
Phantom uncertainty	4	Rectangular	1.732050808	1	2.3	∞
Liquid conductivity (target)	5	Rectangular	1.732050808	0.64	1.8	∞
Liquid conductivity (measured)	2.5	Normal	1	0.64	1.6	∞
Liquid permittivity (target)	5	Rectangular	1.732050808	0.6	1.7	∞
Liquid permittivity (measured)	2.5	Normal	1	0.6	1.5	∞
Combined Standard Uncertainty					7.93	
Expanded Uncertainty (k=2)					15.87	

Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 (see reference [5])

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOLI6000	IC ID:	906B-LI6000	
Model(s):	LI6000, LI6050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				

	Test Report Serial No.:	121505BBO-T709-S95U	Report Issue Date:	January 11, 2006
	Date(s) of Evaluation:	December 21-22, 2005	Report Issue No.:	S709-011106-R0
	Description of Test(s):	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

17.0 REFERENCES

- [1] Federal Communications Commission, "Radiofrequency radiation exposure evaluation: portable devices", Rule Part 47 CFR §2.1093: 1999.
- [2] Health Canada, "Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz", Safety Code 6: 1999.
- [3] Federal Communications Commission, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- [4] Industry Canada, "Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)", Radio Standards Specification RSS-102 Issue 2: November 2005.
- [5] IEEE Standard 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques": December 2003.
- [6] ANSI/TIA-603-C, "Land Mobile FM or PM Communications Equipment - Measurement and Performance Standards": December 2004.

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOLI6000	IC ID:	906B-LI6000	
Model(s):	LI6000, LI6050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					

	Test Report Serial No.:	121505BBO-T709-S95U		Report Issue Date:	January 11, 2006
	Date(s) of Evaluation:	December 21-22, 2005		Report Issue No.:	S709-011106-R0
	Description of Test(s):	RF Exposure	SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

APPENDIX A - SAR MEASUREMENT DATA

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOLI6000	IC ID:	906B-LI6000	
Model(s):	LI6000, LI6050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 16 of 40

	Test Report Serial No.: 121505BBO-T709-S95U		Report Issue Date:	January 11, 2006
	Date(s) of Evaluation: December 21-22, 2005		Report Issue No.:	S709-011106-R0
	Description of Test(s): RF Exposure SAR		FCC 47 CFR §2.1093	IC RSS-102 Issue 2

Date Tested: 12/22/2005

Face-Held SAR - GMRS Mode - Channel 4 - 462.6375 MHz

DUT: Cobra Model: LI6000; Type: Portable UHF FRS/GMRS PTT Radio Transceiver; Serial: 0025783

Ambient Temp: 24.1 °C; Fluid Temp: 22.0 °C; Barometric Pressure: 100.8 kPa; Humidity: 30%

Communication System: FM UHF
 7.4 V 950 mAh Li-ion Battery Pack
 RF Output Power: 0.372 Watts (ERP)
 Frequency: 462.6375 MHz; Channel 4; Duty Cycle: 1:1
 Medium: HSL450 ($\sigma = 0.85 \text{ mho/m}$; $\epsilon_r = 42.7$; $\rho = 1000 \text{ kg/m}^3$)


- Probe: ET3DV6 - SN1387; ConvF(7.5, 7.5, 7.5); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Face-Held SAR - 2.5 cm Separation Distance from Front of DUT to Planar Phantom/Area Scan (8x13x1):

Measurement grid: dx=15mm, dy=15mm

Face-Held SAR - 2.5 cm Separation Distance from Front of DUT to Planar Phantom/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 23.4 V/m; Power Drift = 0.0370 dB
 Peak SAR (extrapolated) = 0.763 W/kg
SAR(1 g) = 0.486 mW/g; SAR(10 g) = 0.340 mW/g

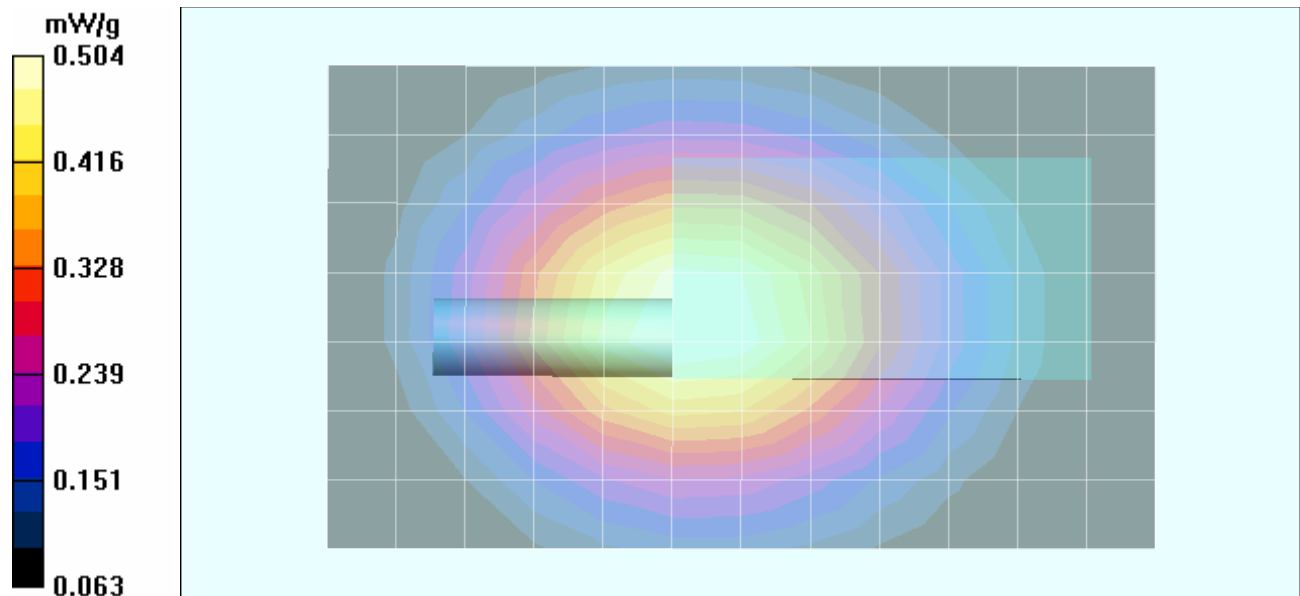

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOLI6000	IC ID:	906B-LI6000	
Model(s):	LI6000, LI6050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				
Page 17 of 40						

	Test Report Serial No.: 121505BBO-T709-S95U		Report Issue Date:	January 11, 2006
	Date(s) of Evaluation: December 21-22, 2005		Report Issue No.:	S709-011106-R0
	Description of Test(s):	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

Z-Axis Scan

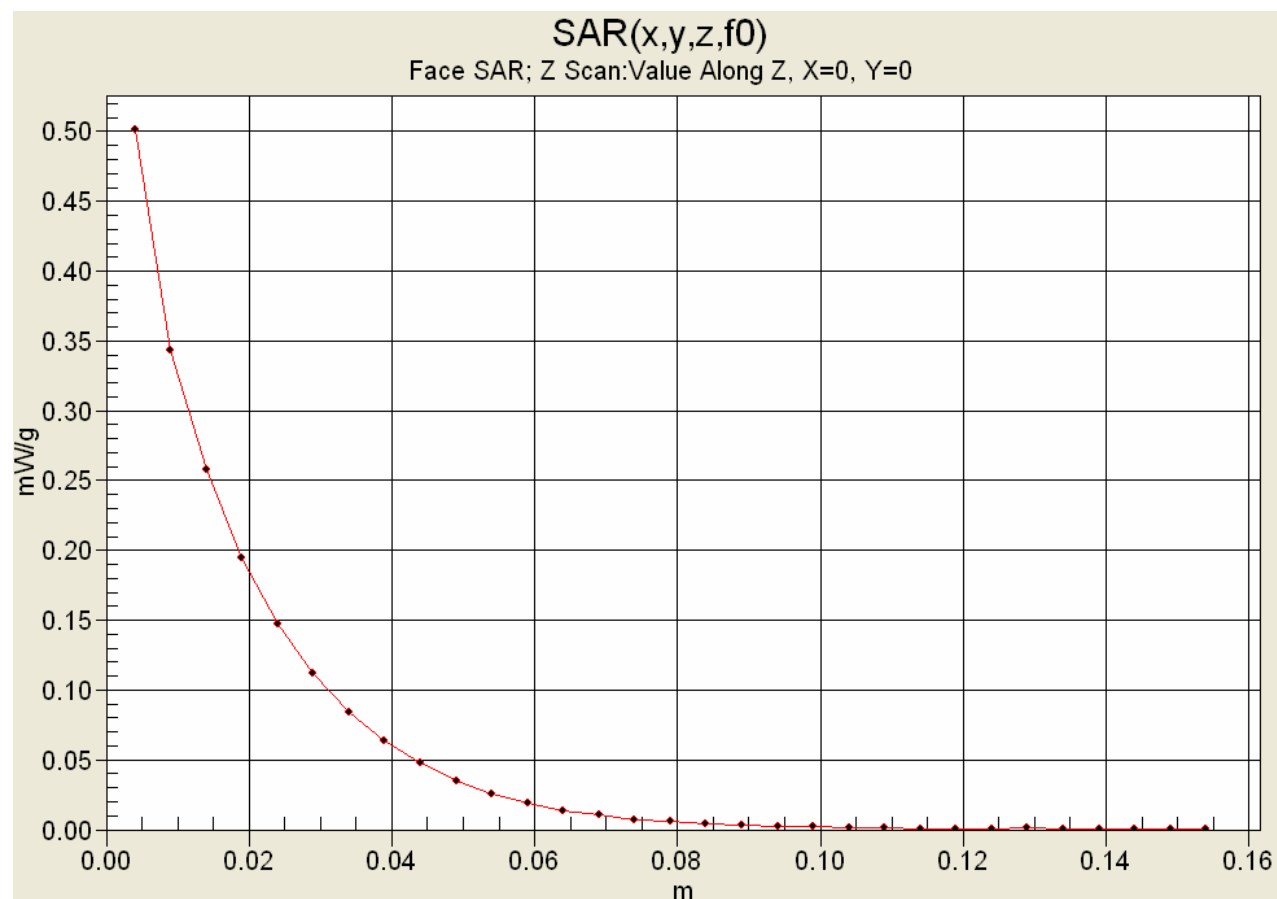

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOLI6000	IC ID:	906B-LI6000	
Model(s):	LI6000, LI6050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 18 of 40

	Test Report Serial No.: 121505BBO-T709-S95U		Report Issue Date:	January 11, 2006
	Date(s) of Evaluation: December 21-22, 2005		Report Issue No.:	S709-011106-R0
	Description of Test(s):	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

Date Tested: 12/21/2005

Body-Worn SAR - GMRS Mode - Channel 4 - 462.6375 MHz

DUT: Cobra Model: LI6000; Type: Portable UHF FRS/GMRS PTT Radio Transceiver; Serial: 0025783

Body-Worn Accessory: Plastic Belt-Clip; Audio Accessory: Generic Earbud with Lapel-Microphone

Ambient Temp: 23.6 °C; Fluid Temp: 22.8 °C; Barometric Pressure: 102.0 kPa; Humidity: 30%

Communication System: FM UHF
 7.4 V 950 mAh Li-ion Battery Pack
 RF Output Power: 0.372 Watts (ERP)
 Frequency: 462.6375 MHz; Duty Cycle: 1:1
 Medium: M450 ($\sigma = 0.95$ mho/m; $\epsilon_r = 56.7$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1387; ConvF(7.5, 7.5, 7.5); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body-Worn SAR - 0.6 cm Belt-Clip Separation Distance from Back of DUT to Planar Phantom/Area Scan (8x13x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn SAR - 0.6 cm Belt-Clip Separation Distance from Back of DUT to Planar Phantom/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 28.1 V/m; Power Drift = -1.43 dB
 Peak SAR (extrapolated) = 1.36 W/kg
SAR(1 g) = 0.797 mW/g; SAR(10 g) = 0.528 mW/g

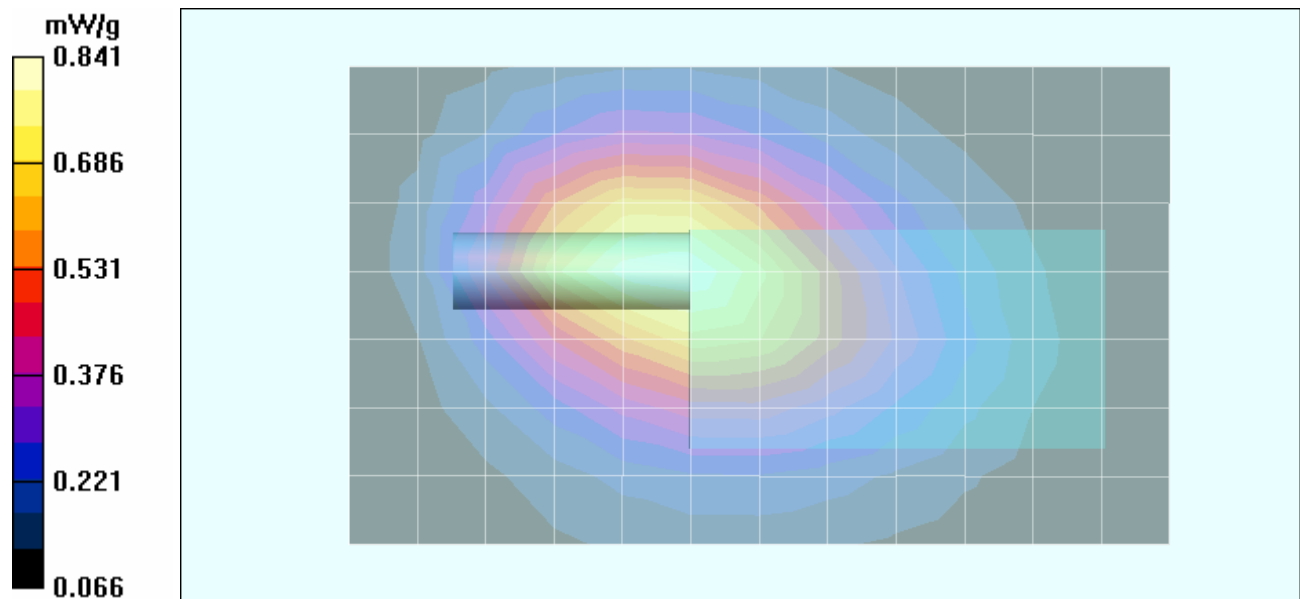

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOLI6000	IC ID:	906B-LI6000	
Model(s):	LI6000, LI6050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				

	Test Report Serial No.:	121505BBO-T709-S95U	Report Issue Date:	January 11, 2006
	Date(s) of Evaluation:	December 21-22, 2005	Report Issue No.:	S709-011106-R0
	Description of Test(s):	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

Z-Axis Scan

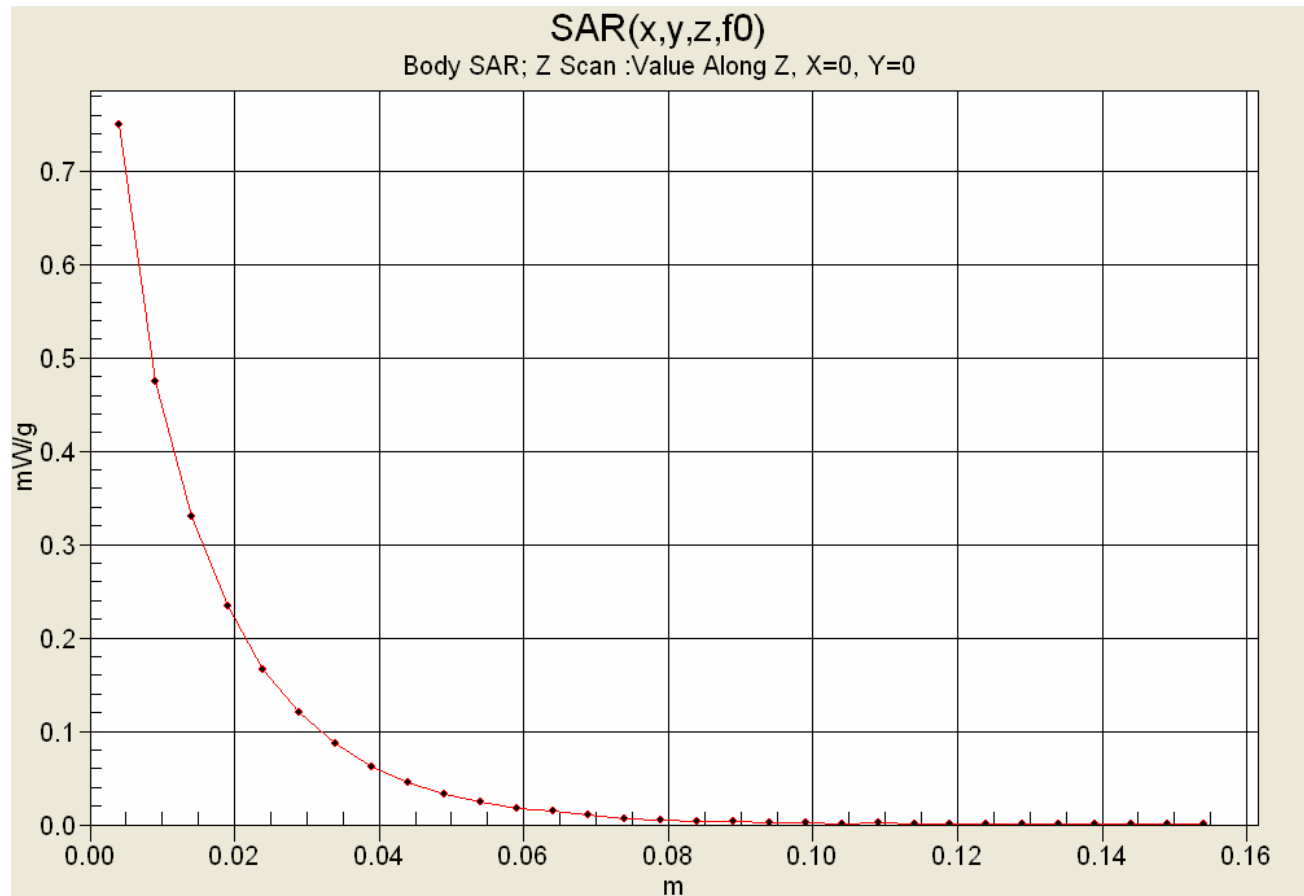


Applicant:	Cobra Electronics Corporation	FCC ID:	BBOLI6000	IC ID:	906B-LI6000	
Model(s):	LI6000, LI6050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 20 of 40

	Test Report Serial No.: 121505BBO-T709-S95U		Report Issue Date:	January 11, 2006
	Date(s) of Evaluation: December 21-22, 2005		Report Issue No.:	S709-011106-R0
	Description of Test(s):	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

SAR-versus-Time Power Drift Evaluation

Body-Worn Configuration with belt-clip and ear-mic
Lithium-ion Battery Pack 7.4V, 950mAh
GMRS Channel 4 - 462.6375 MHz

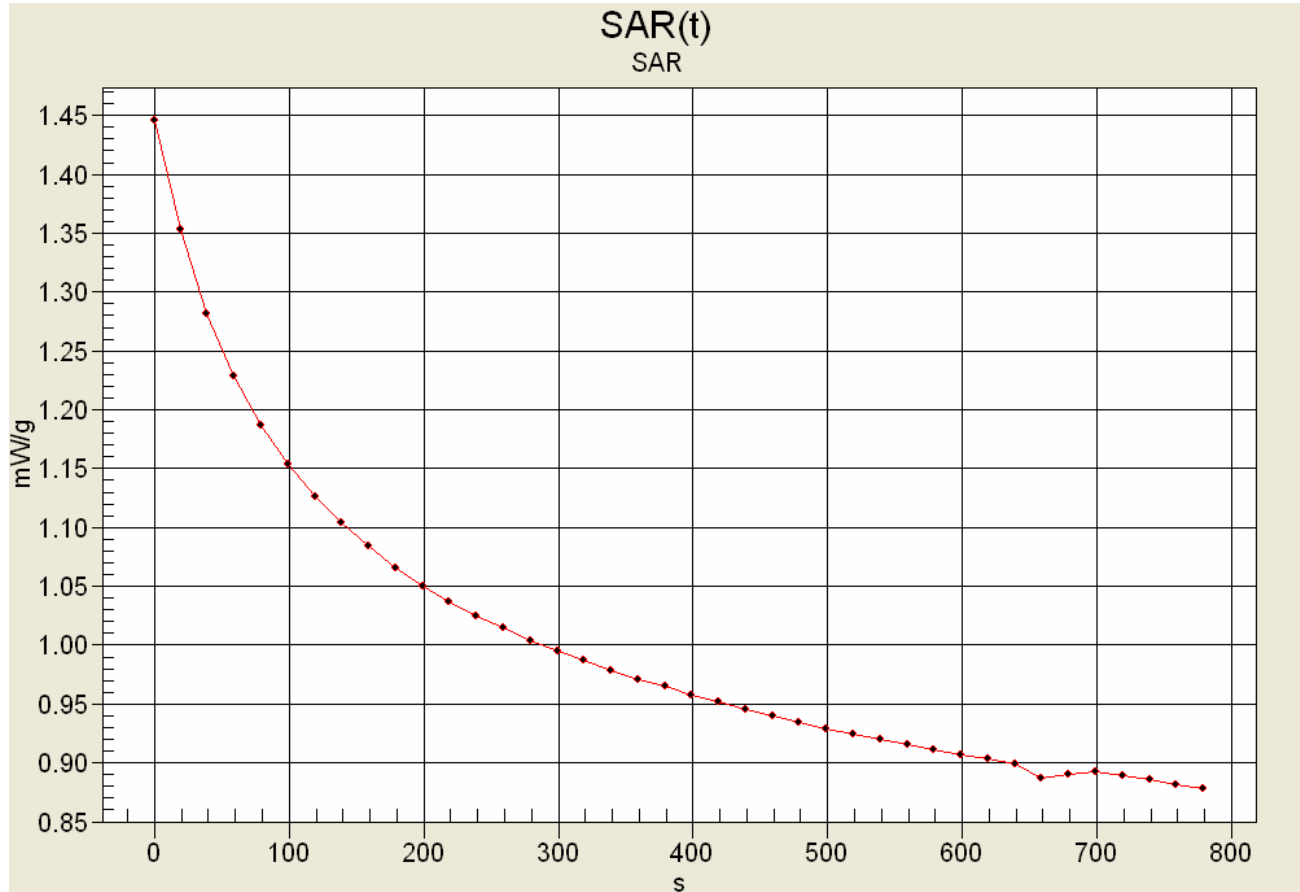

Max SAR: 1.44339 mW/g
Low SAR: 0.87612 mW/g (-2.1682 dB)
SAR after 340s: 0.975801 mW/g (-1.7002 dB)
(340s = Zoom Scan Duration)
(780s = Area Scan Duration)

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOLI6000	IC ID:	906B-LI6000	
Model(s):	LI6000, LI6050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 21 of 40

	Test Report Serial No.:	121505BBO-T709-S95U	Report Issue Date:	January 11, 2006
	Date(s) of Evaluation:	December 21-22, 2005	Report Issue No.:	S709-011106-R0
	Description of Test(s):	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

APPENDIX B - SYSTEM PERFORMANCE CHECK DATA

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOLI6000	IC ID:	906B-LI6000	
Model(s):	LI6000, LI6050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					

	Test Report Serial No.: 121505BBO-T709-S95U		Report Issue Date:	January 11, 2006
	Date(s) of Evaluation: December 21-22, 2005		Report Issue No.:	S709-011106-R0
	Description of Test(s):	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

Date Tested: 12/21/2005

System Performance Check (Brain) - 450 MHz Dipole

DUT: Dipole 450 MHz; Model: D450V2; Type: System Performance Check; Serial: 136; Calibrated: 10/25/2005

Ambient Temp: 22.4 °C; Fluid Temp: 22.1 °C; Barometric Pressure: 102.1 kPa; Humidity: 30%

Communication System: CW

Forward Conducted Power: 250 mW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: HSL450 ($\sigma = 0.85 \text{ mho/m}$; $\epsilon_r = 42.6$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(7.5, 7.5, 7.5); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: Validation Planar; Type: Plexiglas; Serial: 137
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

450 MHz Dipole - System Performance Check/Area Scan (6x11x1):

Measurement grid: dx=15mm, dy=15mm


450 MHz Dipole - System Performance Check/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 40.4 V/m; Power Drift = -0.008 dB

Peak SAR (extrapolated) = 2.28 W/kg


SAR(1 g) = 1.31 mW/g; SAR(10 g) = 0.847 mW/g

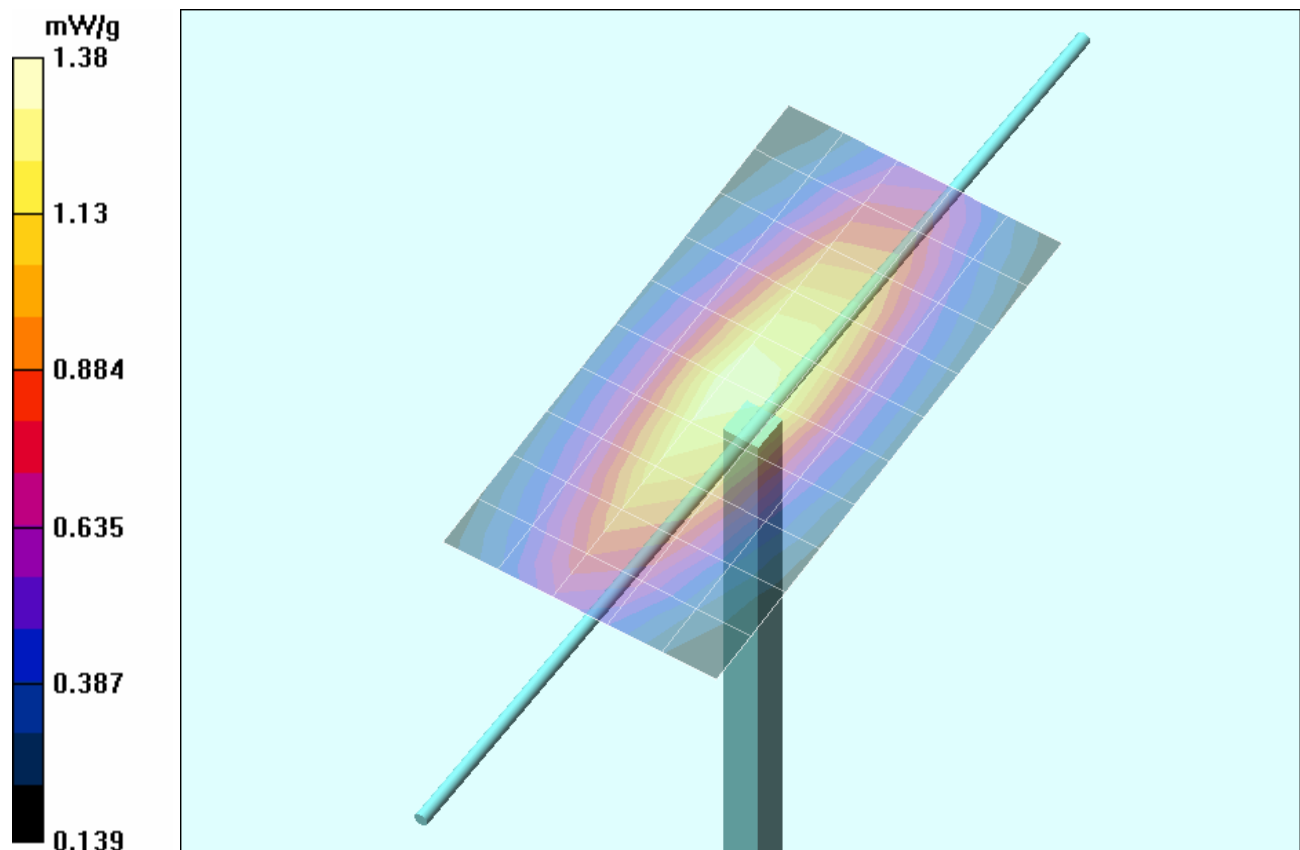

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOLI6000	IC ID:	906B-LI6000	
Model(s):	LI6000, LI6050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				

	Test Report Serial No.: 121505BBO-T709-S95U		Report Issue Date:	January 11, 2006
	Date(s) of Evaluation: December 21-22, 2005		Report Issue No.:	S709-011106-R0
	Description of Test(s):	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

Z-Axis Scan

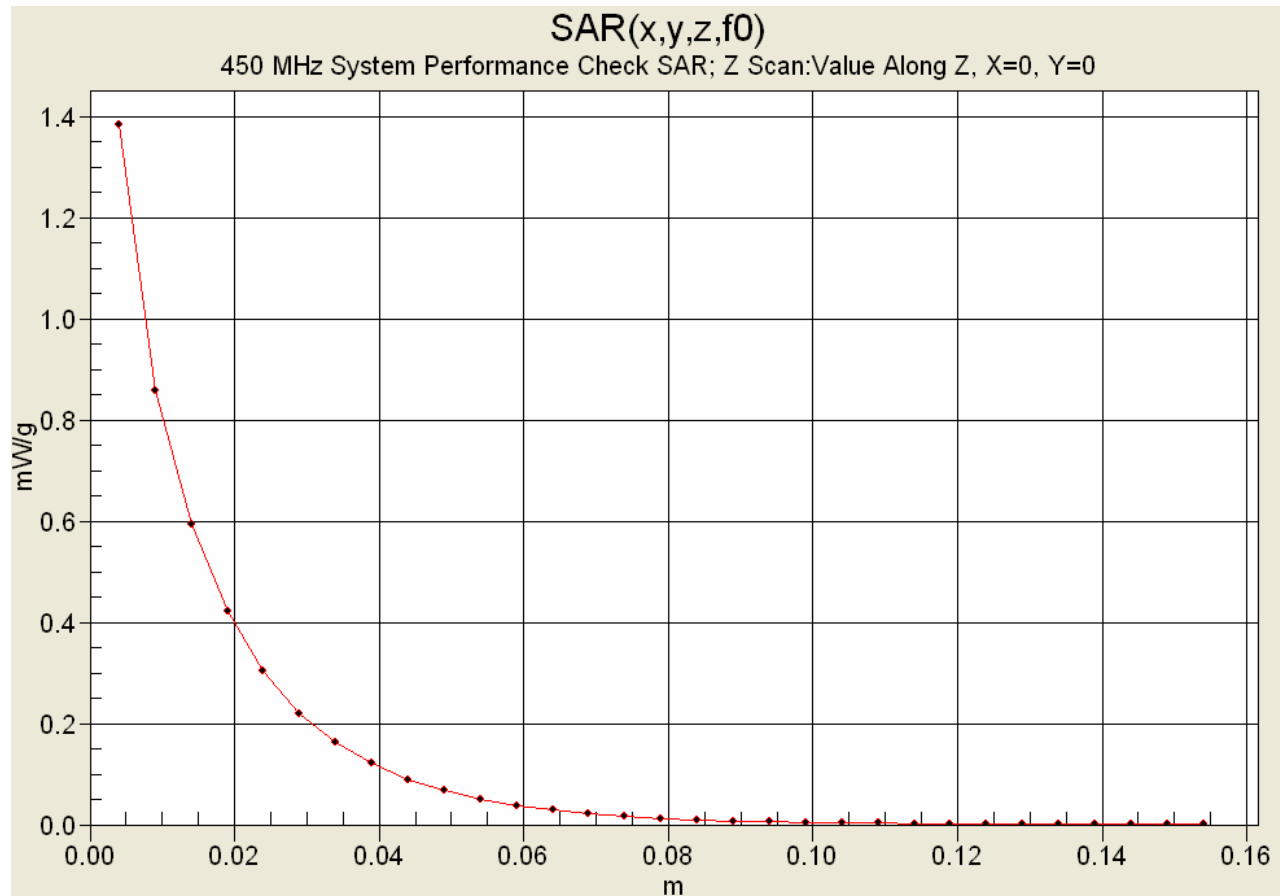

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOLI6000	IC ID:	906B-LI6000	
Model(s):	LI6000, LI6050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				

	Test Report Serial No.: 121505BBO-T709-S95U		Report Issue Date:	January 11, 2006
	Date(s) of Evaluation: December 21-22, 2005		Report Issue No.:	S709-011106-R0
	Description of Test(s):	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

Date Tested: 12/22/2005

System Performance Check (Brain) - 450 MHz Dipole

DUT: Dipole 450 MHz; Model: D450V2; Type: System Performance Check; Serial: 136; Calibrated: 10/25/2005

Ambient Temp: 23.5 °C; Fluid Temp: 21.9 °C; Barometric Pressure: 100.8 kPa; Humidity: 30%

Communication System: CW

Forward Conducted Power: 250 mW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: HSL450 ($\sigma = 0.85$ mho/m; $\epsilon_r = 42.7$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(7.5, 7.5, 7.5); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: Validation Planar; Type: Plexiglas; Serial: 137
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

450 MHz Dipole - System Performance Check/Area Scan (6x11x1):

Measurement grid: dx=15mm, dy=15mm


450 MHz Dipole - System Performance Check/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 41.0 V/m; Power Drift = -0.076 dB

Peak SAR (extrapolated) = 2.29 W/kg


SAR(1 g) = 1.31 mW/g; SAR(10 g) = 0.849 mW/g

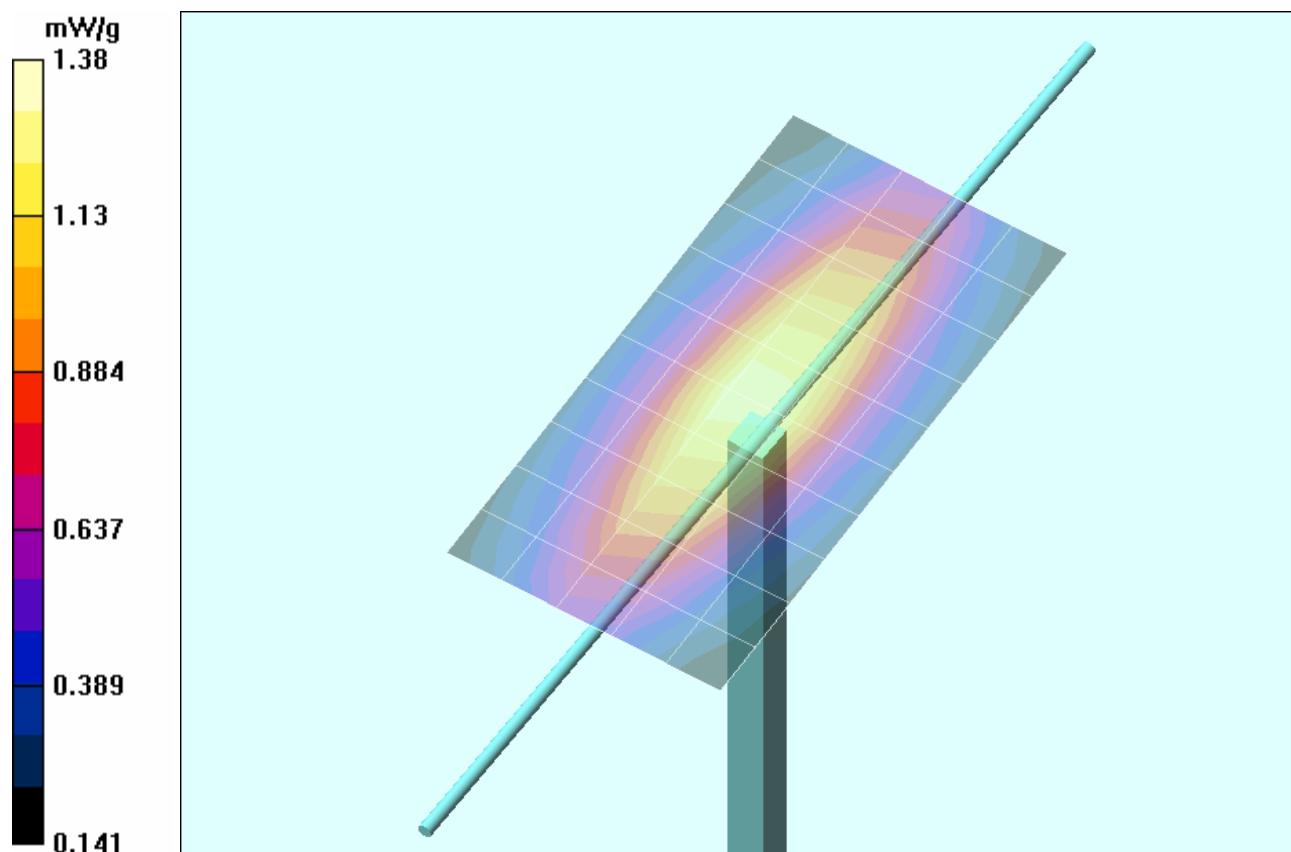

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOLI6000	IC ID:	906B-LI6000	
Model(s):	LI6000, LI6050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				

	Test Report Serial No.: 121505BBO-T709-S95U		Report Issue Date:	January 11, 2006
	Date(s) of Evaluation: December 21-22, 2005		Report Issue No.:	S709-011106-R0
	Description of Test(s):	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

Z-Axis Scan

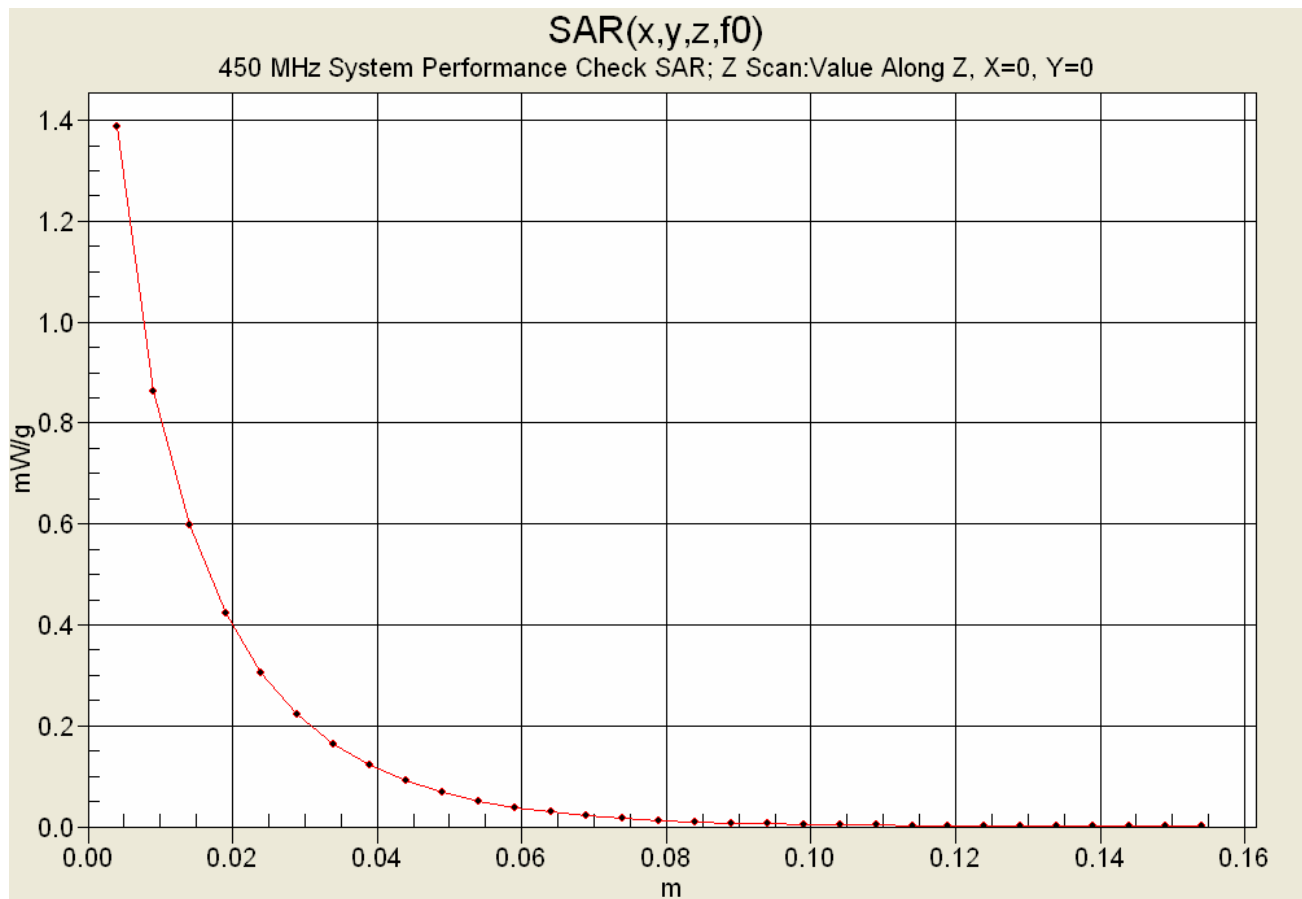

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOLI6000	IC ID:	906B-LI6000	
Model(s):	LI6000, LI6050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 26 of 40

	Test Report Serial No.:	121505BBO-T709-S95U	Report Issue Date:	January 11, 2006
	Date(s) of Evaluation:	December 21-22, 2005	Report Issue No.:	S709-011106-R0
	Description of Test(s):	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOLI6000	IC ID:	906B-LI6000	
Model(s):	LI6000, LI6050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2006 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					

	Test Report Serial No.: 121505BBO-T709-S95U		Report Issue Date:	January 11, 2006
	Date(s) of Evaluation: December 21-22, 2005		Report Issue No.:	S709-011106-R0
	Description of Test(s):	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

450 MHz System Performance Check (Brain)

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

Wed 21/Dec/2005

Frequency(GHz)

FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon

FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eHFCC_sH	Test_e	Test_s
0.3500	44.70	0.87	45.29 0.76
0.3600	44.58	0.87	45.11 0.77
0.3700	44.46	0.87	44.87 0.78
0.3800	44.34	0.87	44.22 0.79
0.3900	44.22	0.87	44.27 0.79
0.4000	44.10	0.87	44.12 0.81
0.4100	43.98	0.87	44.08 0.81
0.4200	43.86	0.87	43.28 0.82
0.4300	43.74	0.87	43.38 0.83
0.4400	43.62	0.87	43.22 0.84
0.4500	43.50	0.87	42.56 0.85
0.4600	43.45	0.87	42.79 0.86
0.4700	43.40	0.87	42.34 0.86
0.4800	43.34	0.87	42.27 0.87
0.4900	43.29	0.87	42.00 0.88
0.5000	43.24	0.87	42.04 0.89
0.5100	43.19	0.87	41.88 0.89
0.5200	43.14	0.88	41.59 0.91
0.5300	43.08	0.88	41.11 0.91
0.5400	43.03	0.88	41.08 0.92
0.5500	42.98	0.88	40.96 0.93

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOLI6000	IC ID:	906B-LI6000	
Model(s):	LI6000, LI6050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 28 of 40

	Test Report Serial No.: 121505BBO-T709-S95U		Report Issue Date:	January 11, 2006
	Date(s) of Evaluation: December 21-22, 2005		Report Issue No.:	S709-011106-R0
	Description of Test(s):	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

450 MHz DUT Evaluation (Body)

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

Wed 21/Dec/2005

Frequency(GHz)

FCC_eHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon

FCC_sHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma

FCC_eB FCC Limits for Body Epsilon

FCC_sB FCC Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.3500	57.70	0.93	58.34	0.86
0.3600	57.60	0.93	58.20	0.87
0.3700	57.50	0.93	57.95	0.88
0.3800	57.40	0.93	57.76	0.89
0.3900	57.30	0.93	57.54	0.90
0.4000	57.20	0.93	57.25	0.90
0.4100	57.10	0.93	57.31	0.91
0.4200	57.00	0.94	56.95	0.92
0.4300	56.90	0.94	56.96	0.94
0.4400	56.80	0.94	56.86	0.94
0.4500	56.70	0.94	56.67	0.95
0.4600	56.66	0.94	56.45	0.96
0.4700	56.62	0.94	56.15	0.96
0.4800	56.58	0.94	56.27	0.97
0.4900	56.54	0.94	56.05	0.98
0.5000	56.51	0.94	55.89	0.98
0.5100	56.47	0.94	55.90	0.99
0.5200	56.43	0.95	55.68	1.01
0.5300	56.39	0.95	55.53	1.02
0.5400	56.35	0.95	55.33	1.02
0.5500	56.31	0.95	55.35	1.03

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOLI6000	IC ID:	906B-LI6000	
Model(s):	LI6000, LI6050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 29 of 40

	Test Report Serial No.: 121505BBO-T709-S95U		Report Issue Date:	January 11, 2006
	Date(s) of Evaluation: December 21-22, 2005		Report Issue No.:	S709-011106-R0
	Description of Test(s):	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

450 MHz System Performance Check & DUT Evaluation (Brain)

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

Thu 22/Dec/2005

Frequency(GHz)

FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon

FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eHFCC_sH	Test_e	Test_s
0.3500	44.70	0.87	45.12 0.76
0.3600	44.58	0.87	44.88 0.77
0.3700	44.46	0.87	44.55 0.78
0.3800	44.34	0.87	44.27 0.79
0.3900	44.22	0.87	44.03 0.80
0.4000	44.10	0.87	43.70 0.80
0.4100	43.98	0.87	43.43 0.81
0.4200	43.86	0.87	43.13 0.82
0.4300	43.74	0.87	43.21 0.83
0.4400	43.62	0.87	42.77 0.84
0.4500	43.50	0.87	42.72 0.85
0.4600	43.45	0.87	42.45 0.86
0.4700	43.40	0.87	41.94 0.86
0.4800	43.34	0.87	41.80 0.87
0.4900	43.29	0.87	41.79 0.88
0.5000	43.24	0.87	41.57 0.89
0.5100	43.19	0.87	41.52 0.90
0.5200	43.14	0.88	41.32 0.91
0.5300	43.08	0.88	41.07 0.92
0.5400	43.03	0.88	40.93 0.92
0.5500	42.98	0.88	40.73 0.93

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOLI6000	IC ID:	906B-LI6000	
Model(s):	LI6000, LI6050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				

	Test Report Serial No.:		121505BBO-T709-S95U	Report Issue Date:		January 11, 2006
	Date(s) of Evaluation:		December 21-22, 2005	Report Issue No.:		S709-011106-R0
	Description of Test(s):		RF Exposure SAR	FCC 47 CFR §2.1093		IC RSS-102 Issue 2


APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOLI6000	IC ID:	906B-LI6000	
Model(s):	LI6000, LI6050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 31 of 40

	Test Report Serial No.:	121505BBO-T709-S95U	Report Issue Date:	January 11, 2006
	Date(s) of Evaluation:	December 21-22, 2005	Report Issue No.:	S709-011106-R0
	Description of Test(s):	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

FACE-HELD SAR TEST SETUP PHOTOGRAPHS

2.5 cm Separation Distance from Front of DUT to Planar Phantom



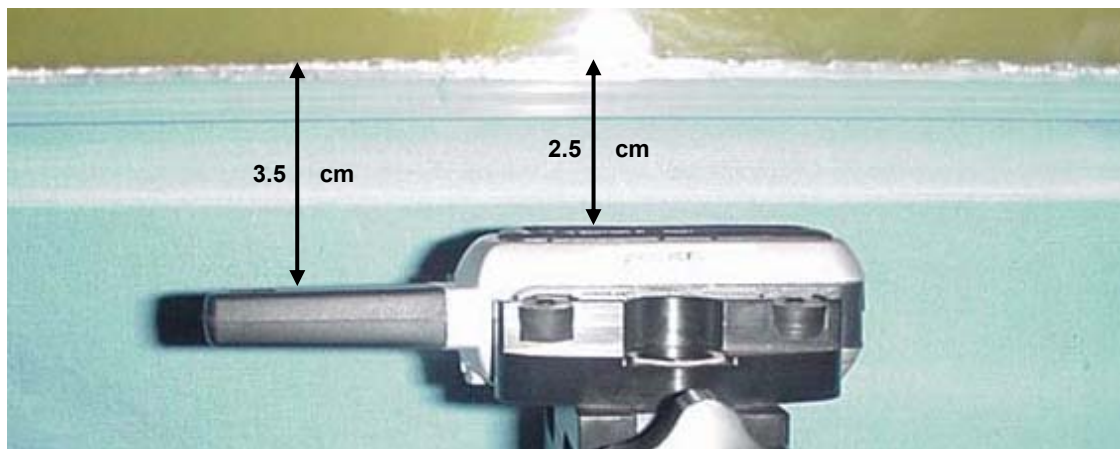


Applicant:	Cobra Electronics Corporation	FCC ID:	BBOLI6000	IC ID:	906B-LI6000	
Model(s):	LI6000, LI6050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				

BODY-WORN SAR TEST SETUP PHOTOGRAPHS

0.6 cm Belt-Clip Separation Distance from Back of DUT to Planar Phantom

With Generic Earbud and Lapel-Microphone Audio Accessory

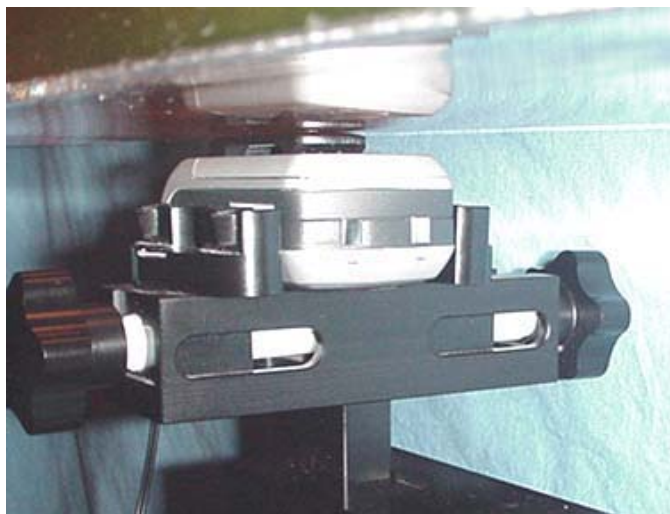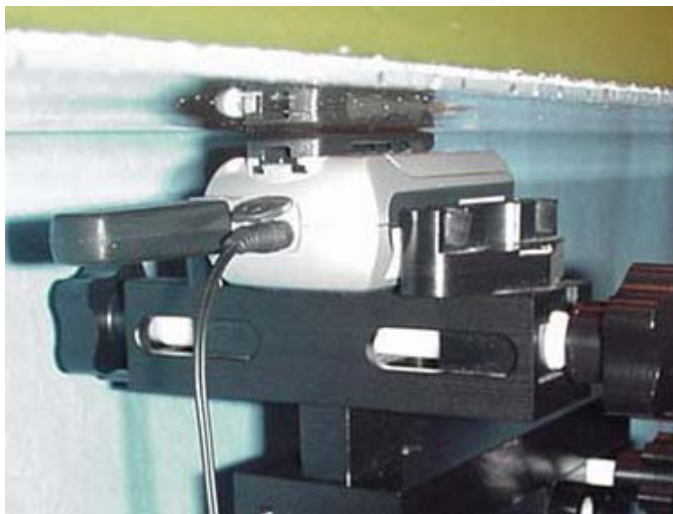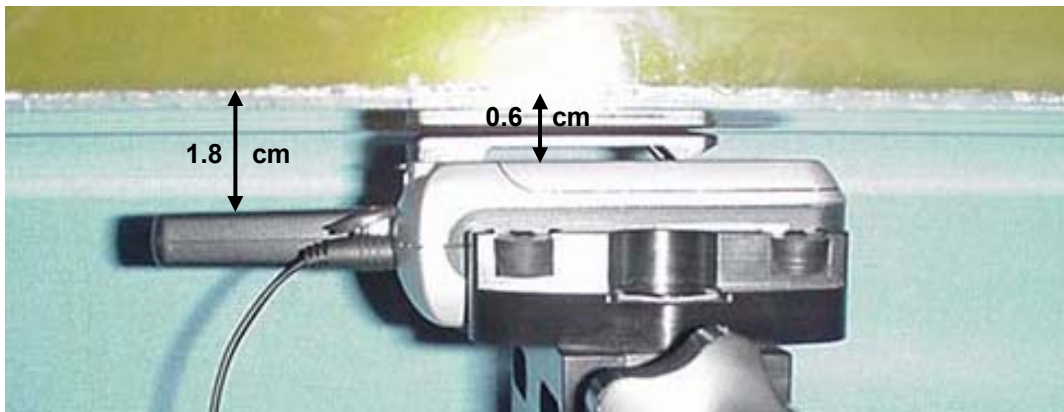


	Test Report Serial No.: 121505BBO-T709-S95U		Report Issue Date:	January 11, 2006
	Date(s) of Evaluation: December 21-22, 2005		Report Issue No.:	S709-011106-R0
	Description of Test(s): RF Exposure SAR		FCC 47 CFR §2.1093	IC RSS-102 Issue 2

SAR TEST SETUP PHOTOGRAPHS



Face-Held SAR Test Setup Configuration

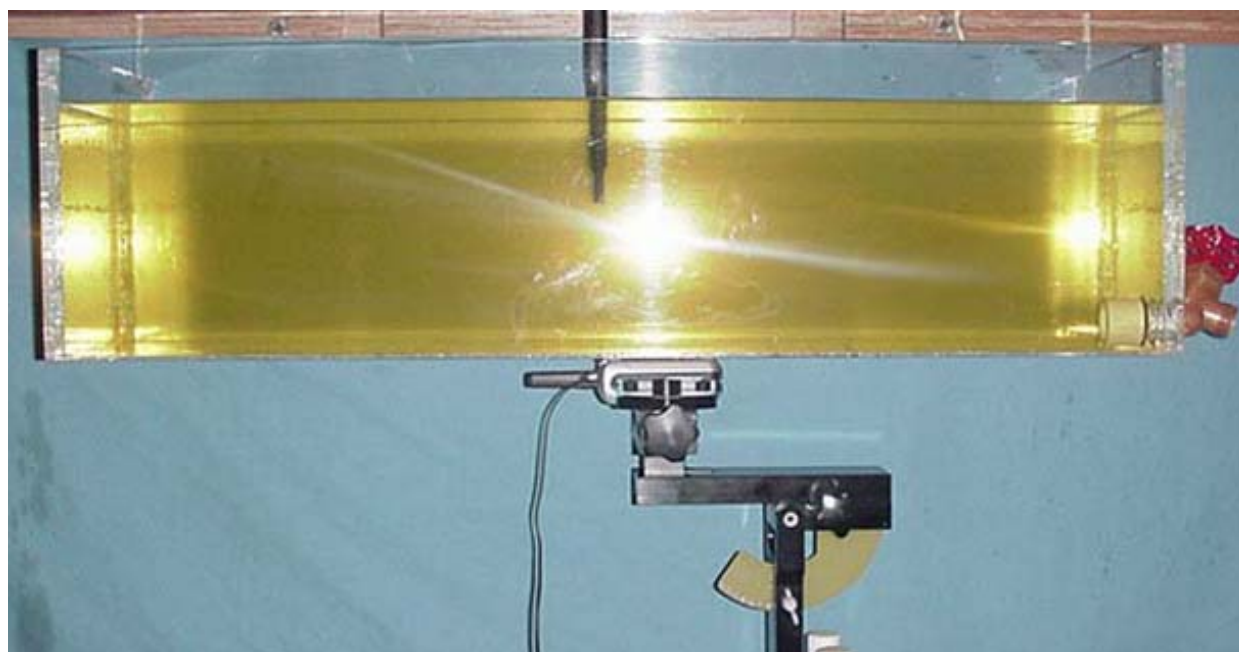

Body-Worn SAR Test Setup Configuration

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOLI6000	IC ID:	906B-LI6000	
Model(s):	LI6000, LI6050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				

	Test Report Serial No.: 121505BBO-T709-S95U		Report Issue Date:	January 11, 2006
	Date(s) of Evaluation: December 21-22, 2005		Report Issue No.:	S709-011106-R0
	Description of Test(s):	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

DUT PHOTOGRAPHS



Front of DUT



Back of DUT



Back of DUT with Plastic Belt-Clip



Top end of DUT



Bottom end of DUT

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOLI6000	IC ID:	906B-LI6000	
Model(s):	LI6000, LI6050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 35 of 40

	Test Report Serial No.: 121505BBO-T709-S95U		Report Issue Date:	January 11, 2006
	Date(s) of Evaluation: December 21-22, 2005		Report Issue No.:	S709-011106-R0
	Description of Test(s):	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

DUT PHOTOGRAPHS



Left Side of DUT with Plastic Belt-Clip



Right Side of DUT with Plastic Belt-Clip



Plastic Belt-Clip Accessory (6 mm thickness)

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOLI6000	IC ID:	906B-LI6000	
Model(s):	LI6000, LI6050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 36 of 40

	Test Report Serial No.:	121505BBO-T709-S95U	Report Issue Date:	January 11, 2006
	Date(s) of Evaluation:	December 21-22, 2005	Report Issue No.:	S709-011106-R0
	Description of Test(s):	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

DUT PHOTOGRAPHS



DUT with Generic Earbud & Lapel-Microphone Audio Accessory

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOLI6000	IC ID:	906B-LI6000	
Model(s):	LI6000, LI6050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				

	Test Report Serial No.: 121505BBO-T709-S95U		Report Issue Date:	January 11, 2006
	Date(s) of Evaluation: December 21-22, 2005		Report Issue No.:	S709-011106-R0
	Description of Test(s):	RF Exposure SAR	FCC 47 CFR §2.1093	IC RSS-102 Issue 2

DUT PHOTOGRAPHS



DUT Battery Compartment



DUT with Lithium-ion Battery Pack

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOLI6000	IC ID:	906B-LI6000	
Model(s):	LI6000, LI6050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 38 of 40

	Test Report Serial No.:		121505BBO-T709-S95U	Report Issue Date:		January 11, 2006
	Date(s) of Evaluation:		December 21-22, 2005	Report Issue No.:		S709-011106-R0
	Description of Test(s):		RF Exposure SAR	FCC 47 CFR §2.1093		IC RSS-102 Issue 2

APPENDIX E - SYSTEM VALIDATION

Applicant:	Cobra Electronics Corporation	FCC ID:	BBOLI6000	IC ID:	906B-LI6000	
Model(s):	LI6000, LI6050	Portable FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 39 of 40

450 MHz SYSTEM VALIDATION DIPOLE

Type:

450 MHz Validation Dipole

Asset Number:

00024

Serial Number:

136

Place of Calibration:

Celltech Labs Inc.

Date of Calibration:

October 25, 2005

Celltech Labs Inc. hereby certifies that this device has been calibrated on the date indicated above.

Calibrated by:




Approved by:





1. Dipole Construction & Electrical Characteristics

The validation dipole was constructed in accordance with the IEEE Std "Recommended Practice for Determining the Spatial-Peak Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques". The electrical properties were measured using an HP 8753E Network Analyzer. The network analyzer was calibrated to the validation dipole N-type connector feed point using an HP85032E Type N calibration kit. The dipole was placed parallel to a planar phantom at a separation distance of 15.0mm from the simulating fluid using a loss-less dielectric spacer. The measured input impedance is:

Feed point impedance at 450MHz	$\text{Re}\{Z\} = 58.518\Omega$ $\text{Im}\{Z\} = 7.0977\Omega$
Return Loss at 450MHz	-20.357dB

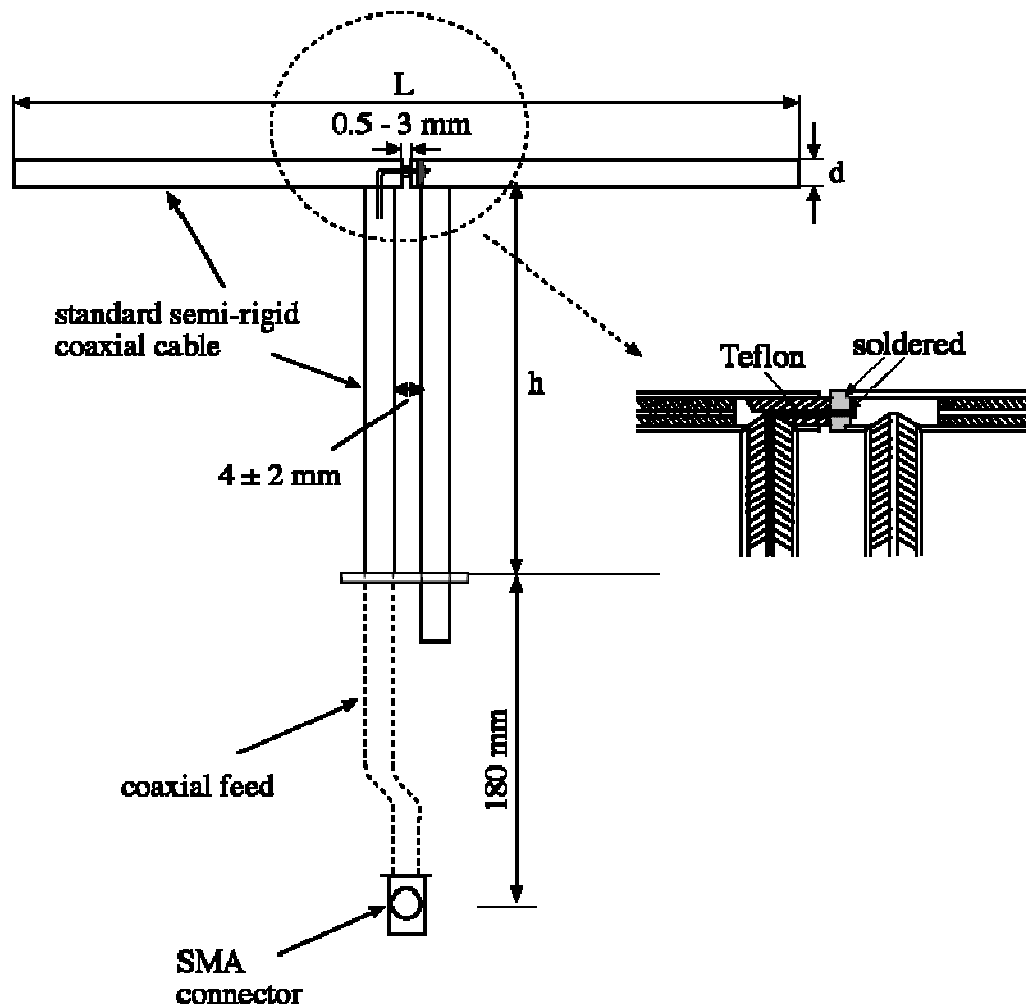

2. Validation Dipole VSWR Data

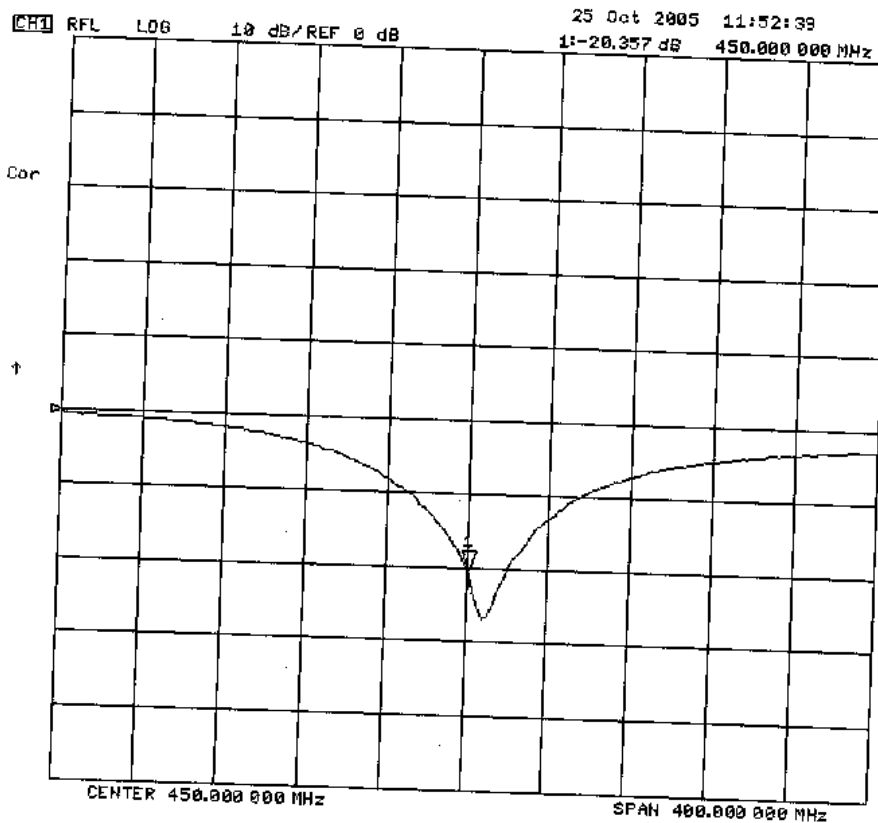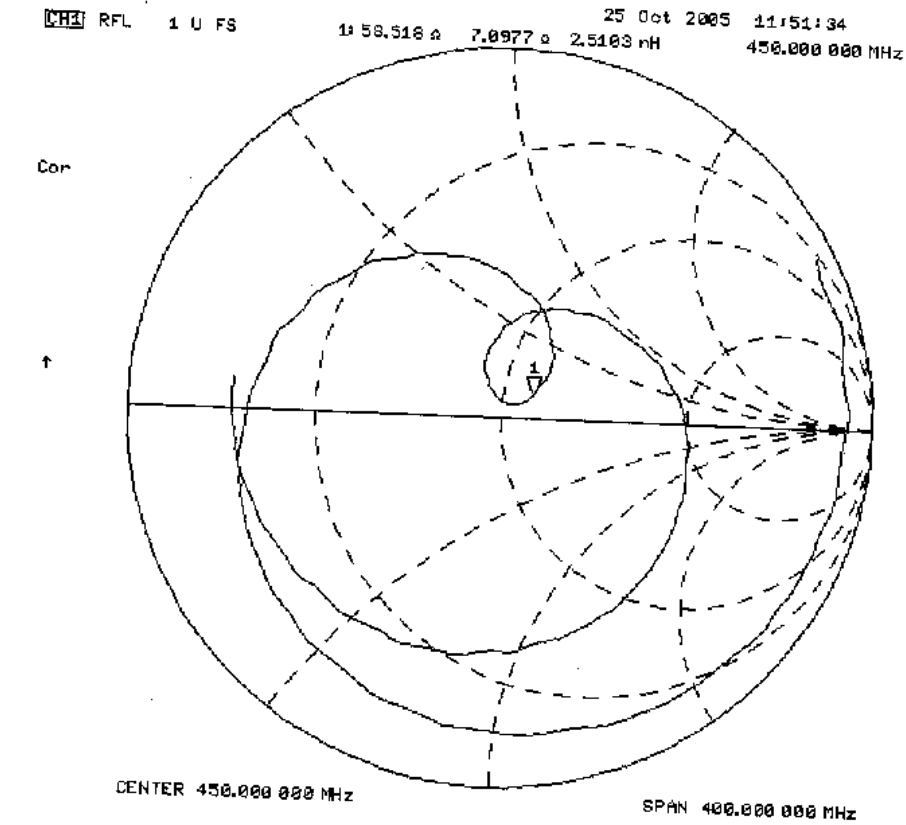

3. Validation Dipole Dimensions

Frequency (MHz)	L (mm)	h (mm)	d (mm)
300	420.0	250.0	6.2
450	288.0	167.0	6.2
835	161.0	89.8	3.6
900	149.0	83.3	3.6
1450	89.1	51.7	3.6
1800	72.0	41.7	3.6
1900	68.0	39.5	3.6
2000	64.5	37.5	3.6
2450	51.8	30.6	3.6
3000	41.5	25.0	3.6


4. Validation Phantom

The validation phantom was constructed using relatively low-loss tangent Plexiglas material. The inner dimensions of the phantom are as follows:

Length: 83.5 cm
Width: 36.9 cm
Height: 21.8 cm

The bottom section of the validation phantom is constructed of 6.2 ± 0.1 mm Plexiglas.

5. Dimensions of Plexiglas Planar Phantom

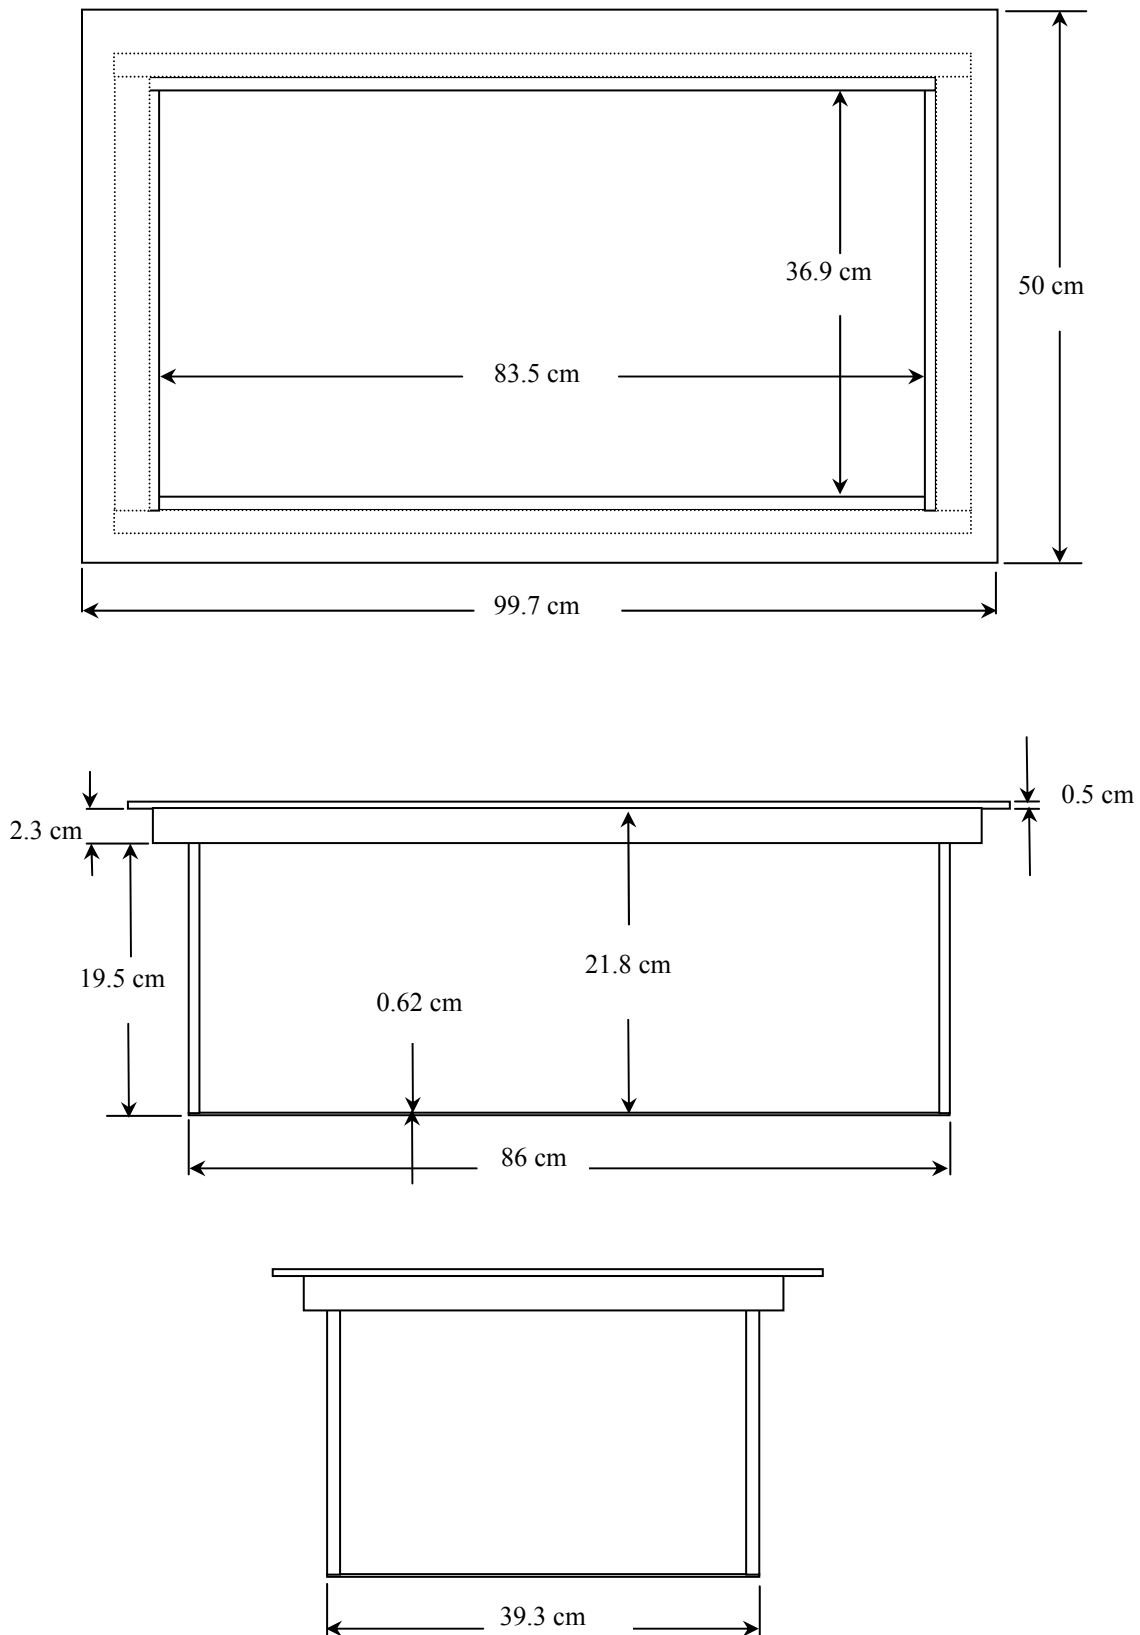

6. 450 MHz System Validation Setup



7. 450 MHz Validation Dipole Setup



8. Measurement Conditions

The planar phantom was filled with 450 MHz brain tissue simulant with the following parameters:

Relative Permittivity: 43.2
 Conductivity: 0.84 mho/m
 Fluid Temperature: 22.5 °C
 Fluid Depth: ≥ 15.0 cm

Environmental Conditions:


Ambient Temperature: 23.5 °C
 Humidity: 34 %
 Barometric Pressure: 101.4 kPa

The 450 MHz brain tissue simulant consists of the following ingredients:

Ingredient	Percentage by weight
Water	38.56%
Sugar	56.32%
Salt	3.95%
HEC	0.98%
Dowicil 75	0.19%
450 MHz Target Dielectric Parameters at 22 °C	$\epsilon_r = 43.5$ $\sigma = 0.87$ S/m

9. SAR Measurement

The SAR measurement was performed with the E-field probe in mechanical detection mode only. The setup and determination of the forward power into the dipole was performed using the following procedures.

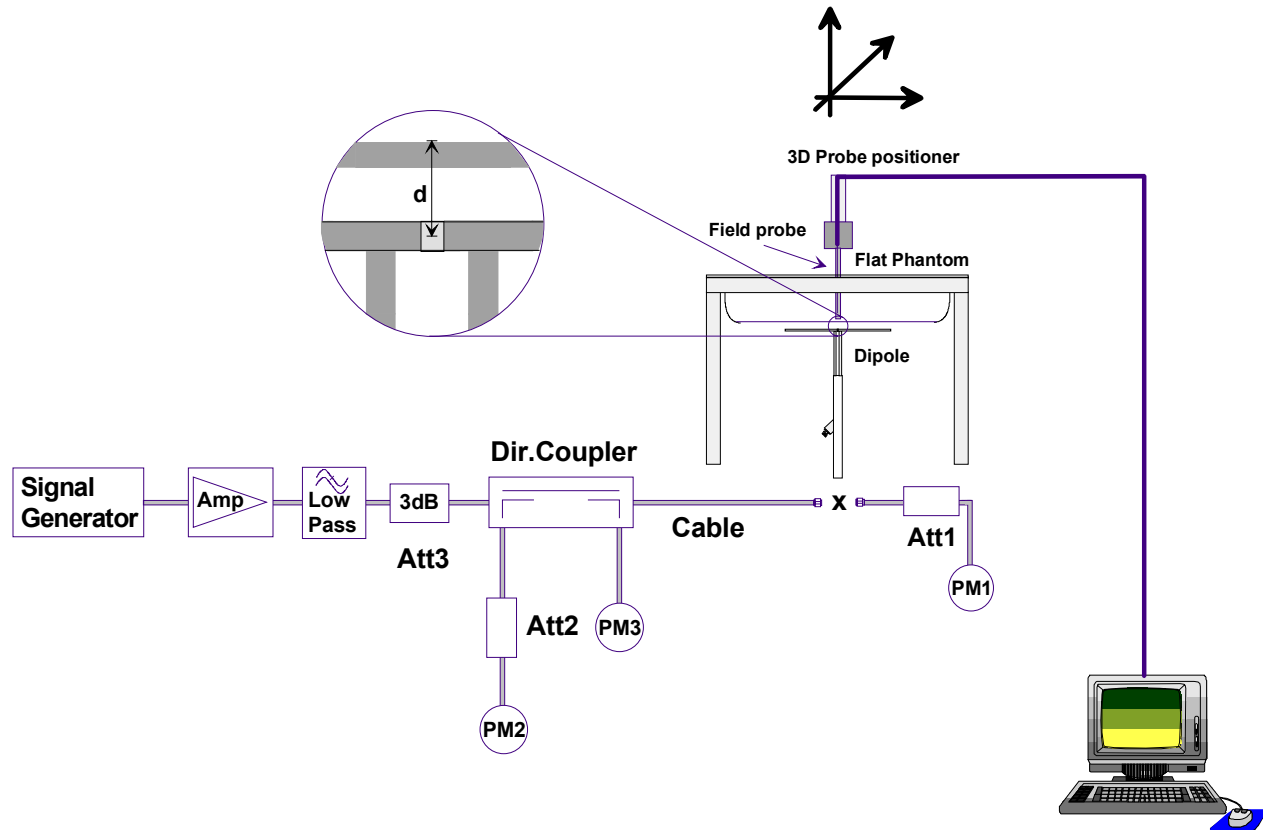

First the power meter PM1 (including attenuator Att1) is connected to the cable to measure the forward power at the location of the dipole connector (X). The signal generator is adjusted for the desired forward power at the dipole connector (taking into account the attenuation of Att1) as read by power meter PM2. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2. If the signal generator does not allow adjustment in 0.01dB steps, the remaining difference at PM2 must be taken into consideration. PM3 records the reflected power from the dipole to ensure that the value is not changed from the previous value. The reflected power should be 20dB below the forward power.

10. Validation Dipole SAR Test Results

Ten SAR measurements were performed in order to achieve repeatability and to establish an average target value.

Validation Measurement	SAR @ 0.25W Input averaged over 1g	SAR @ 1W Input averaged over 1g	SAR @ 0.25W Input averaged over 10g	SAR @ 1W Input averaged over 10g	Peak SAR @ 0.25W Input
Test 1	1.24	4.96	0.800	3.200	1.31
Test 2	1.24	4.96	0.798	3.192	1.31
Test 3	1.24	4.96	0.798	3.192	1.31
Test 4	1.24	4.96	0.799	3.196	1.31
Test 5	1.24	4.96	0.799	3.196	1.31
Test 6	1.24	4.96	0.799	3.196	1.31
Test 7	1.24	4.96	0.801	3.204	1.31
Test 8	1.24	4.96	0.802	3.208	1.31
Test 9	1.25	5.00	0.807	3.228	1.31
Test 10	1.25	5.00	0.806	3.224	1.31
Average Value	1.24	4.97	0.801	3.204	1.31

The results have been normalized to 1W (forward power) into the dipole.

Target SAR @ 1 Watt Input averaged over 1 gram (W/kg)		Measured SAR @ 1 Watt Input averaged over 1 gram (W/kg)	Deviation from Target (%)	Target SAR @ 1 Watt Input averaged over 10 grams (W/kg)		Measured SAR @ 1 Watt Input averaged over 10 grams (W/kg)	Deviation from Target (%)
4.90	+/- 10%	4.97	+1.4%	3.30	+/- 10%	3.204	-2.9%

450 MHz System Validation (Brain) - October 25, 2005

DUT: Dipole 450 MHz; Model: D450V2; Serial: 136; Calibrated: 10/25/2005
 Ambient Temp: 23.5 °C; Fluid Temp: 22.5 °C; Barometric Pressure: 101.4 kPa; Humidity: 34%
 Communication System: CW
 Frequency: 450 MHz; Duty Cycle: 1:1
 Medium: HSL450 ($\sigma = 0.84$ mho/m; $\epsilon_r = 43.2$; $\rho = 1000$ kg/m³)
 - Probe: ET3DV6 - SN1387; ConvF(7.5, 7.5, 7.5); Calibrated: 18/03/2005
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn353; Calibrated: 15/06/2005
 - Phantom: Validation Planar; Type: Plexiglas; Serial: 137
 - Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

450 MHz System Validation/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 1.27 mW/g

450 MHz System Validation/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 39.3 V/m; Power Drift = -0.025 dB
SAR(1 g) = 1.24 mW/g; SAR(10 g) = 0.800 mW/g
 Maximum value of SAR (measured) = 1.31 mW/g

450 MHz System Validation/Zoom Scan 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 39.1 V/m; Power Drift = 0.004 dB
SAR(1 g) = 1.24 mW/g; SAR(10 g) = 0.798 mW/g
 Maximum value of SAR (measured) = 1.31 mW/g

450 MHz System Validation/Zoom Scan 3 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 39.0 V/m; Power Drift = 0.014 dB
SAR(1 g) = 1.24 mW/g; SAR(10 g) = 0.798 mW/g
 Maximum value of SAR (measured) = 1.31 mW/g

450 MHz System Validation/Zoom Scan 4 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 39.0 V/m; Power Drift = 0.040 dB
SAR(1 g) = 1.24 mW/g; SAR(10 g) = 0.799 mW/g
 Maximum value of SAR (measured) = 1.31 mW/g

450 MHz System Validation/Zoom Scan 5 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 39.0 V/m; Power Drift = 0.014 dB
SAR(1 g) = 1.24 mW/g; SAR(10 g) = 0.799 mW/g
 Maximum value of SAR (measured) = 1.31 mW/g


450 MHz System Validation/Zoom Scan 6 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 39.1 V/m; Power Drift = 0.016 dB
SAR(1 g) = 1.24 mW/g; SAR(10 g) = 0.799 mW/g
 Maximum value of SAR (measured) = 1.31 mW/g

450 MHz System Validation/Zoom Scan 7 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 39.1 V/m; Power Drift = 0.008 dB
SAR(1 g) = 1.24 mW/g; SAR(10 g) = 0.801 mW/g
 Maximum value of SAR (measured) = 1.31 mW/g


450 MHz System Validation/Zoom Scan 8 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 39.6 V/m; Power Drift = -0.031 dB
SAR(1 g) = 1.24 mW/g; SAR(10 g) = 0.802 mW/g
 Maximum value of SAR (measured) = 1.31 mW/g

450 MHz System Validation/Zoom Scan 9 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 39.2 V/m; Power Drift = 0.016 dB
SAR(1 g) = 1.25 mW/g; SAR(10 g) = 0.807 mW/g
 Maximum value of SAR (measured) = 1.31 mW/g

450 MHz System Validation/Zoom Scan 10 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 39.2 V/m; Power Drift = -0.010 dB
SAR(1 g) = 1.25 mW/g; SAR(10 g) = 0.806 mW/g
 Maximum value of SAR (measured) = 1.31 mW/g

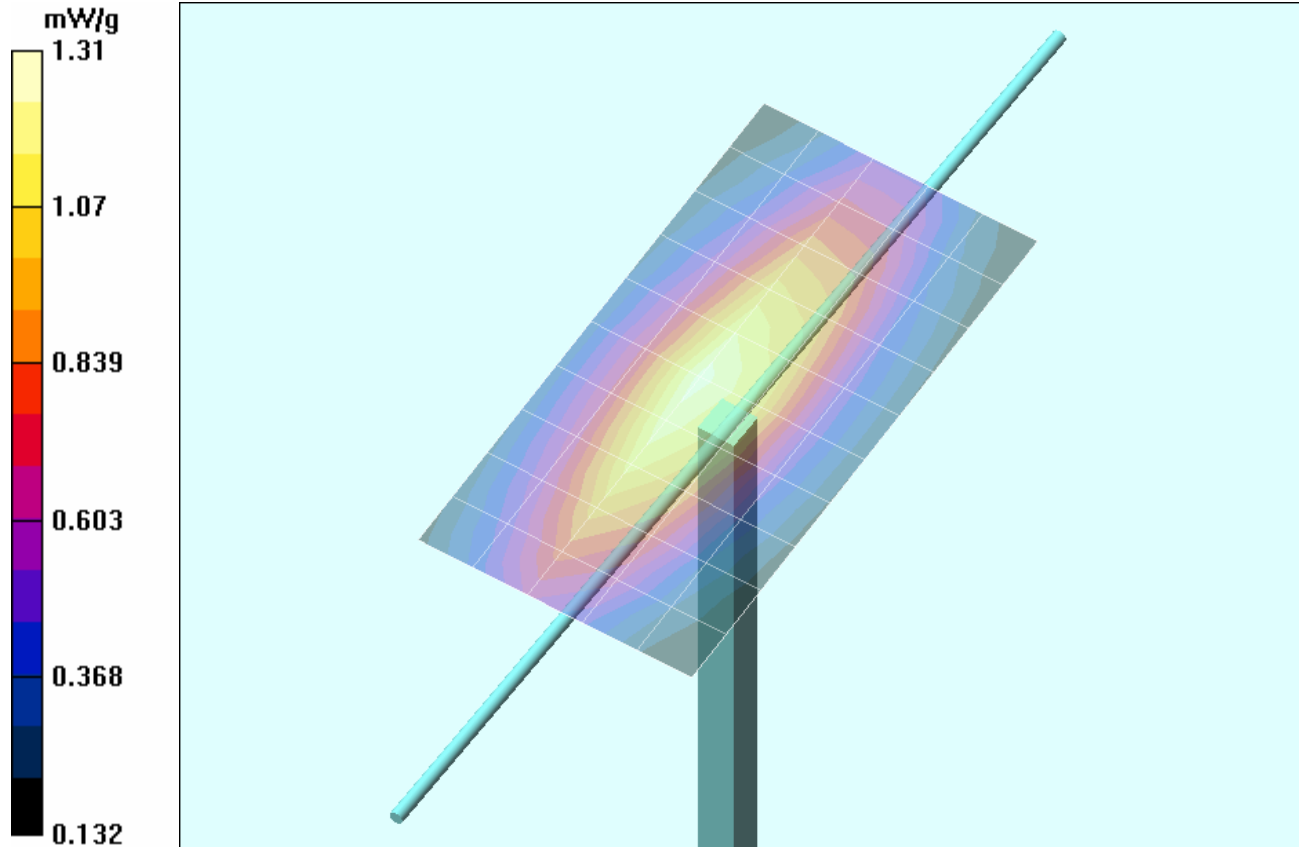

1 g average of 10 measurements: 1.24 mW/g
10 g average of 10 measurements: 0.801 mW/g

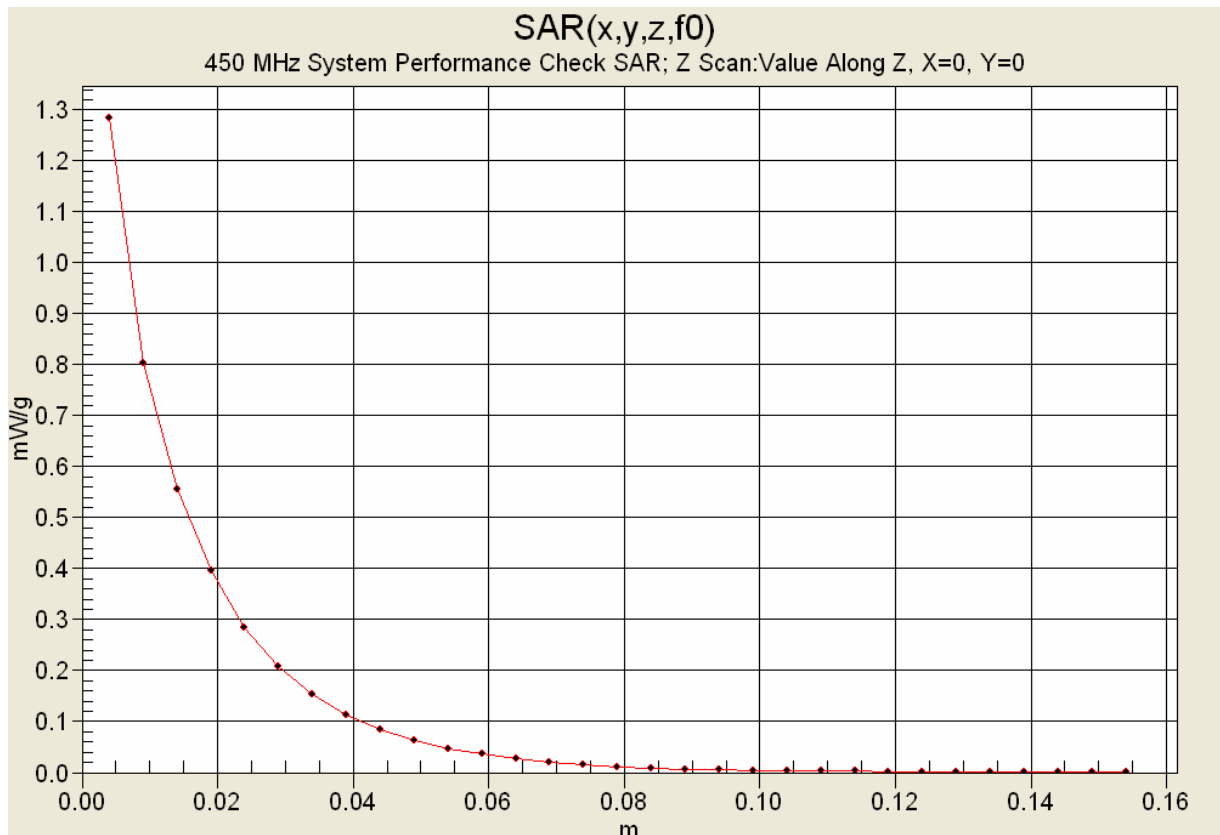

11. Measured Fluid Dielectric Parameters

System Validation (Brain) - 450 MHz Dipole

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

Tue 25/Oct/2005 12:07:39

Freq Frequency(GHz)

FCC_eH FCC OET 65 Supplement C (June 2001) Limits for Head Epsilon

FCC_sH FCC OET 65 Supplement C (June 2001) Limits for Head Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eH	FCC_sH	Test_e	Test_s
0.3500	44.70	0.87	46.08	0.7567
0.3600	44.58	0.87	45.12	0.7628
0.3700	44.46	0.87	45.10	0.7809
0.3800	44.34	0.87	45.43	0.7839
0.3900	44.22	0.87	43.97	0.7737
0.4000	44.10	0.87	43.78	0.7898
0.4100	43.98	0.87	43.52	0.8094
0.4200	43.86	0.87	43.40	0.8252
0.4300	43.74	0.87	43.32	0.8299
0.4400	43.62	0.87	43.32	0.8412
0.4500	43.50	0.87	43.20	0.8371
0.4600	43.45	0.87	42.91	0.8381
0.4700	43.40	0.87	42.76	0.8474
0.4800	43.34	0.87	42.33	0.8578
0.4900	43.29	0.87	42.63	0.8839
0.5000	43.24	0.87	42.19	0.8784
0.5100	43.19	0.87	41.77	0.8958
0.5200	43.14	0.88	41.64	0.8896
0.5300	43.08	0.88	41.13	0.9037
0.5400	43.03	0.88	40.85	0.9328
0.5500	42.98	0.88	40.94	0.9272