

Technical Compliance Statement

FCC and ISED Test Report

For the following information


Ref. File No.: C1M1710177

Product	:	Printer
Model Number	:	(1)SP C342DN (2)SP C340DN
Brand Name	:	Ricoh
Applicant	:	Ricoh Co., Ltd. Technology Center
Manufacturer	:	Ricoh Co., Ltd.
Factory	:	Shanghai Ricoh Digital Equipment Co., Ltd.
Rules and Standards	:	47 CFR FCC Part 15 Subpart B and ICES-003 Issue 6: 2016 (Class B Limit)

We hereby certify that the above product has been tested by us and complied with the FCC and ISED official limits. The product might be marketed in US in accordance with the standard 47 CFR FCC Part 2 and Part 15 Subpart B class B equipment regulations under FCC Rules. The test was performed according to the procedures mentioned in ANSI C63.4-2014.

The test data and results are issued on the test report no. **EM-F170669**.

Signature



Alex Deng/Deputy Manager
Date: 2017. 10. 26

Test Laboratory:

AUDIX Technology Corporation, EMC Department

NVLAP Lab. Code: 200077-0

FCC OET Designation: TW1004

Web Site: www.audixtech.com

The statement is based on a single evaluation of one sample of the above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab logo.

TEST REPORT

Printer

Model Number: (1)SP C342DN (2)SP C340DN


Brand: Ricoh

Applicant for:

Ricoh Co., Ltd. Technology Center
2—7—1 Izumi, Ebina City,
Kanagawa, Japan

Prepared by:

Audix Technology Corporation, EMC Department
No. 53-11, Dingfu, Linkou Dist.,
New Taipei City 244, Taiwan



File No. : C1M1710177
(ACI Ref. No.: A1D1710016)
Report No. : EM-F170669
Date of Report : 2017. 10. 26

The statement is based on a single evaluation of one sample of the above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab logo. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Test Report

Applicant : Ricoh Co., Ltd. Technology Center
Manufacturer : Ricoh Co., Ltd.
Factory : Shanghai Ricoh Digital Equipment Co., ,Ltd.
EUT Description
(1) Product : Printer
(2) Model : (1)SP C342DN (2)SP C340DN
(3) Brand : Ricoh
(4) Power Rating : AC 100-127V, 60Hz
(5) Test Voltage : AC 120V, 60Hz

Rules of Compliance and Applicable Standards:

47 CFR FCC Part 15 Subpart B
ANSI C63.4-2014
ICES-003 Issue 6:2016

The device described above was tested by Audix Technology Corporation to determine the maximum emission levels emanating from the device. All of the tests were requested by the applicant and the results thereof based upon the information that the applicant provided to us. We, Audix Technology Corporation assumes full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT is technically compliance with the requirements of **FCC and ISED official rules and Class B limits.**

This report is made under FCC Part 2.1075. No modifications were required during testing to bring this product into compliance.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Audix Technology Corporation.

Date of Report: 2017. 10. 26

Reviewed by:


(Kitty Ni/Section Manager)

Approved by:


(Alex Deng/Deputy Manager)

Table of Content

1. Revision of Test Report.....	4
2. Summary of Test Result.....	5
2.1. Test Result.....	5
2.2. Description of Test Firm.....	6
3. General Information.....	7
3.1. Description of Application	7
3.2. Description of the EUT.....	8
3.3. Highest Frequency within EUT.....	8
3.4. List of Key Components of EUT.....	8
3.5. Determination of Worse Case Operating Modes.....	9
3.6. Final Test Configuration.....	9
4. Measurement Arrangement.....	10
4.1. Equipment and cables arrangement	10
4.2. Method of Exercising EUT	10
4.3. List of Supported Units under Test.....	11
4.4. List of Used Cables under Test.....	11
5. Measurement of Conducted Emissions.....	12
5.1. List of Test Instruments.....	12
5.2. Test Setup.....	12
5.3. Power-line Conducted Emission Limits.....	13
5.4. Measurement Procedure	13
5.5. Measurement Result.....	14
6. Measurement of Radiated Emissions	16
6.1. List of Test Instruments.....	16
6.2. Test Setup.....	17
6.3. Radiation Emission Limits.....	18
6.4. Measurement Procedure	19
6.5. Measurement Result.....	20
7. Measurement Uncertainty List.....	24
8. Photographs.....	26
8.1. Powerline Conducted Emission Measurement.....	26
8.2. Radiated Emissions Measurement	27

APPENDIX (Photo of EUT)

1. Revision of Test Report

Issued Date	Revision Summary	Report Number
2017. 10. 26	Original Report. (To add a new option card for this time, original report please refer report no. ACI-F16070)	EM-F170669

2. Summary of Test Result

2.1. Test Result

Test Item	Referred Rules/Standard	Limit	Result
Power-line conducted emission	47 CFR FCC Part 15 Subpart B and ICES-003: 2016	Class B	Pass
			Margin 13.71dB at 0.199MHz
Radiated emission (30 – 1000MHz)	47 CFR FCC Part 15 Subpart B and ICES-003: 2016	Class B	Pass
			Margin 4.11dB at 116.66MHz (Vertical, 1.0m/184°)
Radiated emission (Above 1GHz)	47 CFR FCC Part 15 Subpart B and ICES-003: 2016	Class B	Pass
			Margin 8.75dB at 16753.48MHz
Note :			
1. N/A is an abbreviation for Not Applicable.			
2. Special measures: None			
3. Decision and justification not to measure: None			
4. The FCC Part 15 Subpart B emission measurement results are deemed satisfactory evidence of compliance with ICES-003 regulations.			

2.2. Description of Test Firm

Name of Test Firm	Audix Technology Corporation / EMC Department No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan Tel: +886-2-26092133 Fax: +886-2-26099303 Website : www.audixtech.com Contact e-mail: sales@audixtech.com
Accreditations	The laboratory is accredited by following organizations under ISO/IEC 17025:2005 (1) NVLAP(USA) NVLAP Lab Code 200077-0 (2) TAF(Taiwan) No. 1724
Test Facilities	FCC OET Designation Number under APEC MRA by BSMI is : TW1004 (1) No. 8 Shielding Room (2) No. 1 10m Semi-Anechoic Chamber

3. General Information

3.1. Description of Application

Applicant	Ricoh Co., Ltd. Technology Center 2—7—1 Izumi, Ebina City, Kanagawa, Japan
Manufacturer	Ricoh Co., Ltd. 810 Shimoimaizumi ebina city, Kanagawa 243-0460
Factory	Shanghai Ricoh Digital Equipment Co., ,Ltd. No. 887 Jinggang Road, Jinqiao ExportProcessing Zone, Pudong New Area, Shanghai, China
Product	Printer
Brand	Ricoh
FCC ID	BBP-PRSPC342DN1
Model Number	(1)SP C342DN (2)SP C340DN (Declare that the difference between models SP C342DN and SP C340DN is Controller option and operation panel unit. SP C340DN equips with the 4-line-panel and SP C342DN equips with the touch-panel.)

3.2. Description of the EUT

Test Model	SP C342DN
Serial Number	N/A
Power Rating	AC 100-127V, 60Hz, 11A
Rated Power	1300W
Highest working frequency	3000MHz
Firmware Version	N/A
Sample Status	Production
Date of Receipt	2017. 10. 19
Date of Test	2017. 10. 24
I/O Ports List	Front: • USB x1 • SD Card Slot x1 Back : • AC In x1 • LAN x1 • USB x2 • Option x1 (LAN x1, USB x1)
Accessories Supplied	• LAN Cable • USB Cable • AC Power Cord (3C)

3.3. Highest Frequency within EUT

The highest frequency is 3000MHz.

3.4. List of Key Components of EUT

None

3.5. Determination of Worse Case Operating Modes

According to the specification, the EUT was estimated to determine the highest emissions by following configurations:

Test Item	Operating of EUT
Power-line conducted emission	Standby
	NIC (1000BASE) Printer
	NIC2 (1000BASE) Printer
	PictBridge (Rear)
	PictBridge (Front)
	Media Print (SD)
	Media Print (USB)
Radiated emission	Standby
	NIC (1000BASE) Printer
	NIC2 (1000BASE) Printer
	PictBridge (Rear)
	PictBridge (Front)
	Media Print (SD)
	Media Print (USB)

3.6. Final Test Configuration


The worst showed as following configuration was recorded in this report.

Test Item	Operating of EUT
Power-line conducted emission	Media Print (SD)
Radiated emission 30 – 1000MHz) & (Above 1GHz)	Media Print (SD)

4. Measurement Arrangement

4.1. Equipment and cables arrangement

- Connection Diagram of EUT and Peripheral Devices

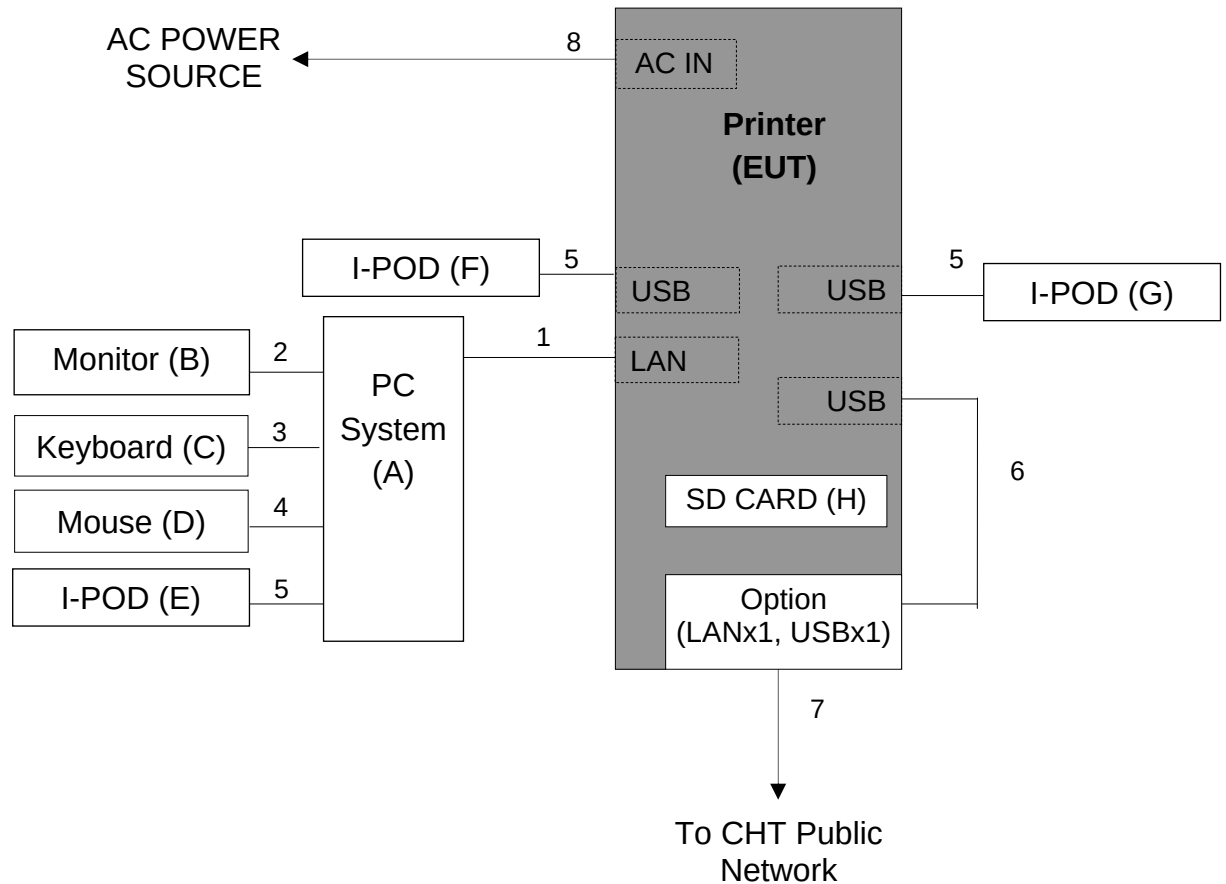

4.2. Method of Exercising EUT

The methods for exercising the EUT during the measurement specified in ANSI C63.4-2014 clause 11.2, 11.3 and figure 16 were used.

Operating System	Windows 7 of PC System
Operating of EUT	Printing "H"
Other	Other peripheral devices were driven and operated in turn

4.3. List of Supported Units under Test

Item	Product	Brand	Model No.	Serial No.	Approval
A	PC System	DELL	D09M	7BLJYBX	By DoC
B	Monitor	DELL	UP2414Q	CN-0RMV6X-74445 -4CI-024L	By DoC
C	USB Keyboard	DELL	SK-8115	CN-ONM433-71616 -7C5-0A4O	By DoC
D	USB Mouse	DELL	MOC5UO	HOV055BG	By DoC
E	I-POD Player	APPLE	A1204	4H722T81VTE	By DoC
F	I-POD Player	APPLE	A1204	4H722TL7VTE	By DoC
G	I-POD Player	APPLE	A1204	4H722T8EVTE	By DoC
H	SD Card	SanDisk	SD Card	N/A	N/A

4.4. List of Used Cables under Test

Item	Type	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remark
1	LAN Cable	1	3.0	No	2	Accessory of EUT
2	Mimi DP Cable	1	1.8	Yes	0	Provided by LAB
3	USB Cable	1	2.0	Yes	1	Provided by LAB
4	USB Cable	1	1.8	Yes	0	Provided by LAB
5	USB Cable	3	1.0	Yes	0	Provided by LAB
6	USB Cable	1	0.2	Yes	0	Accessory of EUT
7	LAN Cable	1	5.0	No	0	Provided by LAB
8	AC Power Cord (3C)	1	2.0	No	0	Accessory of EUT
9	AC Power Cord	2	1.8	No	0	Provided by LAB for above supported units


5. Measurement of Conducted Emissions

5.1. List of Test Instruments

Item	Equipment	Manufacture	Model No.	Serial No.	Cal. Date	Cal. Interval
1	Test Receiver	R&S	ESR3	101774	2017. 02. 07	1 Year
2	A.M.N.	R&S	ENV4200	100169	2016. 11. 11	1 Year
3	L.I.S.N.	Kyoritsu	KNW-407	8-855-9	2016. 12. 23	1 Year
4	Pulse Limiter	R&S	ESH3-Z2	100354	2017. 01. 16	1 Year
5	Signal Cable	Yeida	RG/58AU	CE-08	2017. 09. 22	1 Year
6	Test Software	Audix	e3	V.120619C	N.C.R.	N.C.R.

5.2. Test Setup

The EUT and test equipment were configured in accordance with the requirement of ANSI C63.4-2014 clause 5.2.

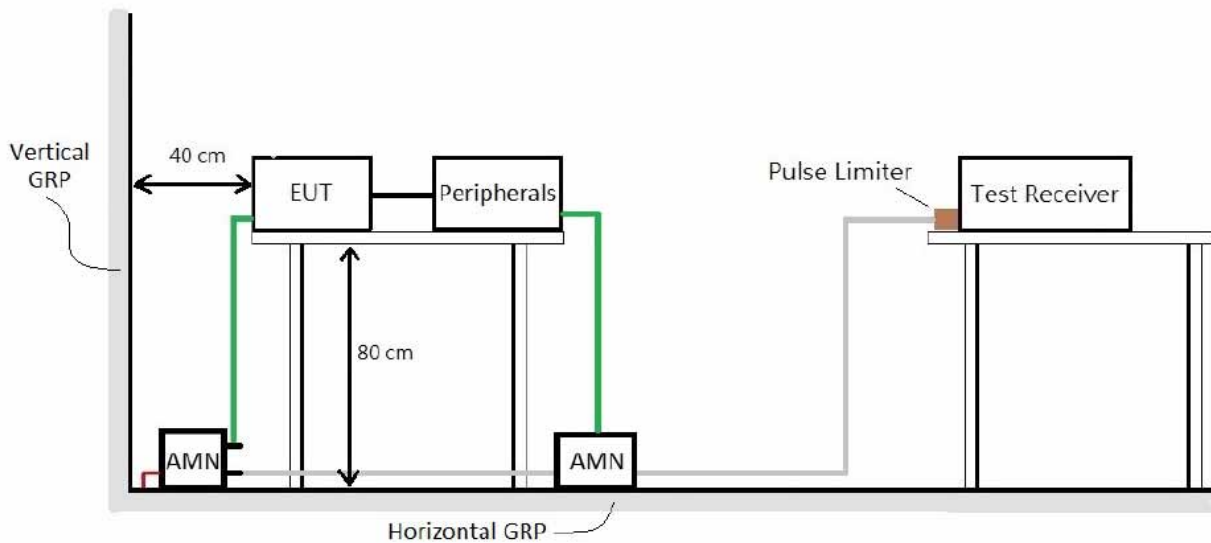

5.3. Power-line Conducted Emission Limits

- For FCC §15.107 and ICES-003 §6.1

Frequency Range (MHz)	Class A Limits		Class B Limits	
	Quasi Peak dB(μV)	Average dB(μV)	Quasi Peak dB(μV)	Average dB(μV)
0.15 – 0.50	79	66	66 – 56*	56 – 46*
0.50 – 5.0	73	60	56	46
5.0 – 30			60	50

Note: * Decreases with the logarithm of the frequency.

5.4. Measurement Procedure


The power-line conducted emission measurement was performed in accordance with the procedure of ANSI C63.4-2014 clause 7.3.

- Setup the EUT and associated equipment described as section 4.1, and they were located 40cm from the vertical conducting plane.
- Connect the EUT power cord to the main A.M.N and associated equipment to the second A.M.N. All ports of the A.M.N not connecting to the measuring equipment was terminated into 50 ohm resistive load.
- Setup the resolution bandwidth of the test receiver at 9kHz (while testing within 0.15 to 30MHz).
- Operate the EUT system as described in section 4.2.
- Both sides of A.C. line were checked for maximum conducted interference. In order to find the maximum emission, all of the interconnecting cables were manipulated.
- For the exploratory measurement, determine the highest emission amplitude relative to the limit on each of the EUT power cord with the peak detector by each of the EUT operation over the specified frequency range and record it.
- For final measurement, select the EUT operation mode that produced the highest amplitude in the exploratory measurement to determine the highest emissions with each specified detector and record it. All of the current-carrying conductors of each of the EUT power cords, except the ground conductor, must be measured over the specified frequency range.
- The measurement result was calculated by following formula:
Emission Level = Reading (Receiver) + Factor (A.M.N) + Cable Loss + Pulse Limiter
- If the average limit is met when using a Quasi-Peak detector receiver, the EUT is deemed to meet both limits and measurement with the average detector is unnecessary.

5.5. Measurement Result

The following data are the worst emissions based on the prescan measurement result.


Test Date	2017. 10. 24	Environment	23°C, 60%
Input Power	AC 120V, 60Hz	Test Phase	Neutral
Tested By	Jemy Wang	Test Result	Pass
Test Mode	Media Print (SD)	Test Model	SP C342DN

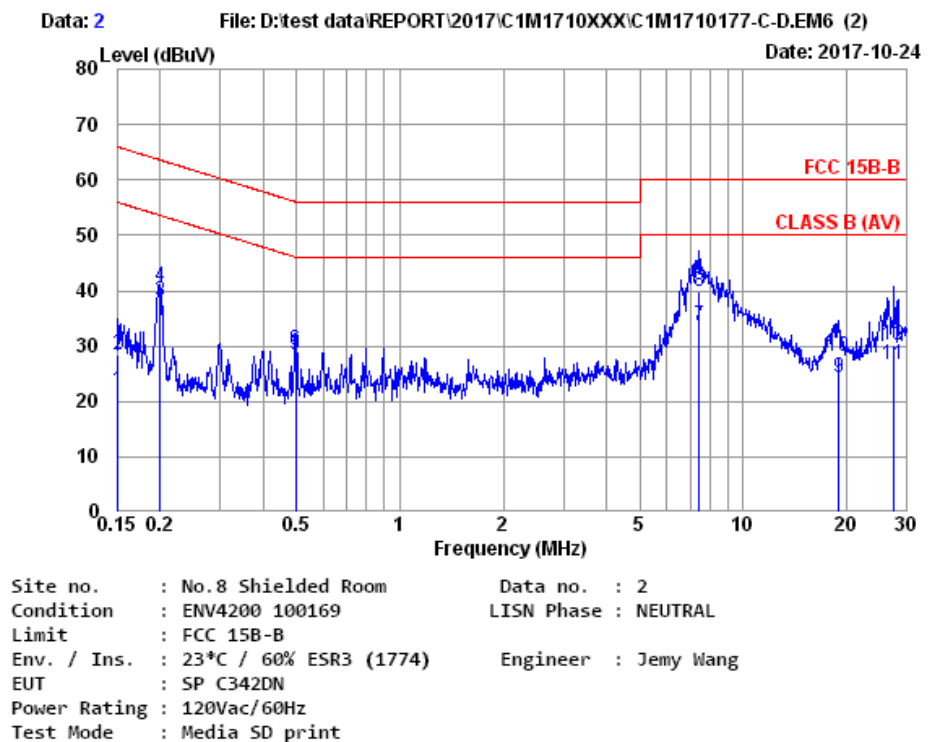

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.151	10.57	0.03	9.86	1.60	22.06	55.96	33.90	Average
2	0.151	10.57	0.03	9.86	8.07	28.53	65.96	37.43	QP
3	0.200	10.52	0.03	9.86	17.73	38.14	53.62	15.48	Average
4	0.200	10.52	0.03	9.86	20.22	40.63	63.62	22.99	QP
5	0.497	10.43	0.04	9.86	8.09	28.42	46.05	17.63	Average
6	0.497	10.43	0.04	9.86	9.07	29.40	56.05	26.65	QP
7	7.446	11.07	0.16	9.88	12.74	33.85	50.00	16.15	Average
8	7.446	11.07	0.16	9.88	18.72	39.83	60.00	20.17	QP
9	19.021	13.35	0.26	9.94	0.78	24.33	50.00	25.67	Average
10	19.021	13.35	0.26	9.94	4.47	28.02	60.00	31.98	QP
11	27.416	15.65	0.32	9.99	0.76	26.72	50.00	23.28	Average
12	27.416	15.65	0.32	9.99	4.24	30.20	60.00	29.80	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Test Date	2017. 10. 24	Environment	23°C, 60%
Input Power	AC 120V, 60Hz	Test Phase	Line
Tested By	Jemy Wang	Test Result	Pass
Test Mode	Media Print (SD)	Test Model	SP C342DN

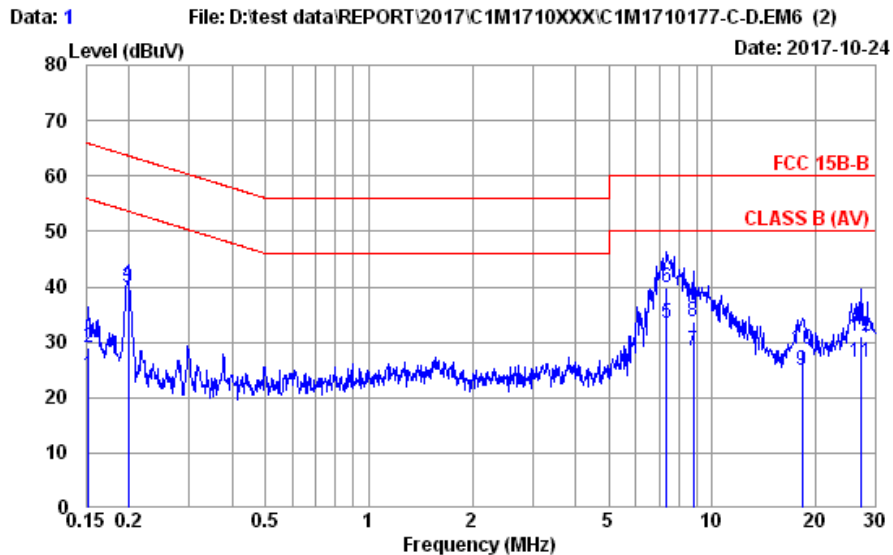

Site no. : No.8 Shielded Room Data no. : 1
Condition : ENV4200 100169 LISN Phase : LINE
Limit : FCC 15B-B
Env. / Ins. : 23°C / 60% ESR3 (1774) Engineer : Jemy Wang
EUT : SP C342DN
Power Rating : 120Vac/60Hz
Test Mode : Media SD print

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.152	10.63	0.03	9.86	3.38	23.90	55.87	31.97	Average
2	0.152	10.63	0.03	9.86	8.54	29.06	65.87	36.81	QP
3	0.199	10.56	0.03	9.86	19.51	39.96	53.67	13.71	Average
4	0.199	10.56	0.03	9.86	19.99	40.44	63.67	23.23	QP
5	7.368	11.06	0.16	9.88	12.38	33.48	50.00	16.52	Average
6	7.368	11.06	0.16	9.88	18.62	39.72	60.00	20.28	QP
7	8.822	11.20	0.18	9.89	7.27	28.54	50.00	21.46	Average
8	8.822	11.20	0.18	9.89	12.39	33.66	60.00	26.34	QP
9	18.232	13.26	0.26	9.93	1.47	24.92	50.00	25.08	Average
10	18.232	13.26	0.26	9.93	5.33	28.78	60.00	31.22	QP
11	26.984	15.62	0.32	9.99	0.53	26.46	50.00	23.54	Average
12	26.984	15.62	0.32	9.99	5.03	30.96	60.00	29.04	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

6. Measurement of Radiated Emissions

6.1. List of Test Instruments

- For measurement of 30 to 1000MHz frequency range

Item	Equipment	Manufacture	Model No.	Serial No.	Cal. Date	Cal. Interval
1	Spectrum Analyzer	Agilent	N9010A-503	MY51250850	2017. 03. 08	1 Year
2	Spectrum Analyzer	Agilent	N9010A-503	MY52220119	2016. 12. 21	1 Year
3	Test Receiver	R&S	ESCI7	100922	2017. 05. 15	1 Year
4	Amplifier	Sonoma	310N	187158	2017. 03. 06	1 Year
5	Amplifier	Sonoma	310N	187159	2017. 03. 14	1 Year
6	Bilog Antenna	Schwarzbeck	VULB 9168	711	2017. 07. 20	1 Year
7	Bilog Antenna	Schwarzbeck	VULB 9168	712	2017. 07. 20	1 Year
8	Signal Cable	HUBER+SUHNER	S07212BD	10m ACC3CL (10mA)	2017. 02. 17	1 Year
9	Signal Cable	HUBER+SUHNER	S07212BD	10m ACC3CL (10mB)	2017. 02. 17	1 Year
10	Test Software	Audix	e3	V.6.1206197	N.C.R.	N.C.R.


- For measurement of above 1GHz frequency range

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1	Spectrum Analyzer	Agilent	N9010A-526	MY51250943	2017. 02. 16	1 Year
2	Microwave Preamplifier	Agilent	8449B	3008A02681	2017. 03. 14	1 Year
3	Double-Ridged Waveguide Horn	ETS-Lindgren	3117	00114403	2017. 03. 27	1 Year
4	Signal Cable	HUBER+SUHNER	SUCOFLEX 104	10m ACCL 1-18G	2017. 04. 23	1 Year
5	Test Software	Audix	e3	V.6.1206197	N.C.R.	N.C.R.


6.2. Test Setup

The EUT and test equipment were configured in accordance with the requirement of ANSI C63.4-2014 clause 5.4. and 5.5.


- For frequency range 30 to 1000MHz (at Open Area Test Site)

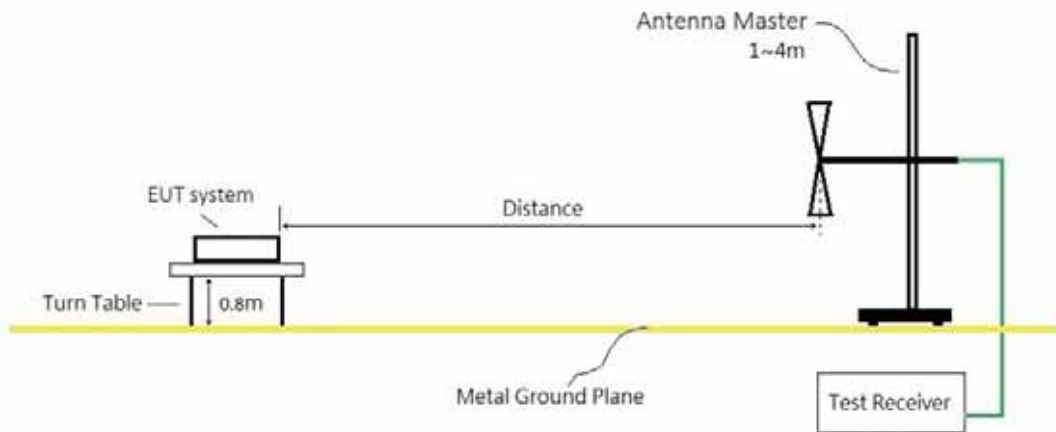

- For frequency range 30 to 1000MHz (at Semi-Anechoic Chamber)

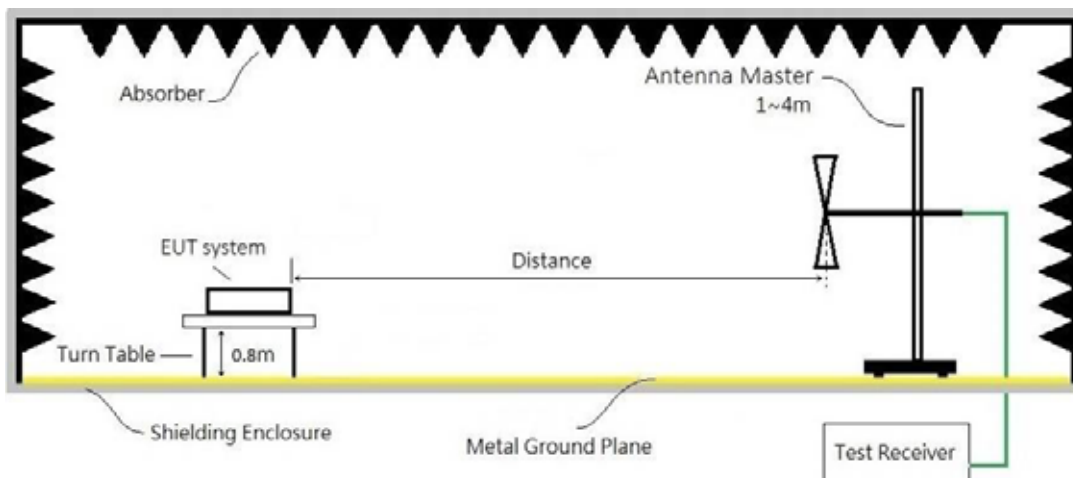

- For frequency range above 1GHz (at Semi-Anechoic Chamber)

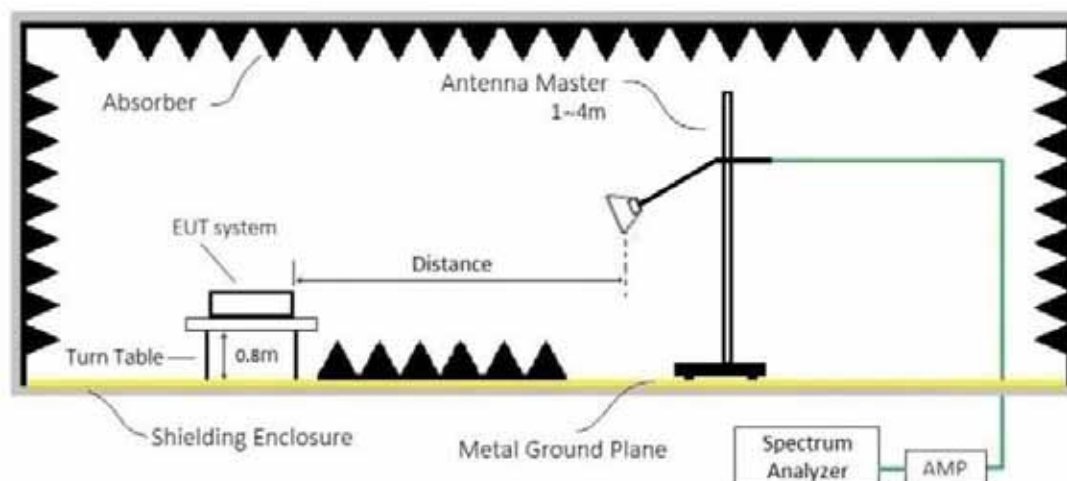

6.3. Radiation Emission Limits

- For Below 1GHz, FCC §15.109(a)(g)/CISPR 22 and ICES-003 §6.2

Frequency Range (MHz)	Distance (meter)	Class A Limits	Class B Limits
		Quasi-Peak [dB(μV/m)]	Quasi-Peak [dB(μV/m)]
30 – 230	10	40	30
230 – 1000		47	37
30 – 230	3	50	40
230 – 1000		57	47

- For Above 1GHz, FCC §15.109(a)(g)/CISPR 22 and ICES-003 §6.2

Frequency Range (MHz)	Distance (meter)	Class A Limits		Class B Limits	
		Peak [dB(μV/m)]	Average [dB(μV/m)]	Peak [dB(μV/m)]	Average [dB(μV/m)]
Above 1000	3	79.54	59.54	73.98	53.98

- The tighter limit applies at the edge between two frequency bands.
- Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the E.U.T.
- The limits from 30 to 1000MHz are referred to CISPR 22 standard, which are in accordance with the requirement of FCC Part 15.38 (b)(3)、Part 15.109 (a)(g) and ICES-003 section 5(a)(i).
- The limits above 1GHz are referred to FCC Part 15.109(a)

- Required highest frequency for radiated measurement

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

6.4. Measurement Procedure

The radiated emission measurement was performed in accordance with the procedure of the ANSI C63.4-2014 clause 8.3.

- The EUT and peripherals were placed on the rotatable non-conduction table, which is 0.8meters above the ground reference plane at the semi-anechoic chamber or OATS as described in section 4.1 and 6.2.
- The measurement distance is set as specified in section 6.3. The specified distance is between the horizontal projection onto the ground plane of the closest periphery of the EUT and the projection onto the ground plane of the center of the axis of the elements of the receiving antenna.
- The resolution bandwidth of the test receiver was at 120kHz (testing from 30 to 1000MHz) or 1MHz (testing above 1000MHz).
- Operate the EUT system as described in section 4.2.
- For the exploratory measurement, determine the highest emission amplitude relative to the limit on each of antenna polarization with the peak detector by each of the EUT operations over the specified frequency range and record it.
- For final measurement, select the EUT operation mode that produced the highest amplitude in the exploratory measurement to determine the highest emissions with each specified detector and record it.
- In order to determine the maximum emission level, must rotate the table in 360 degree and move the receiving antenna between 1~4m height above the ground reference plane.
- In order to find the maximum emission, all of the interconnecting cables were manipulated, except for the bundled cable.
- Both polarizations of receiving antenna were determined.
- The measurement result was calculated by following formulas:

(30 – 1000MHz)

$$\text{Emission Level} = \text{Reading (Receiver)} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Gain}$$

(Above 1GHz)

$$\text{Emission Level} = \text{Reading (Spectrum)} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Gain}$$

- The 3dB bandwidth of the horn antenna is minimum 22 degree (or $w=1.17m$ at 3m distance) for 1~18 GHz.


6.5. Measurement Result

The following data are the worst emissions based on the prescan measurement result.

- For frequency range 30 – 1000MHz

Test Date	2017. 10. 24	Environment	26°C, 59%
Input Power	AC 120V, 60Hz	Ant. Polarity	Horizontal
Tested By	Gary Lin	Test Result	Pass
Test Mode	Media Print (SD)	Test Model	SP C342DN

Data: 2 File: D:\TEST DATA\REPORT\2017\1C1M1710XXX\1C1M1710177\1C1M1710177.EM6 (4)

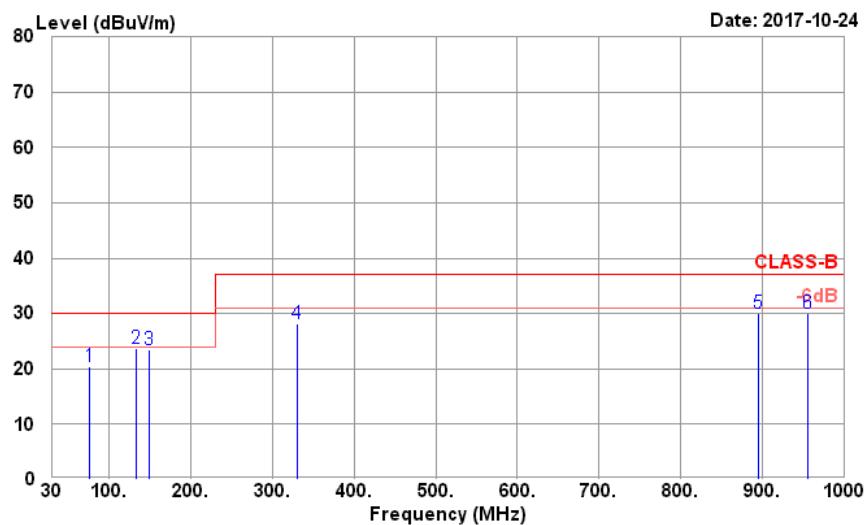


Site no. : NO.1 10M Chamber Data no. : 2
 Dis. / Ant. : 10m VULB 9168 712 Ant. pol. : HORIZONTAL
 Limit : CLASS-B
 Env. / Ins. : 26°C / 59% ESCI 7 (0922) Engineer : GARY LIN
 EUT : SP C342DN
 Power Rating : 120Vac/60Hz
 Test Mode : Media(SD) Print

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	75.62	16.44	1.34	33.16	35.92	20.54	30.00	9.46	QP
2	133.45	18.24	1.82	33.11	36.84	23.79	30.00	6.21	QP
3	149.53	19.00	1.94	33.10	35.58	23.42	30.00	6.58	QP
4	330.27	19.93	3.01	33.01	38.29	28.22	37.00	8.78	QP
5	895.70	28.33	5.39	32.27	28.63	30.08	37.00	6.92	QP
6	955.41	29.02	5.61	31.70	27.09	30.02	37.00	6.98	QP

Remarks: 1.Emission Level= Antenna Factor + Cable Loss + Reading - Preamp.
 2.The emissions not reported are 20 dB lower than the specified limit.

Test Date	2017. 10. 24	Environment	26°C, 59%
Input Power	AC 120V, 60Hz	Ant. Polarity	Vertical
Tested By	Gary Lin	Test Result	Pass
Test Mode	Media Print (SD)	Test Model	SP C342DN

Data: 1 File: D:\TEST DATA\REPORT\2017\1C1M1710XXX\1C1M1710177\1C1M1710177.EM6 (4)

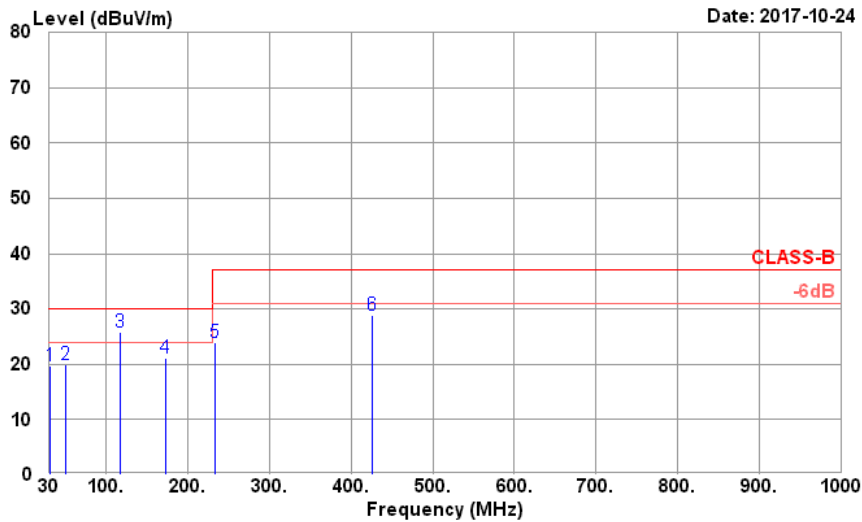

Site no. : NO.1 10M Chamber Data no. : 1
Dis. / Ant. : 10m VULB 9168 711 Ant. pol. : VERTICAL
Limit : CLASS-B
Env. / Ins. : 26°C / 59% ESCI 7 (0922) Engineer : GARY LIN
EUT : SP C342DN
Power Rating : 120Vac/60Hz
Test Mode : Media(SD) Print


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	31.98	18.15	0.68	32.68	33.67	19.82	30.00	10.18	QP
2	49.52	19.68	0.85	32.65	31.99	19.87	30.00	10.13	QP
3	116.66	16.75	1.33	32.64	40.45	25.89	30.00	4.11	QP
4	173.55	18.18	1.66	32.59	33.90	21.15	30.00	8.85	QP
5	232.57	16.90	1.94	32.52	37.50	23.82	37.00	13.18	QP
6	425.66	22.04	2.73	32.40	36.53	28.90	37.00	8.10	QP

Remarks: 1.Emission Level= Antenna Factor + Cable Loss + Reading - Preamp.
2.The emissions not reported are 20 dB lower than the specified limit.

- For frequency range above 1 GHz

Test Date	2017. 10. 24	Environment	26°C, 59%
Input Power	AC 120V, 60Hz	Ant. Polarity	Horizontal
Tested By	Gary Lin	Test Result	Pass
Test Mode	Media Print (SD)	Test Model	SP C342DN

Data: 4 File: D:\TEST DATA\REPORT\2017\1M1710XXX\1M1710177\1M1710177.EM6 (4)

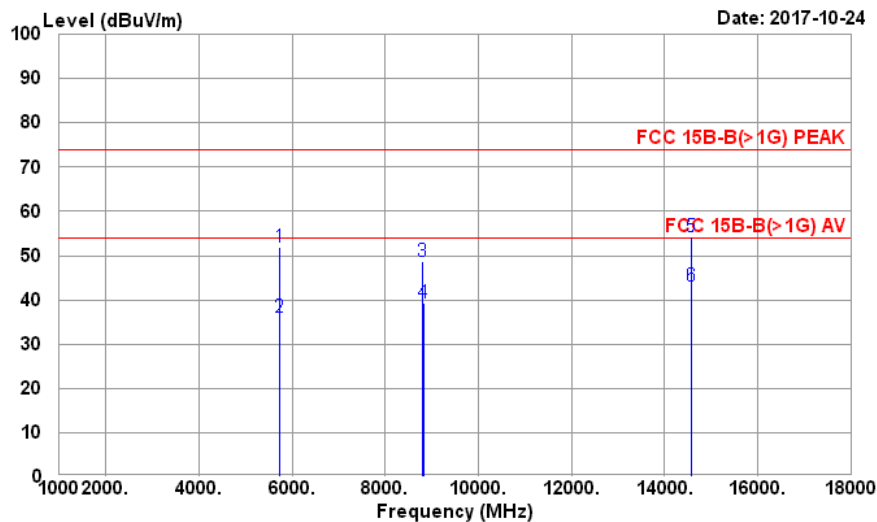


Site no. : NO.1 10M Chamber Data no. : 4
 Dis. / Ant. : 3m 3117 14403 Ant. pol. : HORIZONTAL
 Limit : FCC 15B-B(>1G) PEAK
 Env. / Ins. : 26°C / 59% N9010A (0943) Engineer : GARY LIN
 EUT : SP C342DN
 Power Rating : 120Vac/60Hz
 Test Mode : Media(SD) Print

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	5745.00	34.90	5.07	35.57	47.47	51.87	73.98	22.11	Peak
2	5747.65	34.90	5.07	35.58	31.56	35.95	53.98	18.03	Average
3	8812.62	36.10	5.96	36.15	42.66	48.57	73.98	25.41	Peak
4	8816.33	36.10	5.96	36.15	33.48	39.39	53.98	14.59	Average
5	14565.00	39.82	7.86	34.89	41.52	54.31	73.98	19.67	Peak
6	14567.43	39.82	7.86	34.89	30.44	43.23	53.98	10.75	Average

Remarks: 1.Emission Level= Antenna Factor + Cable Loss + Reading - Preamp.
 2.The emissions not reported are 20 dB lower than the specified limit.

Test Date	2017. 10. 24	Environment	26°C, 59%
Input Power	AC 120V, 60Hz	Ant. Polarity	Vertical
Tested By	Gary Lin	Test Result	Pass
Test Mode	Media Print (SD)	Test Model	SP C342DN

Data: 3 File: D:\TEST DATA\REPORT\2017\1C1M1710XXX\1C1M1710177\1C1M1710177.EM6 (4)

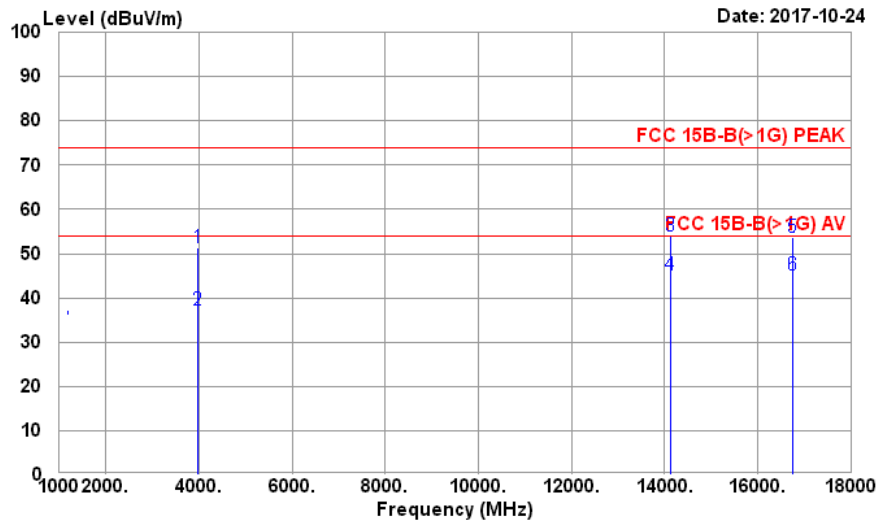

Site no. : NO.1 10M Chamber Data no. : 3
Dis. / Ant. : 3m 3117 14403 Ant. pol. : VERTICAL
Limit : FCC 15B-B(>1G) PEAK
Env. / Ins. : 26°C / 59% N9010A (0943) Engineer : GARY LIN
EUT : SP C342DN
Power Rating : 120Vac/60Hz
Test Mode : Media(SD) Print

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
1	3980.55	33.46	4.00	35.59	49.58	51.45	73.98	22.53	Peak
2	3982.55	33.46	4.00	35.59	35.45	37.32	53.98	16.66	Average
3	14125.00	39.12	7.66	34.41	41.73	54.10	73.98	19.88	Peak
4	14128.66	39.12	7.66	34.41	32.68	45.05	53.98	8.93	Average
5	16750.00	41.80	8.49	35.72	39.18	53.75	73.98	20.23	Peak
6	16753.48	41.80	8.49	35.72	30.66	45.23	53.98	8.75	Average

Remarks: 1.Emission Level= Antenna Factor + Cable Loss + Reading - Preamp.
2.The emissions not reported are 20 dB lower than the specified limit.

7. Measurement Uncertainty List

The measurement uncertainty was estimated for test on the EUT according to CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage of K=2.

The uncertainties value is not used in determining the PASS/FAIL results.

Test Items/Facilities	Frequency/Equipment/Unit	Uncertainty
Conducted emissions at AC mains power port	9kHz-150kHz	±3.7dB
	150kHz-30MHz	±3.5dB
Conducted emissions at wired network port	150kHz-30MHz	±3.5dB
Conducted emissions at broadcast receiver tuner port	150kHz-30MHz	±3.5dB
Conducted emissions Power Clamp	30MHz-300MHz	±4.4dB
Radiated electromagnetic	9kHz-30MHz	±0.5dB
Radiated emissions (10m Chamber)	30MHz-200MHz, 3m, Horizontal	±4.3dB
	200MHz-1000MHz, 3m, Horizontal	±4.3dB
	30MHz-200MHz, 3m, Vertical	±4.4dB
	200MHz-1000MHz, 3m, Vertical	±3.9dB
	30MHz-200MHz, 10m, Horizontal	±4.3dB
	200MHz-1000MHz, 10m, Horizontal	±4.1dB
	30MHz-200MHz, 10m, Vertical	±4.3dB
	200MHz-1000MHz, 10m, Vertical	±3.8dB
	1GHz-6GHz, 3m	±5.5dB
	6GHz-18GHz, 3m	±4.8dB
Radiated emissions (No.1 3m Chamber)	30MHz-200MHz, 3m, Horizontal	±3.9dB
	200MHz-1000MHz, 3m, Horizontal	±4.3dB
	30MHz-200MHz, 3m, Vertical	±4.5dB
	200MHz-1000MHz, 3m, Vertical	±4.1dB
	1GHz-6GHz, 3m	±5.1dB
	6GHz-18GHz, 3m	±5.5dB
Radiated emissions (No.2 3m Chamber)	30MHz-200MHz, 3m, Horizontal	±4.3dB
	200MHz-1000MHz, 3m, Horizontal	±4.3dB
	30MHz-200MHz, 3m, Vertical	±4.4dB
	200MHz-1000MHz, 3m, Vertical	±3.9dB
	1GHz-6GHz, 3m	±5.2dB
	6GHz-18GHz, 3m	±5.2dB
Radiated emissions (No.3 3m Chamber)	30MHz-200MHz, 3m, Horizontal	±4.7dB
	200MHz-1000MHz, 3m, Horizontal	±4.5dB
	30MHz-200MHz, 3m, Vertical	±4.3dB
	200MHz-1000MHz, 3m, Vertical	±4.1dB
Radiated emissions (No.4 3m Chamber)	30MHz-200MHz, 3m, Horizontal	±4.1dB
	200MHz-1000MHz, 3m, Horizontal	±4.4dB
	30MHz-200MHz, 3m, Vertical	±4.2dB
	200MHz-1000MHz, 3m, Vertical	±5.0dB
	1GHz-6GHz, 3m	±4.4dB
	6GHz-18GHz, 3m	±4.1dB

Test Items/Facilities	Frequency/Equipment/Unit	Uncertainty
Radiated emissions (No.3 OATS)	30MHz-200MHz, 3m, Horizontal	±4.5dB
	200MHz-1000MHz, 3m, Horizontal	±4.4dB
	30MHz-200MHz, 3m, Vertical	±4.4dB
	200MHz-1000MHz, 3m, Vertical	±4.0dB
	30MHz-200MHz, 10m, Horizontal	±4.5dB
	200MHz-1000MHz, 10m, Horizontal	±4.2dB
	30MHz-200MHz, 10m, Vertical	±4.3dB
	200MHz-1000MHz, 10m, Vertical	±4.0dB
Radiated emissions (No.5 OATS)	30MHz-200MHz, 3m, Horizontal	±4.2dB
	200MHz-1000MHz, 3m, Horizontal	±4.7dB
	30MHz-200MHz, 3m, Vertical	±4.4dB
	200MHz-1000MHz, 3m, Vertical	±4.4dB
	30MHz-200MHz, 10m, Horizontal	±4.2dB
	200MHz-1000MHz, 10m, Horizontal	±4.6dB
	30MHz-200MHz, 10m, Vertical	±4.4dB
	200MHz-1000MHz, 10m, Vertical	±4.4dB
Radiated emissions (No.6 OATS)	30MHz-200MHz, 3m, Horizontal	±4.3dB
	200MHz-1000MHz, 3m, Horizontal	±4.4dB
	30MHz-200MHz, 3m, Vertical	±4.5dB
	200MHz-1000MHz, 3m, Vertical	±4.1dB
	30MHz-200MHz, 10m, Horizontal	±4.3dB
	200MHz-1000MHz, 10m, Horizontal	±4.2dB
	30MHz-200MHz, 10m, Vertical	±4.4dB
	200MHz-1000MHz, 10m, Vertical	±4.1dB
Radiated emissions (No.7 OATS)	30MHz-200MHz, 3m, Horizontal	±3.9dB
	200MHz-1000MHz, 3m, Horizontal	±4.5dB
	30MHz-200MHz, 3m, Vertical	±4.6dB
	200MHz-1000MHz, 3m, Vertical	±4.5dB
	30MHz-200MHz, 10m, Horizontal	±3.9dB
	200MHz-1000MHz, 10m, Horizontal	±4.3dB
	30MHz-200MHz, 10m, Vertical	±4.6dB
	200MHz-1000MHz, 10m, Vertical	±4.5dB
Radiated emissions (No.8 OATS)	30MHz-200MHz, 3m, Horizontal	±4.5dB
	200MHz-1000MHz, 3m, Horizontal	±4.3dB
	30MHz-200MHz, 3m, Vertical	±4.6dB
	200MHz-1000MHz, 3m, Vertical	±4.1dB
	30MHz-200MHz, 10m, Horizontal	±4.7dB
	200MHz-1000MHz, 10m, Horizontal	±4.2dB
	30MHz-200MHz, 10m, Vertical	±4.6dB
	200MHz-1000MHz, 10m, Vertical	±4.0dB